


# RACCORDS THERMOPLASTIQUES

## Raccords en Nylon 6-6



-20°C ÷ +110°C  
subject to applications

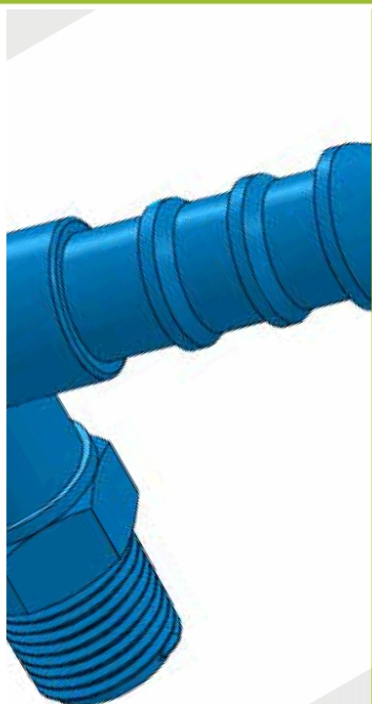

up to 14 Bar at 20°C  
depending from the used tube



Compressed air, water and food  
fluids suitable with construction  
materials



Taper gas BSPT ISO 7  
from R1/8" to R1"  
NPT from N1/8" to N3/4"



Plastic, silicon, rubber  
or soft PVC tubes



Nylon 66

### FEATURES

- The products are made in plastic and it's necessary to use teflon tape over the thread for installation in order and to prevent air leakage. Be sure to prevent excessive torque when screwing the fittings.



REACH

Products in compliance with  
the directive 2002/95/EC

**RoHS2**

Products in compliance with  
the directive 2011/65/EU



DM174



TIFO




EC1935



TIFO

### DIAMETER OF THE BARB

ØD	Ø 4 mm	Ø 5 mm	Ø 6 mm	Ø 8 mm	Ø 10 mm	Ø 12 mm	Ø 14 mm	Ø 16 mm	Ø 19 mm
ØB (mm)	5,2 mm	6,3 mm	8,0 mm	10,0 mm	12,0 mm	14,0 mm	16,2 mm	18,2 mm	21,0 mm
ØD	Ø 5/32"	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	
ØB (mm)	5,3 mm	6,3 mm	8,0 mm	9,8 mm	12,0 mm	13,8 mm	17,5 mm	21,0 mm	



### RECOMMENDED TIGHTENING TORQUE

THREAD SIZE	NM	FT LB
1/8	0,1	0,07
1/4	0,8	0,6
3/8	4	3
1/2	6	4