

Quality Australian Carpet Gripper, Made to AS/NZS 2455.1.2007

GRIPPER RANGE

| Product Code | Ply | | Strips | | Nail Description | Nails | | | Pins | |
|--------------|-----------|------|--------|--------|------------------|-------|--------|-------|------|---|
| | Thickness | Type | # | Meters | | # | Length | Depth | Row | # |

9mm Gripper - with Luxury 11mm - 12mm Underlays

| 28mm Full Width (domestic 2-pin) | | | | | | | | | | |
|----------------------------------|-------|---------------|----|------|--------------------------------|---|------|------|---|----|
| 423-9/72 | 9.0mm | Poplar / Pine | 72 | 86.4 | Long Ring Shank (Wood) Nail | 9 | 23.9 | 15.4 | 2 | 58 |
| 440-9/72 | | | 72 | 86.4 | Regular Hardened Concrete Nail | | 20.6 | 12.1 | | |

8mm Gripper - with low density 10mm - 11mm Underlays


| 28mm Full Width (domestic 2-pin) | | | | | | | | | | |
|----------------------------------|-------|---------------|-----|-------|-----------------------------------|----|------|------|---|-----|
| 400-8/108 | 8.0mm | Poplar / Pine | 108 | 129.6 | Standard (No Nail) | 9 | - | - | 2 | 58 |
| 422-8/90 | | | 90 | 108.0 | Regular Ring Shank (Wood) Nail | | 19.1 | 11.6 | | |
| 424-8/72 | | | 72 | 86.4 | Ultra-Long Ring Shank (Wood) Nail | | 23.9 | 16.4 | | |
| 440-8/90 | | | 90 | 108.0 | Regular Hardened Concrete Nail | | 19.1 | 11.6 | | |
| 441-8/90 | | | 90 | 108.0 | 2-Hit Hardened Concrete Nail | | 17.5 | 10.0 | | |
| 442-8/90 | | | 90 | 108.0 | Special Hardened Concrete Nail | | 16.5 | 9.0 | | |
| 32mm Archi (commercial 3-pin) | | | | | | | | | | |
| 600-8/84 | 8.0mm | Poplar / Pine | 84 | 100.8 | Standard (No Nail) | 10 | - | - | 3 | 105 |
| 622-8/70 | | | 70 | 84.0 | Regular Ring Shank (Wood) Nail | | 19.1 | 11.6 | | |
| 624-8/56 | | | 56 | 67.2 | Ultra-Long Ring Shank (Wood) Nail | | 23.9 | 16.4 | | |
| 640-8/70 | | | 70 | 84.0 | Regular Hardened Concrete Nail | | 19.1 | 11.6 | | |
| 641-8/70 | | | 70 | 84.0 | 2-Hit Hardened Concrete Nail | | 17.5 | 10.0 | | |
| 642-8/70 | | | 70 | 84.0 | Special Hardened Concrete Nail | | 16.5 | 9.0 | | |
| 44mm Archi (commercial 3-pin) | | | | | | | | | | |
| 800-8/48 | 8.0mm | Poplar / Pine | 48 | 57.6 | Standard (No Nail) | 10 | - | - | 3 | 105 |

6mm & 7mm Gripper - with low density 6mm - 7mm Underlays


| 22mm Stock (domestic 2-pin) | | | | | | | | | | |
|----------------------------------|-------|---------------|-----|-------|--------------------------------|----|------|------|---|-----|
| 260-7/100 | 6.0mm | Birch | 100 | 120.0 | Dual Purpose Nail | 9 | 18.3 | 12.3 | 2 | 58 |
| 25mm Extra Wide (domestic 2-pin) | | | | | | | | | | |
| 300-7/120 | 6.0mm | Birch | 120 | 144.0 | Standard (No Nail) | 9 | - | - | 2 | 58 |
| 322-7/100 | | | 100 | 120.0 | Regular Ring Shank (Wood) Nail | | 19.1 | 13.1 | | |
| 341-7/100 | | | 100 | 120.0 | 2-Hit Hardened Concrete Nail | | 16.5 | 10.5 | | |
| 28mm Archi (commercial 3-pin) | | | | | | | | | | |
| 522-7/72 | 7.0mm | Poplar / Pine | 72 | 86.4 | Regular Ring Shank (Wood) Nail | 10 | 19.1 | 12.6 | 3 | 105 |
| 541-7/72 | | | 72 | 86.4 | 2-Hit Hardened Concrete Nail | | 16.5 | 10.0 | | |
| 32mm Archi (commercial 3-pin) | | | | | | | | | | |
| 600-7/84 | 7.0mm | Poplar / Pine | 84 | 100.8 | Standard (No Nail) | 10 | - | - | 3 | 105 |
| 622-7/70 | | | 70 | 84.0 | Regular Ring Shank (Wood) Nail | | 19.1 | 12.6 | | |
| 641-7/70 | | | 70 | 84.0 | 2-Hit Hardened Concrete Nail | | 16.5 | 10.0 | | |

GRIPPER TYPES


| Ply | Width | Type | Standard (No Nail) | Regular Wood | Long Wood | Regular Concrete | 2-Hit Concrete | Dual Purpose |
|------------------------------------|-------|------------|--------------------|--------------|-----------|------------------|----------------|--------------|
| Domestic (2-Pin) Grippers | | | | | | | | |
| 6mm | 22mm | Stock | -- | -- | -- | -- | -- | 260-7/100 |
| 7mm | 25mm | Extra Wide | 300-7/120 | 322-7/100 | -- | -- | 341-7/100 | -- |
| 8mm | 28mm | Full Width | 400-8/108 | 422-8/90 | 424-8/72 | 440-8/90 | 441-8/90 | -- |
| 9mm | 28mm | Full Width | -- | -- | 423-9/72 | 440-9/72 | -- | -- |
| Commercial (3-Pin) Grippers | | | | | | | | |
| 7mm | 28mm | Archi | -- | 522-7/72 | -- | -- | 541-7/72 | -- |
| 7mm | 32mm | Archi | 600-7/84 | 622-7/70 | -- | -- | 641-7/70 | -- |
| 8mm | 32mm | Archi | 600-8/84 | 622-8/70 | 624-8/56 | 640-8/70 | 641-8/70 | -- |
| 8mm | 44mm | Archi | 800-8/48 | -- | - | -- | -- | -- |




22mm Stock




25mm Extra Wide




28mm Full Width



28mm Archi

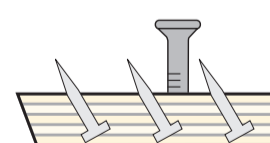


32mm Archi

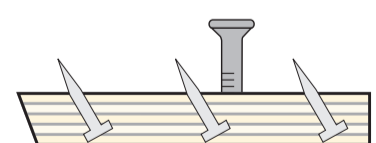

44mm Archi

PIN LENGTHS

Using accurate 'pin' nails we can set 3 heights to suit different carpet backings. Long Pin = 6.5mm high; Medium Pin = 5.5mm high; Short Pin = 4.5mm high (Where no pin height is noted assume 'medium pin').

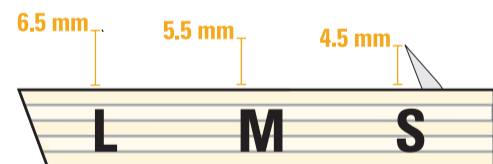


Long Pin (-L)
used with woven, rough or thicker carpet backings

Medium Pin (-M)
used with most carpet backings


Short Pin (-S)
used with light weight or thinner carpet backings

PLYWOOD


BBS gripper is made with 5 veneers of plywood for added strength. All plywood glues emit no more than 'E Zero' Formaldehyde.



9mm Gripper




8mm Gripper




7mm Gripper



NAIL DEPTH INTO THE SUB-FLOOR

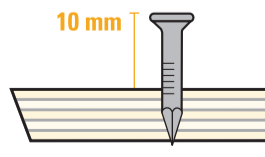

In the Gripper

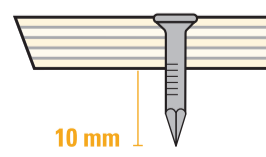

Driven into the sub-floor

| Nail Type | Depth into Sub-Floor |
|------------------|----------------------|
| Regular wood | 11.6 – 13.1mm |
| Long Wood | 14.9 – 16.4mm |
| Regular Concrete | 10.6 – 12.1mm |
| 2-Hit concrete | 9.5 – 10mm |
| Dual Purpose | 11.8 – 12.3mm |