

## EXIT BOXX

### High-Speed Exit & Payment

#### Payment by Credit/EMV, Bill, Coin (no change given).

- PayEASE is the fully automated POS module of EASE, the Parking Management Software (PMS) that manages multiple rate structures, discounts, coupons, passes and more!
- 4-line LCD or 12" interactive touch screen LCD. 12" LCD offers customizable/advertising images, programmable story boards & multiple languages provide easy navigation.
- Custom branding: corporate colors, logo and customized text.
- Eater/scanner reads tickets, coupons, applies discounts and validations.
- Processes real-time payments via encrypted credit card reader or EMV reader, contactless/TAP & pin pad.
- Paid ticket or successful payment opens barrier gate. Receipt printing is automatic or optional.
- Validation BOXX & web validation discounts automatically applied upon ticket scan.
- Real-time connection to EASE via LAN – continues to operate in off-line mode in case of network loss.
- UPS backup power protects electronics, provides stable current, and offers surge suppression.
- Powder coated, stainless steel cabinet with multi-point locks.
- Slim profile: 11" deep (28cm). Fits on narrow islands.

#### OPTIONS

- Accept payments via bills, coins, tokens.
- Add an intercom (VoIP or analog).
- Utilize RFID card access readers (proximity or long range) with your existing building access system or CardEASE.
- Upgrade to a 2D scanner to read QR codes and phone screens.
- Add an eater to collect closed tickets and coupons/vouchers.
- Add a custom voice greeting.
- Add security cameras.
- Include a thermostatically controlled heater or dehumidifier.

#### USABILITY


- 100% rated as "Very Easy to Use" or "Easy to Use"
- 90% of Survey respondents found a large color screen helpful.



**4-line LCD +  
Encrypted Card  
Reader**

**12" LCD +  
Encrypted Card  
Reader +  
Intercom**

**4-line LCD +  
Bills, Coins,  
Credit + IP  
Intercom**

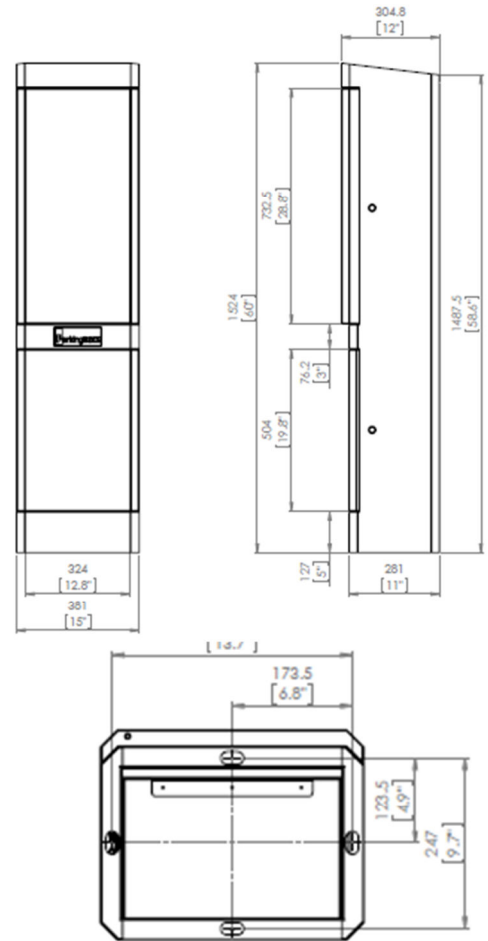

Above options also show: custom branding, VoIP intercom, RFID card access reader.  
Additional models and custom colors are available.  
See Exit Lane Configuration options.

**MOUNTING HOLES**

## TECHNICAL SPECIFICATIONS

Cabinet Size	60" x 15" x 12" (152.4cm x 38cm x 32.4cm) (h x w x d)
Housing	304B Stainless steel with powder coating
Locks	Drill resistant
Operating Temp	32°F to 150°F (-0°C to 65°C). -40°F/C with optional heater
Relative Humidity	97%
Power	120VAC, 60Hz, 5A. Optional: backup battery
Weight	225lbs (102kg) without battery
Printer	Thermal paper roll, 5250 receipts
Display	12" touch-screen LCD or 4-line sunlight readable LCD with backlight
Card Reader	Encrypted magnetic card reader, EMV/Interac card reader + pin-pad
Warranty	1 year parts warranty
Certifications	CSA, PCI, ADA & AODA Compliant