

GENERAL DOORS
Corporation

NEWPORT

COMMERCIAL SERIES

MODEL NPC138 & NPC200



NPC138
1-3/8" THICK
R-VALUE 12

NPC200
2" THICK
R-VALUE 18

26

CFC/HCFC
FREE
POLYURETHANE
CORE

HIGH
THERMAL
EFFICIENCY
RATING


GAUGE
WOODGRAIN
EMBOSSSED
STEEL FACE

COMMERCIAL & INDUSTRIAL OVERHEAD DOORS

Polyurethane Insulated Steel Doors
General Doors Corporation Newport Commercial Series are our most versatile Insulated door models. Available in both 1-3/8" thick and 2" thick, these highly energy efficient door systems are ideal for medium sized commercial applications of all types. Sections are built from a continuous foaming process of CFC/HCFC-free polyurethane insulation bonded between steel skins to provide exceptional strength and structural integrity.

- Features**
- Perfect choice when aesthetics are a key consideration.
 - Available in three panel options: Light Ribbed, Flush and Short Raised.
 - Continuous reinforcing strip for hardware attachment.
 - Thermal break between exterior and interior skins
 - High strength to weight ratio.

Specifications	NPC138	NPC200
Door Thickness	1-3/8"	2"
R-Value	12	18
Face Sheet Thickness	28GA	28GA
Steel Embossment	Woodgrain	Woodgrain
Construction Layers	Triple	Triple
Section Joint	Tongue/Groove	Tongue/Groove
Maximum Width	16'-2"	20'-2"
Maximum Height	14'-0"	16'-0"
Warranty	1 yr. materials/work 5 yr. delamination	1 yr. materials/work 5 yr. delamination

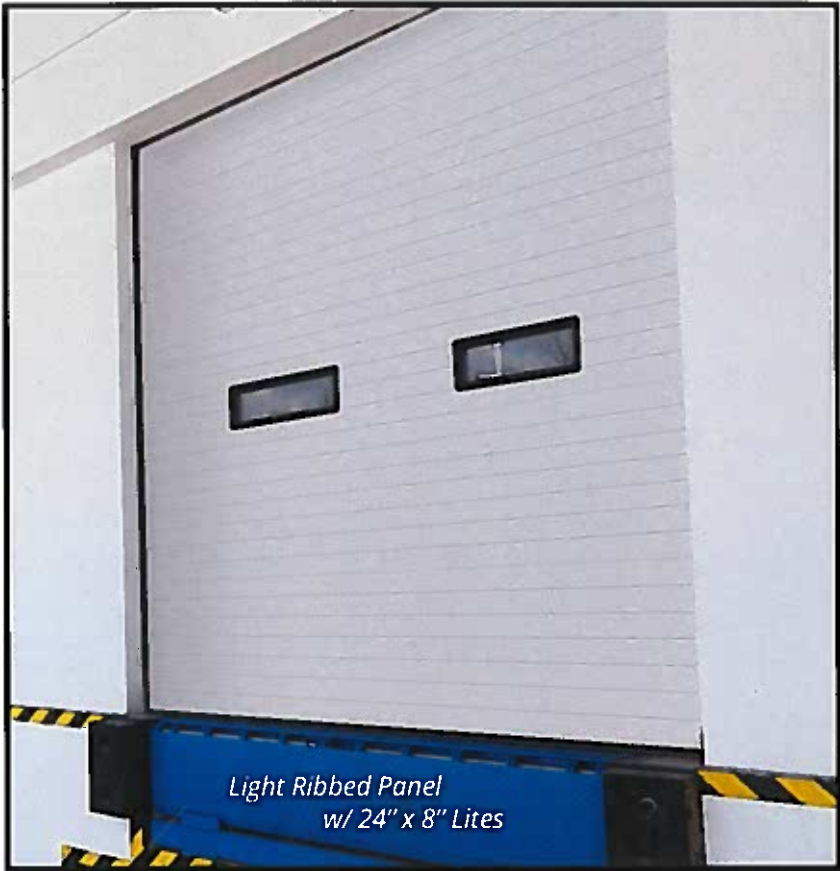

- Options**
- Exterior operated cylinder lock
 - Exhaust ports
 - Reinforcing for draw bar operator
 - Black PVC recessed step plate/lift handle
 - Factory installed top seal
 - Extended life torsion springs (25M, 50M, 100M cycle)
 - Wind load package available



Lite Options

- 34" x 16"
24" x 12"
24" x 8"
- Black polymer frame
 - Available for Light Ribbed & Flush Panel
 - Insulated glass
- 22" x 14"
- Color matched to door
 - Available in all panel styles
 - Single or insulated glass
 - Decorative inserts available
- Full View Aluminum (NPC200 only)**
- Color matched to door
 - Available in all panel styles
 - Multiple glazing options available. Check with factory.

Lite Guide		
Door Width	Standard No. of lites*	No. of FVA panels
Up to 9'-2"	2	2
9'-3" to 12'-2"	3	3
12'-3" to 16'-2"	4	4
16'-3" to 20'-2"	5	5

*May vary using 34" x 16" lites in special widths. Check with factory.

