CART SERIES 4000



Compliant to the requirements of art. 70 annex V


The low 4000 cart represents the cutting edge of the carriages in production at Bigà Italia. This cart is **built to size** upon customer's request, according to the real needs of load and size. Tyre dimensions, side rails, caps, are from time to time designed and built in relation to the pavement, the site, and the stress of use of the cart itself, creating a product that will last over time. The capacity varies from 100 kg. to 2,000 kg ensuring always a perfect rolling.

It is produced with load floor measures from 240 cm o 400 cm and a width from 90 to 180 cm. Max External measures 500 x 180 cm.

Strengths of the cart Series 4000

- A) Load surface with a minimum height 8cm for easy loading of any cart weighing 500 kg, with climb ramp less than 5%. B) Front wheels mounted on the fifth wheel, which allows the cart to turn with bending angles close to 90 degrees, keeping a path almost integral with the wheels of the hauler.
- C) The tilt platform does not need to be lowered or raised from the ground with hands, a lever is used that allows the operator not to have to bend his back and touch the floor with his hands so remaining in standing position.



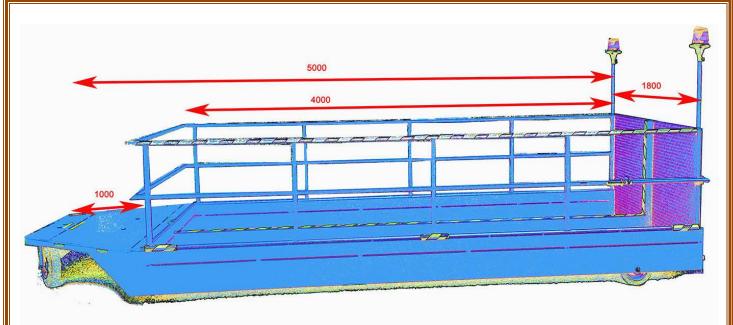









Bigà Italia Via G. Galilei trav. I° n° 12 25010 San Zeno Naviglio (BS) Italia Tel. +39 030.2161048 fax +39 030.2168077 www.bigaitalia.it www.bigaitalia.com email.info@bigaitalia.it

