

Standard Features


- Front Toolbox (GN Only)
- 14,000 lb. G.V.W.R.
- 7.000 lb. x 2 G.A.W.R.
- 2 5/16" Adjustable Ball Coupler
- Safety Chains

- I Drop Leg Jack (10,000 lb.)
- 2 Dexter EZ-Lube Brake Axles (7,000 lb.)
 Sand Blasted, Acid Washed, Powder Coated
- 6 Leaf Slipper Spring Suspension
- 4 16" White Spoke Wheels
- 4 235/80R16 Radial Tires (3,520 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Tool Tray
- 6' 6" Slide in Ramps w/ Holders
- 8" x 10 lb. I-Beam Tongue
- 8" x 10 lb. I-Beam Main Frame
- 3" Channel Crossmembers 16" on Center

- 2" Treated Pine Lumber Deck
- 96" Wide Deck
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness



At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

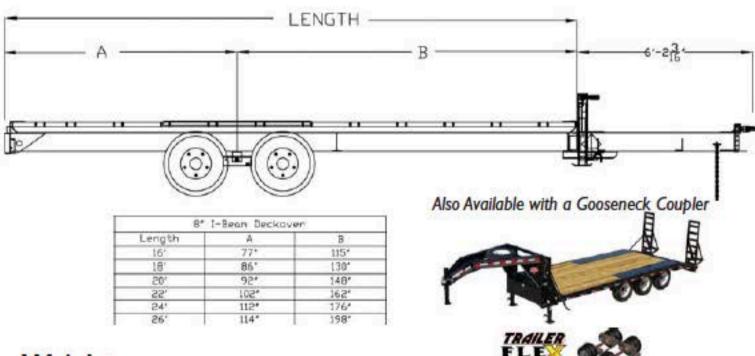

Weights

Length	Axles	Est. Base Weight:
16'	2 - 7000	3200 lbs / 1451 kg
18'	2 - 7000	3400 lbs / 1542 kg
20'	2 - 7000	3600 lbs / 1633 kg
20' GN	2 - 7000	4100 lbs / 1860 kg

Length	Axles	Est. Base Weight
22'	2 - 7000	3820 lbs / 1733 kg
24'	2 - 7000	4060 lbs / 1842 kg
26'	2 - 7000	4340 lbs / 1969 kg

† Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

Coupler Options

BP 2 5/16" Adjustable (14,000 lb.) *

Rigid mount 2-5/16 (25,000 lb.)

GN 2 5/16" Round (30,000 lb.) w/Toolbox GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx

3" Pintle Eye - Channel-mount (21,000 lb.)

GN 2 5/16" Square (30,000 lb.) w/Toolbox

GN 2 5/16" Round (25,000 lb.) w/Toolbox

GN 2 5/16" Square (25,000 lb.) w/ Toolbox

Axle Options

- (2) 5,200# Electric / Spring
- (3) 5,200# Electric / Spring
- (2) 7,000# Electric / Spring *
- (2) 7,000# Electric / Torsion
- (2) 7,000# Hydraulic Drum / Spring
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Elec/Hyd Disk / Torsion
- (3) 7,000# Electric / Spring
- (3) 7,000# Electric / Torsion
- (3) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Load Range G 14ply Tires Electric / Spring
- (3) 7,000# Load Range G 14ply Tires Electric / Spring
- (2) 8,000# Oil Bath Axles w / 235-80 Tires Electric / Spring
- (2) 8,000# Load Range G Tires Electric / Spring

Tail Options

Straight Deck w/ 6'6" Slide-in Ramps *

- 3' Dovetall w/ 5' Slide-in Ramps (18' and up)
- 3' Dovetall w/ 2, 16"x60" Foldup Ramps
- 3' Dovetail w/ 3, 16"x60" Foldup Ramps
- 3' Dovetail w/ 2, 31"x66" Foldup Ramps
- 5' dove with 2 Flipover Ramps (Must Have R option)
- 3' Dovetall w/ 3 31"x66" Foldub Rambs
- 3' Dovetail w/ 2 16"x60" Dbl Hinge Foldup Ramps
- 5' Dove w/ 5' Slide-in Ramps (Must Have R option)
- 3' Dovetall w/ 3 16"x60" Dbl Hinge Foldup Ramps
- 4' Dove with 2 Flipover Ramps
- 4' Dove with 3 Flipover Ramps
- 5' Dove with 3 Flipover Ramps (Must Have R option)
- 5' Dove 3 31"x66" Fld Up Rmp.(Must Have R opt.)
- 3' Dovetall w/ Split Heavy Duty Gate
- 3' Dovetall w/ Heavy Duty Gate
- 4' Dove with 4ft Monster Ramps
- 5' Dove 2 31"x66" Fld Up Rmp.(Must Have R opt.)

Other Options

Cold Weather Wiring Harness (7-Way RV)

Plate for Winch

6"Taller GN Riser

Douglas Fir Decking

9,990 G.V.W.R.

12"oc Crossmembers

I Pair D-Rings

Rough Oak Floor

Weld-On Strap Ratchets (2)

2nd Jack

Receiver Hitch

Goodyear G Rated Tires

4" Ratchets every 4ft w/ Slide Track

Mount Only for Spare Tire

1/4" Diamond Plate Steel Floor

Steel Floor & 4 D-Rings

Front Toolbox (Bumber Pull)

102" Deck Width

Rear Support Jacks (Dovetall and 96"Only)

Spare Tire and Mount (Bumper Pull)

Deck on the Neck (GN Only)

Side-mount Toolbox

Winch 12VDC (12,000 lb.) Incl. Front Toolbox 2-speed Jacks (12,000 lb.)

- * Standard Feature
- ² Special Order Option: Requires additional lead-time