



Low-Pro Flatdeck with Duals



NOW EQUIPPED WITH
DEXTER AXLES




Lengths
20' - 40'

Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" BP
- 8 - 16" 245/75R16 Radial Tires (2,778 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- 2" x 6" Square Tubing
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Tongue (to 27')
- 12" x 14 lb. I-Beam Main Frame (to 27')
- 3" Channel Crossmembers 16" on Center
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted
- Acid Washed

POWDER COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

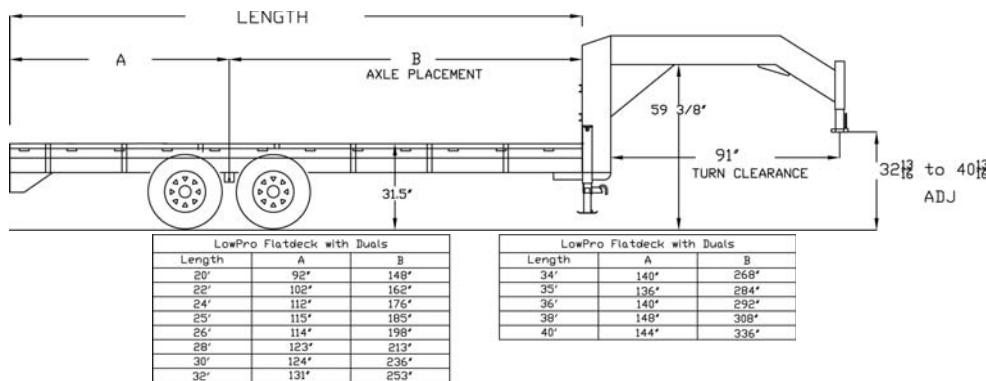

Weights

Length	Axles	Est. Base Weight†
20'	2 - 10000	5780 lbs / 2622 kg
22'	2 - 10000	5920 lbs / 2685 kg
25'	2 - 10000	6300 lbs / 2858 kg
28'	2 - 10000	6840 lbs / 3103 kg
30'	2 - 10000	7240 lbs / 3284 kg

Length	Axles	Est. Base Weight†
32'	2 - 10000	7560 lbs / 3429 kg
34'	2 - 10000	7820 lbs / 3547 kg
36'	2 - 10000	8200 lbs / 3719 kg
38'	2 - 10000	8520 lbs / 3865 kg
40'	2 - 10000	8780 lbs / 3983 kg

†Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

Coupler Options

- GN 2 5/16" Round (25,000 lb.) *
- BP 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.)
- GN Load-Leveling 2 5/16" Square (30,000 lb.)
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.)
- GN 2 5/16" Square (25,000 lb.)

Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Elec / Spring *
- (2) 10,000# Elec / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Elec / Spring
- (3) 10,000# Elec / Torsion
- (3) 10,000# Elec/Hyd Disk / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (2) 16,000# 17.5" wheel, Air / Spring
- (2) 16,000# 17.5" wheel, Elec / Spring

Tail Options

- Straight Deck w/ 2 Slide-in Ramps *
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 Flip-over Monster Ramps

Other Options

- 6" Taller GN Riser
- 19 lb. I-Beam MainFrame & Neck
- 22 lb. I-Beam MainFrame & Neck (from 19 lb.)
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor & 4 D-Rings
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.)
- 2-speed Jacks (12,000 lb. rating)

Notes:

- 30' and up includes Frame Bridging
- * Standard Feature
- ² Special Order Option: Requires additional lead-time



Also Available with a
Bumper Pull or Pintle
Coupler.



AIR RIDE SUSPENSION AVAILABLE