



DECLARATION OF PERFORMANCE

Pursuant to the Construction Products Regulation n° 305/2011

n° **DOP-IT- 57**

1. Unique identification code of the product-type: **INTOCREM REP (EN 998-1)**
2. Type number: **MORTAR PRODUCED IN FACTORY FOR GENEAL PURPOSES (GP)**
3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer: **for internal and external plasters.**
4. Name, registered name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11, (5): **MALVIN SRL – industrial area ASI state road 7 bis km 15,400 - 81030 Gricignano D’Aversa (CE) - www.malvinsrl.com**
5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in article 12 (2): **not applicable.**
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V: **system 4.**
7. In case of declaration of performance concerning a construction product covered by a harmonized standard: **The notified body has no tasks to be carried out.**
8. In case of a declaration of performance concerning a construction product for which has been issued an European technical assessment: **not applicable.**
9. Declared performance

Main characteristics	Performance	Norm
Fire reaction	class A1	EN 998-1:2010
Water absorption "c"	W1	
Water vapor diffusion coefficient "μ"	10	
Adhesion	0,50 N/mm ²	
Thermal conductivity (tabulated value) "λ"	0,43 W/mK	
Durability	NPD	
Dangerous substances	see SDS	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer, by: **Giovanni Vittorioso - Sole Administrator**

Gricignano D’Aversa, 30/06/2013






EN 998-1:2010

MALVIN SRL

Registered office and Factory:
Zona ASI, S. S. 7 bis Km 15,400
81030 Gricignano Di Aversa (CE)
www.malvinsrl.com

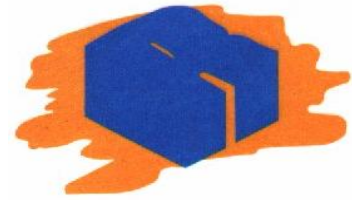

10 INTOCEM REP (EN 998-1) n° DoP-IT - 57

Mortar produced in factory for internal and external plaster for general purposes (GP)

Fire reaction	class A1
Water absorption "c"	W1
Water vapor diffusion factor "μ"	10
Adhesion	0,50 N/mm ²
Thermal conductivity (tabulated value) "λ"	0,43 W/mK
Durability	NPD
Dangerous substances	see SDS

MALVIN

The performance characteristics refer to laboratory tests, values depend on the weather conditions and on the methods of implementations. The operator must verify the suitability of the product depending on the use planned.



MALVIN





DECLARATION OF PERFORMANCE

pursuant to the Construction Products Regulation n° 305/2011

n° **DOP-IT- 58**

1. Unique identification code of the product-type: **INTOCEM REP FR (EN 998-1)**
2. Type number: **MORTAR PRODUCED IN FACTORY FOR GENEAL PURPOSES (GP)**
3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer: **for internal and external plasters.**
4. Name, registered name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11, (5): **MALVIN SRL – industrial area ASI state road 7 bis km 15,400 - 81030 Gricignano D’Aversa (CE) - www.malvinsrl.com**
5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in article 12 (2): **not applicable.**
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V: **system 4.**
7. In case of declaration of performance concerning a construction product covered by a harmonized standard: **The notified body has no tasks to be carried out.**
8. In case of a declaration of performance concerning a construction product for which has been issued an European technical assessment: **not applicable.**
9. Declared performance

Main characteristics	Performance	Norm
Fire reaction	class A1	EN 998-1:2010
Water absorption "c"	W1	
Water vapor diffusion coefficient "μ"	10	
Adhesion	0,50 N/mm ²	
Thermal conductivity (tabulated value) "λ"	0,43 W/mK	
Durability	NPD	
Dangerous substances	See SDS	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer, by: **Giovanni Vittorioso - Sole Administrator**

Gricignano D’Aversa, 30/06/2013






EN 998-1:2010

MALVIN SRL

Registered office and Factory:
Zona ASI, S. S. 7 bis Km 15,400
81030 Gricignano Di Aversa (CE)
www.malvinsrl.com

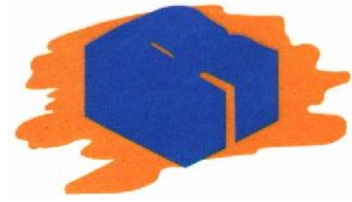

10 INTOCEM REP FR (EN 998-1) n° DoP-IT - 58

Mortar produced in factory for internal and external plaster for general purposes (GP)

Fire reaction	class A1
Water absorption "c"	W1
Water vapor diffusion factor "μ"	10
Adhesion	0,50 N/mm ²
Thermal conductivity (tabulated value) "λ"	0,43 W/mK
Durability	NPD
Dangerous substances	See SDS

MALVIN

The performance characteristics refer to laboratory tests, values depend on the weather conditions and on the methods of implementations. The operator must verify the suitability of the product depending on the use planned.



MALVIN

