



DECLARATION OF PERFORMANCE

Pursuant to the Construction Products Regulation n° 305/2011

n° **DOP-IT- 152**

1. Unique identification code of the product-type: **INTOFIN CALCE SANA B-FB**
2. Type number: **RESTORATION MORTAR PRODUCED IN FACTORY (R)**
3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer: **for internal/external plasters.**
4. Name, registered name or registered trade mark and contact address of the manufacturer as required pursuant to 11, (5): **MALVIN SRL– industrial area ASI state road 7 bis km 15,400 - 81030 Gricignano D'Aversa (CE) - www.malvinsrl.com**
5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in article 12 (2): **not applicable.**
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V: **system 4.**
7. In case of declaration of performance concerning a construction product covered by a harmonized standard: **The notified body has no tasks to be carried out.**
8. In case of a declaration of performance concerning a construction product for which has been issued an European technical assessment: **not applicable.**
9. Declared performance

Main characteristics	Performance	Norm
Fire reaction	class A1	EN 998-1:2010
Water absorption "c"	$\geq 0,3 \text{ kg/m}^2$ after 24 h	
Water vapor diff. Coeff. " μ "	6	
Adhesion	$0,32 \text{ N/mm}^2$	
Thermal conductivity (tabulated value) " λ "	$0,35 \text{ W/mK}$	
Durability	NPD	
Dangerous substances	see SDS	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.


Signed for and on behalf of the manufacturer, by: **Giovanni Vittorioso - Sole Administrator**

Gricignano D'Aversa, 30/06/2013





MALVIN SRL
 Registered office and Factory:
 Zona ASI, S. S. 7 bis Km 15,400
 81030 Gricignano Di Aversa (CE)
www.malvinsrl.com

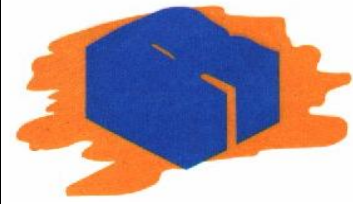

10
INTOCEM CALCE SANA B-FB (EN 998-1)
 n° DoP-IT - 152

Restoration mortar produced in factory for internal and external plasters (R)

Fire reaction	class A1
Water absorption "c"	≥ 0,3 kg/m ² after 24 h
Water vapor diff. coefficient "μ"	6
Adhesion	0,32 N/mm ²
Thermal conductivity (tabulated value) "λ"	0,35 W/mK
Durability	NPD
Dangerous substances	see SDS

MALVIN

The performance characteristics refer to laboratory tests, values depend on the weather conditions and on the methods of implementations. The operator must verify the suitability of the product depending on the use planned.



MALVIN





DECLARATION OF PERFORMANCE

Pursuant to the Construction Products Regulation n° 305/2011
n° **DOP-IT- 153**

1. Unique identification code of the product-type: **INTOFIN CALCE SANA B I-FB I**
2. Type number: **RESTORATION MORTAR PRODUCED IN FACTORY (R)**
3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer: **for internal/external plasters.**
4. Name, registered name or registered trade mark and contact address of the manufacturer as required pursuant to 11, (5): **MALVIN SRL– industrial area ASI state road 7 bis km 15,400 - 81030 Gricignano D'Aversa (CE) - www.malvinsrl.com**
5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in article 12 (2): **not applicable.**
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V: **system 4.**
7. In case of declaration of performance concerning a construction product covered by a harmonized standard: **The notified body has no tasks to be carried out.**
8. In case of a declaration of performance concerning a construction product for which has been issued an European technical assessment: **not applicable.**
9. Declared performance

Main characteristics	Performance	Norm
Fire reaction	class A1	EN 998-1:2010
Water absorption "c"	≥ 0,3 kg/m ² after 24 h	
Water vapor diff. Coeff. "μ"	6	
Adhesion	0,32 N/mm ²	
Thermal conductivity (tabulated value) "λ"	0,35 W/mK	
Durability	NPD	
Dangerous substances	see SDS	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer, by: **Giovanni Vittorioso - Sole Administrator**

Gricignano D'Aversa, 30/06/2013






EN 998-1:2010

MALVIN SRL

Registered office and Factory:
Zona ASI, S. S. 7 bis Km 15,400
81030 Gricignano Di Aversa (CE)
www.malvinsrl.com

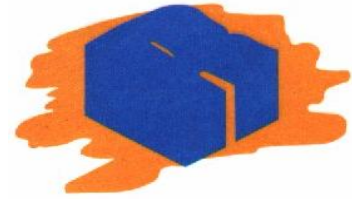

10 INTOCEM CALCE SANA B I - FB I(EN 998-1) n° DoP-IT - 153

Restoration mortar produced in factory for internal and external plasters (R)

Fire reaction	class A1
Water absorption "c"	$\geq 0,3 \text{ kg/m}^2$ after 24 h
Water vapor diff. coefficient " μ "	6
Adhesion	0,32 N/mm ²
Thermal conductivity (tabulated value) " λ "	0,35 W/mK
Durability	NPD
Dangerous substances	see SDS

MALVIN

The performance characteristics refer to laboratory tests, values depend on the weather conditions and on the methods of implementations. The operator must verify the suitability of the product depending on the use planned.



MALVIN



SEDE LEGALE E STABILIMENTO • Zona ASI - SS 7 Bis Km 15,400 - 81030 Gricignano di Aversa (CE)
TEL. + 39 081 8132780 - 5029713 •  800 - 142 999 • FAX + 39 081 5029748 • commerciale@malvinsrl.com - www.malvinsrl.com



DECLARATION OF PERFORMANCE

Pursuant to the Construction Products Regulation n° 305/2011
n° **DOP-IT- 154**

1. Unique identification code of the product-type: **INTOFIN CALCE SANA MB-SFB**
2. Type number: **RESTORATION MORTAR PRODUCED IN FACTORY (R)**
3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer: **for internal/external plasters.**
4. Name, registered name or registered trade mark and contact address of the manufacturer as required pursuant to 11, (5): **MALVIN SRL– industrial area ASI state road 7 bis km 15,400 - 81030 Gricignano D'Aversa (CE) - www.malvinsrl.com**
5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in article 12 (2): **not applicable.**
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V: **system 4.**
7. In case of declaration of performance concerning a construction product covered by a harmonized standard: **The notified body has no tasks to be carried out.**
8. In case of a declaration of performance concerning a construction product for which has been issued an European technical assessment: **not applicable.**
9. Declared performance

Main characteristics	Performance	Norm
Fire reaction	class A1	EN 998-1:2010
Water absorption "c"	≥ 0,3 kg/m ² after 24 h	
Water vapor diff. Coeff. "μ"	7	
Adhesion	0,40 N/mm ²	
Thermal conductivity (tabulated value) "λ"	0,39 W/mK	
Durability	NPD	
Dangerous substances	see SDS	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer, by: **Giovanni Vittorioso - Sole Administrator**

Gricignano D'Aversa, 30/06/2013






EN 998-1:2010

MALVIN SRL

Registered office and Factory:
Zona ASI, S. S. 7 bis Km 15,400
81030 Gricignano Di Aversa (CE)
www.malvinsrl.com

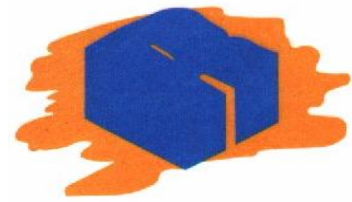

10 INTOCEM CALCE SANA MB- SFB (EN 998-1) n° DoP-IT - 154

Restoration mortar produced in factory for internal and external plasters (R)

Fire reaction	class A1
Water absorption "c"	$\geq 0,3 \text{ kg/m}^2$ after 24 h
Water vapor diff. coefficient " μ "	7
Adhesion	0,40 N/mm ²
Thermal conductivity (tabulated value) " λ "	0,39 W/mK
Durability	NPD
Dangerous substances	see SDS

MALVIN

The performance characteristics refer to laboratory tests, values depend on the weather conditions and on the methods of implementations. The operator must verify the suitability of the product depending on the use planned.



MALVIN



SEDE LEGALE E STABILIMENTO • Zona ASI - SS 7 Bis Km 15,400 - 81030 Gricignano di Aversa (CE)

TEL. + 39 081 8132780 - 5029713

Numero Verde
800 - 142 999

FAX + 39 081 5029748 • commerciale@malvinsrl.com - www.malvinsrl.com



DECLARATION OF PERFORMANCE

Pursuant to the Construction Products Regulation n° 305/2011
n° **DOP-IT- 155**

1. Unique identification code of the product-type: **INTOFIN CALCE SANA MB I-SFB I**
2. Type number: **RESTORATION MORTAR PRODUCED IN FACTORY (R)**
3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer: **for internal/external plasters.**
4. Name, registered name or registered trade mark and contact address of the manufacturer as required pursuant to 11, (5): **MALVIN SRL– industrial area ASI state road 7 bis km 15,400 - 81030 Gricignano D’Aversa (CE) - www.malvinsrl.com**
5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in article 12 (2): **not applicable.**
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V: **system 4.**
7. In case of declaration of performance concerning a construction product covered by a harmonized standard: **The notified body has no tasks to be carried out.**
8. In case of a declaration of performance concerning a construction product for which has been issued an European technical assessment: **not applicable.**
9. Declared performance

Main characteristics	Performance	Norm
Fire reaction	class A1	EN 998-1:2010
Water absorption "c"	≥ 0,3 kg/m ² after 24 h	
Water vapor diff. Coeff. "μ"	7	
Adhesion	0,40 N/mm ²	
Thermal conductivity (tabulated value) "λ"	0,43 W/mK	
Durability	NPD	
Dangerous substances	see SDS	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer, by: **Giovanni Vittorioso - Sole Administrator**

Gricignano D’Aversa, 30/06/2013






EN 998-1:2010

MALVIN SRL

Registered office and Factory:
Zona ASI, S. S. 7 bis Km 15,400
81030 Gricignano Di Aversa (CE)
www.malvinsrl.com



10

INTOCEM CALCE SANA MB I - SFB I(EN 998-1)

n° DoP-IT - 155

Restoration mortar produced in factory for internal and external plasters (R)

Fire reaction	class A1
Water absorption "c"	$\geq 0,3 \text{ kg/m}^2$ after 24 h
Water vapor diff. coefficient " μ "	7
Adhesion	0,40 N/mm ²
Thermal conductivity (tabulated value) " λ "	0,43 W/mK
Durability	NPD
Dangerous substances	see SDS

MALVIN

The performance characteristics refer to laboratory tests, values depend on the weather conditions and on the methods of implementations. The operator must verify the suitability of the product depending on the use planned.



MALVIN



SEDE LEGALE E STABILIMENTO • Zona ASI - SS 7 Bis Km 15,400 - 81030 Gricignano di Aversa (CE)
TEL. + 39 081 8132780 - 5029713 •  800 - 142 999 • FAX + 39 081 5029748 • commerciale@malvinsrl.com - www.malvinsrl.com