



# DECLARATION OF PERFORMANCE

Pursuant to the Construction Products Regulation n° 305/2011  
n° **DOP-IT- 148**

1. Unique identification code of the product-type: **INTOCOL SS FLEX S1 (EN 12004)**
2. Type number: **IMPROVED CEMENTITIOUS ADHESIVE WITH LIMITED SLIP AND EXTENDED OPEN TIME FOR CERAMIC TILES (C2 TE – S1 )**
3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer: **wall and floor tiling in interiors and exteriors.**
4. Name, registered name or registered trade mark and contact address of the manufacturer as required pursuant to 11, (5): **MALVIN SRL –industrial area ASI state road 7 bis km 15,400 - 81030 Gricignano D’Aversa (CE) - www.malvinsrl.com**
5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in article 12 (2): **not applicable.**
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V: **system 3.**
7. In case of declaration of performance concerning a construction product covered by a harmonized standard: **TECNOPROVE SRL as a notified testing laboratory n. 0925, has conducted the initial type tests in accordance with the system of assessment and verification of constancy of performance 3 and has issued the following test report n. 98/A/2 of 03/11/2017.**
8. In case of a declaration of performance concerning a construction product for which has been issued an European technical assessment: **not applicable.**
9. Declared performance

MAIN CHARACTERISTICS	PERFORMANCE	HARMONISED TECHNICAL STANDARD
Reaction to fire	Class A1 <sub>n</sub>	EN 12004:2012
Initial tensile adhesion	≥ 1,0 N/mm <sup>2</sup>	
Tensile bonding after immersion in water	≥ 1,0 N/mm <sup>2</sup>	
Tensile bonding after thermal ageing	≥ 1,0 N/mm <sup>2</sup>	
Tensile bonding after frost and thaw cycles	≥ 1,0 N/mm <sup>2</sup>	
Release of dangerous substances	See SDS	
Deformability	> 2,5mm < 5 mm -S1	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer, by: **Giovanni Vittorioso - Sole Administrator**  
(name and function)


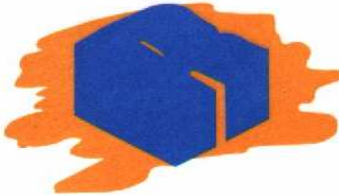
**Gricignano D’Aversa, 30/05/2018**  
(place and date of issue)


  
signature



**DECLARATION OF PERFORMANCE**  
 Pursuant to the Construction Products Regulation n° 305/2011  
 n° **DOP-IT- 148**



 0925 EN 12004:2012	<p align="center"><b>MALVIN SRL</b></p> <p align="center"><i>Registered office and Factory:</i>                  Zona ASI, S. S. 7 bis Km 15,400                  81030 Gricignano Di Aversa (CE)  <b>www.malvinsrl.com</b></p>	
<p align="center"><b>10</b></p> <p align="center"><b>INTOCOL SS FLEX S1 (EN 12004)</b></p> <p align="center">n° DoP-IT - 148</p> <p align="center">Improved cementitious adhesive with limited split and extended open time, for internal and external ceramic tiles.                  (C2 TE S1)</p>		
Fire reaction	Class A1 <sub>n</sub>	
Initial tensile adhesion	≥ 1,0 N/mm <sup>2</sup>	
Tensile bonding after immersion in water	≥ 1,0 N/mm <sup>2</sup>	
Tensile bonding after thermal ageing	≥ 1,0 N/mm <sup>2</sup>	
Tensile bonding after frost and thaw cycles	≥ 1,0 N/mm <sup>2</sup>	
Release of dangerous substances	See SDS	
Deformability	> 2,5mm < 5 mm -S1	

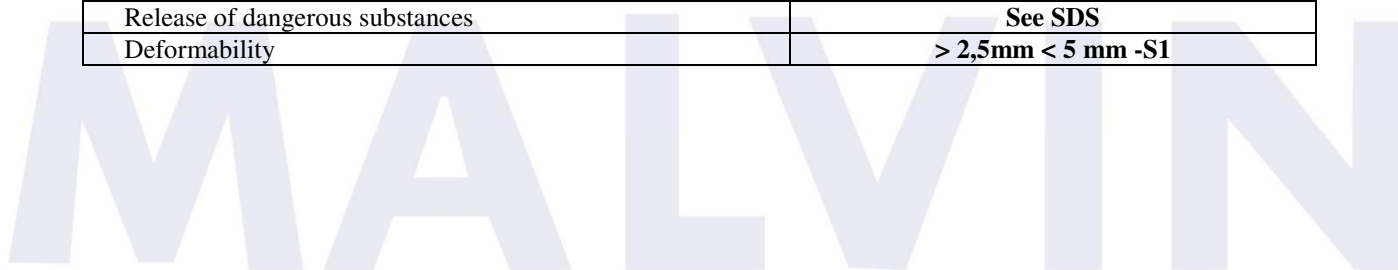

*Le caratteristiche prestazionali riportate si riferiscono a prove di laboratorio, i valori possono subire scostamenti in funzione delle condizioni climatiche e modalità di messa in opera. L'utilizzatore deve verificare l'idoneità del prodotto all'impiego previsto.*



**MALVIN**

