



MATERIAL HANDLING

Genie
A TEREX BRAND

Hinowa

Wienold LIFTE
seit 1987

IPS
Ireland

MATERIAL HANDLING SOLUTIONS



With many years of experience in the lifting equipment industry, IPS Ireland has the knowledge and expertise to provide you with the perfect material handling solution.

Whether you need equipment for basic "lift and shift" applications, or specialised rough terrain materials handling capabilities, IPS Ireland can provide you with expert, impartial advice. We partner with some of the world's leading manufacturers to ensure our customers receive the highest quality products at competitive prices.

Our comprehensive inventory of new and Approved Used equipment covers a wide range of load capacities and engine/motor sizes, as well as transport and accessory options. Reliable, easy to operate and with products suitable for use both indoors and outdoors, the IPS Ireland range makes light work of lifting and moving heavy loads.



Designed with the user in mind, Genie's hugely popular range of simple and highly manoeuvrable products are easy for one person to set-up, operate and transport from site to site. Lightweight and compact, but strong enough to suit all of your material handling needs, the Genie Material Lift range offers an affordable solution to a variety of indoor and outdoor lifting applications. Plus with its range of accessories and options, it can be adapted, making it the perfect tool for loading, moving and positioning heavy loads with ease.

Genie® Lift



The Genie Lift is ideally suited to material handling and pallet lifting, and with three bases and a range of accessories, it is fully customisable. Made from lightweight aluminium, it is designed to be easily manoeuvrable, simple to operate, and has non-marking wheels suitable for both indoor and outdoor applications. The Genie Lift comes with a standard winch and is well suited for lifting heavy material to and from shelving, installation and general lifting.

MODELS AVAILABLE

Product	Lifting Height (max.)	Load Capacity*	Weight**
GL™-4	1.80m	227kg	57kg
GL™-8	3.06m	181kg	66kg
GL™-10	3.56m	159kg	68kg
GL™-12	4.20m	159kg	70kg

*30cm load centre **Weight will vary depending on options and/or country standards.

Genie® Super Hoist

Compact, and easy to set up, the Genie Super Hoist is a fully portable, telescoping pneumatic hoist, which can reach heights of up to 5.6m. Using a CO₂, or compressed air cylinder which attaches to the base, this versatile hoist makes light work of installing overhead ceiling panels, and plumbing. With a 4.8m stretched hose and the ability to lift up to 136kg, the Genie Super Hoist is simple to use, and effective at getting the job completed.

MODELS AVAILABLE

Product	Lifting Height (max.)	Load Capacity	Platform Width x Length
GH™-3.8	3.80m	136kg	61cm x 48cm
GH™-5.6	5.60m	113kg	61cm x 48cm



Genie® Superlift™ Advantage



The fully customisable Genie Superlift Advantage has six load handling attachments and a choice of either a standard base (with welded steel for extra support) or a straddle base (adjustable for wide loads and pallets up to 122cm). This compact, portable material lift is easy to operate and can fit through a single doorway in an upright position. The additional attachments are easy to apply and remove, enabling the Genie Superlift Advantage to be configured to suit the exact requirements of the job.

MODELS AVAILABLE

Product	Lifting Height (max.)	Load Capacity*	Weight**
SLA™-5	2.00m	454kg	98kg
SLA™-10	3.49m	454kg	118kg
SLA™-15	4.98m	363kg	151kg
SLA™-20	6.46m	363kg	184kg
SLA™-25	7.94m	295kg	204kg

*46cm load centre **Weight will vary depending on options and/or country standards.

Genie® Superlift™ Contractor

The heavy-duty Genie Superlift Contractor comes with a variety of interchangeable accessories, making it a versatile piece of kit suitable for industrial applications and installations. The preferred choice for contractors, it's easy to operate, and supports a number of load handling attachments including adjustable forks, loading platform and fork extensions, each designed to safely lift, lower and move loads of up to 295kg.

MODELS AVAILABLE

Product	Lifting Height (max.)	Load Capacity*	Weight**
SLC™-12	3.94m	295kg	102kg
SLC™-18	5.64m	295kg	139kg
SLC™-24	7.32m	295kg	157kg

*36cm load centre **Weight will vary depending on options and/or country standards.





Wienold's high quality hydraulic and mechanical material lifts offer innovative solutions for lifting a wide range of materials including heavy duty glass panels. These versatile lifts are easy to manoeuvre and entirely adaptable, with a range of accessories available. Working flush against a wall is a problem of the past with Wienold Lift.



Wienold MFC 750 – Mini Floor Crane

Wienold's latest innovative product; the Mini Floor Crane is designed to fit a wide variety of applications. It features two long legs which are backwards mounted and fitted with two counterweight boxes. This combination allows the Mini Floor Crane to lift loads of up to 900kg and up to 2.90m in height (MFC 750/K). The shorty version (MFC 750/Ks) is ideal for space restricted tasks with a small footprint of just 0.65m x 1.2m. and a maximum lifting capacity of 745kg. The Mini Floor Crane is fully adaptable and can be positioned in front of walls to lift over obstacles, and can also lift loads from below floor level the with an optional electric hook winch (MFC 750/K only).

MODELS AVAILABLE

Product	Lifting Height (max.)	Load Capacity	Weight*
MFC 750/K	2.90m	900kg	168kg
MFC 750/Ks	2.90m	745kg	142kg

*Weight of chassis including boom. Weight of counterbalance weights is 490kg.



Wienold WLU-P – Counterbalance Material Lift

The Wienold WLU Premium is versatile and easily transportable due to its compact dimensions. The solid steel chassis allows for a range of applications using different outriggers, enabling the user to alter the lift to suit task demands. The WLU premium with short outriggers can lift up to 400kg to heights of up to 5.15m. Designed to save space, the "shorty" has a simple design to enable easy assembly in confined areas, lifting materials over and above objects with ease. Also available with reverse-mounted outriggers (WLU P/K), and without counterweights with front-facing outriggers (WLU P/L). Dual circuit vacuum lift available for heavy glass handling.

MODELS AVAILABLE

Product	Lifting Height (max.)	Load Capacity	Weight*
WLU P/Ks Premium 2.8	2.85m	400kg	113kg
WLU P/Ks Premium 4.0	4.00m	400kg	129kg
WLU P/Ks Premium 5.1	5.15m	360kg	145kg

* Weight of chassis and outriggers. Weight of counterbalance weights is 144kg.



Wienold SLK – Superlift with Counterbalance Weights



Ideal for working flush against the wall and over obstacles, the Wienold SLK handles heavy loads with ease and is perfect for installation, heating and ventilation and exhibition applications. Its counterweights allow the Superlift to raise and lower materials from the front, by arranging the outriggers and counterbalancing weights at the back.

MODELS AVAILABLE

Product	Lifting Height (max.)	Load Capacity	Weight*
SLK-5	2.00m	450kg	105kg
SLK-10	3.50m	450kg	122kg
SLK-15	5.00m	360kg	150kg
SLK-20	6.50m	360kg	182kg
SLK-25	7.90m	300kg	200kg

*Weight of basic chassis. Weight of counterbalance weights is 128kg.

Wienold GML - Glass Material Lift

The Wienold GML lift series provides a new and efficient way of handling delicate materials such as glass, and moving heavy loads. Available in three mast drive options, the GML series is available in electric AC, DC, and manual versions. All GML models are fitted with locking castors which can be locked for in-line steering, and the steel manufactured chassis frame, legs and outriggers provide a high standard of stability. The GML 800+ range is powerful enough to lift heavy loads with ease and can lift up to 900kg to heights of up to 7.90m. The GML 500+ offers maximum lifting heights of up to 9.05m along with a load capacity of up to 500kg. Various glass handling attachments available.

MODELS AVAILABLE

Product	Lifting Height (max.)	Load Capacity	Weight*
GML 800+ 10/M	3.50m	900kg	237kg
GML 800+ 15/M	5.00m	850kg	260kg
GML 800+ 20/M	6.50m	850kg	313kg
GML 800+ 25/M	7.90m	800kg	339kg
GML 500+ 30/M	9.05m	500kg	480kg

*Weight of chassis and outriggers. Weight of counterbalance weights is 207kg.



Hinowa DUMPERS

Hinowa's tracked dumpers have very low ground pressure, minimising their impact on lawns and paved areas. Compact and robust, they are designed for working in confined spaces and have great rough terrain capabilities. Powerful but economical to run, they are ideal for a range of applications and popular with farmers, estate managers, landscapers and builders.



Hinowa HS400

The Hinowa HS400 is ultra-compact and perfect for working indoors and in tight, hard to manoeuvre areas. This walk-behind dumper has a 400kg lift capacity, and a Honda petrol engine, making it versatile enough to be used for a number of applications.

MODELS AVAILABLE

Dumper Bed	Rated Volume	Load Capacity	Weight
Standard	0.20m ³	400kg	255kg
Self-Loading	0.20m ³	400kg	316kg
Farm Bed	0.19m ³	400kg	270kg



Hinowa HS701



The stand-on Hinowa HS701 mini-dumper is designed to distribute weight evenly, with track frames that work to reduce pressure on the ground, allowing for smooth operation. With a load-capacity of up to 700kg, the Hinowa HS701 enables the user to adjust the speed according to the ground conditions from 2.2km/h for uneven surfaces to 3.3km/h on flat surfaces. Available with either a Kubota diesel engine or a Honda petrol engine.

MODELS AVAILABLE

Dumper Bed	Rated Volume	Load Capacity	Weight*
Standard	0.34m ³	700kg	540kg
Self-Loading	0.34m ³	700kg	600kg
High-Tip	0.29m ³	550kg	620kg

*Weight based on petrol version.



Hinowa TX 2500 Traxporter

The Hinowa TX2500 Traxporter is a high-performance ride-on tracked dumper. With a 3-way tipping bed and intelligent unloading system, it is ideal for landscaping, construction and agricultural work. Designed for enhanced productivity, it has a 180° swivel cab, 2,500kg load capacity and the ability to operate the bed while the vehicle is in motion. The powerful Kubota 4-cylinder diesel engine, top speed of 11km/h and wide tracks make it ideal for use on rough terrain and soft ground.

MODELS AVAILABLE

Dumper Bed	Rated Volume	Load Capacity	Weight
Swivel	1.49m ³	2500kg	2700kg
3-Way	1.35m ³	2500kg	2700kg



TRACKED FORKLIFTS

Designed to carry heavy loads on soft or uneven terrain such as mud, gravel, snow and sand, Hinowa's tracked forklifts are perfect for moving bulky goods around the site. The adjustable width tracks and Honda petrol engine provide superior lift and drive capabilities, carrying loads of up to 2,000kg over difficult ground and raising them to a height of up to 0.37m (TP2000).

MODELS AVAILABLE

Product	Translation Speed	Load Capacity	Weight
TP1600	1.5–2.2km/h	1600kg	1330kg
TP1800	1.5–2.2km/h	1800kg	1200kg
TP2000	1.5–2.2km/h	2000kg	845kg



FOR ALL YOUR ACCESS PLATFORM NEEDS



REPLACEMENT PARTS



DEPOT SPARE PARTS STOCK MANAGEMENT



WORKSHOP SUPPLIES & STOCK MANAGEMENT




NEW & USED PLATFORM SALES



OUTRIGGER PADS

For more information on any of our services, or to talk about how we can help - please visit ipsireland.ie or call **+353 (0) 42 933 9111**

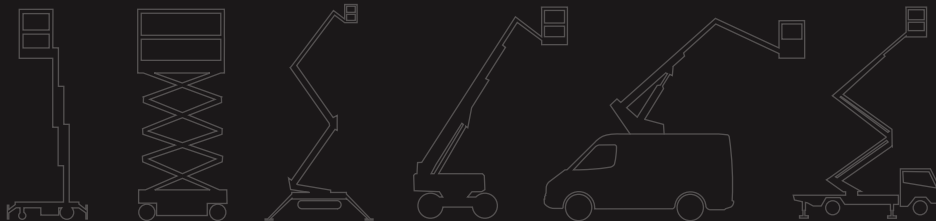

WE STOCK 1000'S OF OEM PARTS FROM ALL THE LEADING ACCESS PLATFORM MANUFACTURERS

Genie
A TEREX BRAND

Hinowa

JLG

POP
PRODUCTS LIMITED

G
manlift

OMMELIFT

A
ALDERCOTE

MANITOU

mec

snorkel

ISOLI

niftylift

DEUTZ

BOSS



Gary Power
Sales Manager

📞 087 668 9220

✉️ sales@ipsireland.ie



Trevor Lambe
Business Development Manager

📞 087 1232 141

✉️ trevor@ipsireland.ie

