



THE EDGE

I 120

Value With Elegance

Insulating windows
that give you
"the edge"
you need today



An insulating window must be a performer.

The proven performance of THE EDGE leads the industry. But, that's just the beginning.

A good quality window will require little maintenance.

Every component of THE EDGE has been carefully designed to be durable and maintenance free, from the 6063 T6 extruded aluminum to the strong zinc die-cast latches.

Since insulating windows become a permanent addition, they should not detract from the beauty of your home.

Homeowners tell us that the attractive offset type window frame adds unmatched beauty you can be proud of.

All of these superior qualities add up to the insulating value you need today.

Get THE EDGE

Projected frame design adds air space for better insulation




Geon vinyl thermal barrier insures positive seal and insulation between prime and insulating windows

Marine-type glazing wraps around glass to reduce breakage and air infiltration

Quality extruded glass frames for added strength and long life

Poly pile weatherstrip offers superior seal combined with long life


Heavy-duty extruded center bar adds strength and insured proper sash operation

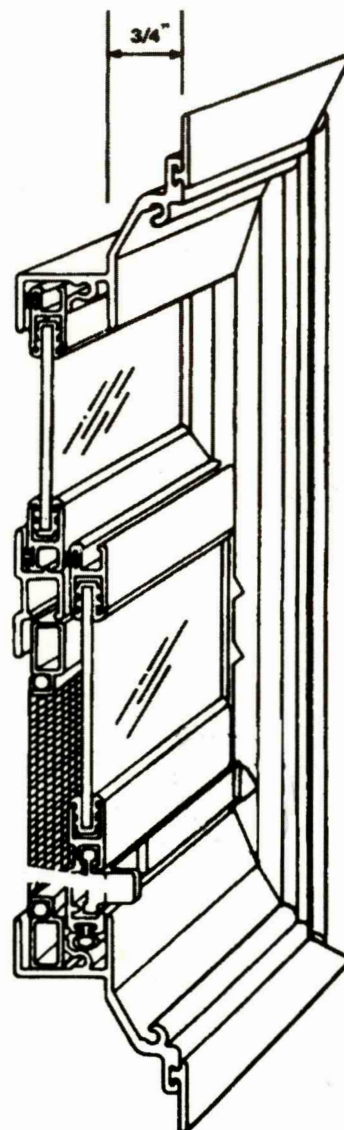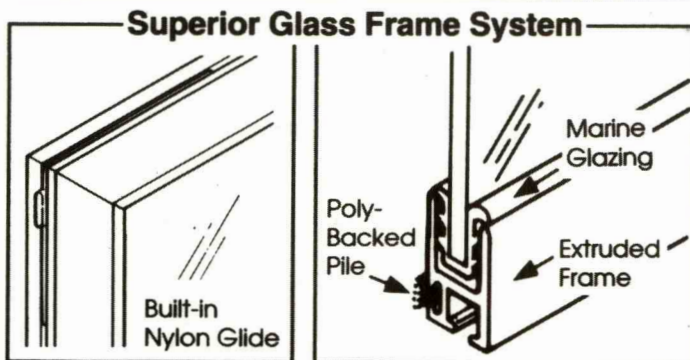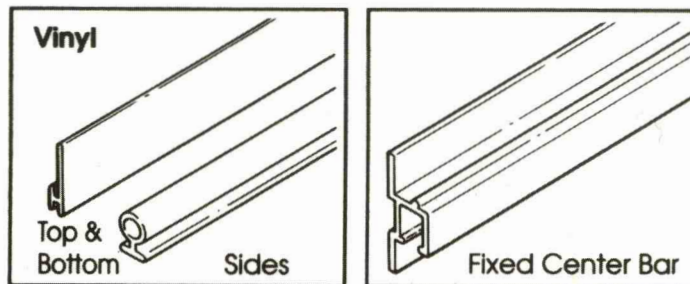

Available From

Standard Features

- Recessed, EasyClean composite tilt latches that are 5 times the strength of standard nylon latches.
- Roller tilt constant force balance system for smooth and quiet operation for all sizes with no maintenance concerns.
- Extruded aluminum screen frame for long lasting durability and appearance.
- DH performance rating DP40 with optional DP60 performance package.
- Many optional features available to enhance the appearance and performance of your investment.
- Dual Glaze using SilverGuard[®] double strength glass for maximum SHGC and UV protection. **A**
- Enviroseal NXT spacer by Super Spacer[™] for true warm edge technology. **B**
- Wet glazed using high performance silicon for superior thermal performance.
- All frame sash corners fusion welded at 45 degrees to eliminate air and water penetration. **C**
- 7 degree true slope sill to naturally drain all water (with double weatherstripped interior leg) **D**
- High performance cam action locks that out-perform industry standards. **E**
- Two integral sash ventilation night latches
- 3-1/4" 100% pure virgin PVC frame with multiple chambers and heavy walls, designed for maximum structural strength. **F**
- Full aluminum reinforced meeting rails for maximum strength wide and deep interlocks. **G**
- Unique raised beveled design to enhance your home's beauty. **H**
- Tested to meet and/or surpass all industry standards set by Energy Star, NFRC, AAMA and EWC

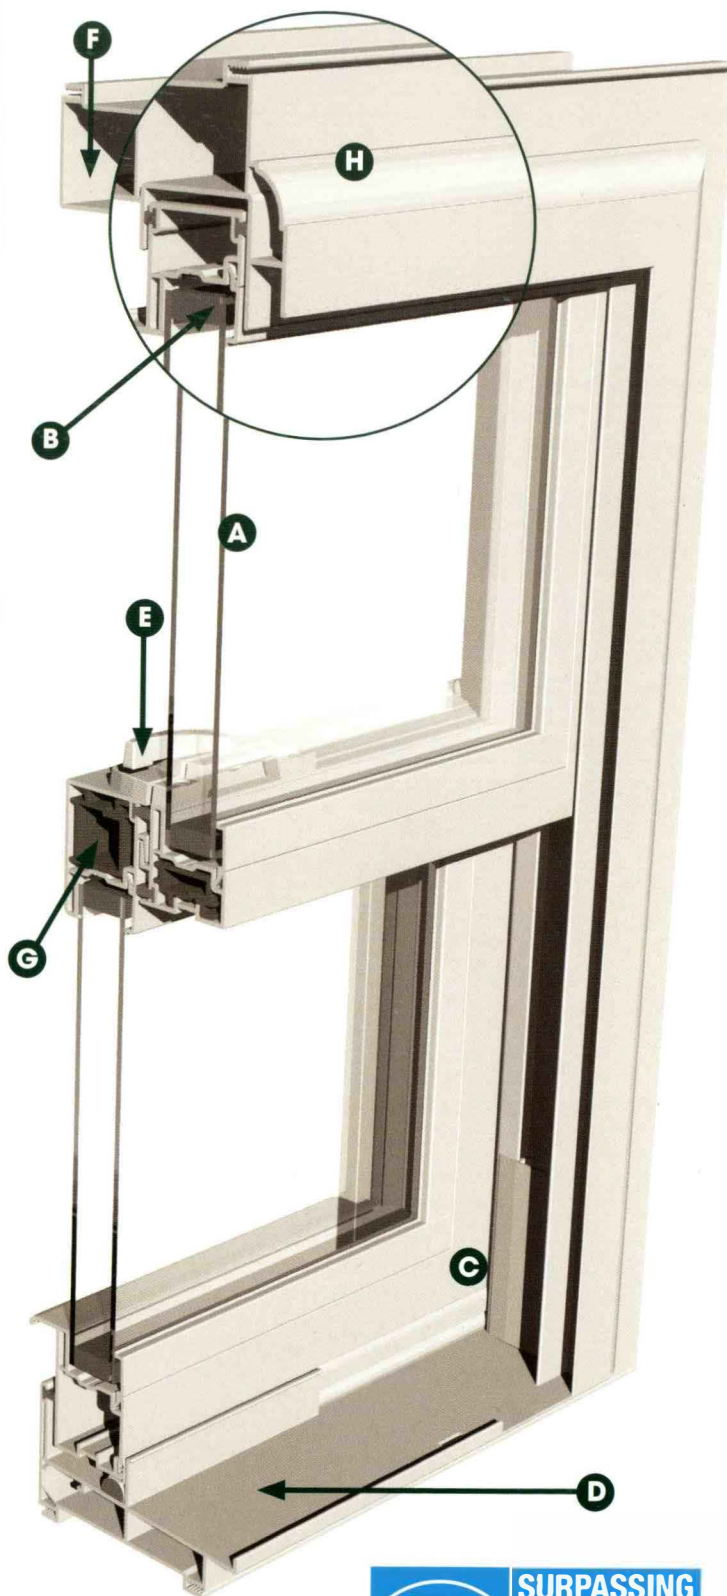

5/16 X 3/4 1- MILL
2 -WHITE
3- BRONZE
4- ALMOND
5- TAN
6- DESERT SAND
7- BLACK
8- SANDS TONE
9- ADOBE

3/8 X 3/4 1- MILL
2 -WHITE
3- BRONZE
4- ALMOND
5- TAN
6- DESERT SAND
7- SANDS TONE
8- ADOBE

7/16 X 3/4 1- WHITE
2- BRONZE
3- ALMOND
4- TAN
5- DESERT SAND
6- SANDSTONE
7- ADOBE

SLIDING PATIO DOORS


1- MILL
2- WHITE
3- ALMOND
4- TAN
5- BRONZE

STORM WINDOWS MILL
 WHITE
 BRONZE
 ALMOND
 SANDSTONE

Excellent durability for long-term performance

Pleasing aesthetic appearance


Added value and differentiation

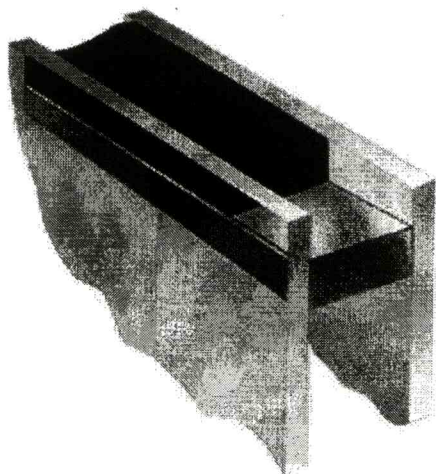

Additional
Images





Documents & Resources



Technical
Library

You May Be Interested In

Super Spacer® Premium Enhanced

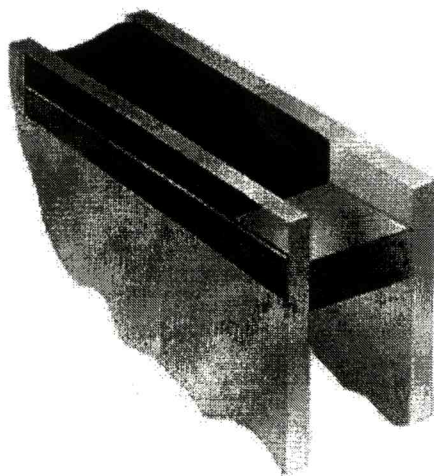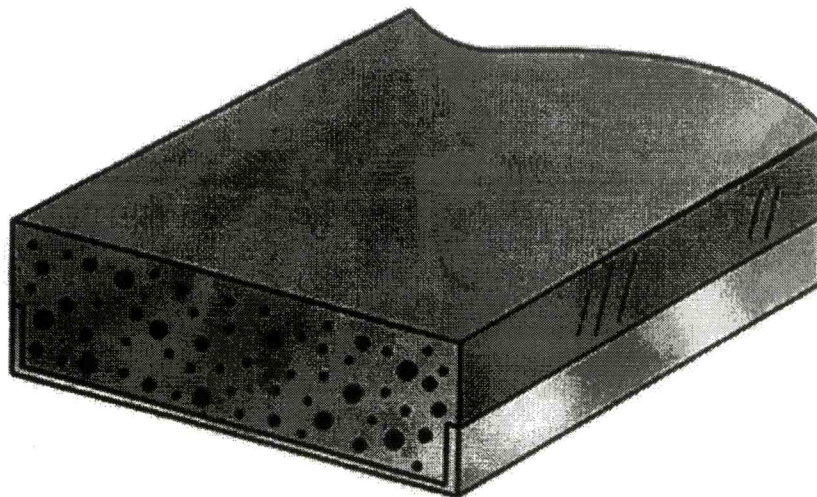

Additional
Images



Contact Us

[Have a rep contact me](#)

Product Literature


[Safety Data Sheet](#)

[marketing tools](#)[contact us](#)[careers](#)[Search](#)[who we are](#)[products & solutions](#)[investors](#)[locations](#)[news](#)[resources](#)

[Home](#) > [Products & Solutions](#) > [IG Spacers](#) > [Dual Seal Spacers](#) > [Super Spacer® Standard](#)


Super Spacer® Standard

Quanex's Super Spacer® Standard, featuring Polymer EPDM (Ethylene-propylene-diene-monomer) construction, dependably delivers high performance for insulating glass units, including excellent resistance to ozone, weathering, water and aging, while maintaining its flexibility through wide changes in temperature and barometric pressure.

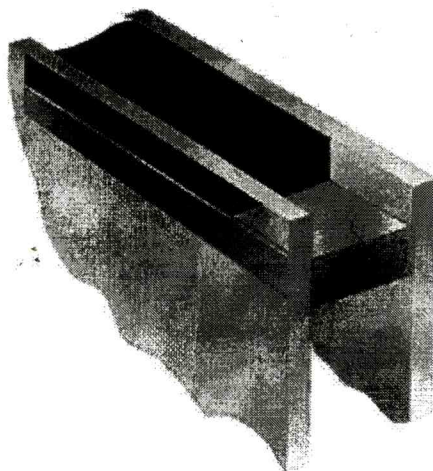

12/18/18

82520

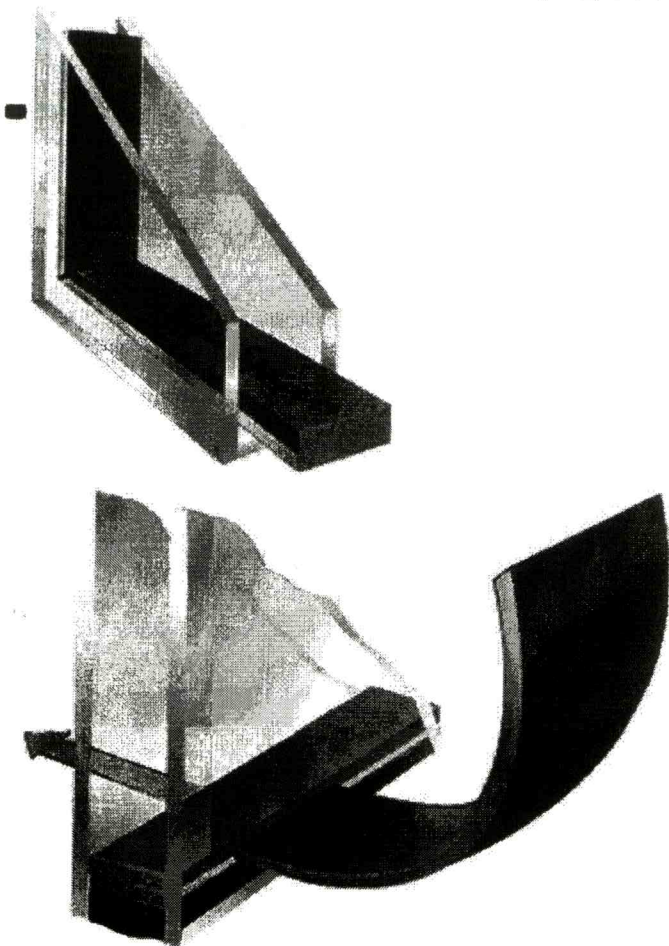

Super Spacer from Quane...

benefits



excellence

features





Super Spacer Standard enables high performance along with manufacturing efficiencies:

- Improved productivity
- Optimized energy savings
- Enhanced environmental comfort near windows
- Excellent condensation and mold resistance
- Color stability

screen frame
5/16 3/8 7/16

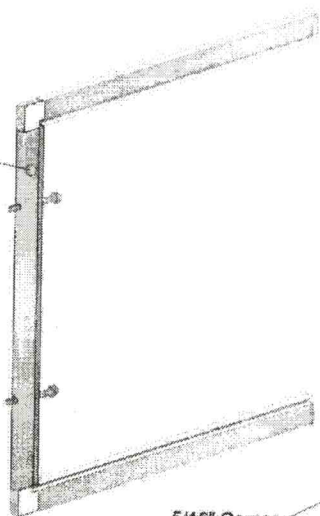


5/16" Corner

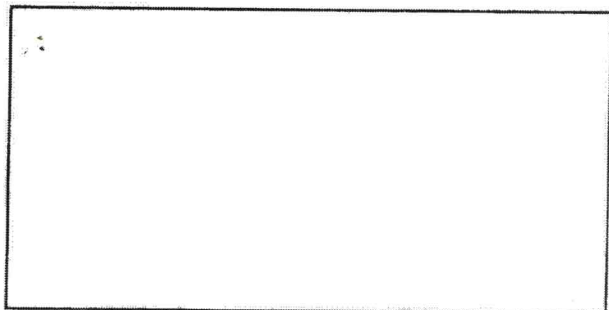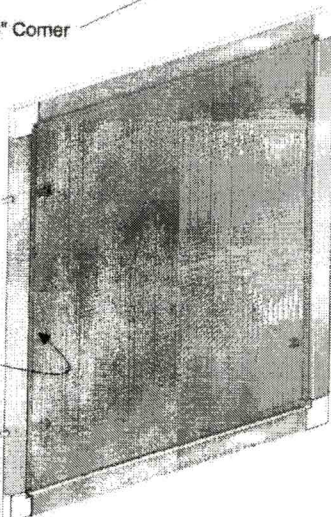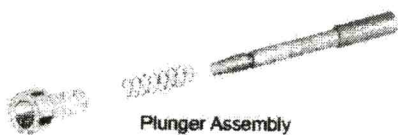
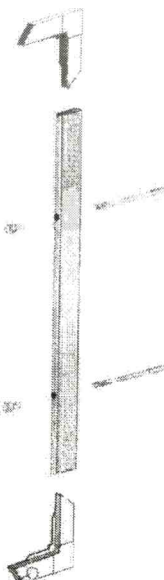


FIBERGLASS SCREEN MESH CHARCOAL
SCREEN FRAME

$\frac{5}{16}$ $\frac{3}{8}$ $\frac{7}{16}$




8

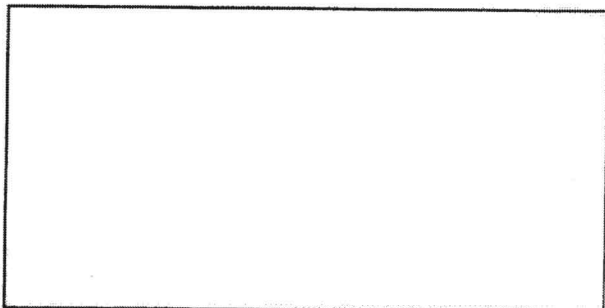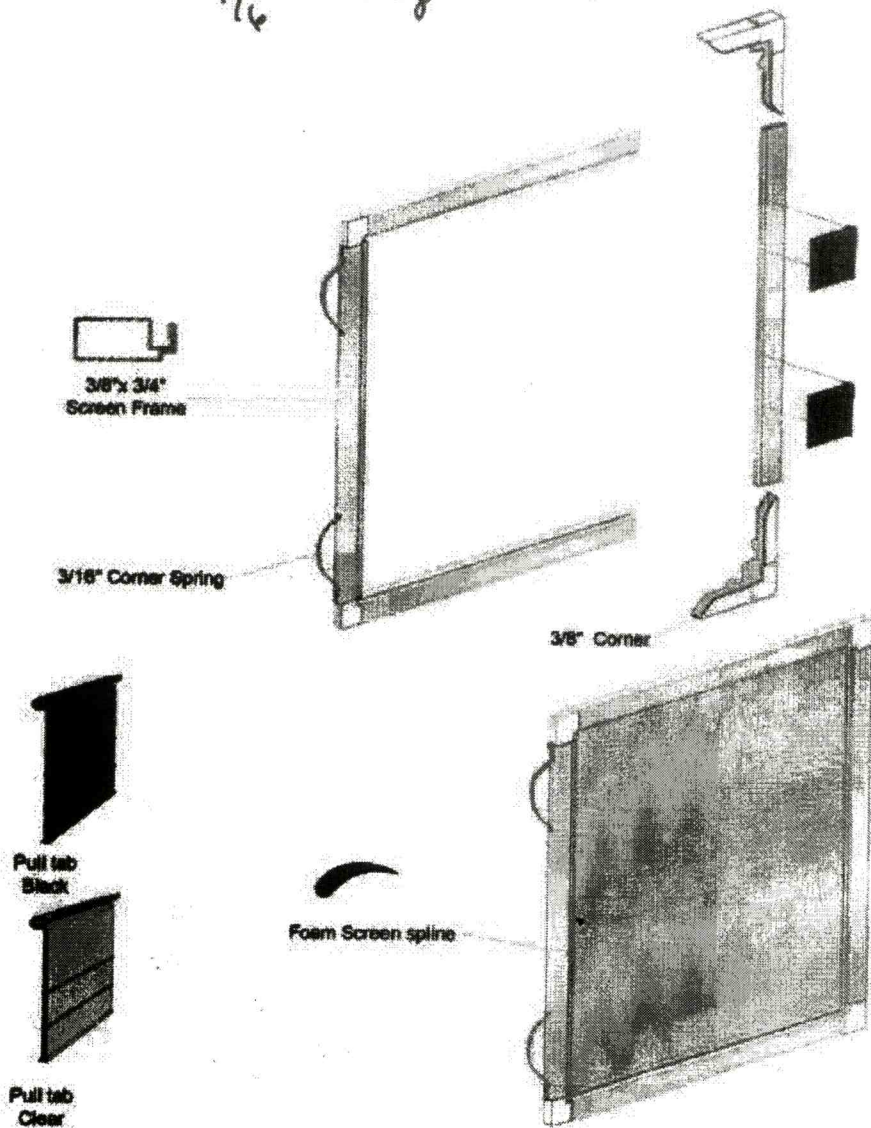

Solar Guard Screen Wire

- Blocks Up to 70% of the Sun's Heat
- Reduces Cooling Costs
- Reduces Fading of Carpeting, Drapes, and Furniture
- Attractive 54 x 18 Mesh
- Made From Durable Vinyl Coated Fiberglass
- Stocked in Popular Charcoal, Bronze, and Gray Colors
- All Types, Widths, and Colors Can Be Combined for Quantity Pricing

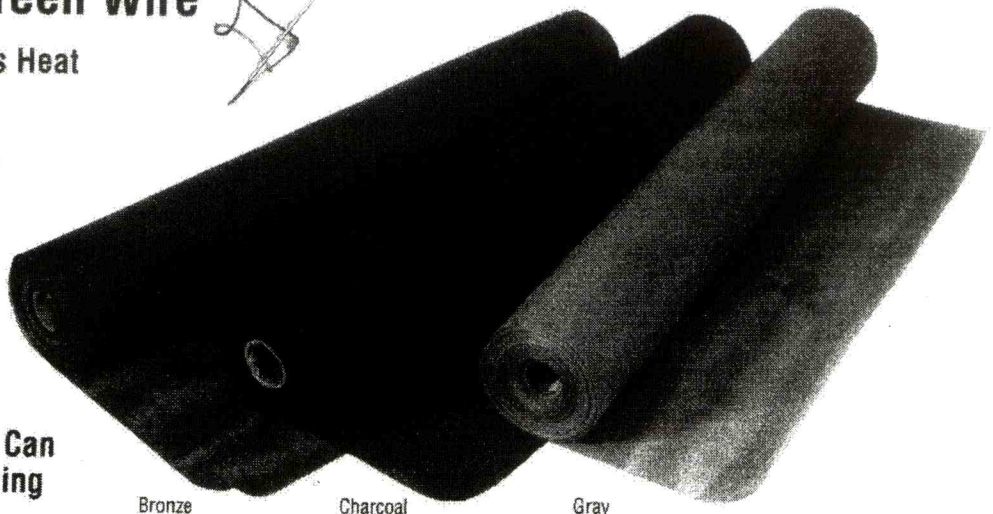


Bronze

Charcoal

Gray

Solar Guard Screen Wire cuts energy costs by reducing direct sunlight heat gain. This unique weave is made of vinyl-coated fiberglass that screens out insects while allowing natural airflow.


You can install it in any screen frame.

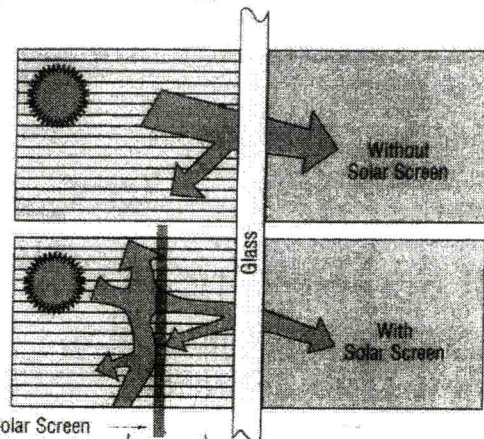


Solar Guard Absorbs and Dissipates as Much as 70% of the Transmitted Heat

SOLAR GUARD SCREEN WIRE - 54 X 18 MESH
ROLL LENGTH: 100 FEET (30.5 M)


CAT. NO.	COLOR	ROLL WIDTH	AREA PER ROLL SQUARE FEET/METERS
BSG24CH	Charcoal	24" (610 mm)	200' (18.6 m)
BSG24BRZ	Bronze	24" (610 mm)	200' (18.6 m)
BSG36CH	Charcoal	36" (914 mm)	300' (27.9 m)
BSG36BRZ	Bronze	36" (914 mm)	300' (27.9 m)
BSG36GRY	Gray	36" (914 mm)	300' (27.9 m)
BSG48CH	Charcoal	48" (1219 mm)	400' (37.2 m)
BSG48BRZ	Bronze	48" (1219 mm)	400' (37.2 m)
BSG48GRY	Gray	48" (1219 mm)	400' (37.2 m)
BSG60CH	Charcoal	60" (1524 mm)	500' (46.5 m)
BSG60BRZ	Bronze	60" (1524 mm)	500' (46.5 m)
BSG60GRY	Gray	60" (1524 mm)	500' (46.5 m)

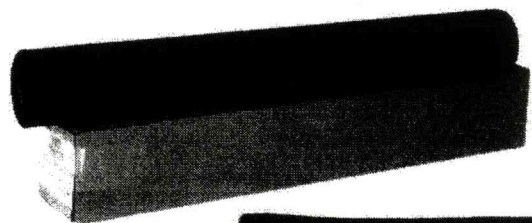


Screen Frame

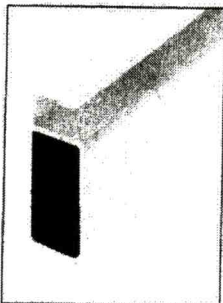


1/4" Extruded
Page W118




5/16" Extruded
Page W118




3/8" Extruded
Page W119



7/16" Extruded
Page W119



1" Extruded
Page W119



Spread Bar
Page W135