

KEEP YOUR GARAGE CLEAN AND DRY

COMPLETE GARAGE DOOR SEALING SYSTEMS

ISSUE 1 | 2017



ORDER DIRECT
FROM CLEVERSEAL

AUSTRALIA: 1300 887 438
NEW ZEALAND: 0800 111 670

www.cleverseal.com

Clever
SEAL
Sealing Systems

Benefit from numerous advantages

ABOUT US

Formed in 2007, the family-owned company has over 60 years of experience in the garage door and aluminum industries. This makes Cleverseal a reassuring purchase.

Designed, developed and manufactured in Australia, Cleverseal garage door sealing systems are already successfully installed on thousands of homes and factories throughout Australia, as well as overseas.



WHAT WE DO

Fed up with all those annoying cold draughts, smoke, driving rain, excess water, pests, dust, coastal corrosion, pollen and of course bushfire embers invading your garage?

Block out the elements by closing the gaps around the door and floor with a sealing system. The tight seal will keep the inside of your garage clean despite the weather outside.

Products

Cleverseal systems comprise of a comprehensive range of well-designed effective aluminum sections, combined with various lengths of bristle brush.



Treat yourself to the comfort and cleanliness

Save on energy

Energy cost savings by reducing air movement around the garage by 96%.

Bushfire protection

Cinderseal is the only product in the market that has been specifically developed for the first line in protection against bushfire for garage doors.

Door types

Available in single lengths or kit sets to suit your garage door type and size. DIY friendly or can be installed by your reputable garage door service business.



Bottom of door


The Cobra garage door bottom seal is available in three different models to suit out-of-level floors, cleverly designed to enable quick, efficient installation to close those tapering floor gaps.



Floor seal

More hard-wearing than door mounted weather-stripping, our floor mounted Door Dam Garage Door Threshold Seal provides a tight, long lasting barrier between the bottom of your garage door and floor. Door Dam forms an effective mini dam inside the line of your garage door.

Roller door seal commonly used carriers

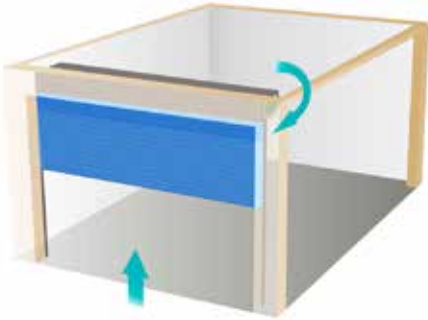

Multi Purpose
#RT370



55 Deg Angle
#5550V



Multi Purpose
#0050V

Roller door side seal carrier options



Back Brush Option
#67540V



RAD B&D Series 1
10mm Leg
#RTS1070



RAD Steeline / Gliderol/
Centurion Series A
#RTS1470



Centurion AA Series
#RT1970



Steeline/Gliderol/
Centurion AA Series
#RTS2570

(Also used as sectional overhead seal options)


Sectional door seal



55 Deg Angle
#5550V Standard side/top seal
common fixing plane



Multi Purpose
#RT370 side/top seal options
door fitted tight to wall
(exposed steel beam...no vertical fixing)

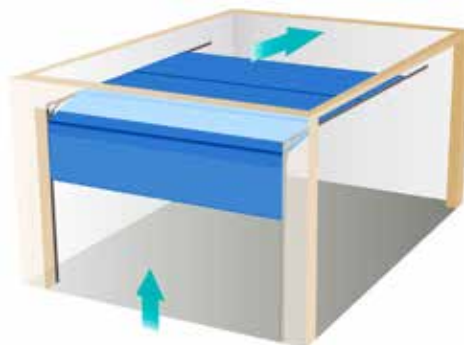


30 deg 65mm Back
#3050V/#3065V Top seal option
(open steel beam...no vertical fixing)



Back Brush
#2W42 Side/Top seal option - 2 way brush
(seal undulation wall surface)

Tilt up door seals

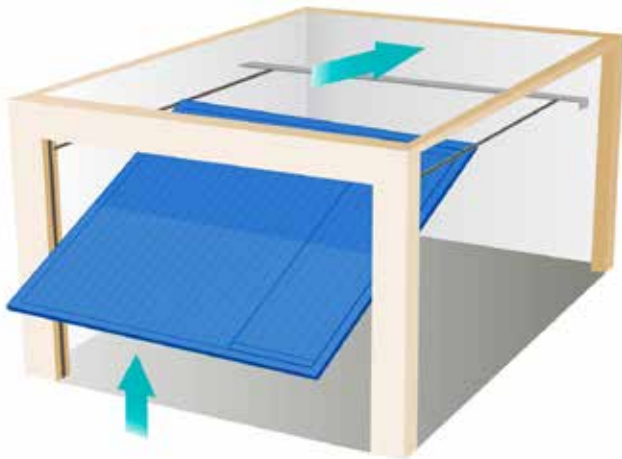

#0050V
Back H Carrier



Retro Fit - Exterior Application
#FACE FIX FLEXI
SEAL BRUSH



#Side Fix Flexi Seal
Fitted to door during manufacture

Commercial roller door



30 deg 65mm Back
#3050V/#3065V
Top seal option
(exposed installation)



Multi Purpose
#RT370 Top seal option
#RT370 Side seal option
(slide under channel guide)



Multi Purpose
#0050V Straight/'H'
Top seal option
(straight/'H')

Adaptors



Multi Purpose
#2W12



From 3.2mm to 5mm
#AD5



From 3.2mm to 8mm
#AD8

Seal insert standard stock length

3.2 Spline DPSS

	1250mm	1500mm	2250mm	2500mm	2750mm	3000mm
BB13	•	•	•	•	•	•
BB16	•	•	•	•	•	•
BB19	•	•	•	•	•	•
BB25	•	•	•	•	•	•
BB30	•	•	•	•	•	•
BB40	•	•	•	•	•	•
BB50	•	•		•	•	•
BB75	•	•		*	*	*
BB100	•	•		*	*	*
BB125	•	•		*	*	*

5.0 Spline DPSS **

	1250mm	1500mm
BB50	•	•
BB75	•	•
BB100	•	•
BB125	•	•
BB150	•	•
BB175	•	•
BB200	•	•

3.2 Spline Flame Retardant

	1250mm	1500mm	2250mm	2500mm	2750mm	3000mm
BB13	•	•	•	•	•	•
BB19	•	•	•	•	•	•
BB25	•	•	•	•	•	•
BB30	•	•	•	•	•	•
BB40	•	•	•	•	•	•
BB50	•	•		•	•	•
BB75	•	•		*	*	*
BB100	•	•		*	*	*
BB100	•	•		*	*	*
BB125	•	•		*	*	*

5.0 Spline Flame Retardant **

	1250mm	1500mm
BB50	•	•
BB75	•	•
BB100	•	•
BB125	•	•
BB150	•	•
BB175	•	•
BB200	•	•

8mm Spline DPSS **

	1250mm	1500mm
BB50	•	•
BB75	•	•
BB100	•	•
BB125	•	•
BB150	•	•
BB175	•	•
BB200	•	•

3.2 Spline 'Santoprene' co-extruded

	1250mm	1500mm	2250mm	2500mm	2750mm	3000mm
COX 16	•	•	•	•	•	•
COX 21	•	•	•	•	•	•
COX 32	•	•	•	•	•	•

Note: Compliance with AS 3959-2009/2010 requires that Cinderseal Flame Retardant Bristle Brush be used as 'the most suitable'

* Use of 1250mm & 1500mm lengths used to supply 2500mm & 3000mm product lengths

** 1250mm & 1500mm length modules to supply desired product length.



1300 887 438
 sales@cleverseal.com
 www.cleverseal.com

