




AERIAL WORK PLATFORM

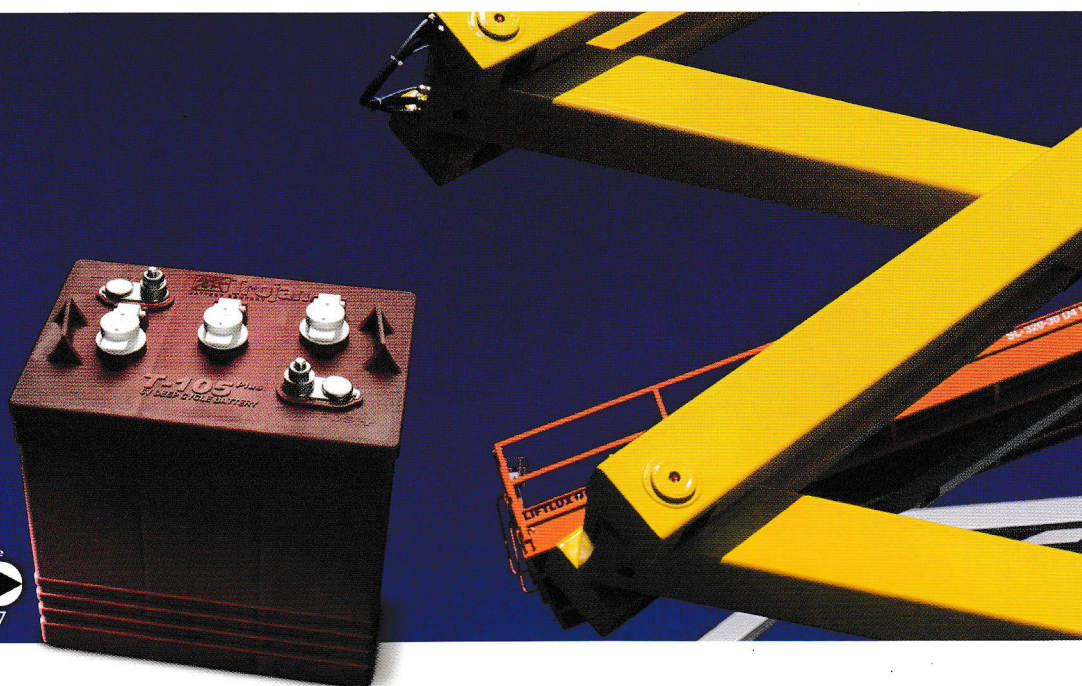

LIFT and ACCESS Magazine
LLEAP
AWARD WINNER 2007

AERIAL WORK PLATFORM/ACCESS

Trojan Battery - Rise Above the Rest

With over 80 years of experience, Trojan Battery delivers the world's most dependable, durable and powerful deep cycle batteries for use in aerial work platform (AWP)/access equipment.

Trojan's broad portfolio of flooded/wet, Deep-Cycle Gel™ and AGM batteries are available in 6-volt and 12-volt sizes and yield ideal performance in even the harshest conditions. Our award-winning flooded batteries feature Trojan's proprietary Maxguard® Advanced Design Separator and exclusive Alpha Plus® paste formulation. Together these technologies help extend the life of your battery, sustain performance and lower overall maintenance costs.

Our Deep-Cycle Gel™ and AGM batteries are maintenance free, require no watering and offer a convenient alternative to flooded batteries.

Trojan's AWP/Access products deliver superior performance and is why:

- Trojan Battery's Plus Series™ was awarded Best Overall winner in Lift and Access magazine's 2007 LLEAP Awards
- The world's top aerial work platform manufacturers and rental companies trust Trojan batteries to deliver power for their equipment

With Trojan Battery, you can expect maximum uptime and more productive hours on the job allowing you to rise above the rest. We offer outstanding technical support provided by full-time applications engineers. *Trojan batteries are available worldwide through Trojan's Master Distributor Network.*

Call 800-423-6569 or 562-236-3000 for more information
or visit us at **www.trojanbattery.com**.

Clean energy for life™

BCI GROUP SIZE	TYPE	CAPACITY ^A Minutes		CAPACITY ^B Amp-Hours (AH)		TERMINAL TYPE (See Below)	DIMENSIONS ^C Inches (mm)			WEIGHT lbs. (kg)
		@25 Amps	@75 Amps	5 Hr Rate	20 Hr Rate		L	W	H ^D	
6 VOLT DEEP CYCLE BATTERIES										
GC2	T-605	383	105	175	210	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	58 (26)
GC2	T-105	447	115	185	225	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	62 (28)
GC2	T-105 Plus	447	115	185	225	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	62 (28)
GC2	T-125	488	132	195	240	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	66 (30)
GC2	T-125 Plus	488	132	195	240	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	66 (30)
GC2H	T-145	530	145	215	260	1,3,4,5	10 3/8 (264)	7 1/8 (181)	11 5/8 (295)	72 (33)
GC2H	T-145 Plus	530	145	215	260	1,2,4	10 3/8 (264)	7 1/8 (181)	11 1/2 (292)	72 (33)
901	J250G	475	130	195	235	5	11 1/2 (292)	7 (178)	11 7/8 (302)	67 (30)
901	J250P	540	135	215	250	6	11 11/16 (297)	7 (178)	11 1/2 (292)	72 (33)
902	J305G	620	170	255	310	5	12 1/4 (311)	7 (178)	14 3/8 (365)	90 (41)
902	J305P	675	175	270	315	6	11 5/8 (295)	7 (178)	14 3/8 (365)	95 (43)
902	J305H	745	195	285	335	6	11 5/8 (295)	7 (178)	14 3/8 (365)	97 (44)
903	L16G	750	185	305	370	5,9	12 1/4 (311)	7 (178)	17 (432)	106 (48)
903	L16P	805	200	320	390	6,9	11 5/8 (295)	7 (178)	16 3/4 (424)	113 (51)
903	L16H	885	225	345	420	6	11 5/8 (295)	7 (178)	16 3/4 (424)	124 (56)
6 VOLT DUAL PURPOSE AGM BATTERIES										
GC2	6V-AGM	385	-	154	200	6	10 1/4 (260)	7 1/16 (179)	10 5/8 (270)	65 (29)
12 VOLT DUAL PURPOSE AGM BATTERIES										
27	27-AGM	175	-	76	100	6	12 (305)	6 5/8 (168)	9 3/16 (233)	67 (30)
6 VOLT DEEP-CYCLE GEL BATTERIES										
GC2	6V-GEL	394	-	154	189	5	10 1/4 (260)	7 1/8 (181)	10 7/8 (276)	68 (31)
12 VOLT DEEP-CYCLE GEL BATTERIES										
27	27-GEL	179	-	76	91	5	12 3/4 (324)	6 3/4 (171)	9 1/4 (234)	63 (29)
31	31-GEL	200	-	85	102	5	12 15/16 (329)	6 3/4 (171)	9 5/8 (245)	69 (31)


A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.

B. The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20 Hr rate and 86°F (30°C) for the 5 Hr rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.

C. Dimensions are based on maximum size. Dimensions may vary depending on type of handle or terminal.

D. Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

TERMINAL CONFIGURATIONS

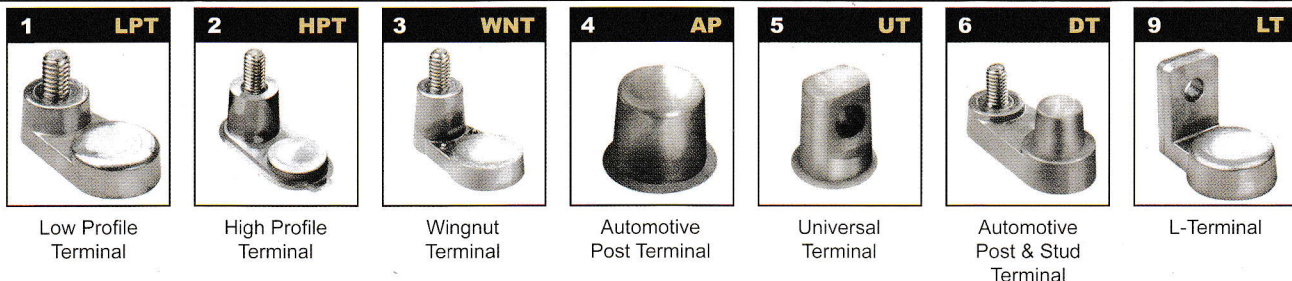

For a Trojan Master Distributor near you, call 800-423-6569 or 562-236-3000 or visit us at www.trojanbattery.com.



DEEP-CYCLE GEL™



DEEP-CYCLE GEL™

Premium Deep Cycle Technology with Maintenance Free Convenience

With over 85 years of experience, Trojan Battery—the most trusted name in deep cycle flooded/wet technology—offers the next best thing: Deep-Cycle Gel™ batteries.

Trojan Deep-Cycle Gel batteries are completely maintenance free and require no watering. Select from our extended portfolio featuring two new European sizes: 5SHP-GEL and TE35-GEL. Additional benefits include:

- Long-lasting runtime and battery life in the most demanding of applications
- Proprietary Gel formulation prevents stratification
- Superior engineering offers exceptional durability
- Certified non-spillable (UN2800); approved for air, sea or ground transportation
- Sealed containers ensure safe use in schools, hospitals, office buildings and other health & safety-sensitive (HSE) environments

Trojan Deep-Cycle Gel is engineered for high performance in deep-discharge and heavy-duty cycling applications:

- Aerial Work Platform (AWP)/Access
- Floor Machine
- Golf/Utility/Neighborhood Electric Vehicle (NEV)
- Industrial
- Material Handling
- Recreational Vehicle (RV)
- Remote Monitoring & Instrumentation
- Renewable Energy (Solar, Small Wind and Small Hydro)

We offer outstanding technical support provided by full-time application engineers. Call 800-423-6569 or +1-562-236-3000 for more information or visit us at www.trojanbattery.com.

Deep-Cycle Gel is available worldwide through Trojan's Master Distributor Network.

Clean energy for life™

Product Specifications

BCI GROUP SIZE	TYPE	VOLTAGE	CAPACITY ^A Minutes	CRANKING PERFORMANCE		CAPACITY ^B Amp-Hours (AH)		TERMINAL TYPE (See Below)	HANDLE or BRACKET	DIMENSIONS ^C Inches (mm)			WEIGHT lbs. (kg)
			@25 Amps	CCA ^D @0°F	CA ^E @32°F	5 Hr Rate	20 Hr Rate			L	W	H ^F	
DEEP-CYCLE GEL BATTERIES													
GC2	6V-GEL	6 Volt	394	575	825	154	189	5	Bracket	10 1/4 (260)	7 1/8 (181)	10 7/8 (276)	68 (31)
DIN	TE35-GEL	6 Volt	-	-	-	180	210	4	Grip Handle	9 5/8 (244)	7 1/2 (190)	10 7/8 (276)	69 (31)
24	24-GEL	12 Volt	147	330	460	66	77	5,6	Handle	10 7/8 (276)	6 3/4 (171)	9 5/16 (236)	52 (24)
27	27-GEL	12 Volt	179	395	545	76	91	5	Handle	12 3/4 (324)	6 3/4 (171)	9 1/4 (234)	63 (29)
31	31-GEL	12 Volt	200	445	620	85	102	5	Handle	12 15/16 (329)	6 3/4 (171)	9 5/8 (245)	69 (31)
DIN	5SHP-GEL*	12 Volt	-	- -	-	110	125	4	Handle	13 9/16 (345)	6 3/4 (171)	11 1/8 (283)	85 (39)

A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.

B. The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20 Hr and 86°F (30°C) for the 5 Hr rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.





C. Dimensions are based on maximum size. Dimensions may vary depending on type of handle or terminal. Batteries to be mounted with .5 inches (12.7mm) spacing minimum

D. C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F at a voltage above 1.2 V/cell.

E. C.A. (Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F at a voltage above 1.2 V/cell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F.

F. Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

* 5SHP-GEL available November 2009

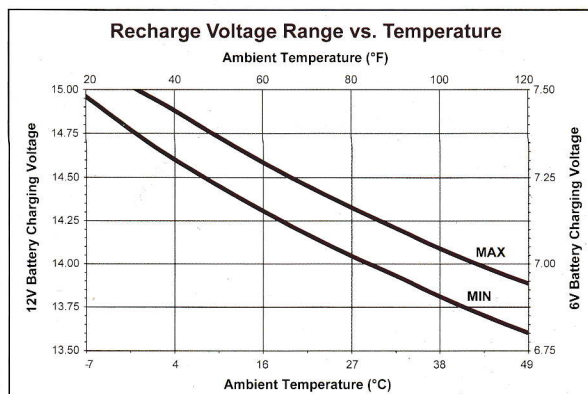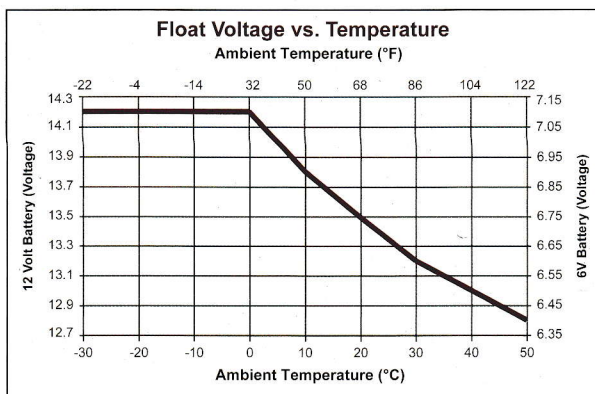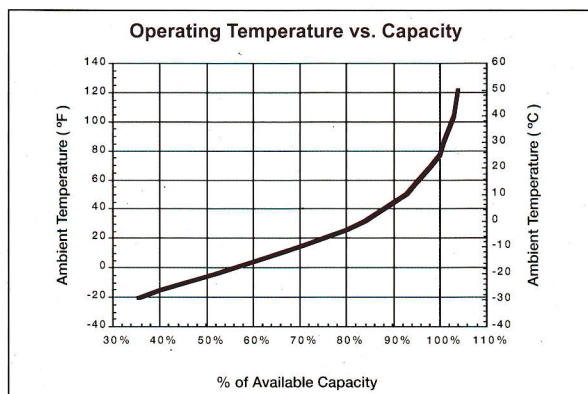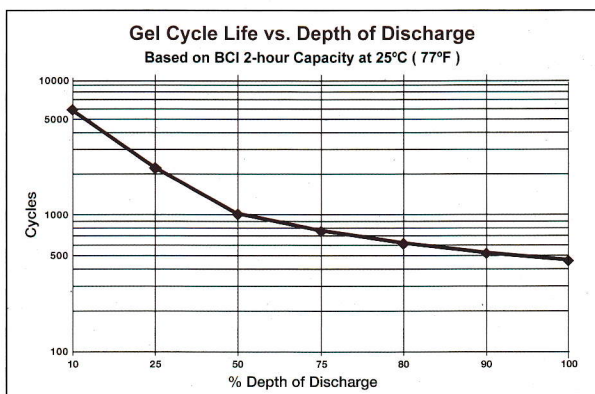


Charging Instructions:

Do not install or charge batteries in a sealed or non-ventilated compartment. Only use a temperature compensated, constant potential, voltage-regulated charger. Constant under or overcharging will damage the battery and shorten its life as with any battery.


For 12V batteries: charge to at least 14.1 volts but no more than 14.4 volts at 77°F (25°C).

For 6V batteries: charge to at least 7.05 volts but no more than 7.2 volts at 77°F (25°C).


TERMINAL CONFIGURATIONS



Automotive Post Terminal



Universal Terminal



Automotive Post & Stud Terminal



For a Trojan Master Distributor near you, call 800-423-6569 or +1-562-236-3000 or visit www.trojanbattery.com.



FLOOR MACHINE



FLOOR MACHINE

Trojan Battery - The Power to Shine

With over 80 years of experience, Trojan Battery delivers the world's most reliable, powerful and durable floor machine batteries to meet your toughest cleaning needs—in both flooded/wet and gel technologies.

Trojan's broad portfolio of flooded and gel batteries are available in 6-volt and 12-volt sizes. Our flooded deep cycle batteries feature Trojan's proprietary Maxguard® Advanced Design Separator and exclusive Alpha Plus® paste formulation. Together these technologies help extend the life of your battery, sustain performance and lower overall maintenance costs.

Our Deep-Cycle Gel™ batteries are maintenance free and require no watering. Certified non-spillable, Trojan's Deep-Cycle Gel is ideal for use in Health & Safety-sensitive Environments (HSE) such as schools, hospitals, office buildings and airports.

Trojan's Floor Machine products deliver superior capacity and durability, and is why:

- **The world's top floor machine manufacturers and cleaning contractors know they can depend on Trojan's rugged construction to provide long-lasting power in the harshest conditions**
- **You can expect unrivaled capacity for more productive hours each and every shift, seven days a week**

With Trojan Battery's high-capacity deep cycle batteries, you have the power to shine. We offer outstanding technical support provided by full-time applications engineers. *Trojan batteries are available worldwide through Trojan's Master Distributor Network.*










Call 800-423-6569 or 562-236-3000 for more information
or visit us at **www.trojanbattery.com**.

Clean energy for life™

BCI GROUP SIZE	TYPE	CAPACITY ^A Minutes		CAPACITY ^B Amp-Hours (AH)		TERMINAL TYPE (See Below)	DIMENSIONS ^C Inches (mm)			WEIGHT lbs. (kg)
		@25 Amps	@75 Amps	5 Hr Rate	20 Hr Rate		L	W	H ^D	
6 VOLT DEEP CYCLE BATTERIES										
GC2	T-605	383	105	175	210	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	58 (26)
GC2	T-105	447	115	185	225	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	62 (28)
GC2	T-105 Plus	447	115	185	225	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	62 (28)
GC2	T-125	488	132	195	240	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	66 (30)
GC2	T-125 Plus	488	132	195	240	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	66 (30)
GC2H	T-145	530	145	215	260	1,3,4,5	10 3/8 (264)	7 1/8 (181)	11 5/8 (295)	72 (33)
GC2H	T-145 Plus	530	145	215	260	1,2,4	10 3/8 (264)	7 1/8 (181)	11 1/2 (292)	72 (33)
DIN	TE35	500	135	200	245	4	9 5/8 (244)	7 1/2 (191)	10 7/8 (276)	68 (31)
901	J250G	475	130	195	235	5	11 1/2 (292)	7 (178)	11 7/8 (302)	67 (30)
901	J250P	540	135	215	250	6	11 11/16 (297)	7 (178)	11 1/2 (292)	72 (33)
902	J305G	620	170	255	310	5	12 1/4 (311)	7 (178)	14 3/8 (365)	90 (41)
902	J305P	675	175	270	315	6	11 5/8 (295)	7 (178)	14 3/8 (365)	95 (43)
902	J305H	745	195	285	335	6	11 5/8 (295)	7 (178)	14 3/8 (365)	97 (44)
903	L16G	750	185	305	370	5,9	12 1/4 (311)	7 (178)	17 (432)	106 (48)
903	L16P	805	200	320	390	6,9	11 5/8 (295)	7 (178)	16 3/4 (424)	113 (51)
903	L16H	885	225	345	420	6	11 5/8 (295)	7 (178)	16 3/4 (424)	124 (56)
12 VOLT DEEP CYCLE BATTERIES										
24	24TMX	140	36	70	85	3	11 1/4 (286)	6 3/4 (171)	9 3/4 (248)	47 (21)
27	27TMX	175	45	85	105	3	12 3/4 (324)	6 3/4 (171)	9 3/4 (248)	55 (25)
27	27TMH	200	51	95	115	3,4,5	12 3/4 (324)	6 3/4 (171)	9 3/4 (248)	61 (28)
30H	30XHS	225	57	105	130	3,4,5	13 15/16 (355)	6 3/4 (171)	10 1/16 (256)	66 (30)
30H	31XHS	225	57	105	130	7	13 (330)	6 3/4 (171)	9 1/2 (241)	67 (30)
N/A	J150	280	70	120	150	2	13 13/16 (351)	7 1/8 (181)	11 1/8 (283)	84 (38)
N/A	J150 Plus	280	70	120	150	1,2,4	13 13/16 (351)	7 1/8 (181)	11 1/8 (283)	84 (38)
921	J185G	300	85	150	180	5	15 1/2 (394)	7 (178)	14 5/8 (371)	105 (48)
921	J185P	375	95	160	195	6	15 (381)	7 (178)	14 5/8 (371)	113 (51)
921	J185H	415	110	180	215	6	15 (381)	7 (178)	14 5/8 (371)	127 (58)
N/A	DC-500ML	1050	272	361	450	4,9	19 1/4 (489)	10 5/8 (270)	16 3/4 (425)	332 (151)
36 VOLT DEEP CYCLE BATTERIES										
N/A	18DC-500ML	1050	272	361	450	10	35 1/4 (895)	19 1/8 (486)	16 3/4 (425)	986 (447)
6 VOLT DEEP-CYCLE GEL BATTERIES										
GC2	6V-GEL	394	-	154	189	5	10 1/4 (260)	7 1/8 (181)	10 7/8 (276)	68 (31)
12 VOLT DEEP-CYCLE GEL BATTERIES										
24	24-GEL	147	-	66	77	6	10 7/8 (276)	6 3/4 (171)	9 5/16 (236)	52 (24)
27	27-GEL	179	-	76	91	5	12 3/4 (324)	6 3/4 (171)	9 1/4 (234)	63 (29)
31	31-GEL	200	-	85	102	5	12 15/16 (329)	6 3/4 (171)	9 5/8 (245)	69 (31)


- A.** The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B.** The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20 Hr rate and 86°F (30°C) for the 5 Hr rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C.** Dimensions are based on maximum size. Dimensions may vary depending on type of handle or terminal.
- D.** Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

TERMINAL CONFIGURATIONS

1	2	3	4	5	6	7	9	10
LPT	HPT	WNT	AP	UT	DT	LT	LT	
								
Low Profile Terminal	High Profile Terminal	Wingnut Terminal	Automotive Post Terminal	Universal Terminal	Automotive Post & Stud Terminal	Stud Terminal	L-Terminal	Cable & Plug



For a Trojan Master Distributor near you, call 800-423-6569 or 562-236-3000 or visit us at www.trojanbattery.com.

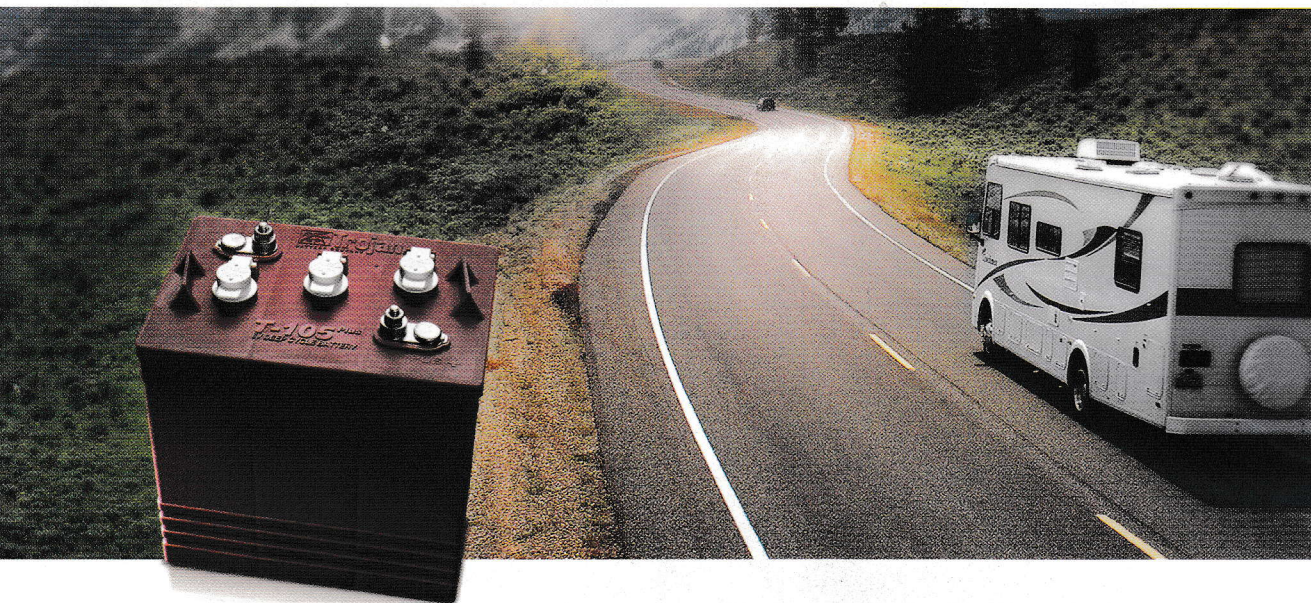

RECREATIONAL VEHICLE

RECREATIONAL VEHICLE

Trojan Battery - Power Up Your RV With Confidence

With over 80 years of experience, Trojan Battery delivers the world's most reliable and long-lasting deep cycle batteries for use in recreational vehicles (RV).

Trojan's broad portfolio of 6-volt and 12-volt flooded/wet, Deep-Cycle Gel™ and AGM batteries yield ideal performance for RV house power. Our flooded batteries feature Trojan's proprietary Maxguard® Advanced Design Separator and exclusive Alpha Plus® paste formulation. Together these technologies help extend the life of your battery, sustain performance and lower overall maintenance costs.

Our Deep-Cycle Gel™ and AGM batteries are maintenance free, require no watering and offer a convenient alternative to flooded batteries.

Trojan's RV products deliver superior reliability and is why:

- Seasoned RV owners know they can confidently hit the road with Trojan batteries on-board to supply all of their house power needs
- You can enjoy uninterrupted, long-lasting power and peace of mind

Trojan Battery's durability, longevity and proven technology means you can depend on our batteries for consistent performance no matter where the road may take you—from your neighborhood to across the country. We offer outstanding technical support provided by full-time applications engineers. *Trojan batteries are available worldwide through Trojan's Master Distributor Network.*









Call 800-423-6569 or 562-236-3000 for more information
or visit us at **www.trojanbattery.com**

Clean energy for life™

BCI GROUP SIZE	TYPE	CAPACITY ^A Minutes		CRANKING PERFORMANCE		CAPACITY ^B Amp-Hours (AH)		TERMINAL TYPE (See Below)	DIMENSIONS ^C Inches (mm)			WEIGHT lbs. (kg)
		@25 Amps	@75 Amps	CCA ^D @0°F	CA ^E @32°F	5 Hr Rate	20 Hr Rate		L	W	H ^F	
6 VOLT DEEP CYCLE BATTERIES												
GC2	T-105	447	115	-	-	185	225	1,3,4,5,9	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	62 (28)
GC2	T-105 Plus	447	115	-	-	185	225	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	62 (28)
GC2	T-125	488	132	-	-	195	240	1,3,4,5,9	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	66 (30)
GC2	T-125 Plus	488	132	-	-	195	240	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	66 (30)
GC2H	T-145	530	145	-	-	215	260	1,3,4,5	10 3/8 (264)	7 1/8 (181)	11 5/8 (295)	72 (33)
GC2H	T-145 Plus	530	145	-	-	215	260	1,2,4	10 3/8 (264)	7 1/8 (181)	11 1/2 (292)	72 (33)
12 VOLT DEEP CYCLE BATTERIES												
24	24TMX	140	36	440	540	70	85	3,9	11 1/4 (286)	6 3/4 (171)	9 3/4 (248)	47 (21)
27	27TMX	175	45	530	650	85	105	3,9	12 3/4 (324)	6 3/4 (171)	9 3/4 (248)	55 (25)
24	SCS150	150	36	530	650	80	100	8	11 1/4 (286)	6 3/4 (171)	9 3/4 (248)	50 (23)
27	SCS200	200	52	620	760	95	115	8	12 3/4 (324)	6 3/4 (171)	9 3/4 (248)	60 (27)
30H	SCS225	225	57	665	820	105	130	8	13 15/16 (355)	6 3/4 (171)	9 7/8 (251)	66 (30)
6 VOLT DUAL PURPOSE AGM BATTERIES												
GC2	6V-AGM	385	-	1100	1400	154	200	6	10 1/4 (260)	7 1/8 (181)	10 3/4 (274)	65 (29)
12 VOLT DUAL PURPOSE AGM BATTERIES												
24	24-AGM	130	-	440	620	61	80	6	10 1/4 (260)	6 5/8 (168)	9 1/2 (241)	52 (24)
27	27-AGM	175	-	560	780	76	100	6	12 1/16 (306)	6 5/8 (168)	9 7/16 (239)	67 (30)
31	31-AGM	190	-	720	950	83	110	6	12 15/16 (329)	6 13/16 (173)	9 5/16 (237)	74 (34)
4D	4D-AGM	325	-	1110	1420	131	165	6	20 7/8 (530)	8 1/4 (209)	9 5/8 (244)	125 (57)
8D	8D-AGM	460	-	1450	1850	179	230	6	20 1/2 (521)	10 9/16 (269)	9 3/16 (233)	167 (76)
6 VOLT DEEP-CYCLE GEL BATTERIES												
GC2	6V-GEL	394	-	575	825	154	189	5	10 1/4 (260)	7 1/8 (181)	10 7/8 (276)	68 (31)
12 VOLT DEEP-CYCLE GEL BATTERIES												
24	24-GEL	147	-	330	460	66	77	5,6	10 7/8 (276)	6 3/4 (171)	9 5/16 (236)	52 (24)
27	27-GEL	179	-	395	545	76	91	5	12 3/4 (324)	6 3/4 (171)	9 1/4 (234)	63 (29)
31	31-GEL	200	-	445	620	85	102	5	12 15/16 (329)	6 3/4 (171)	9 5/8 (245)	69 (31)

- A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B. The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20 Hr and 100 Hr rates and 86°F (30°C) for the 5 Hr rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C. Dimensions are based on maximum size. Dimensions may vary depending on type of handle or terminal.
- D. C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F at a voltage above 1.2 V/cell.
- E. C.A. (Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F at a voltage above 1.2 V/cell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F.
- F. Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

TERMINAL CONFIGURATIONS

1 LPT	2 HPT	3 WNT	4 AP	5 UT	6 DT	8 DWNT	9 LT
							
Low Profile Terminal	High Profile Terminal	Wingnut Terminal	Automotive Post Terminal	Universal Terminal	Automotive Post & Stud Terminal	Dual Wingnut Terminal	L-Terminal



For a Trojan Master Distributor near you, call 800-423-6569 or 562-236-3000 or visit us at www.trojanbattery.com




Trojan
BATTERY COMPANY



HydroLink™ Watering System

Battery Watering Made Easy

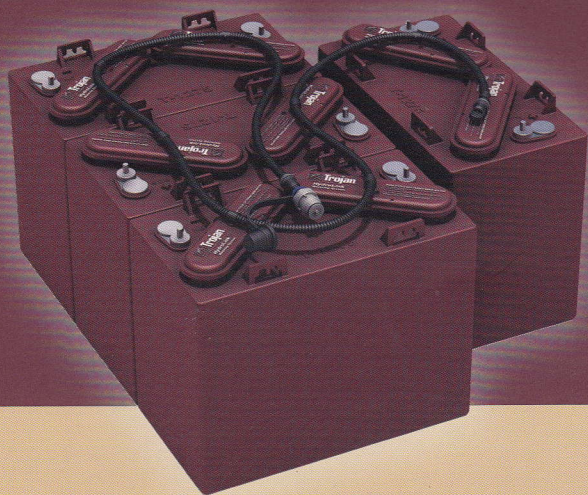

Trojan Battery now offers the **HydroLink™ Watering System**, a truly innovative solution that focuses on faster, easier and safer battery watering.

As the leading manufacturer of deep-cycle golf car batteries, Trojan knows the importance of battery maintenance and the impact it has on your battery's life. Battery maintenance, particularly watering your battery, can be time-consuming, messy and, in some instances, unsafe.

That is why Trojan Battery has developed HydroLink™ – Battery Watering Made Easy.



The HydroLink™ Watering System offers key features and benefits, not available in the golf market today:

Pre-installed on your Trojan Batteries

HydroLink™ is available pre-installed on Trojan golf car batteries, removing the guess work on proper installation for customers. With one simple snap of a single connection from the watering tube into each HydroLink™, the system is ready for use.

Independent Water Level Indicator

Trojan's HydroLink™ comes with an independent, non-mechanical water level indicator that is simple to read. A white indicator means that the battery needs water and a black indicator means that the battery has enough water. The HydroLink™ indicator will not give a false reading, unlike products that utilize mechanical readers.

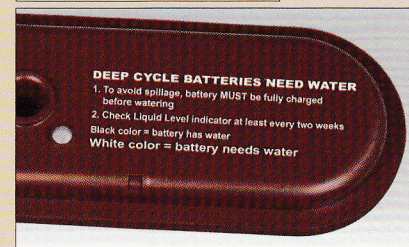

Snake™ Tubing

The new durable Snake™ tubing offers the quickest, simplest installation. The patent pending, one-piece Snake™ tubing eliminates the need for multiple connections, resulting in fewer parts and faster filling.