

CENTRAL HYDRAULICS INC.

•Daytona Beach •Cocoa •Leesburg •Ocala •Tampa 1-800-264-9571

Manual Hose Reels




INLET - 1/2" FPT

M Series Mini 3/8" and 1/2" Hose I.D.

Inlet — 1/2" FPT Max. Temp. — 200°F

All reels shipped less hose unless requested on quote basis.

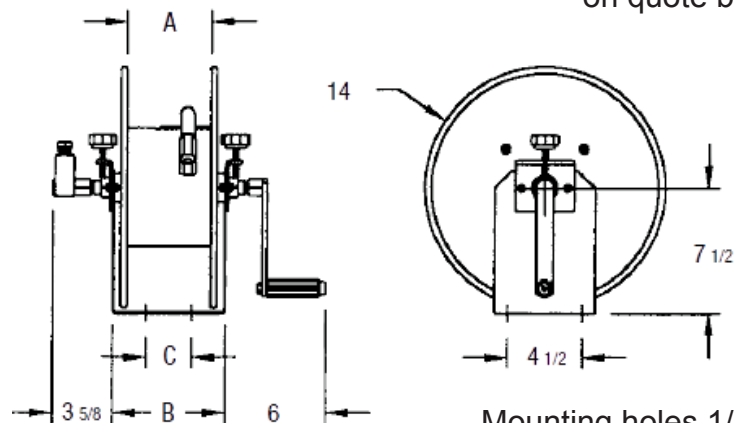

Mounting holes 1/2" dia.

Model Number	Operating Pressure	Capacity 3/8"	Hose I.D. 1/2"	Shipping Weight
M5-5-14N	4000 PSI	75 FT.	50 FT.	20#
M10-5-14	4000 PSI	150 FT.	100 FT.	23#

SERIES	DIMENSIONS		
	A	B	C
M5-5-14	5	7	2 3/4
M10-5-14	10	12	7 3/4

COMPACT MANUAL DRIVEN MINI-REEL.

REEL is best applied where a maximum of 150 ft. of 3/8" I.D. hose is required, and where space or weight is a critical factor. This products is ideally fitted into tight space applications such as small truck skid units for pesticides, pressure wash or deployment of air tools in the construction trades.

M Series Mini Specifics

- Beaded edges on spool prevents hose damage or injury to operator
- Heavy 12 GA. base
- Heavy duty ABS bearings require no lubrication for years of dependable service
- Fully adjustable brake - adjust with hand knob
- Only 14 1/2" tall
- External swivel-O-rings can be changed by simply removing one retaining ring
- 2M Series Mini Hose Reels also available in stainless steel. Call for more details.

HOSETRACT


CENTRAL HYDRAULICS INC.

•Daytona Beach •Cocoa •Leesburg •Ocala •Tampa 1-800-264-9571


Manual Hose Reels

M Series

3/8" and 1/2" Hose I.D.

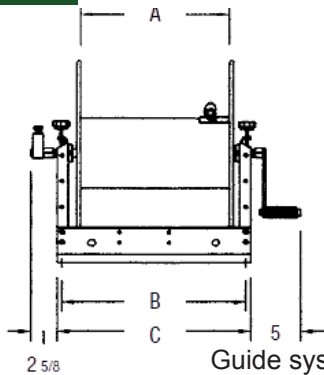

Inlet — 1/2" FPT Max. Temp. — 200°F



SERIES	DIMENSIONS		
	A	B	C
M5	5	7 ³ / ₄	8 ³ / ₄
M10	10	12 ³ / ₄	13 ³ / ₄
M15	15	18 ¹ / ₂	19 ¹ / ₂
M20	20	23 ¹ / ₂	24 ¹ / ₂
M25	25	28 ¹ / ₂	29 ¹ / ₂



Guide system available for 10", 15", 20", 25" wide reels. Sold separately. M Series Hose Reels also available in stainless steel.

Mounting holes 1/2" dia.


Model Number	Operating Pressure	Capacity 3/8"	Hose I.D. 1/2"	Shipping Weight
M5-5	4000 PSI	100 FT.	75 FT.	30#
M10-5	4000 PSI	250 FT.	175 FT.	37#
M15-5	4000 PSI	350 FT.	275 FT.	49#
M20-5	4000 PSI	450 FT.	375 FT.	59#
M25-5	4000 PSI	550 FT.	475 FT.	72#

- Flow through shaft for universal installation
- Self lubricating ABS bearings
- External swivel - standardized O-rings can be changed by simply removing one retaining ring
- Fully adjustable nylon brake - adjust tension with hand knob
- Mounting base is light and strong




M Series

3/4" and 1" Hose I.D.

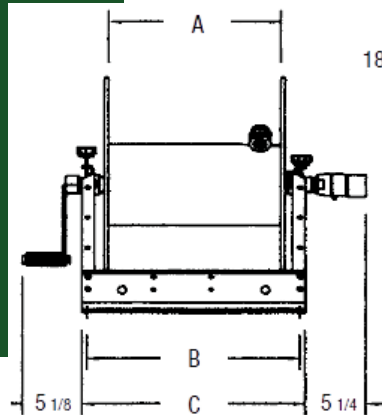

Inlet — 1" FPT Max. Temp. — 200°F

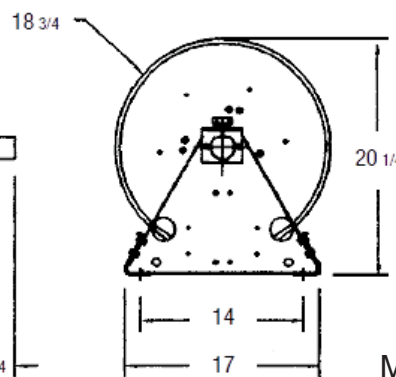

SERIES	DIMENSIONS		
	A	B	C
M5	10	12 ³ / ₄	13 ³ / ₄
M10	15	18 ¹ / ₂	19 ¹ / ₂
M15	20	23 ¹ / ₂	24 ¹ / ₂
M20	25	28 ¹ / ₂	29 ¹ / ₂

Guide system available for 10", 15", 20", 25" wide reels. Sold separately

- Flow through shaft for left or right hand installation
- Self lubricating ABS bearings
- External swivel - standardized O-rings can be changed by simply removing one retaining ring
- Fully adjustable nylon brake - adjust tension with hand knob
- Mounting base is light and strong

Mounting holes 1/2" dia.

Model Number	Operating Pressure	Capacity 3/4"	Hose I.D. 1"	Shipping Weight
M10-10	300 PSI	75 FT.	50 FT.	40#
M15-10	300 PSI	100 FT.	75 FT.	49#
M20-10	300 PSI	125 FT.	100 FT.	59#
M25-10	300 PSI	150 FT.	125 FT.	72#

HOSETRACT