

COMMERCIAL FLOORING SOLUTIONS

gerflor.com

2017/2018 COLLECTION



Gerflor®
theflooringgroup

EDITORIAL

ARCHITECTURE, DECORATION, SPORT, TECHNOSPECIFIC. **FLOORING SOLUTIONS FOR PROFESSIONAL APPLICATIONS**

GERFLOR, EXPERT AND LEADER IN GLOBAL SOLUTIONS FOR RESILIENT FLOORS, WALL COVERINGS, ACCESSIBILITY, FROM INSTALLING TO FINISHING FOR ALL PROFESSIONAL APPLICATIONS

For more than 70 years and in more than 100 countries, Gerflor is recognized as an expert in its field thanks to technical, decorative and eco-responsible added value solutions specific to each market application (healthcare, retirement homes, retail, industry, education, social housing, offices, sports...).

The Gerflor Group is well known as being the official supplier for the most famous and demanding worldwide customers and events such as Boeing, Carrefour and Olympic games.

Gerflor has been committed to creating solutions that continue to anticipate and meet the needs of customers around the globe. Our expertise in research and development as well as our manufacturing capabilities are focused on meeting each of our markets' requirements.

OUR GOAL IS TO OFFER MORE AND MORE GLOBAL SOLUTIONS

Our product offer aims to be functional and global; it goes far beyond our flooring range and includes SPM wall protection and handrails, ROMUS profiles, tools and door mats (2 companies which belong to the Gerflor Group), as well as complementary solutions for:

- optimising floor fitting (tools, welding etc.)
- achieving a perfectly finished site (skirtings, stair-noses etc.)
- resolving specific technical problems (shower systems, accessibility in establishments open to the public etc.).

WE PROVIDE YOU WITH ENVIRONMENTALLY RESPONSIBLE SOLUTIONS

All Gerflor production sites are ISO 14001 certified. We set ourselves the highest standards when it comes to environmental quality. Gerflor uses recycled materials across all our product ranges. Our new generation of loose lay products reduces the use of adhesives and facilitates recovery and recycling at the end of the product's life. We also strongly promote durable and renewable material integration and 100% vegetal plasticizers in our product offer. In addition, our products are easy to maintain throughout their lives and qualify for credits under many internationally accredited Green Building Schemes.

This catalogue is a showcase of all our competencies across all market segments. We hope it will be a helpful resource for you and contribute to the success of your projects.

Always more inspiration, well being, security, performance and return on investment.

Bertrand CHAMMAS
C.E.O. of the Gerflor Group

► HOMOGENEOUS FLOORING

P.8

► Evercare™

- Mipolam Symbioz™
- Mipolam Esprit
- Mipolam Affinity **NEW**
- Mipolam Accord **NEW**

- Mipolam Elegance
- Mipolam Cosmo **NEW**
- Mipolam Troplan

► PUR

- Mipolam Classic **NEW**

► PU

- Architecton

► MULTILAYERED FLOORING

P.36

► Taralay Premium

- Osmoz
- Indiana
- Metallica
- Brazilia
- Costa Rica
- Fusion
- My Taralay
- Dry-Tex™ System

► Taralay Element

- City

► Taralay Impression / Uni **NEW**

- Corner
- Kubes
- Rice
- Stars
- Cemento

- Mohair
- Nest
- Trame
- Gentlemen
- Wood
- Uni

► Taralay Initial **NEW**

- Diversion
- Fantasy
- Strada
- Urban
- Tweedy
- Wood

► Tarastep

-
-
-
-
-
-

► LUXURY VINYL TILE

P.90

► Saga² **NEW**

- Creation 70 "Exclusive Edition" **NEW**
- Creation 70
- Creation 70 Clic System
- Creation 70 X'Press

► Creation 70

- Creation 70 "Exclusive Edition" **NEW**
- Creation 70
- Creation 70 Clic System
- Creation 70 X'Press

► Creation 55

- Creation 55 "Exclusive Edition" **NEW**
- Creation 55
- Creation 55 Clic System
- Creation 55 X'Press

► Creation 30

- Creation 30
- Creation 30 Lock
- Creation 30 X'Press

► FAST TRACK LOOSLAY TILE

P.192

► GTI EL5

► GTI MAX **NEW**

► Attraction® **NEW**

► SPECIALITY FLOORING

P.208

► Static control Mipolam EL

- Accord EL7 Evercare™ **NEW**
- Elegance EL5 Evercare™ **NEW**
- Robust EL7
- Technic EL5
- GTI EL5

► Safety flooring

- Tarasafe Geo
- Tarasafe Ultra & Ultra Comfort
- Tarasafe Ultra H2O
- Tarasafe Standard
- Tarasafe Plus/Super

► Shower System

- Elegance SD
- Tarasafe Ultra H2O
- Mural Calypso

► Wall Covering

- Mural Ultra
- Mural Club
- Mural Calypso

► SPORTS FLOORING

P.236

► TARAFLEX™ Sports Flooring

► Hardwood flooring systems CONNOR SPORTS®

► Outdoor play areas SPORT COURT

► FINISHES AND TECHNICAL SOLUTIONS

P.270

► Finishes

- Skirting solutions
- Stair solutions
- Profile solutions
- Welding solutions

► Specialized finishes

- Paint and marking for boundary lines

► Technical solutions

- Shower system
- Floor protection **NEW**
- Clean Corner System
- Safe'Cap **NEW**
- Specific features
- Glues and adhesives
- Tools

► SPECIFICATIONS - INSTALLATION - MAINTENANCE

P.312

GLOSSARY

FORMATS

With foam backing (Comfort)

		
ROLL	STEP	REMOVABLE TILE

Without foam backing (Compact)

							
ROLL	TILE	PLANK	REMOVABLE TILE	REMOVABLE PLANK	INTERLOCKING LOOSE-LAY TILE	Pressure Sensitive Adhesive (PSA)	Pressure Sensitive Adhesive (PSA)

PERFORMANCES

T/P	17dB	R10
ABRASION GROUP	SOUND INSULATION IN dB (EN ISO 717/2)	SLIP RESISTANCE WET (DIN 51130)

10^5 ELECTRICAL RESISTANCE IN Ω : $5 \times 10^4 \leq R_t \leq 10^5$ (EN 1081/DIN 51953)	10^7 ELECTRICAL RESISTANCE IN Ω : $10^4 \leq R_t \leq 10^5$ (EN 1081/DIN 51953)	 VERY HIGH DENSITY FOAM
--	---	---

 100% recyclable 100% RECYCLABLE FLOORING	 RECYCLABLE FLOORING
---	---

TREATMENTS

 PROTECSOL [®] 2 POLYURETHANE SURFACE TREATMENT UV CURED STAIN SHIELD MATT EFFECT	 Protecsol [®] POLYURETHANE SURFACE TREATMENT UV CURED	 evercare [™] MICRO STRUCTURED CROSS COAT POLIMERISED LASER TECHNOLOGY
PUR+	PUR	PU
POLYURETHANE SURFACE TREATMENT	POLYURETHANE SURFACE TREATMENT	PU SURFACE TREATMENT
		SparClean [®]
		POWDER COATED TREATMENT

CERTIFICATION



 Bfl-s1	 Cr+st			 <10GΩ	 <10GΩ	 DS	 DS	
FIRE RESISTANCE	STATIC ELECTRICAL PROPENSITY	Bs2d0	ELECTRICAL RESISTANCE			SLIP RESISTANCE	THERMAL CONDUCTIVITY	WATER RESISTANCE

Scale reduction for Wood designs.

The images of floorcoverings in this catalogue have been reproduced as faithfully as printing technology permits.

A		
• Accessibility	302	
• Accord EL7 (Mipolam EL)	214	
• Adhesives & tapes	308	
• Architecton	35	
• Attraction®	204	
B		
• Bateco	299	
• Brazilia	49	
C		
• Cemento	66	
• Charme	71	
• City	58	
• Clean Corner System	304	
• Connor Sports® (Hardwood Flooring Systems)	260-265	
• Copper strip	300	
• Corner	62	
• Costa Rica	50	
• Creation 70	106-115	
• Creation 70 Clic System	116-123	
• Creation 70 Exclusive Edition	100-105	
• Creation 70 X'Press	124-127	
• Creation 55	138-149	
• Creation 55 Clic System	150-159	
• Creation 55 Exclusive Edition	132-137	
• Creation 55 X'Press	160-163	
• Creation 30	168-177	
• Creation 30 Lock	178-183	
• Creation 30 X'Press	184-187	
• Creation accessories	130 & 166 & 190	
D		
• Diversion	78	
• Dry-Tex™ System	54 & 255 & 296	
E		
• Elegance EL5 (Mipolam EL)	215	
• Elegance SD	228	
• Entrance solutions (Romus)	286	
• ESD Solutions (Mipolam EL)	212	
• Esterel	85	
F		
• Filament	82	
• Finishes & Technical solution	270-311	
• Floor Protection	299	
• Fusion	51	
G		
• Gentlemen	68	
• GTI EL5	200 & 216	
• GTI MAX	196	
H		
• Habana (Taralay Initial)	85	
• Habana (Taralay Impression)	69	
• Herringbone	69	
I		
• Indiana	44	
• Infinity	73	
• Isolsport	299	
K		
• Kubes	63	
L		
• Loft (Taralay Impression)	71	
M		
• Maintenance products	300	
• Metallica	47	
• Mipolam Accord	24	
• Mipolam Affinity	22	
• Mipolam Classic	34	
• Mipolam Cosmo	29	
• Mipolam EL (ESD Solutions)	212	
• Mipolam Elegance	26	
• Mipolam Esprit	20	
• Mipolam Symbioz™	14	
• Mipolam Troplan	30	
• Mohair	66	
• Moon Island	72	
• Mural Calypso	229 & 235	
• Mural Club	234	
• Mural Ultra	234	
• My Taralay Premium	52	
N		
• Nest	67	
• Noma (Taralay Initial)	85	
• Noma (Taralay Impression)	72	
O		
• Osmoz	43	
• Ottawa	83	
P		
• Portobello	72	
• Profile solutions	281-283	
R		
• Renzo (Taralay Initial)	83	
• Renzo (Taralay Impression)	73	
• Rice	64	
• Robust EL7 (Mipolam EL)	214	
• Romus (Entrance solutions)	286-287	
S		
• Safety flooring	218	
• Saga²	97-99	
• Safe Cap	306	
• Shower System (Taradouche)	226 & 291	
• Skirting solutions	273-277	
• Specific products	298-305	
• Sport Court (Outdoor Play Areas)	266-269	
• Sport finishes	288-289	
• Sports Flooring	236-269	
• Stair solutions	278-280	
• Stars	65	
• Strada	79	
• Sycamore	70	
T		
• Taradouche Shower System	226 & 291	
• Taraflex™ Sports Flooring	242-259	
• Tarafoma	299	
• Taralay Element	56	
• Taralay Impression	60	
• Taralay Initial	76	
• Taralay Premium	40	
• Tarasafe Geo	221	
• Tarasafe Standard	225	
• Tarasafe Plus / Super	225	
• Tarasafe Ultra	223	
• Tarasafe Ultra H₂O	224 & 228	
• Tarasafe Ultra Comfort	223	
• Tarastep	86	
• Technic EL5 (Mipolam EL)	215	
• Tools	310	
• Trame	68	
• Tweedy	81	
U		
• Uni (Taralay)	75	
• Urban	80	
W		
• Wall covering	232	
• Walnut	71	
• Welding solutions	284-285	
• Wood (Taralay Initial)	82-85	
• Wood (Taralay Impression)	69-73	

ALL OVER THE WORLD GERFLOR INVENTS FOR YOU

9 MARKETS



HEALTHCARE



RETAIL



HOUSING



INDUSTRY



SPORT



EDUCATION



HOSPITALITY



OFFICES



TRANSPORT

Worldwide presence and proximity to our customers through:

26 subsidiaries and a broad network of partner distributors

15 manufacturing plants and logistic hubs

- sales offices
- manufacturing plants and logistic hubs



LATEST INNOVATIONS

- | | | | |
|------|---|------|--|
| 2010 | Creation Clic System: unique vertical clic system | 2015 | Clean Corner System: unique and patented installation solution
GTI EL5: unique and patented ESD renovation tile |
| 2011 | Mipolam Symbioz™: T Group homogeneous flooring with 100% bio based plasticizer
Evercare™: micro structured, cross coat polymerised, laser technology surface treatment | 2016 | Creation collection awarded reddot award winner 2016 |
| 2012 | Taraflex™ Dry Tex System: unique & patented solution for moisture subfloor | 2017 | New Taralay Impression collection awarded IDA 2017
Mipolam “80 years”: new Mipolam Affinity, Accord, Classic, Cosmo |
| 2013 | New Mural Calypso | | 
 |
| 2014 | New Taralay Premium with Protесol® 2 surface treatment | | |

ECO-RESPONSIBLE SOLUTIONS

LESS SPEAKING FOR MORE ACTION



INDOOR AIR QUALITY



COMPOSITION

- 100% REACH compliant
- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



INSTALLATION

- Innovative adhesive free installation systems



RECYCLED CONTENT

- 25% average recycled content
- 100% REACH compliant recycled content



RECYCLING

- 100% recyclable product



LIFE CYCLE ANALYSIS

- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an ISO 14001 and ISO 50001 certified site
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)
- Exclusive surface treatments to reduce drastically the use of chemical product and water and ensure the lowest environmental impact



INDOOR AIR QUALITY

- TVOC emissions 10 times better than norms requirements (TVOC < 100 µg/m³ after 28 days)
- TVOC < 10ug/m³ after 28 days for all products treated Evercare™ / Protecsol®2
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



WELLNESS

- **Health:** Antibacterial activity (inhibits growth > 99%)
- **Safety:** Anti slip performance
- **Comfort:** Walking comfort and impact noise reduction


CONTRIBUTION TO GREEN BUILDING CERTIFICATION



LEED (Leadership in Energy and Environmental Design) certification

issued by the USGBC (US Green Building Council), confirms that a building or a community has been designed and constructed using strategies to improve performance by saving energy, treating water, reducing CO₂ emissions, and improving indoor air quality. Our floorings contribute to building certifications (3 levels of certification: silver, gold, platinum) because:

- Low VOC emission (Floorscore® compliant)
- High recycled content
- Product specific EPD (Environment Product Declaration)

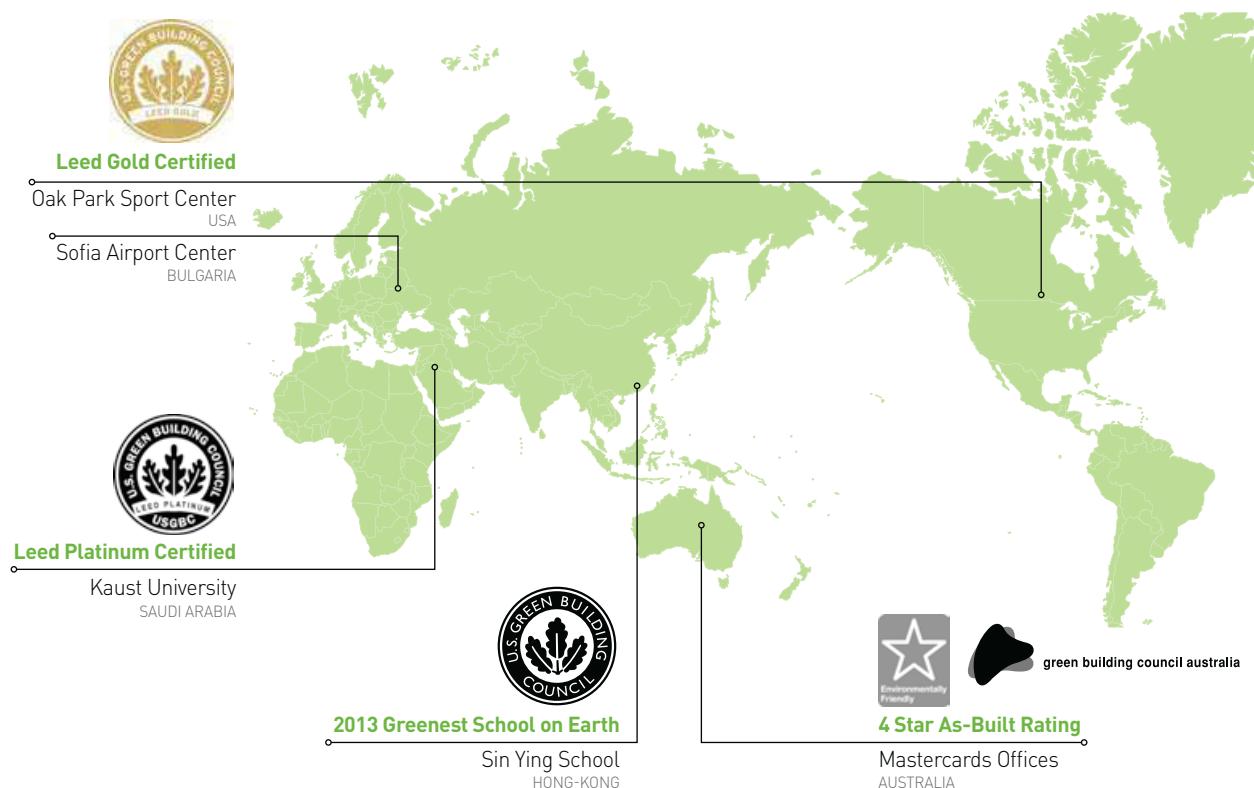



Office Insider

HOMOGENEOUS
FLOORING

.....PAGES.....

8 / 35

.....



Homogeneous flooring Evercare™

- Mipolam Symbioz™ 14
- Mipolam Esprit 20
- Mipolam Affinity **NEW** 22
- Mipolam Accord **NEW** 24
- Mipolam Elegance 26
- Mipolam Cosmo **NEW** 28
- Mipolam Troplan 30


Homogeneous flooring (PUR)

- Mipolam Classic **NEW** 34

Homogeneous flooring (PU)

- Architecton 35

HOMOGENEOUS FLOORING

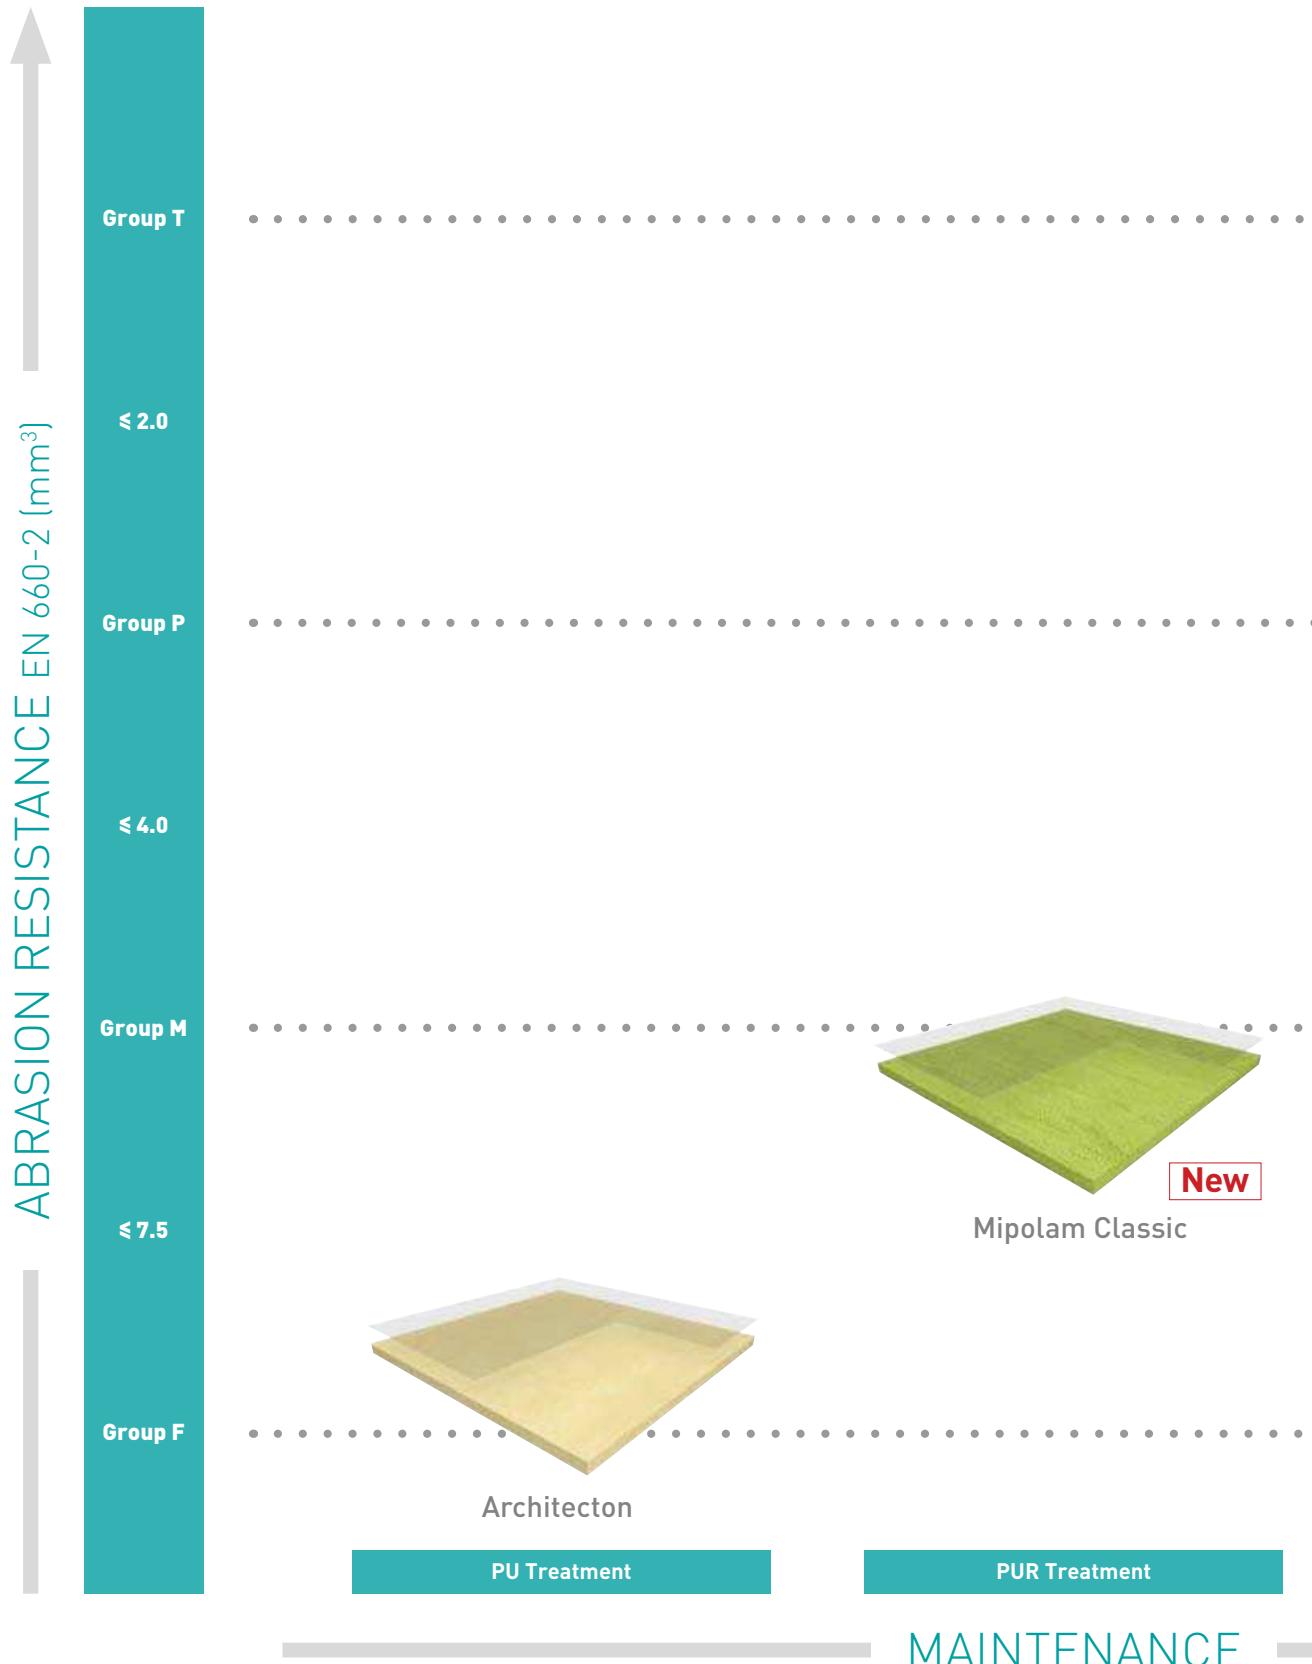



Mipolam Esprit
Mipolam Affinity **New**
Mipolam Accord **New**
Mipolam Elegance



Mipolam Symbioz™



New
Mipolam Cosmo



Mipolam Troplan

Evercare™ Treatment




HOMOGENEOUS FLOORING

MIPOLAM SYMBIOZ™



MIPOLAM SYMBIOZ™

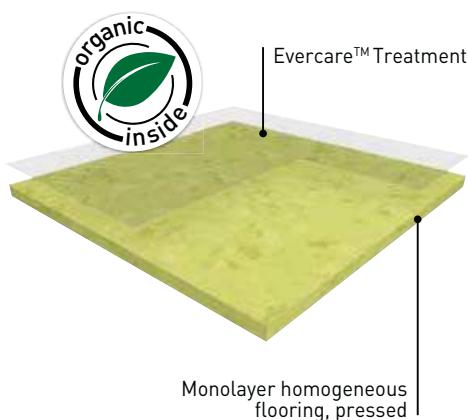

MIPOLAM SYMBIOZ™ is a fully flexible homogeneous compacted floorcovering in sheet, 2m wide, abrasion group T, providing excellent resistance to wear and tear in high traffic areas. Its weight is **2580 gr/m²**. It features a non-directional design incorporating coloured chips to ensure an even colour throughout the thickness presenting a **nice matt finish**.

MIPOLAM SYMBIOZ™ contains over 75% sustainable or renewable raw materials. It includes a 100% bio based plasticizer, made of residues from cereals (wheat, corn...). This floorcovering is a non-emissive product (below the level of VOC measurement accuracy).

The flooring is equipped with **Evercare™**, patented surface treatment obtained by UV laser cross-linking offering **the best chemical resistance to the main products used in healthcare** environment as Betadine, eosin, hydro alcoholic solutions, making the maintenance easy and long lasting the flooring. This treatment **avoids applying any acrylic emulsion** throughout the lifetime of the product.

The flooring is **antistatic** (<2kV), its residual indentation is ≈ 0.02 mm. The flooring is a **group T** wear rating suitable for heavy duty traffic areas and **Bfl-s1** fire resistance.

As part of our sustainable development policy, this product is manufactured in the first floor covering plant awarded with the triple certification: ISO 9001 (quality), ISO 14 001 (environment) and OHSAS 18001 (safety).



BBR40 :
100% Bio-based plasticizer rod for Mipolam Symbioz™
(see page 285)

MIPOLAM SYMBIOZ™



Mipolam Symbioz™ has been engineered using a full life cycle model, to guarantee the lowest environmental impact at every stage of the product life

- **Highest durability:** abrasion T group: product life expectancy > 20 years
- **Eco-responsible exclusive Bio based plasticizer,** 100% made from organic source
- **Evercare™ :** New revolutionary patented polyurethane surface treatment with unique performance in staining providing chemical resistance
- **Easy maintenance:** no wax for life
- **On average 30% savings on maintenance cost**
- **15% less detergent and water use.**

Indoor Air Quality: very low emitting material (40 times lower than European standards).

MIPOLAM SYMBIOZ™			
DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	2
Weight	EN ISO 23997 (EN 430)	g/sq.m	2580
Width of sheet	EN ISO 24341 (EN 426)	cm	200
Length of sheet	EN ISO 24341 (EN 426)	lm	20
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10581 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance ⁽¹⁾	DIN 51130	class	R9
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	NF 189	group	T
Type Binder content	EN ISO 10581	type	I
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40
Impact Sound Insulation	EN ISO 717-2	dB	5
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≈ 0.02
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	EVERCARE™
Chemical products resistance	EN ISO 26987 (EN 423)	class	OK
Anti-bacterial activity [E. coli - S. aureus - MRSA] ⁽²⁾	ISO 22196	-	> 99% inhibits growth
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg / m ³	<10
Certification	-	-	Floorscore®
CE MARKING			
CE	EN 14041		

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges.

(2) The implementation of an effective cleaning regime is the most important defence against infection.

HOMOGENEOUS FLOORING

MIPOLAM SYMBIOZ™



Compact | T | Evercare™ | 100% recyclable |

 6027 Acacia	 6048 Lavander	
 6007 Garden	 6006 Blue Sky	 6055 Tomato
 6017 Grass	 6016 Sea Blue	 6035 Sunset
 6037 Lagoon	 6046 Blue Night	 6032 Sunshine


MIPOLAM SYMBIOZ™



HOMOGENEOUS FLOORING

MIPOLAM ESPRIT / AFFINITY / ACCORD / ELEGANCE / COSMO / TROPLAN


► MIPOLAM ESPRIT

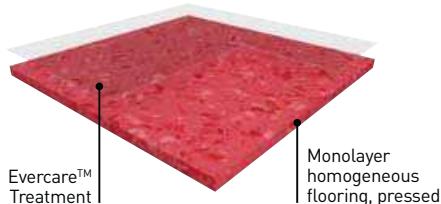

MIPOLAM ESPRIT is a vinyl flooring homogeneous pressed in 2m sheets, with a thickness of 2mm and a **weight ≤ 2780 g**. The non-directional design with colour throughout the thickness is available in 24 references presenting a nice **matt finish**. This flooring is suitable for heavy duty traffic areas, and facilitates floor-wall junctions, angles and welding treatments. The flooring is equipped with **Evercare™**, a patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as Betadine, eosin, hydro alcoholic solutions, making the maintenance easy and long lasting the flooring. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product. This flooring is composed of 45% minerals, 22% of inexhaustible material and at least 25% of recycled 100% controlled. It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is **REACH compliant**. COV emissions after 28 days (ISO 16000-6) are below detection levels with $<10 \mu\text{g}/\text{m}^3$ and this product is classified A + (the best class). On demand, **MIPOLAM ESPRIT** is available with phthalate free. The flooring is **antistatic** ($<2\text{kV}$), its residual indentation is < 0.02 mm. The flooring is a **group T** wear rating suitable for heavy duty traffic areas and **Bfl-s1** fire resistance.

► MIPOLAM AFFINITY

NEW

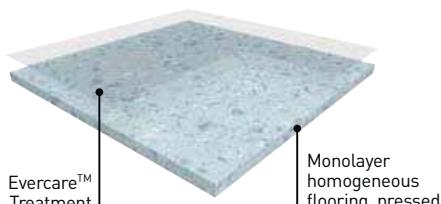


MIPOLAM AFFINITY is a vinyl flooring homogeneous pressed in 2m sheets, with a thickness of 2mm and a **weight of 2850g**. The non-directional design with colour throughout the thickness is available in 28 references presenting a contrasted designed & a **matt finish**.

This flooring is recommended for collective buildings making skirtings easier, as well as angles and welding. The flooring is equipped with **Evercare™**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product. It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is **REACH compliant**. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels ($<10 \mu\text{g}/\text{m}^3$) and this product is classified A + (the best class). On demand, **MIPOLAM AFFINITY** is available with phthalate free plasticizer. This flooring is **antistatic** ($<2\text{kV}$), its residual indentation is < 0.02 mm to 150 minutes respecting EN ISO 24343-1 (EN 433). This flooring complies with EN ISO 10581 (EN 649) offering a **group T** wear rating and complies with EN ISO 10581 offering a Binder content Type I, which makes it suitable for heavy duty traffic areas. It has a **Bfl-s1** fire resistance.

► MIPOLAM ACCORD


NEW

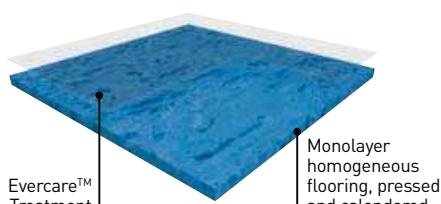

MIPOLAM ACCORD is a monolayer homogeneous flooring with high PVC content calendered and pressed in 2m sheets, with a thickness of 2mm and a **weight of ≤ 2850 g**. The semi-directional design with colour throughout the thickness is available in 28 references presenting a nice **matt finish**. This flooring is recommended for collective buildings making skirtings easier, as well as angles and welding. The flooring is equipped with **Evercare™** the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. This Evercare™ treatment avoids staining of chemical products used in Healthcare like betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring. This treatment has excellent maintenance characteristics and does not require the application of acrylic polishes. The flooring is composed of minimum 25% recycled content 100% controlled and is **REACH compliant**. This flooring is **antistatic** ($<2\text{kV}$). The product is non reactive to residual indentation with a value < 0.02 mm. The flooring is a **group T** wear rating suitable for heavy duty traffic areas and **Bfl-s1** fire resistance. The product emission rate of volatile organic compounds is $<10 \mu\text{g}/\text{m}^3$ (TVOC after 28 days ISO 16000-6).

MIPOLAM ESPRIT / AFFINITY / ACCORD / ELEGANCE / COSMO / TROPLAN


► MIPOLAM ELEGANCE

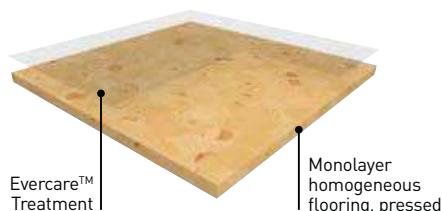

MIPOLAM ELEGANCE is a monolayer homogeneous flooring with a high PVC content pressed in 2m sheets, with a thickness of 2mm and a **weight of ≤ 2850g**. The non-directional design with colour throughout the thickness integrates a 3D effect (transparent particles in pure PVC on all 33 references) and a **matt finish**. This flooring is recommended for administrative buildings making skirtings easier, as well as angles and welding. The flooring is equipped with **Evercare™** the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. This Evercare™ treatment avoids staining of chemical products used in Healthcare like betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring. This treatment has excellent maintenance characteristics and does not require the application of acrylic polishes. The flooring is composed of minimum 25% recycled content 100% controlled and is **REACH compliant**. This flooring is **antistatic** (<2kV). The product is non reactive to residual indentation with a value < 0,02 mm. The flooring is a **group T** wear rating suitable for heavy duty traffic areas and **Bfl-s1** fire resistance. The product emission rate of volatile organic compounds is <10 µg/m³ [TVOC after 28 days ISO 16000-6].

► MIPOLAM COSMO

NEW

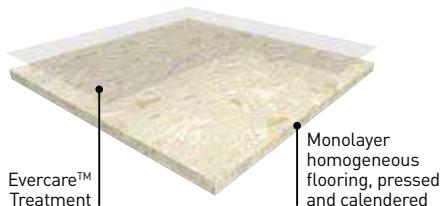

MIPOLAM COSMO is a vinyl flooring homogeneous calendered and pressed in 2m sheets, with a thickness of 2mm and a **weight ≤ 3000g**. The semi-directional design with colour throughout the thickness is available in 24 references presenting a nice **matt finish**. This flooring is suitable for medium to high traffic areas, and facilitates floor-wall junctions, angles and welding treatments. The flooring is equipped with **Evercare™**, a patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as Betadine, eosin, hydro alcoholic solutions, making the maintenance easy and long lasting the flooring. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product. This flooring is composed of 45% minerals, 22% of inexhaustible material and at least 25% of recycled 100% controlled. It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is **REACH compliant**. COV emissions after 28 days (ISO 16000-6) are below detection levels with <10 µg/m³ and this product is classified A + (the best class). On demand, **MIPOLAM COSMO** is available with phthalate free. The flooring is **antistatic** (<2kV), its residual indentation is < 0.02 mm. The flooring is a **group P** wear rating suitable for heavy duty traffic areas and **Bfl-s1** fire resistance.

► MIPOLAM TROPLAN



MIPOLAM TROPLAN is a vinyl flooring homogeneous calendered and pressed in 2m sheets, with a thickness of 2mm and a **weight ≤ 3300g**. The directional design with colour throughout the thickness is available in 18 references presenting a nice **matt finish**. This flooring is suitable for medium to high traffic areas, and facilitates floor-wall junctions, angles and welding treatments. The flooring is equipped with **Evercare™**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as Betadine, eosin, hydro alcoholic solutions, making the maintenance easy and long lasting the flooring. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product. This flooring is composed of 45% minerals, 22% of inexhaustible material and at least 25% of recycled 100% controlled. It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is **REACH compliant**. COV emissions after 28 days (ISO 16000-6) are below detection levels with <10 µg/m³ and this product is classified A + (the best class). On demand, **MIPOLAM COSMO** is available with phthalate free. The flooring is **antistatic** (<2kV), its residual indentation is < 0.03 mm. The flooring is a **group M** wear rating suitable for heavy duty traffic areas and **Bfl-s1** fire resistance.



6

A large, white, three-dimensional number '6' is mounted on a dark blue wall on the right side of the hallway.

HOMOGENEOUS FLOORING

MIPOLAM ESPRIT / AFFINITY / ACCORD / ELEGANCE / COSMO / TROPLAN



High performing homogeneous multipurpose floorings

Suitable for heavy traffic areas (education, healthcare, shops)

► **MIPOLAM ESPRIT / MIPOLAM AFFINITY / MIPOLAM ACCORD / MIPOLAM ELEGANCE / MIPOLAM COSMO / MIPOLAM TROPLAN:**

Evercare™ - New revolutionary patented polyurethane surface treatment with unique performance in staining providing unrivalled chemical and scratching resistance

► **Antistatic**

► **Densely compacted surface for improved wear and ease of maintenance.**

	MIPOLAM ESPRIT	MIPOLAM AFFINITY	MIPOLAM ACCORD	MIPOLAM ELEGANCE	MIPOLAM COSMO	MIPOLAM TROPLAN
DESCRIPTION						
Total thickness	EN ISO 24346 (EN 428) mm	2	2	2	2	2
Weight	EN ISO 23997 (EN 430) g/sq.m	2780	2850	2850	2850	3000
Width of sheet	EN ISO 24341 (EN 426) cm	200	200	200	200	200
Length of sheet	EN ISO 24341 (EN 426) lm	20	20	20	20	20
Tile size	EN ISO 24342 (EN 427) mm	608 x 608 ⁽¹⁾	608 x 608 ⁽¹⁾	608 x 608 ⁽¹⁾	608 x 608 ⁽¹⁾	608 x 608 ⁽¹⁾
Number of tiles per package	-	20	20	20	20	20
CLASSIFICATION						
Norm / Product specification	-	EN ISO 10581 (EN 649)	EN ISO 10581 (EN 649)	EN ISO 10581 (EN 649)	EN ISO 10581 (EN 649)	EN ISO 10581 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43	34-43	34-43	34-43
Fire rating	EN 13501-1	class	B _{fl} -s1	B _{fl} -s1	B _{fl} -s1	B _{fl} -s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
Slip resistance ⁽²⁾	DIN 51130	class	R9	R9	R9	R9
PERFORMANCES						
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0	≤ 2.0	≤ 4.0
Wear group	NF 189	group	T	T	T	P
Type Binder content	EN ISO 10581	type	I	I	I	I
Dimensional stability	EN ISO 23999 (EN 434)	%	Sheet ≤ 0.40 Tile ≤ 0.25			
Impact Sound Insulation	EN ISO 717-2	dB	5	5	5	5
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≈ 0.02	≈ 0.02	≈ 0.02	≈ 0.02
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	OK	OK	OK
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.k)	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Evercare™	Evercare™	Evercare™	Evercare™
Chemical products resistance	EN ISO 26987 (EN 423)	class	OK	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽³⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
ENVIRONMENT / INDOOR AIR QUALITY						
TVOC after 28 days	ISO 16000-6	µg / m ³	<10	<10	<10	<10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®
CE MARKING						
CE	EN 14041					

(1) Products available in tiles for a minimum quantity order of 500 sqm.

(2) For lifetime sustainable wet resistance, please refer to Tarasafe ranges.

(3) The implementation of an effective cleaning regime is the most important defence against infection.


HOMOGENEOUS FLOORING




5341 Peanut



5340 Mist




5329 Cumin



5330 Smoke


MIPOLAM ESPRIT

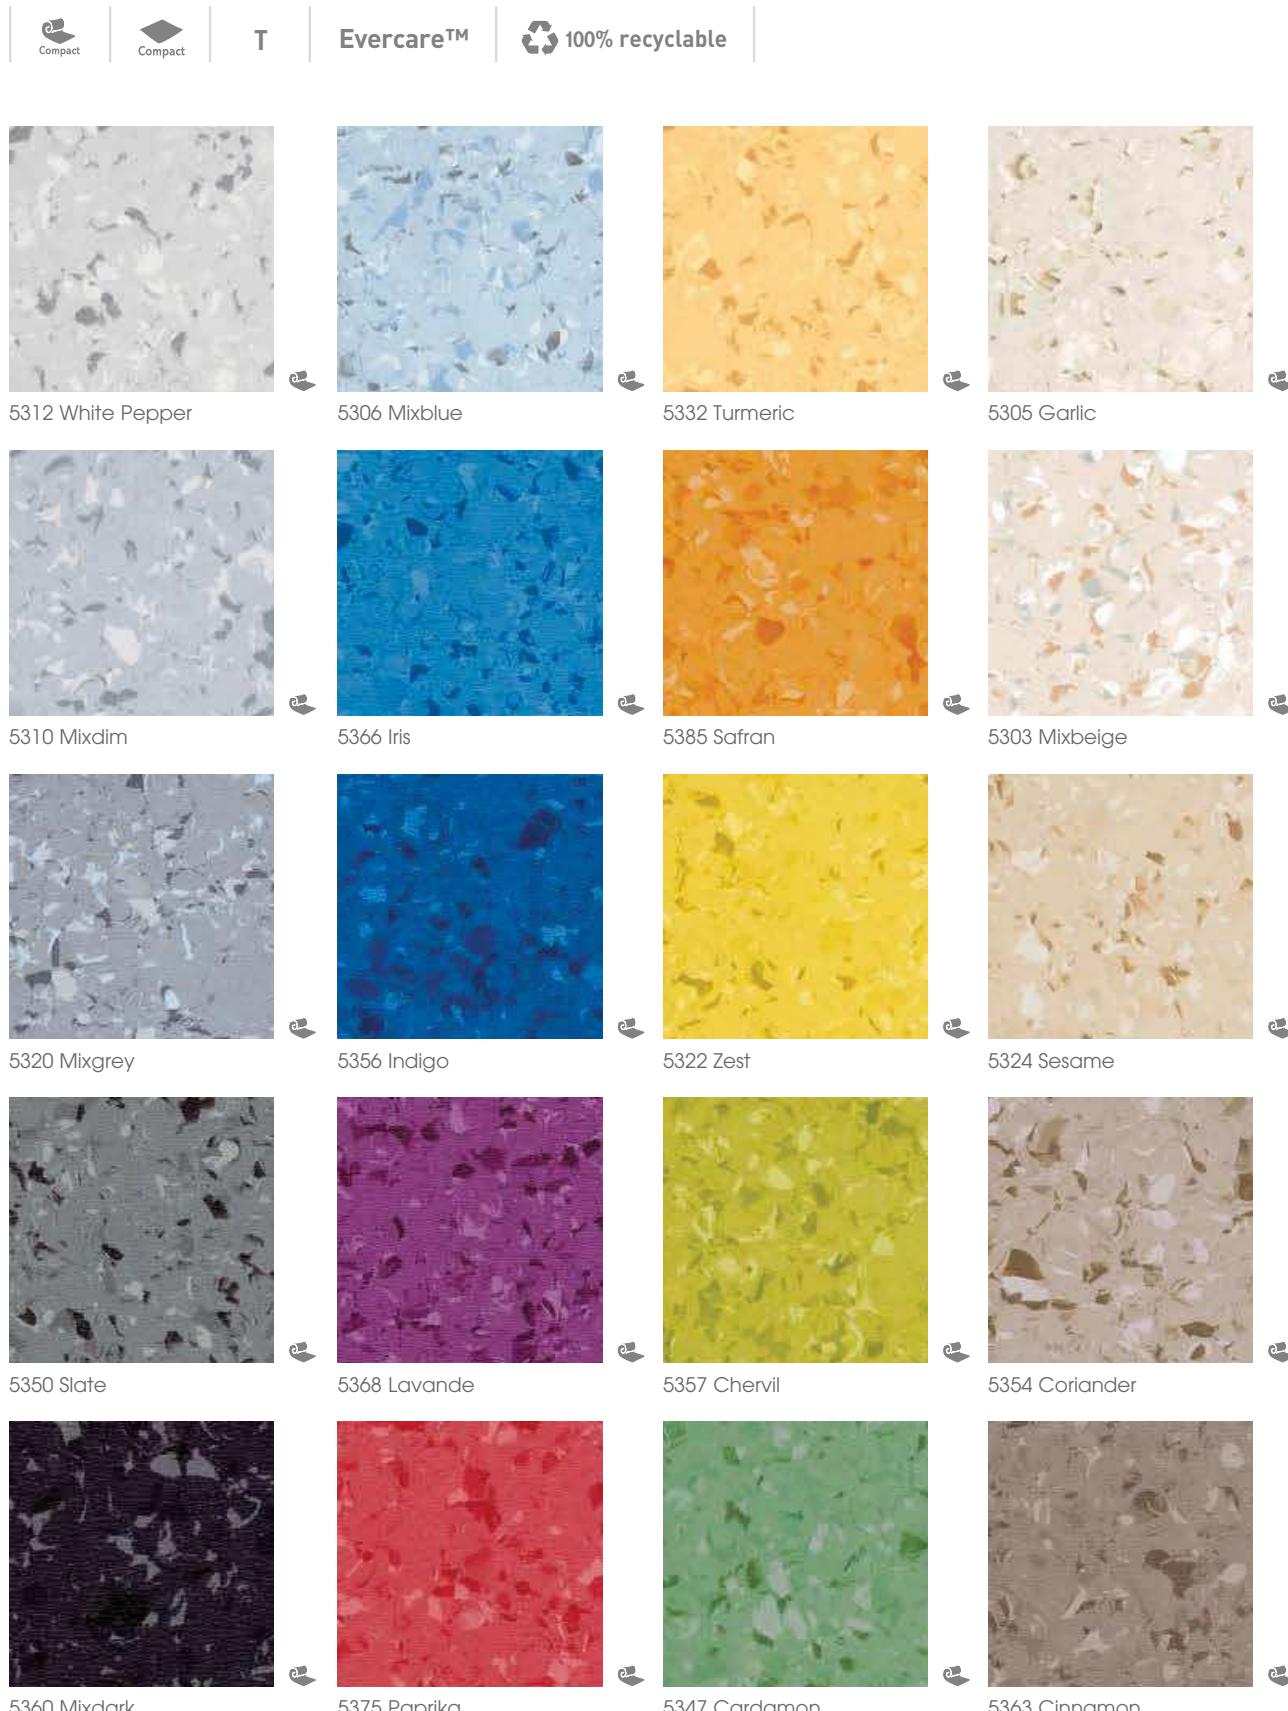

◆ Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm.

HOMOGENEOUS FLOORING

MIPOLAM AFFINITY **NEW**

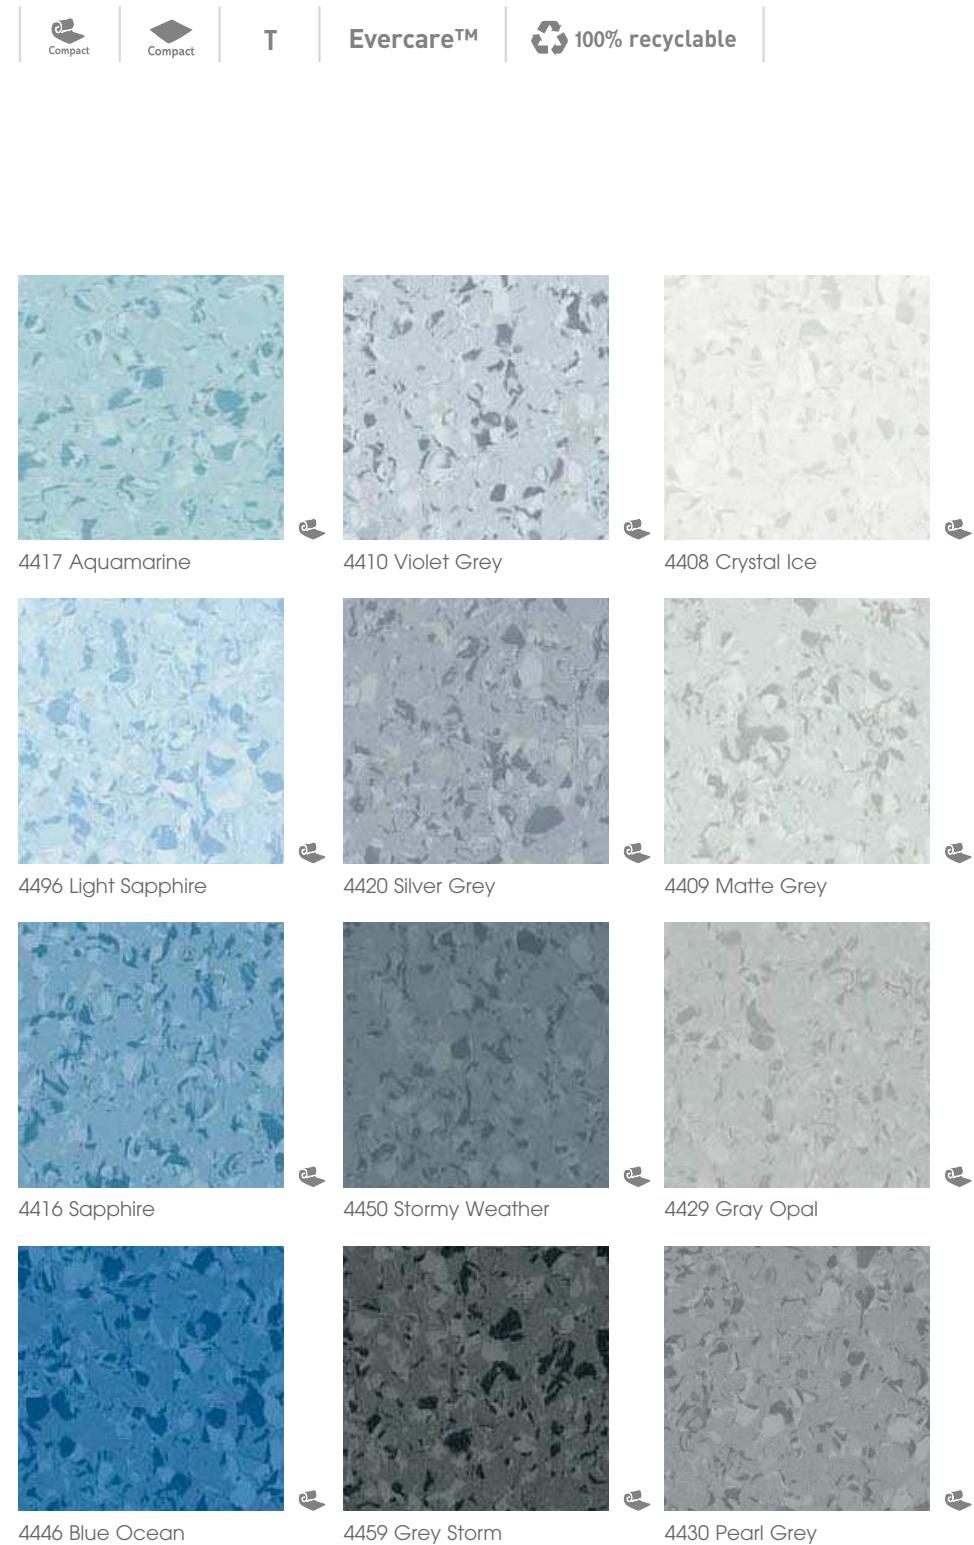

◆ Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm.

MIPOLAM AFFINITY **NEW**

T

Evercare™

100% recyclable



4405 Sand Opal



4403 Natural Shade



4447 Light Emerald



4432 Citrine



4401 Quartz



4441 Light Greige



4457 Olivine




4455 Orange Sunlight



4424 Smoked Opal



4445 Mocca



4443 Lime Taupe



4448 Ruby




4425 Amber



4460 Black Stone



4463 Greige



4437 Cashmere Rose

◆ Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm.

HOMOGENEOUS FLOORING

MIPOLAM ACCORD **NEW**



0425 Cork



0324 Sand



0315 Orange River



0332 Dore




0448 Bandak



0447 Grunsee



0437 Flamingo Resort



0457 Como

MIPOLAM ACCORD **NEW**


T

Evercare™

100% recyclable



0301 Louise



0310 Huron



0312 Powell



0321 Salt




0303 Manitoba



0320 Ontario



0319 Toba



0306 Inari



0305 Light Sand



0330 Kruger



0450 Thames



0316 Malaren



0441 Loch Ness



0443 Krumme



0459 Mississippi




0417 Constance



0463 Bourget



0445 Otto



0360 Balaton



0346 Roxen

◆ Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm.

HOMOGENEOUS FLOORING


MIPOLAM ELEGANCE



Compact | Compact | Compact | T | Evercare™ | 100% recyclable



0323 Nut



0347 Mangoustan




0705 Patisson



0697 Greenstone



0322 Jicama



0318 Grape



0704 Raspberry Grey



0328 Almond



0696 Ginger




0344 Nutmeg



0327 Pear




0343 Pecan




0321 Olive

◆ Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm.


MIPOLAM ELEGANCE

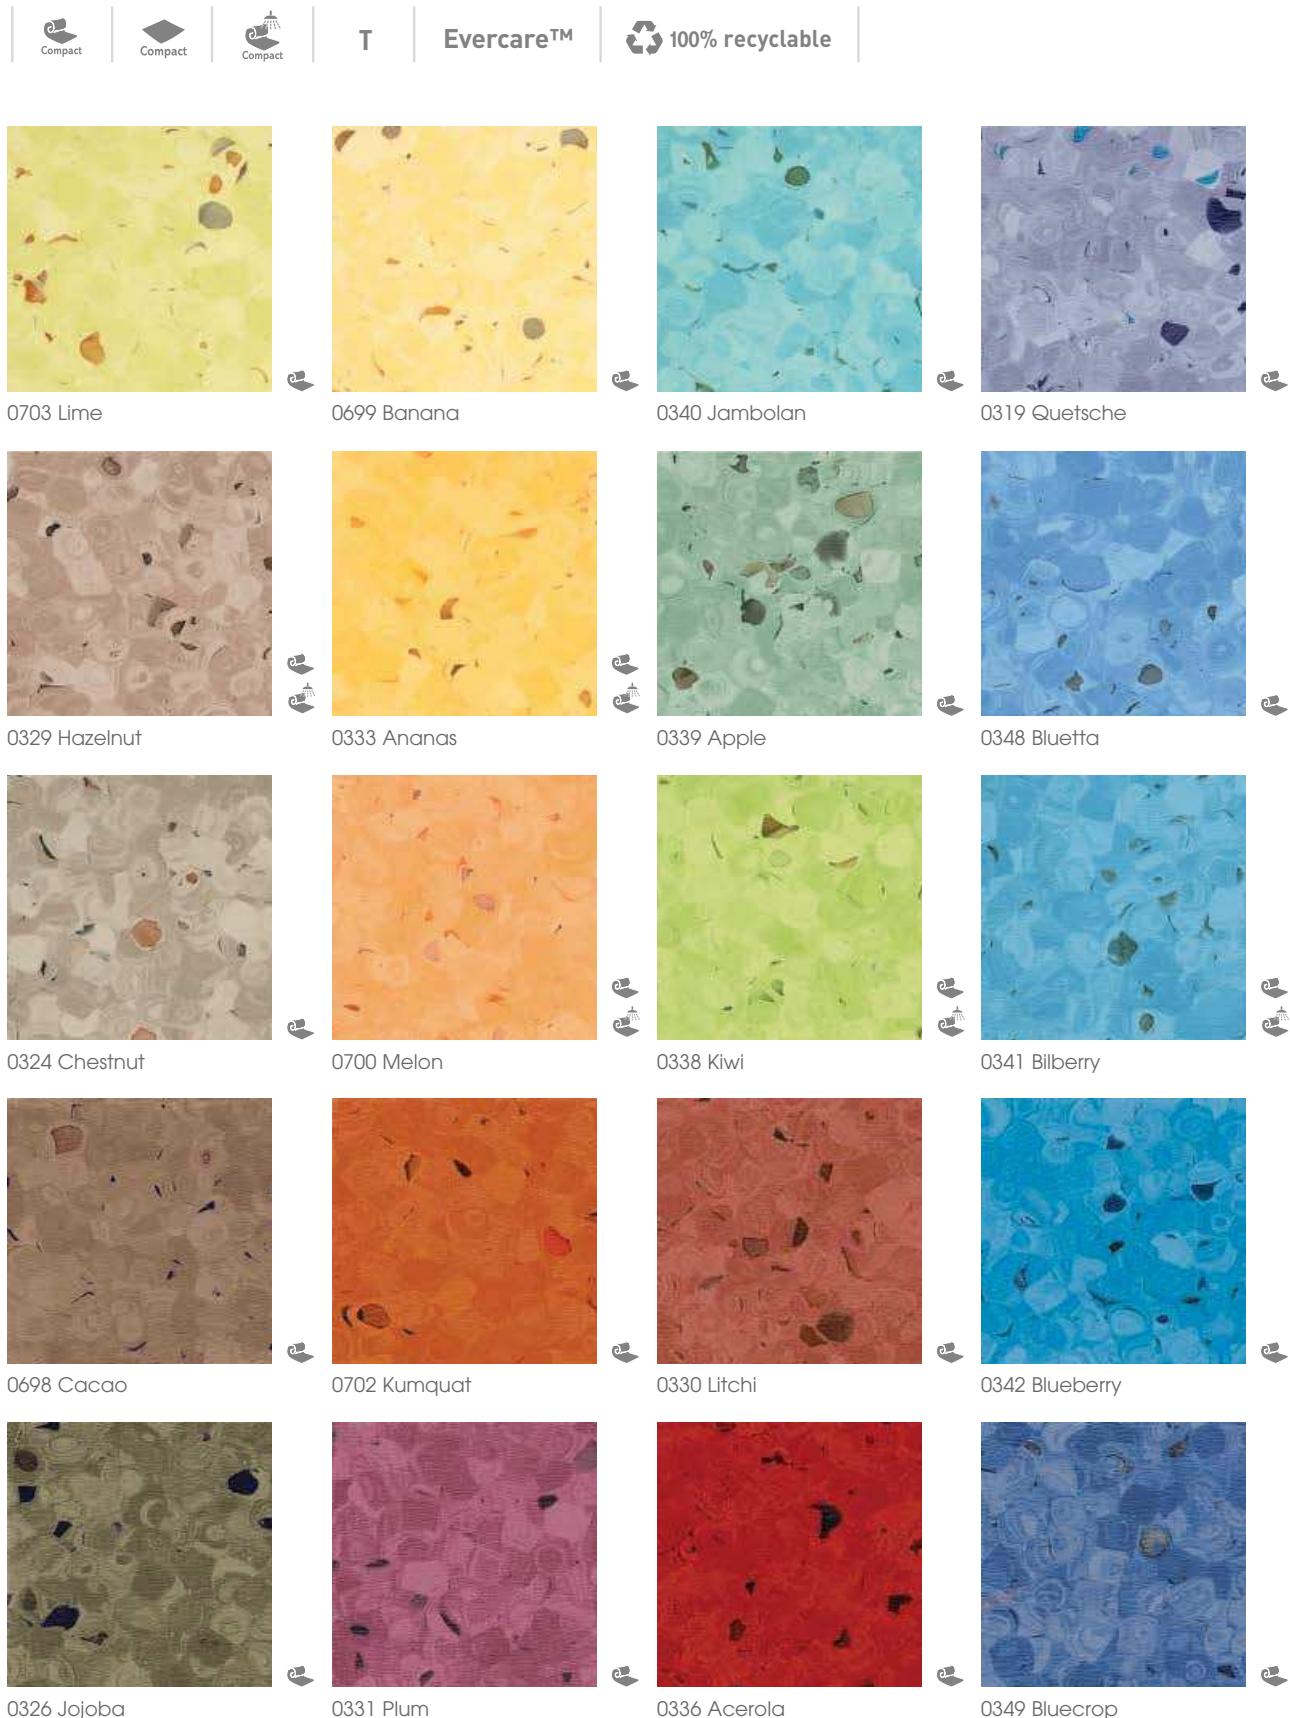


References also available as Elegance SD suitable for Shower system.




2607 Aqua Marine




2637 Emerald



2606 Azur




2636 Overseas



2646 Blue Navy

HOMOGENEOUS FLOORING

MIPOLAM COSMO NEW

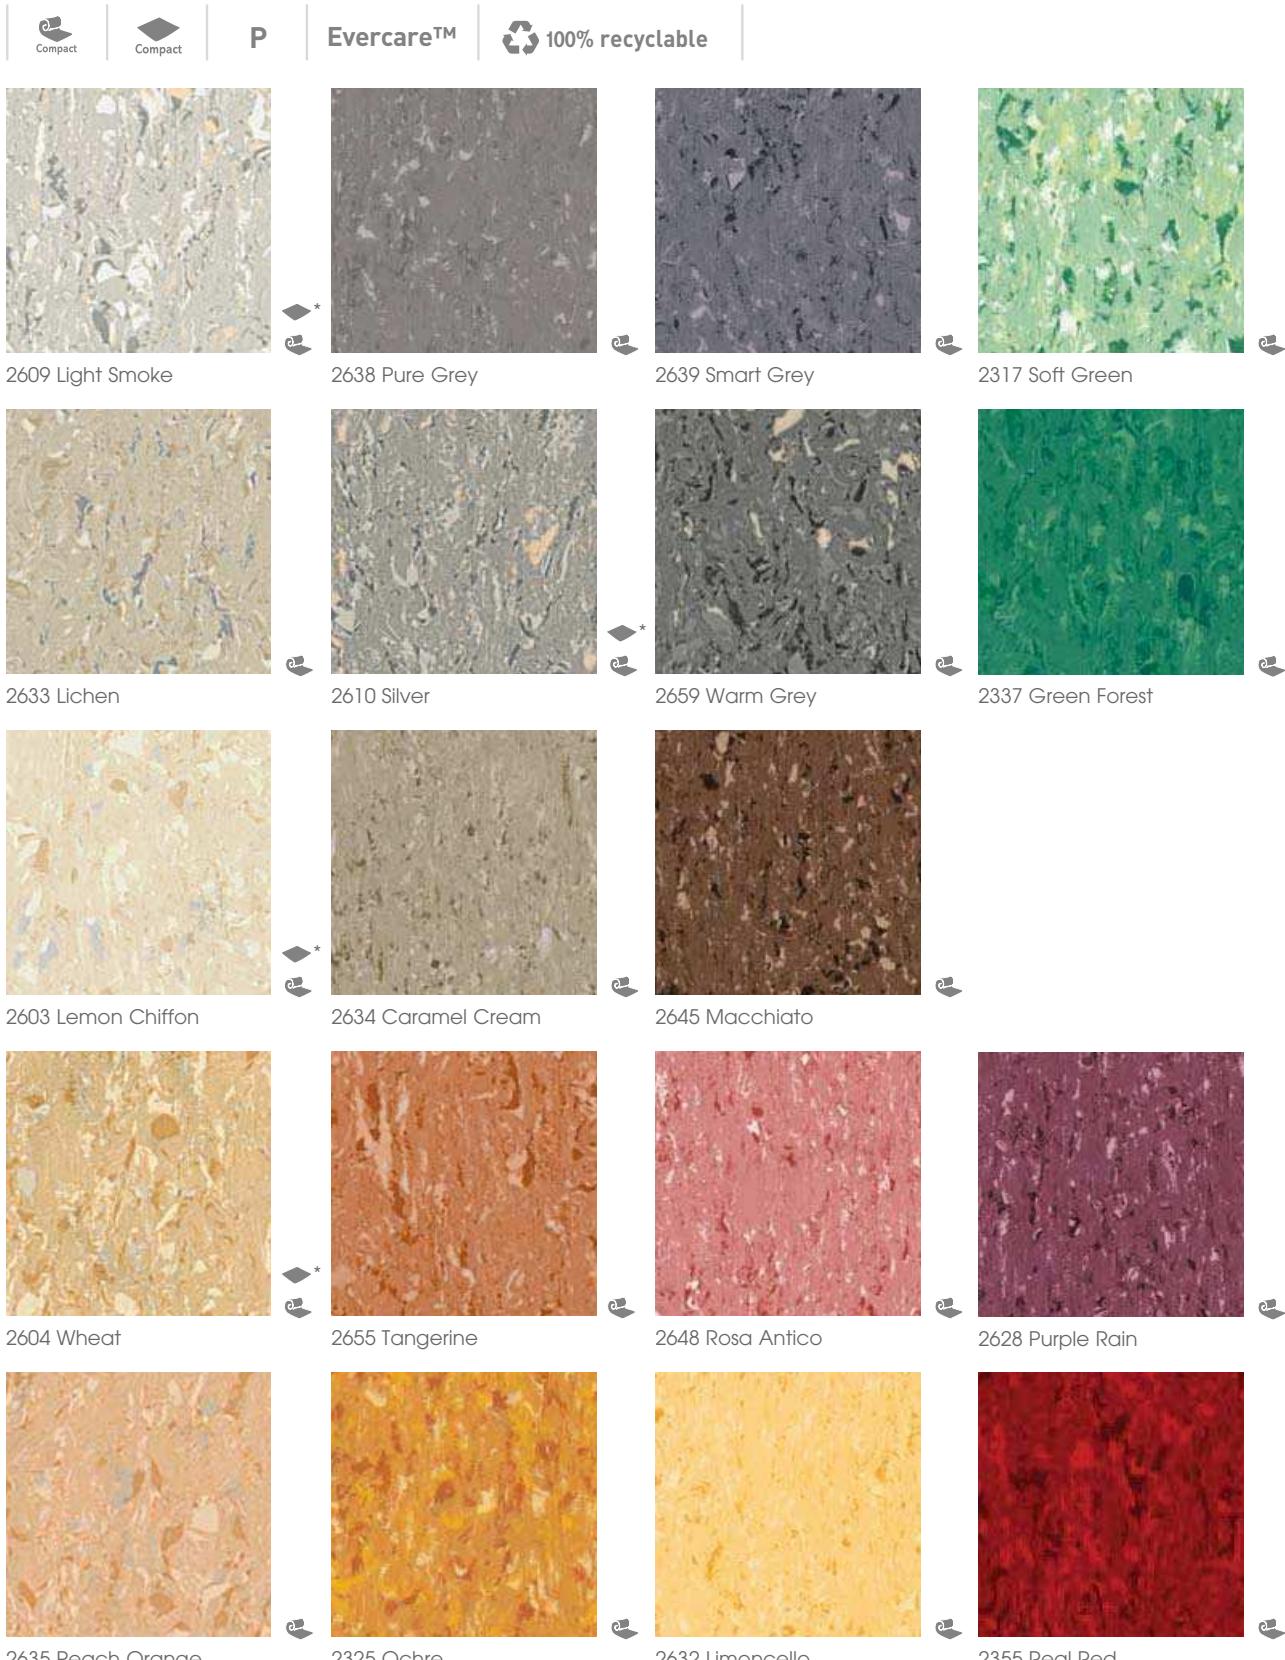

* ◆ [608 x 608 mm] compact tile in stock. All other references available as tiles for a minimum order quantity of 500 sqm.

HOMOGENEOUS FLOORING

MIPOLAM TROPLAN



M

Evercare™



1032 Yellow



1055 Apricot



1010 Grey



1009 Light Grey



1002 Beige



1003 Light Ocre



1059 Blue Grey



1006 Blue




1007 Green



1035 Ocre



1040 Dark Grey



1036 Medium Blue



1037 Medium Green




1004 Earth



1060 Anthracite



1056 Dark Blue



1057 Dark Green



1033 Brown




HOMOGENEOUS FLOORING

MIPOLAM CLASSIC - ARCHITECTON



MIPOLAM CLASSIC

NEW

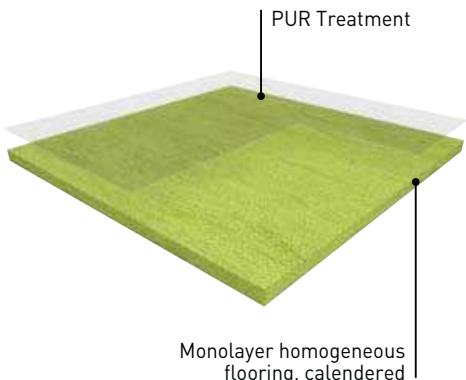

MIPOLAM CLASSIC is a flexible monolayer homogeneous calendered flooring in 2m sheets, with a thickness of 2mm and a **weight of ≤ 3300g**.

The directional design with colour throughout the thickness is available in 18 references.

This flooring is antistatic (<2kV).

The product is non reactive to residual indentation with a value ≤ 0.03 mm.

This product receives a **PUR** surface treatment : a good foundation for routine maintenance. No acrylic emulsion / polishes is required after installation.


The flooring is **group M** wear rating suitable for medium to heavy traffic areas.

The product emission rate of volatile organic compounds is <10 µg/m³ (TVOC after 28 days ISO 16000-6).



ARCHITECTON

 Tiles only
Compact

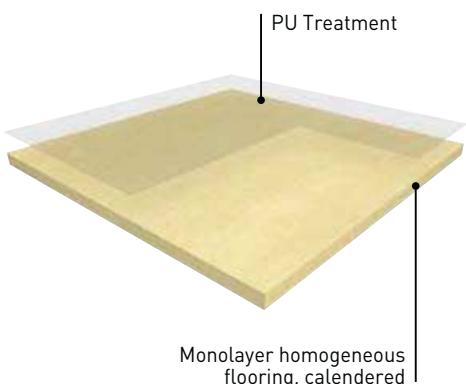

ARCHITECTON is a flexible monolayer homogeneous calendered flooring, with a thickness of 2mm and a **weight of ≤ 3680g**.

The directional design with colour throughout the thickness is available in 19 tile references.

This flooring is antistatic (<2kV).

The product is non reactive to residual indentation with a value ≤ 0.03 mm.

It receives a protective **PU** factory seal: a good foundation for routine maintenance. Acrylic emulsion / polishes is required after installation.

The flooring is **group F** wear rating suitable for normal to medium traffic areas.

The product emission rate of volatile organic compounds is <10 µg/m³ (TVOC after 28 days ISO 16000-6).

MIPOLAM CLASSIC - ARCHITECTON



- **ARCHITECTON is a homogeneous multipurpose flooring**
- **MIPOLAM CLASSIC is available in tile or sheet format and is suitable for normal to heavy traffic areas, Group M wear rating**
- **ARCHITECTON is available in tiles only and is suitable for normal to medium traffic areas, Group F wear rating**
- **PUR surface treatment: good foundation for routine maintenance.**
- **PU surface treatment: acrylic emulsion required after installation.**

	MIPOLAM CLASSIC		ARCHITECTON	
DESCRIPTION				
Total thickness	EN ISO 24346 (EN 428)	mm	1.5	2
Weight	EN ISO 23997 (EN 430)	g/sq.m	2520	3300
Width of sheet	EN ISO 24341 (EN 426)	cm	200	200
Length of sheet	EN ISO 24341 (EN 426)	lm	20	20
Tile size	EN ISO 24342 (EN 427)	mm	- 300 x 300 ⁽¹⁾ 608 x 608	300 x 300
Number of tiles per package	-	-	- 50 / 20	50
CLASSIFICATION				
Norm / Product specification	-	-	EN ISO 10581 (EN 649)	EN ISO 10581 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	23-31	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
PERFORMANCES				
Wear resistance	EN 660.2	mm ³	≤ 15.0	≤ 7.5
Wear group	NF 189	group	F	M
Type Binder content	EN ISO 10581	type	II	III
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40	Sheet ≤ 0.40 Tile ≤ 0.25
Impact Sound Insulation	EN ISO 717-2	dB	4	4
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≈ 0.03	≈ 0.03
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	OK
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PUR	PUR
Chemical products resistance	EN ISO 26987 (EN 423)	class	OK	OK
ENVIRONMENT / INDOOR AIR QUALITY				
TVOC after 28 days	ISO 16000-6	µg / m ³	<10	<10
CE MARKING				
CE	EN 14041			

(1) Tiles (300 x 300 mm) available for a minimum order quantity of 500 sqm.

HOMOGENEOUS FLOORING

MIPOLAM CLASSIC NEW

**M****PUR**

0002 Platinum



0005 Steel



0303 Grey



0013 Pewter



0108 Pepper



0010 Azure



0126 Nordica



0127 Bermuda



0301 Beige



0121 Green Leaf



0120 Borneo



0125 Truffle



0003 Ivory



0006 Honey



0014 Brown



0124 Tortora



0122 Pineapple



0123 Corallo

All colours available as 300 x 300mm tiles upon request for a minimum order quantity of 500 sqm

▲Thickness: 1.5 mm - Sheet format only

ARCHITECTON



MULTILAYERED
FLOORING

.....PAGES.....

36/89




Taralay Premium	40
• Osmoz	43
• Indiana	44
• Metallica	47
• Brazilia	49
• Costa Rica	50
• Fusion	51
My Taralay Premium	52
Taralay Premium Dry-Tex™.....	54
Taralay Element	56
• City	58
Taralay Impression/Uni	60
• Corner	62
• Kubes	63
• Rice	64
• Stars	65
• Cemento	66
• Mohair	66
• Nest	67
• Trame	68
• Gentlemen	68
• Wood	69-73
• Uni	75
Taralay Initial	76
• Diversion	78
• Strada	79
• Urban	80
• Tweedy	81
• Wood	82-85
Tarastep	86

MULTILAYERED FLOORING




ABRASION RESISTANCE

Homogeneous wearlayer

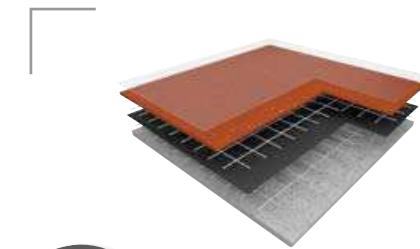


Taralay Element
Comfort




Taralay Element
Compact

Clear wearlayer

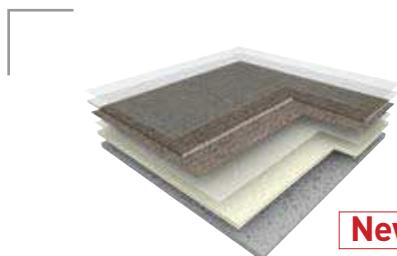

New

Taralay Initial
Comfort




New


Taralay Initial
Compact

Protecsol® Treatment

MAINTENANCE

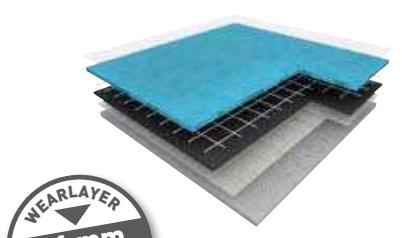


Taralay Premium
Comfort




Taralay Premium
Compact

TARALAY PREMIUM

- A global offer 6 designs, 86 colours
- A decorative solution:
My Taralay
- A technical solution:
Dry-Tex™ System



Taralay Premium
Dry-Tex™ System




New

Taralay Impression Comfort*
Taralay Impression Comfort Plus**



*

**



New

Taralay Impression Compact*
Taralay Impression Compact Plus**




Treatment

MULTILAYERED FLOORING

TARALAY PREMIUM



TARALAY PREMIUM COMFORT

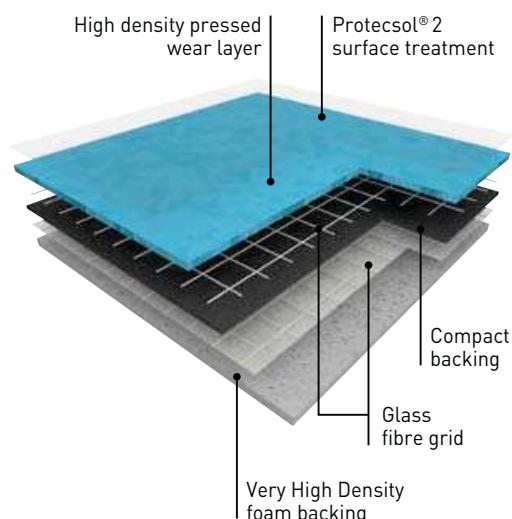

TARALAY PREMIUM COMFORT is a multilayered calendered and pressed vinyl floorcovering, with no filler and a group T wear rating, available in 2m wide sheet.

The product comprises a **>1mm thick, pure vinyl wear layer incorporating very densely pressed coloured chips**, with a **mat finishing** and **without a transparent wear layer**.

The product comprises a compact backing which is calendered, pressed and a Very High Density (VHD) foam backing. It is reinforced with a double glass fibre grid yielding a **16dB sound insulation**, **an indentation resistance of 0.06mm** and **a rolling heavy loads easiness**.

TARALAY PREMIUM COMFORT is treated with **Protecsol® 2**, a surface treatment obtained by UV laser crosslinking. This Protecsol® 2 ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

It is composed of 40% of minerals and inexhaustible materials.

It is made of 100% controlled recycled materials.

It does not contain any heavy metals or CMR 1&2 and they are 100% compliant with REACH.


On demand, Taralay Premium is available with phthalate free.

The products emission rate of volatile organic compounds is **<10µg/m³ (TVOC after 28 days – ISO 16000-6)**.

It is 100% recyclable.



TARALAY PREMIUM COMPACT

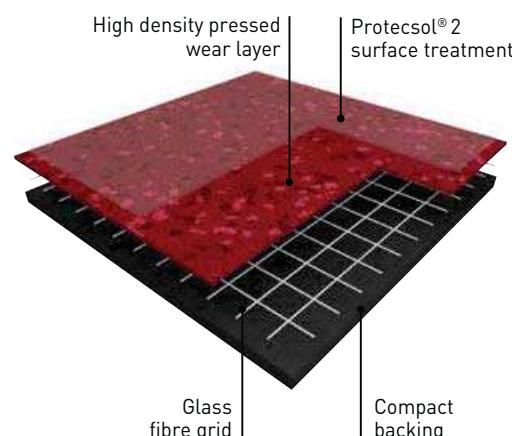

TARALAY PREMIUM COMPACT is a multilayered calendered and pressed vinyl floorcovering, with no filler and a group T wear rating, available in 2m wide sheet.

The product comprises a **>1mm thick, pure vinyl wear layer incorporating very densely pressed coloured chips**, with a **mat finishing** and **without a transparent wear layer**.

The product comprises a compact backing which is calendered, pressed and reinforced with a glass fibre grid yielding a **8dB sound insulation**, **an indentation resistance of 0.02mm** and **a rolling heavy loads easiness**.

TARALAY PREMIUM COMPACT is treated with **Protecsol® 2**, a surface treatment obtained by UV laser crosslinking. This Protecsol® 2 ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

It is composed of 40% of minerals and inexhaustible materials.

It is made of 100% controlled recycled materials.

It does not contain any heavy metals or CMR 1&2 and they are 100% compliant with REACH.

On demand, Taralay Premium is available with phthalate free.

The products emission rate of volatile organic compounds is **<10µg/m³ (TVOC after 28 days – ISO 16000-6)**.

It is 100% recyclable.

TARALAY PREMIUM



► Outstanding durability

Design within the whole thickness of the wear layer,
>> 1mm thick

► Long lasting appearance

Pure vinyl wear layer (no filler, no transparent wear layer)
for the best scratch and soiling resistance

► Easy maintenance & matt effect

Protecsol® 2 surface treatment

► Excellent indoor air quality

TVOC after 28 days < 10µg/m³

► Rolling heavy loads easiness, best stability and very high

performance indentation / acoustic

0.06 mm / 16db for Comfort, 0.02 mm / 8db for Compact

Glass fibre grid reinforcement & very high density foam backing

TARALAY PREMIUM COMFORT	TARALAY PREMIUM COMPACT
Osmoz - Indiana - Metallica - Brazilia - Costa Rica	Osmoz - Indiana - Metallica - Brazilia - Costa Rica - Fusion

DESCRIPTION				
Total thickness	EN ISO 24346 (EN 428)	mm	3.00 - 3.30	2.00
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	> 1	> 1
Weight	EN ISO 23997 (EN 430)	g/sq.m	2800 - 3260	2580 - 2680
Width of sheet	EN ISO 24341 (EN 426)	cm	200	200
Length of sheet	EN ISO 24341 (EN 426)	lm	25	20
CLASSIFICATION				
Norm / Product specification	-	-	EN 651	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-42	34-43
Fire rating	EN 13501-1	class	Cfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance ^[1]	DIN 51 130	class	R10	R10
PERFORMANCES				
Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T
Type Binder content	EN ISO 10582	type	-	I
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 (EN 433)	mm	≤ 0.20	≤ 0.10
Residual indentation (average measured value)	-	mm	≈ 0.06	≈ 0.02
Impact sound insulation	EN ISO 717-2	dB	16	8
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	OK
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	Protecsol® 2	Protecsol® 2
Chemical products resistance ^[2]	EN ISO 26987 (EN 423)	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ^[3]	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
ENVIRONMENT / INDOOR AIR QUALITY				
TVOC after 28 days	ISO 16000-6	µg / m³	<10	<10
Certification	-	-	Floorscore®	Floorscore®
CE MARKING				
CE	EN 14041			

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges.

(2) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

(3) The implementation of an effective cleaning regime is the most important defence against infection.



MULTILAYERED FLOORING

TARALAY PREMIUM - OSMOZ



Compact



Comfort

16dB

Protecsol® 2




100% recyclable




3793 Cashmere Grey



3792 Storm Grey



8255 Golden Sunset




4348 Alpaga



4149 Mandarin



4527 Bamboo




4350 Elefant




4148 Scarlet Red



4496 Pacific Blue




3791 Slate Grey



4143 Rose Shocking




4495 Atlantic Blue



4344 Ivory



4347 Raphia



4349 Angora



4351 Greige



MULTILAYERED FLOORING

TARALAY PREMIUM - INDIANA



Compact




Comfort


16dB

Protecsol® 2


100% recyclable



4015 Guinea




4133 Agalega



4526 Lasia



8254 Samui




4135 Aldabra




4469 Pemba




8242 Masirah




4140 Mahe




4476 Wattaru




4142 Penang



4145 Madura



4475 Felidu



4146 Moheli



4141 Zanzibar




TARALAY PREMIUM - INDIANA

Dry-Tex™
S Y S T E M

- The all in one moisture solution
- Available with 4 references of Taralay Indiana

For any project please contact your Sales Representative for further technical information!

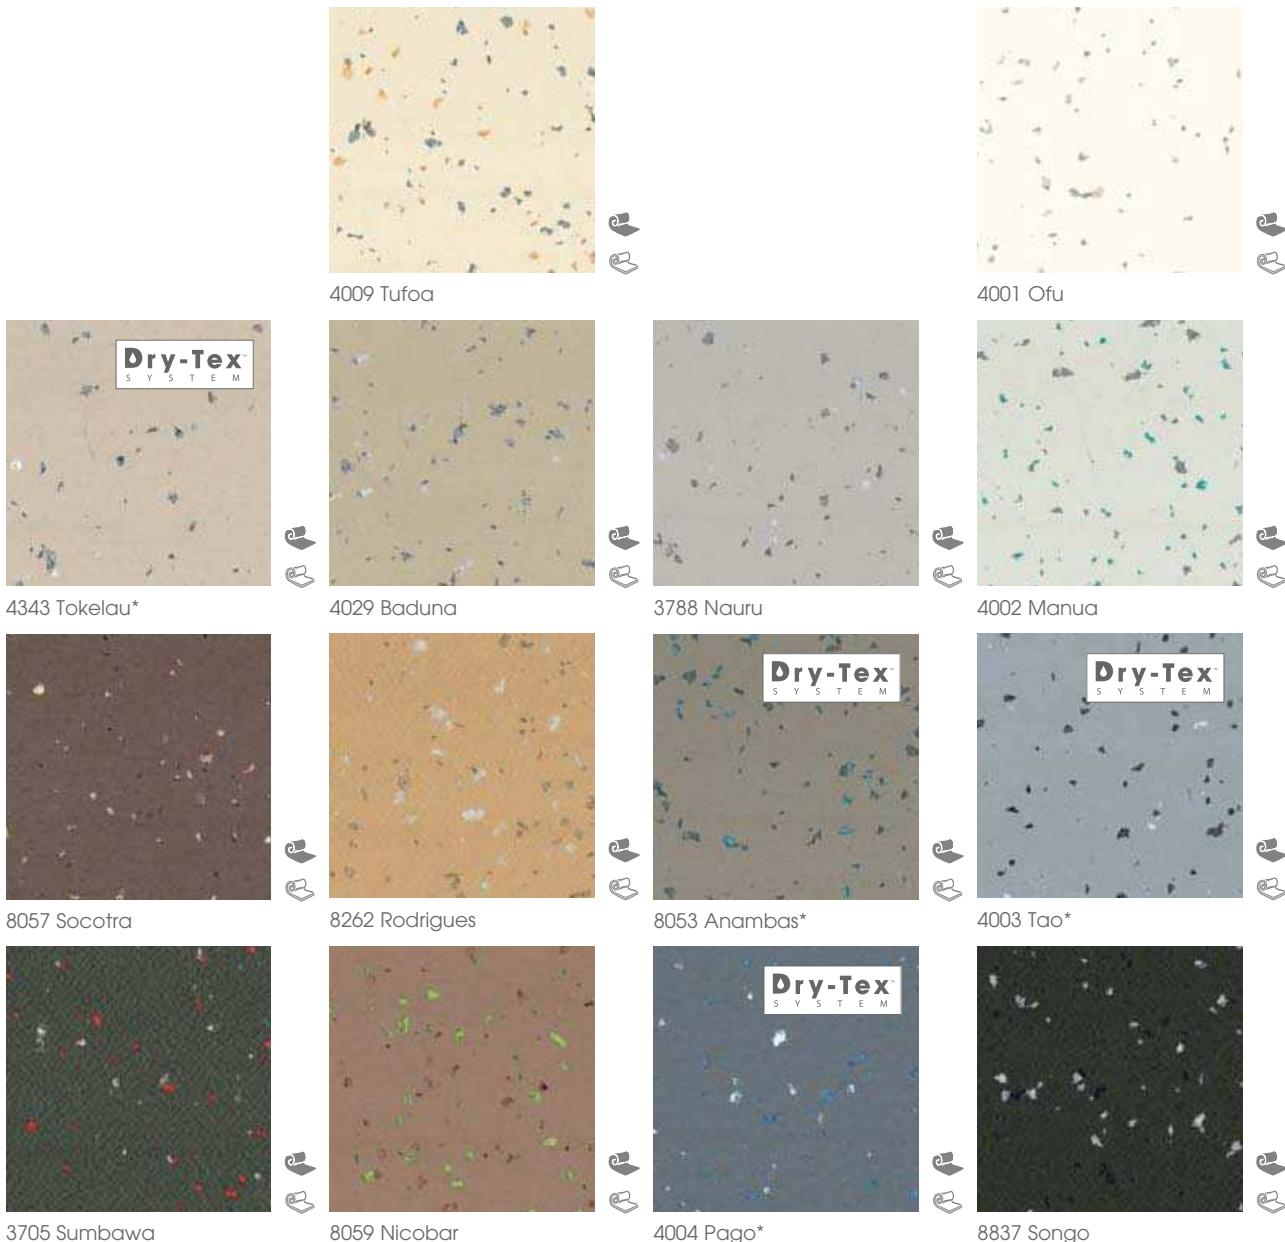

*Product available as Taralay Premium & Taralay Premium Dry-Tex™.



MULTILAYERED FLOORING

TARALAY PREMIUM - METALLICA



Compact



Comfort

16dB

Protecsol® 2

100% recyclable



9330 Moon



9753 Energy



9506 Himalia



9302 Atlas



9719 Eclipse



9745 Cosmic



9002 Pulsar



9127 Meteorite



9415 Celeste



9310 Tethys



MULTILAYERED FLOORING

TARALAY PREMIUM - BRAZILIA



Compact




Comfort


16dB

Protecsol® 2


100% recyclable




3734 Almerim



8736 Recife




3709 Ceara




3707 Paraiba




4729 Mato Grosso



4342 Juara




4329 Bacabal



8062 Campinas




8386 Boa Vista



8269 Ipanema




8157 Goias




4136 Sao Luis




8577 Amazonas



4477 Maceio



4478 Copacabana



4481 Estancia

MULTILAYERED FLOORING

TARALAY PREMIUM - COSTA RICA



Compact



Comfort

16dB


Protecsol® 2




100% recyclable




4743 Nublo



4794 Talamanca




4752 Sombra



4746 Jaguar




8387 Balsa




8191 Meseta



8395 Caballo



8183 Volcan



4454 Ara



TARALAY PREMIUM - FUSION



Protecsol® 2

100% recyclable



Multilayered
Flooring



4753 Cotopaxi




4741 Lanzarote



4749 Vesuvio



4745 Lopevi




4748 Kamchatka

MULTILAYERED FLOORING

NEW PRODUCT OFFER: COLOURS ON DEMAND

A NEW SERVICE FOR CUSTOMISED
FLOORS

My Taralay

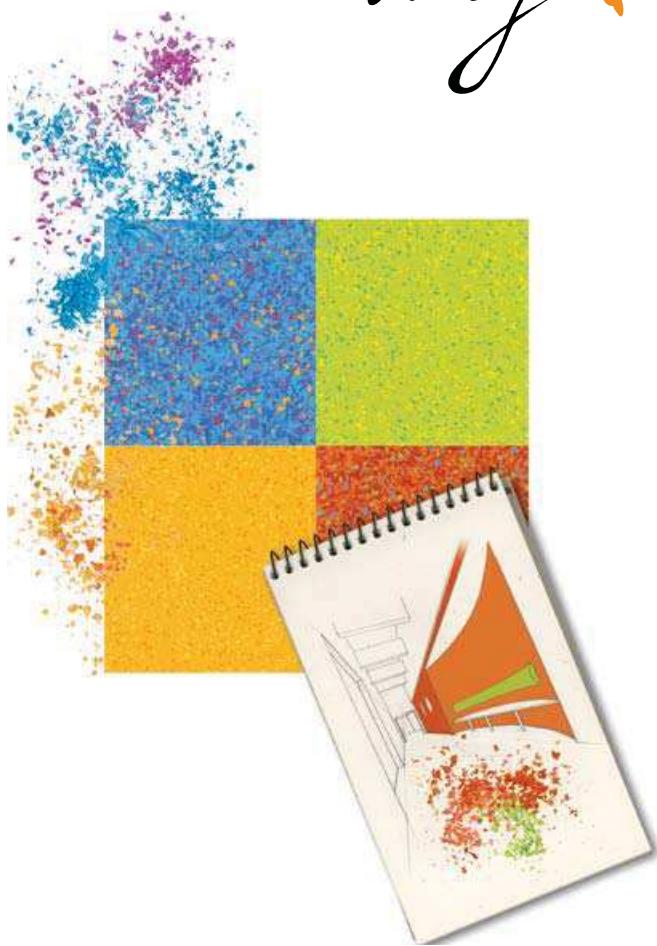

You want to **surprise** people with **flooring** in **harmony with space and light**, Gerflor gives you the **freedom** to build your own **unique decoration projects**.

Express your emotions, make up your own atmosphere, reinvent floors with My Taralay.

AN EXCLUSIVE CONCEPT

The performance of the **Taralay Premium** range in the colours of your choice.




My Taralay creation
Brazilia
Education - France

HOW IT WORKS

1 Select a design type


layout



Brazilia type



Indiana type



Fusion type



Osmoz type

2 Choose your granules

palette



3 Visualise your harmonies


and order online on mytaralaybygerflor.com



MULTILAYERED FLOORING

TARALAY PREMIUM DRY-TEX™ SYSTEM

THE
ALL-IN-ONE
MOISTURE
SOLUTION

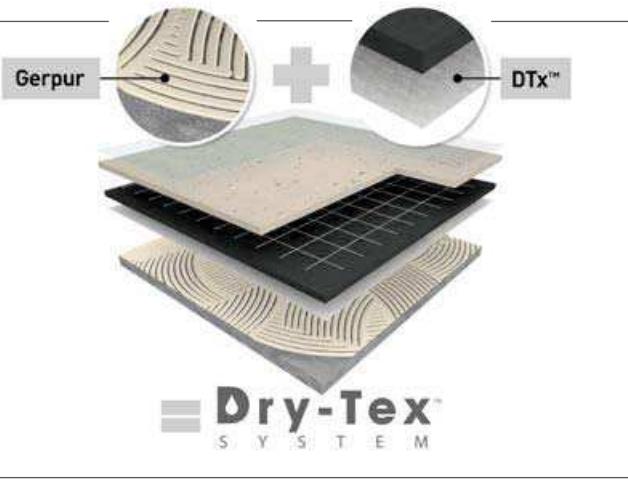

All the performance of Taralay Premium (See page 44)



4343 Tokelau



8053 Anambas



4004 Pago



4003 Tao



And much more
for any slab with
high moisture

SAVE MONEY

- ✓ up to 70% cost savings compared to other third-party mitigation systems

SAVE TIME

- ✓ the only one-step, full-spread adhesive solution

RELIABLE SOLUTION

- ✓ over 500 000 sqm installed since 2009 with the same system used in Taraflex® Sports Flooring

HIGH PERFORMANCE SYSTEM

- ✓ proven to resist up to 98% RH

* For any project please contact your Sales Representative for further technical information!



Compact



Comfort

8dB

Protecsol® 2



100% recyclable

► TARALAY PREMIUM DRY-TEX™



TARALAY PREMIUM DRY-TEX™ SYSTEM includes **TARALAY PREMIUM DRY-TEX™** and **GERPUR glue**.

This system provides a complete moisture mitigation in full-spread adhesive installation eliminating interposition barrier for any slab with high moisture (up to 98%RH).

TARALAY PREMIUM DRY-TEX™ is a multi-layered calendered and pressed vinyl floorcovering, with no filler and a group T wear rating, available in 2m wide sheet.

The product comprises a **>1mm thick homogeneous, pure vinyl wear layer incorporating very densely pressed coloured chips, with a mat finishing and without transparent wearlayer**.

The product comprises a 100% post-manufacturing compact reinforced with a glass fiber grid and a non-woven backing. The product offers 8dB sound insulation, an indentation resistance of 0.06mm and a rolling heavy loads easiness.

TARALAY PREMIUM DRY-TEX™ is treated with **Protecsol®2**, a surface treatment obtained by UV laser crosslinking. This Protecsol®2 ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

It is composed of 40% of minerals and inexhaustible materials.

It is made of 100% controlled recycled materials.

It does not contain any heavy metals or CMR 1&2 and they are 100% compliant with REACH.

The products emission rate of volatile organic compounds is **<10µg/m³ (TVOC after 28 days - ISO 16000-6)**.

It is 100% recyclable.

TARALAY PREMIUM DRY-TEX™			
DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	2.50
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	1.02
Weight	EN ISO 23997 (EN 430)	g/sq.m	2660
Width of sheet	EN ISO 24341 (EN 426)	cm	200
Length of sheet	EN ISO 24341 (EN 426)	lm	20
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance ^[1]	DIN 51 130	class	R10
PERFORMANCES			
Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	NF 189	group	T
Type Binder content	EN ISO 10582	type	I
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Residual indentation (value)	-	mm	≤ 0.03
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.k)	0.25
Impact sound insulation	EN ISO 717-2	dB	8
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Protecsol® 2
Chemical products resistance ^[2]	EN ISO 26987 (EN 423)	-	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ^[3]	ISO 22196	-	> 99% inhibits growth
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg / m³	<10
Certification	-	-	Floorscore®
CE MARKING			
	EN 14041		

^[1] For lifetime sustainable wet resistance, please refer to Tarasafe ranges.

^[2] Regarding the resistance to chemicals, please download the corresponding leaflet from our website.


^[3] The implementation of an effective cleaning regime is the most important defence against infection.

MULTILAYERED FLOORING

TARALAY ELEMENT



► TARALAY ELEMENT COMFORT

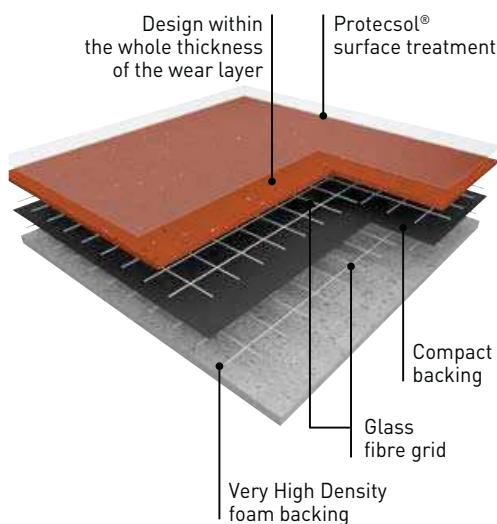

TARALAY ELEMENT COMFORT is a multilayered vinyl floorcovering available in 2m wide sheet, with a group T wear rating.

The product comprises a 0.75mm thick, pure vinyl and coloured wear layer throughout the thickness, without a transparent wear layer.

It comprises a Very High Density (VHD) foam and is reinforced with 2 fibre glass grids which yields a 17dB sound insulation rating and a resistance to indentation of 0.07mm.


This flooring is protected by the surface treatment, **Protecsol®**, with a minimum thickness of 25µm, ensuring easy maintenance and no required polish for the entire lifetime of the product.

It is composed of 47% mineral and inexhaustible materials.

It does not contain any heavy metals or CMR 1&2 components and it is 100% compliant with REACH.

The product emission rate of volatile organic compounds is <10µg/m³ (TVOC after 28 days ISO 16000-6). It is 100% recyclable.

► TARALAY ELEMENT COMPACT

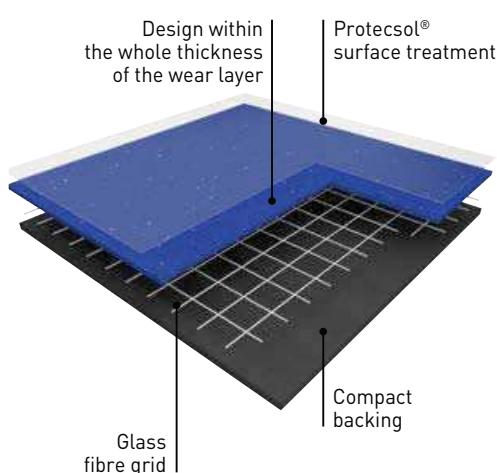

TARALAY ELEMENT COMPACT is a multilayered vinyl floorcovering available in 2m wide sheet, with a group T wear rating.

The product comprises a 0.75mm thick, pure vinyl and coloured wear layer throughout the thickness, without a transparent wear layer.

It is reinforced with a fibre glass grid for a better dimensional stability.

The construction of the product yields a 6 dB sound insulation rating.

This flooring is protected by the surface treatment, **Protecsol®**, with a minimum thickness of 25µm, ensuring easy maintenance and no required polish for the entire lifetime of the product.

It is composed of 50% mineral and inexhaustible materials.

It does not contain any heavy metals or CMR 1&2 components and it is 100% compliant with REACH.

The product emission rate of volatile organic compounds is <10µg/m³ (TVOC after 28 days ISO 16000-6). It is 100% recyclable.

TARALAY ELEMENT




- Durable and bright colours: inlaid design within the whole thickness of the wear layer
- Very High Density (VHD) foam with 2 fibre glass grids which yields a 17dB sound insulation rating and a resistance to indentation of 0.07mm
- Easy maintenance with Protecsol® surface treatment

	TARALAY ELEMENT COMFORT			TARALAY ELEMENT COMPACT
DESCRIPTION				
Total thickness	EN ISO 24346 (EN 428)	mm	3.0	2.0
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.75	0.75
Weight	EN ISO 23997 (EN 430)	g/sq.m	2850	2700
Width of sheet	EN ISO 24341 (EN 426)	cm	200	200
Length of sheet	EN ISO 24341 (EN 426)	lm	25	20
CLASSIFICATION				
Norm / Product specification	-	-	EN 651	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-42	34-43
Fire rating	EN 13501-1	class	Cfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance ⁽¹⁾	DIN 51 130	class	R10	R10
PERFORMANCES				
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T
Type Binder content	EN ISO 10582	type	-	I
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 (EN 433)	mm	≤ 0.20	≤ 0.10
Residual indentation (average measured value)	-	mm	≈ 0.07	≈ 0.03
Impact sound insulation	EN ISO 717-2	dB	17	6
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	OK
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	Protecsol®	Protecsol®
Chemical products resistance ⁽²⁾	EN ISO 26987 (EN 423)	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽³⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
ENVIRONMENT / INDOOR AIR QUALITY				
TVOC after 28 days	ISO 16000-6	µg / m ³	<10	<10
Certification	-	-	Floorscore®	Floorscore®
CE MARKING				
CE	EN 14041			

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges.

(2) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.


(3) The implementation of an effective cleaning regime is the most important defence against infection.



4341 Prague



4339 Agadir



8068 Kinshasa



8252 Shanghai



4523 Rio




MULTILAYERED FLOORING

TARALAY ELEMENT - CITY



17dB


Protecsol®




3733 Stockholm



4337 Bilbao



3739 Tokyo



3744 Calgary



3743 New-York




4338 London




3732 Copenhagen



3753 Amsterdam



4487 Berlin




8067 Dakar



4340 Dubai



3752 Cape Town




4488 Santorini



4144 Bangkok



4134 Moscow



8846 Las Vegas




4490 Palermo



4138 Paris



4115 Sydney




4117 Bamako

MULTILAYERED FLOORING

TARALAY UNI / IMPRESSION

New

► TARALAY IMPRESSION COMPACT

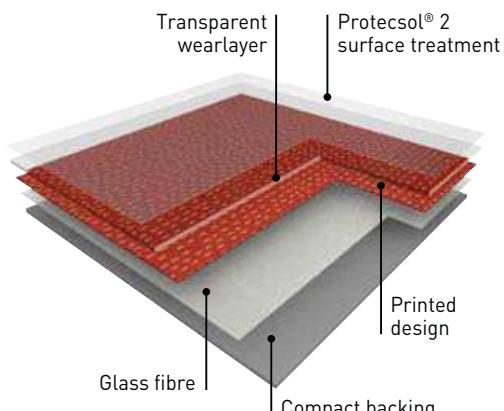

TARALAY IMPRESSION COMPACT 0,7 is a multi-layered vinyl floorcovering, available in 2m wide sheet, with a group T wear rating. The product comprises a compacted backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.70 mm thick). **It offers 8 dB sound insulation and an indentation resistance of ca. 0.03 mm.**


TARALAY IMPRESSION COMPACT PLUS 0,9 is a multi-layered vinyl floorcovering, available in 2m wide sheet, with a group T wear rating.

The product comprises a compacted backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.90 mm thick). **It offers 8 dB sound insulation and an indentation resistance of ca. 0.03 mm.**

The flooring is equipped with **Protecsol®2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (<10 µg / m³) and this product is classified A + (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Compact has antibacterial efficacy (E.coli / S.aureus / MRSA) : >99% after 24 hours according to ISO22196.

► TARALAY IMPRESSION COMFORT

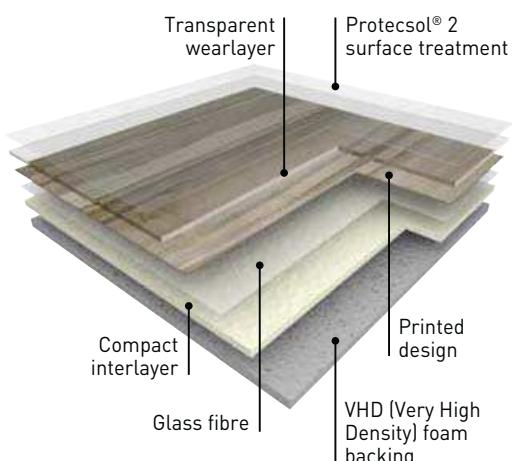


TARALAY IMPRESSION COMFORT 0,65 is an acoustic multi-layered vinyl floorcovering, available in 2m wide sheet, with a group T wear rating. The product comprises a Very High Density (VHD) foam backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.65 mm thick). **It offers 19 dB sound insulation and an indentation resistance of ca. 0.08 mm.**

TARALAY IMPRESSION COMFORT PLUS 0,9 is an acoustic multi-layered vinyl floorcovering, available in 2m wide sheet, with a group T wear rating. The product comprises a Very High Density (VHD) foam backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.90 mm thick). **It offers 19 dB sound insulation and an indentation resistance of ca. 0.08 mm.**

The flooring is equipped with **Protecsol®2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (<10 µg/m³) and this product is classified A + (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Comfort Plus has antibacterial efficacy (E.coli / S.aureus / MRSA): > 99% after 24 hours according to ISO22196.

► TARALAY UNI COMFORT

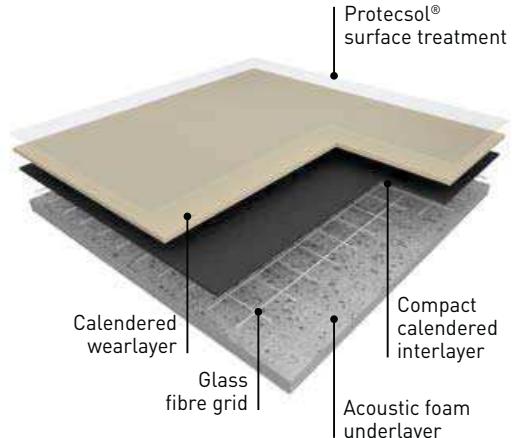

TARALAY UNI COMFORT is an acoustic multi-layered vinyl floor covering, available in 2m wide sheets, with a group T wear rating.

The product comprises a Very High Density (VHD) foam backing reinforced with glass fibre and a calendered wearlayer (0.65 mm thick). **It offers 17 dB sound insulation and an indentation resistance of 0.11mm.** It has a plain coloured design, making it ideal for cut design work.

It is protected by a UV-cured **Protecsol®** surface treatment, which facilitates ease of maintenance and permanently eliminates the need for an acrylic emulsion (metallisation).

It does not contain any heavy metals or CMR 1&2 substances and it is 100% REACH compliant. The product emission rate of volatile organic compounds is < 10 µg/m³ (TVOC after 28 days - ISO 16000 -6). It is 100% recyclable.

TARALAY UNI / IMPRESSION

New



17dB
(TL Uni)

Protecsol®

19dB
(TL Impression)

Protecsol® 2

100% recyclable

Multilayered
Flooring

- ULTRA-REALISTIC DESIGNS:
New embosses and new plank dimensions for wood designs
- MATT EFFECT
- EXTREME STAIN RESISTANCE, EASY MAINTENANCE:
Protecsol® 2 surface treatment (patented technology by Gerflor)
- HIGH TRAFFIC RESISTANCE, LONG-LASTING APPEARANCE
Available with a 0.7mm wearlayer and available with a 0.9mm wearlayer upon request (minimum order quantity of 1600 sq.m)

- THE BEST ACOUSTIC / INDENTATION PERFORMANCE ON THE MARKET
COMPACT: 0.03 mm / 8 dB
COMFORT: 0.08 mm / 19 dB
- ECO-RESPONSIBLE SOLUTION
Best in class for indoor air quality (TVOC < 10 µg/m³ after 28 days)

	TARALAY IMPRESSION COMPACT	TARALAY IMPRESSION COMPACT PLUS	TARALAY IMPRESSION COMFORT	TARALAY IMPRESSION COMFORT PLUS	TARALAY UNI COMFORT
DESCRIPTION					
Total thickness	EN ISO 24346 (EN 428)	mm	2.00	2.25	3.35
Wearlayer Thickness	EN ISO 24340 (EN 429)	mm	0.70	0.90	0.65
Weight	EN ISO 23997 (EN 430)	g/sq.m	2635	2975	2825
Width of sheet	EN ISO 24341 (EN 426)	cm	200	200	200
Length of sheet	EN ISO 24341 (EN 426)	lm	25	20	25
CLASSIFICATION					
Norm / Product specification	-	-	EN ISO 10582 (EN 649)	EN ISO 10582 (EN 649)	EN 651
European classification	EN ISO 10874 (EN 685)	class	34-43	34 - 43	34-42
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
Slip resistance ^[1]	DIN 51 130	class	R10	R10	R10
PERFORMANCES					
Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T	T
Type Binder content	EN ISO 10582	type	I	I	-
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 (EN 433)	mm	≤ 0.10	≤ 0.10	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	≈ 0.03	≈ 0.08
Impact sound insulation	EN ISO 717-2	dB	8	8	19
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	OK	OK
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.k)	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	PROTECSOL® 2	PROTECSOL® 2	PROTECSOL® 2
Chemical products resistance ^[2]	EN ISO 26987 (EN 423)	-	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ^[3]	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
ENVIRONMENT / INDOOR QUALITY AIR					
TVOC after 28 days	ISO 16000-6	µg / m³	<10	<10	<10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®
CE MARKING					
CE	EN 14041				

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges.

(2) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

(3) The implementation of an effective cleaning regime is the most important defence against infection.

MULTILAYERED FLOORING

TARALAY IMPRESSION - CORNER

New




Comfort



Compact

19dB

Protecsol® 2



0732 - Corner Dark Blue




0728 - Corner Offwhite



0740 - Corner Turquoise




0729 - Corner Metal




0739 - Corner Anis



0730 - Corner Light Beige



0741 - Corner Tomette




0733 - Corner Copper

TARALAY IMPRESSION - KUBES


New




Comfort | Compact | 19dB | Protecsol® 2 | 100% recyclable




0756 - Kubes Beige




0755 - Kubes White




0751 - Kubes Taupe




0753 - Kubes Grey




0747 - Kubes Olive



0754 - Kubes Blue



0748 - Kubes Burgundy



0749 - Kubes Sky



0752 - Kubes Gold



0750 - Kubes Sun

Multilayered
Flooring

MULTILAYERED FLOORING

TARALAY IMPRESSION - RICE

New



Comfort



Compact


19dB

Protecsol® 2

100% recyclable



0763 - Rice Greige



0737 - Rice Souris




0738 - Rice Copper




0758 - Rice Sea




0736 - Rice Champagne



0735 - Rice Light Green



0762 - Rice Brown



0757 - Rice Coquelicot



0759 - Rice Mustard

TARALAY IMPRESSION - STARS

New



Comfort | Compact | 19dB | Protecsol® 2 | 100% recyclable

Multilayered
Flooring



0764 - Stars Orange



0743 - Stars Baltique



0744 - Stars Anthracite

MULTILAYERED FLOORING

TARALAY IMPRESSION - CEMENTO - MOHAIR

New



Comfort



Compact

19dB

Protecsol® 2



100% recyclable

CEMENTO



0543 - Cemento Brescia



0523 - Cemento Genova



0525 - Cemento Modena



0524 - Cemento Capri




MOHAIR



0769 - Mohair White



0767 - Mohair Natural



0766 - Mohair Dark




TARALAY IMPRESSION - NEST

New



Comfort | Compact | 19dB | Protecsol® 2 | 100% recyclable

Multilayered
Flooring

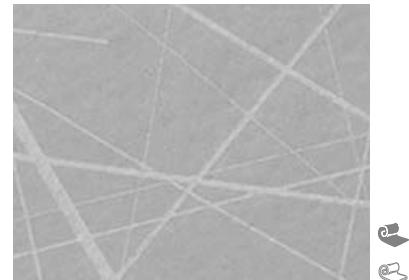

0745 - Nest Metal



0746 - Nest Black



0765 - Nest Taupe

MULTILAYERED FLOORING

TARALAY IMPRESSION - TRAME - GENTLEMEN

New



Comfort



Compact

19dB

Protecsol® 2




100% recyclable

TRAME




0774 - Trame Clear



0776 - Trame Beige



0777 - Trame Rose



0775 - Trame Blue




GENTLEMEN



0772 - Gentlemen Coffee



0771 - Gentlemen Grey



0770 - Gentlemen Clear



TARALAY IMPRESSION - WOOD

New



Comfort | Compact | 19dB | Protecsol® 2 | 100% recyclable

HERRINGBONE



0722 - Herringbone Blond



HABANA



0538 - Habana Vinales



0724 - Herringbone Chatain



0522 - Habana Trinidad



Multilayered
Flooring

MULTILAYERED FLOORING

TARALAY IMPRESSION - WOOD

New



Comfort



Compact

19dB

Protecsol® 2



SYCAMORE



0727 - Sycamore Vanilla



0726 - Sycamore Dark



0725 - Sycamore Light Brown



TARALAY IMPRESSION - WOOD

New



Comfort | Compact | 19dB | Protecsol® 2 | 100% recyclable

LOFT



112/
14,2/
8,7/
6,4 cm



0671 - Loft Light Brown

WALNUT



10 cm



0528 - Walnut Cream



11,2/
14,2/
8,7/
6,4 cm



0734 - Loft Chestnut



10 cm



1314 - Walnut Brown

CHARME



20 cm



0723 - Charme Pecan



20 cm



0721 - Charme Natural



Multilayered
Flooring

MULTILAYERED FLOORING

TARALAY IMPRESSION - WOOD

New



Comfort



Compact

19dB

Protecsol® 2



100% recyclable

NOMA



16,6 cm



0371 - Noma Rustic



16,6 cm



0373 - Noma Ice



16,6 cm



0519 - Noma Beige



PORTOBELLO



16,6 cm



0773 - Portobello

MOON ISLAND



16,6 cm



0760 - Moon Island

TARALAY IMPRESSION - WOOD

New



19dB

Protecsol® 2



INFINITY



0720 - Infinity Aube



No plank
Continuous
design



RENZO



0068 - Renzo Pecan



No plank
Continuous
design



0680 - Infinity Greige



No plank
Continuous
design



0025 - Renzo Taupe



No plank
Continuous
design



0719 - Infinity Lichen



No plank
Continuous
design



TARALAY IMPRESSION		PLANKS SIZES IN CM		
Colour Reference	Colour Name	Pattern Repeat in m	Length	Width
0519	Noma Beige	1000 X 1000	100	16,6
0373	Noma Ice	1000 X 1000	100	16,6
0371	Noma Rustic	1000 X 1000	100	16,6
0538	Habana Vinales	1000 X 1000	100	16,6
0552	Habana Trinidad	1000 X 1000	100	16,6
0528	Walnut Cream	1000 X 1000	100	10
1314	Walnut Brown	1000 X 1000	100	10
0671	Loft Light Brown	1000 X 1000	100	11,2-14,2-8,7-6,4
0734	Loft Chestnut	1000 X 1000	100	11,2-14,2 8,7-6,4
0721	Charme Natural	1000 X 1000	100	20
0723	Charme Pecan	1000 X 1000	100	20
0760	Moonisland	1000 X 1000	100	16,6
0773	Portobello	1000 X 1000	100	16,6
0722	Herringbone Blond	1000 X 1000	100	16,6
0724	Herringbone Chatain	1000 X 1000	100	16,6



MULTILAYERED FLOORING

TARALAY UNI COMFORT

New




17dB


Protecsol®




100% recyclable



6265 - Uni Brown




6267 - Uni Beige




0778 - Uni Anthracite




6271 - Uni Grey




6273 - Uni White




6260 - Uni Dark Blue



6261 - Uni Blue



6262 - Uni Turquoise



6270 - Uni Tomette



6264 - Uni Olive



6263 - Uni Anis



6269 - Uni Orange



6268 - Uni Sun


Multilayered
Flooring

MULTILAYERED FLOORING

TARALAY INITIAL

New

► TARALAY INITIAL COMPACT

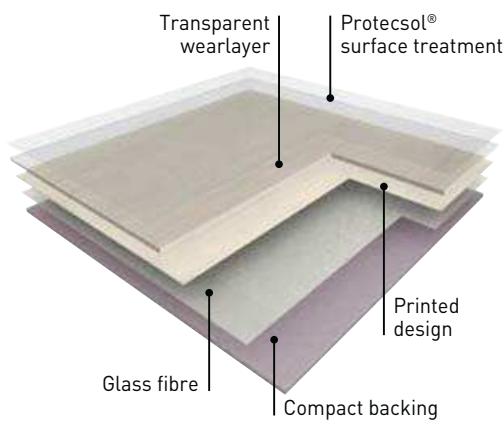


TARALAY INITIAL COMPACT is a multi-layered vinyl floorcovering, available in 2m wide sheet, with a group T wear rating.

The product comprises a compacted backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.70 mm thick). It offers 6 dB sound insulation and an indentation resistance of 0.03 mm.

It is treated with **Protecsol®**, a UV cured surface treatment, which facilitates ease of maintenance and eliminates permanently the need for acrylic emulsion (metallisation).

These products do not contain any heavy metals or CMR 1&2 and are 100% compliant with REACH. The products emission rate of volatile organic compounds is < 10 µg/m³ (TVOC after 28 days – ISO 16000-6). It is 100% recyclable.

► TARALAY INITIAL COMFORT

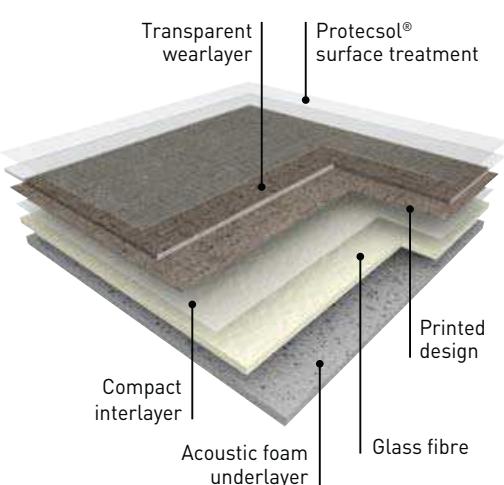

TARALAY INITIAL COMFORT is an acoustic multi-layered vinyl floorcovering, available in 2 m wide sheet, with a group T wear rating.

The product comprises a foam backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.65 mm thick). It offers 19 dB sound insulation and an indentation resistance of 0.10 mm.

It is treated with **Protecsol®**, a UV cured surface treatment, which facilitates ease of maintenance and eliminates permanently the need for acrylic emulsion (metallisation).

It does not contain any heavy metals or CMR 1&2 and is 100% compliant with REACH. The products emission rate of volatile organic compounds is < 10 µg/m³ (TVOC after 28 days – ISO 16000-6). It is 100% recyclable.

TARALAY INITIAL

New



- All references are available in compact and comfort
- High resistance to indentation 0,03mm (Compact) and 0,10 mm (Comfort)
- High impact insulation 6dB (Compact) and 19dB (Comfort)
- Protecsol® Surface Treatment (easy maintenance & no wax)
- Highest performance in TVOC emission < 10µg /m³

	TARALAY INITIAL COMPACT PRO		TARALAY INITIAL COMFORT PRO	
DESCRIPTION				
Total thickness	EN ISO 24346 (EN 428)	mm	2.00	3.35
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.70	0.65
Weight	EN ISO 23997 (EN 430)	g/sq.m	2635	2825
Width of sheet	EN ISO 24341 (EN 426)	cm	200	200
Length of sheet	EN ISO 24341 (EN 426)	lm	25	25
CLASSIFICATION				
Norm / Product specification	-	-	EN ISO 10582 (EN 649)	EN 651
European classification	EN ISO 10874 (EN 685)	class	34-43	34-42
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet ^[1]	DIN 51 130	class	R10	R10
PERFORMANCES				
Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T
Type Binder content	EN ISO 10582	type	I	-
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 (EN 433)	mm	≤ 0.10	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	≈ 0.10
Impact sound insulation	EN ISO 717-2	dB	6	19
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	OK
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	Protecsol®	Protecsol®
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ^[2]	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
ENVIRONMENT / INDOOR AIR QUALITY				
TVOC after 28 days	ISO 16000-6	µg / m³	<10	<10
Certification	-	-	Floorscore®	Floorscore®
CE MARKING				
CE	EN 14041			

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges.

(2) The implementation of an effective cleaning regime is the most important defence against infection.

MULTILAYERED FLOORING

TARALAY INITIAL - DIVERSION

New



Comfort



Compact

19dB

Protecsol®



100% recyclable




0599 Rose




0595 Grenade




0516 Bordeaux




0600 Clementine




0596 Mimosa




0515 Kiwi



0047 Ivoire




0597 Atlantique



0824 Souris



0825 Turquoise



0049 Carbone

TARALAY INITIAL - STRADA

New



19dB

Protecsol®



100% recyclable

Multilayered
Flooring



0791 Metallic



0790 Chrome



0465 Ciment

MULTILAYERED FLOORING

TARALAY INITIAL - URBAN

New



Comfort




Compact

19dB

Protecsol®



100% recyclable



0037 Souris



0035 Gris



TARALAY INITIAL - TWEEDY

New



Comfort



Compact

19dB

Protecsol®



Multilayered
Flooring



0545 Natural



0823 Beige



0822 Taupe



MULTILAYERED FLOORING

TARALAY INITIAL - WOOD

New



Comfort



Compact

19dB

Protecsol®



100% recyclable



FILAMENT



0829 Creme



0799 Light



0826 Grey



TARALAY INITIAL - WOOD

New



19dB

Protecsol®



100% recyclable

Multilayered
Flooring



OTTAWA



0779 Poplar

RENZO



0590 Steel



0069 Noisette



0024 Chamois



MULTILAYERED FLOORING

TARALAY INITIAL - WOOD

New



Multilayered
Flooring

ESTEREL



0636 Blond



0518 Chocolate



HABANA



0797 Ivory



0828 Beige



NOMA



0588 Clair



0589 Marron




Design name	Colour Reference	Colour Name	Pattern Repeat in m	Planks Sizes in cm	
				Length	Width
Esterel	0636	Blond	1x1	100	10
Esterel	0518	Chocolate	1x1	100	10
Habana	0828	Beige	1x1	100	16,6
Habana	0797	Ivory	1x1	100	16,6
Noma	0588	Clair	1x1	100	16,6
Noma	0589	Marron	1x1	100	16,6
Ottawa	0592	Poplar	1x1	100	6,2

MULTILAYERED FLOORING

TARASTEP

► TARASTEP

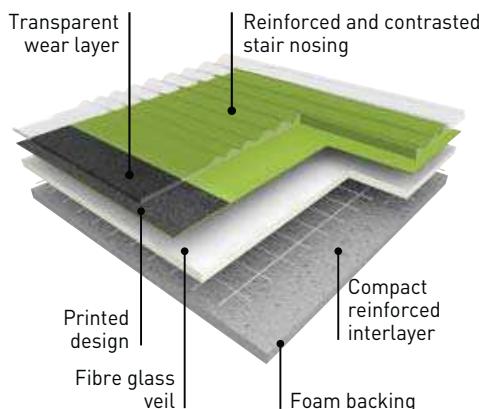

TARASTEP is a multilayered and foam backed complete step with a thickness of 3.35 mm. It comprises a printed design, a vinyl transparent wear layer and a specific embossing on stair nosing for safety.


It is an all-in-one stair covering comprising the stair tread, a ribbed nosing in a contrasted colour and the stair riser. All references have a 70% contrast level between stair tread and stair nosing to increase visibility for visually impaired people.

TARASTEP provides high sound insulation (17 dB).

The emissions of VOC after 28 days (NF EN 16000) are 100 µg / m³.

It is 100% recyclable.

► ACCESS FOR ALL

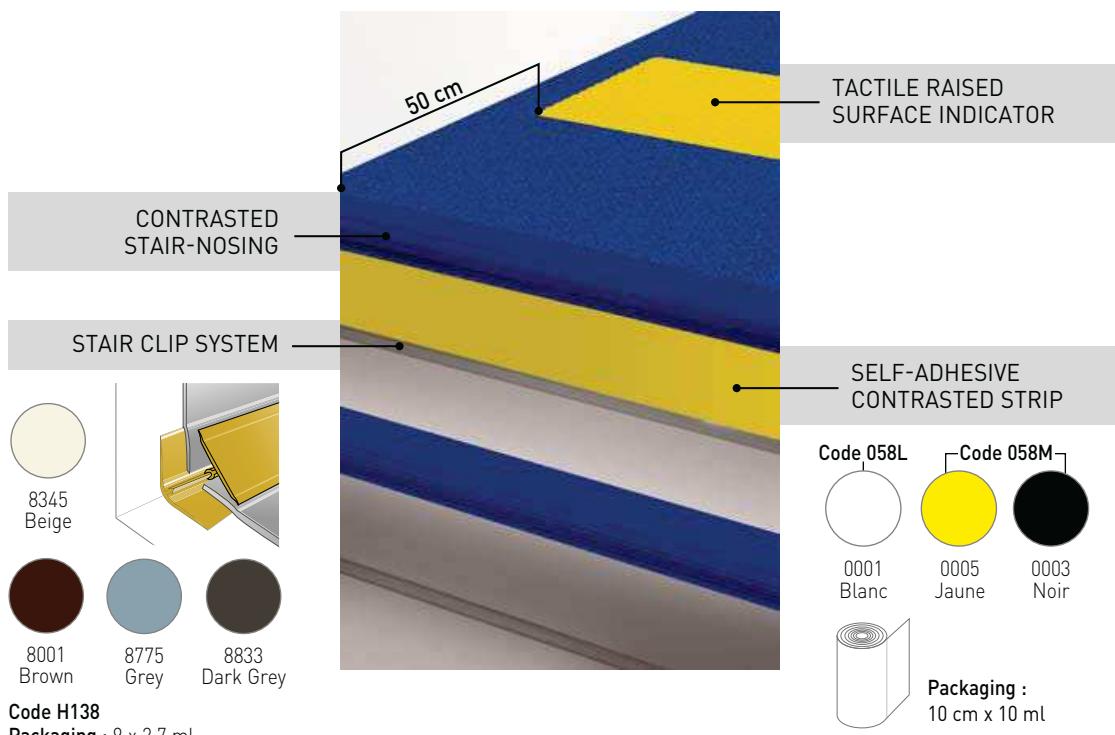

TARASTEP



100% recyclable

Multilayered
Flooring

TARASTEP

DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	3.35
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.85
Weight	EN ISO 23997 (EN 430)	g/sq.m	3100
Width of sheet	EN ISO 24341 (EN 426)	cm	101
Length of sheet	EN ISO 24341 (EN 426)	lm	20
CLASSIFICATION			
Norm / Product specification	-	-	EN 651
European classification	EN ISO 10874 (EN 685)	class	34-42
Impact sound insulation	EN ISO 717-2	dB	17
Room impact	NFS 31 074	dB	< 65
Fire rating	EN 13501-1	class	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	NF 189	group	T
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 (EN 433)	mm	≤ 0.20
Residual indentation (average measured value)	-	-	0.11
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR QUALITY AIR			
TVOC after 28 days	ISO 16000-6	µg / m ³	<100
CE MARKING			
	EN 14041	 	

MULTILAYERED FLOORING

TARASTEP



100% recyclable

ON THE WHOLE RANGE
MORE THAN
70%
CONTRAST



0702 Chamois / Marron

71,2%
CONTRAST



0701 Taupe / Gris Clair

77,3%
CONTRAST




0703 Noisette / Beige

75,2%
CONTRAST



0721 Brun / Beige Clair

70,5%
CONTRAST

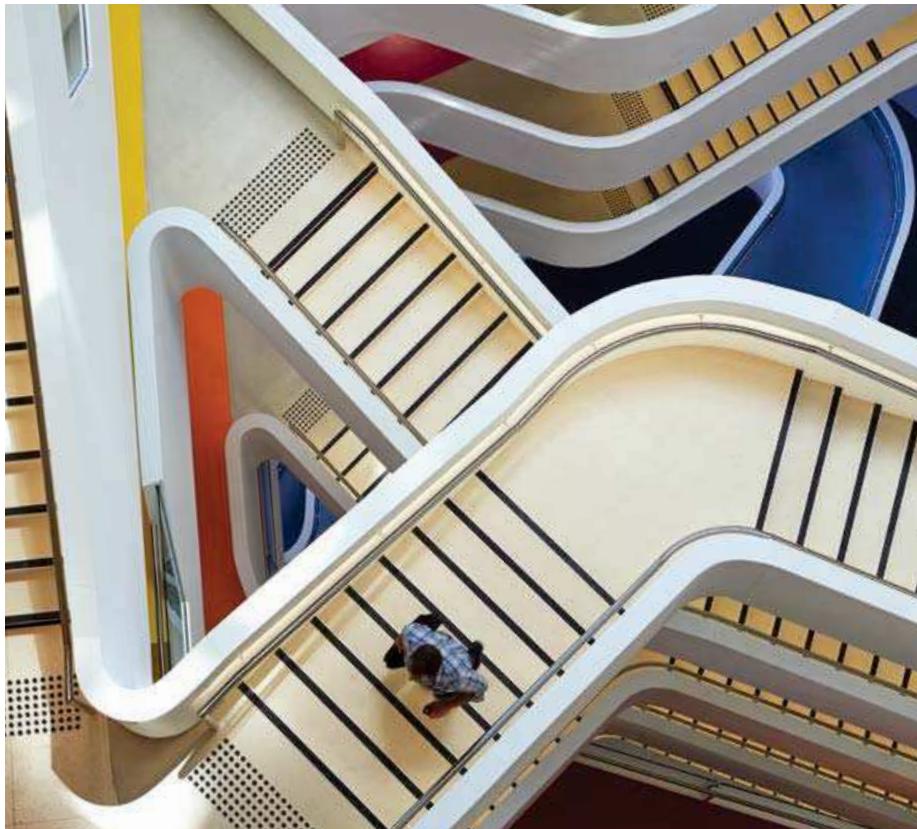


0719 Carbone / Jaune

72,9%
CONTRAST

TARASTEP

ON THE WHOLE RANGE
MORE THAN
70%
CONTRAST

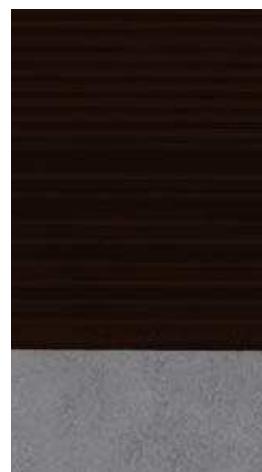

0720 Beige Clair / Brun

81,3%
CONTRAST

0722 Gris Clair / Carbone


75,9%
CONTRAST

0714 Gris / Noir

75,6%
CONTRAST

0723 Carbone / Gris Clair

73,3%
CONTRAST



0724 Carbone / Bamboo

73,7%
CONTRAST

0718 Ivoire / Mandarine

70,3%
CONTRAST

0717 Ivoire / Vermillon

71,5%
CONTRAST

0716 Ivoire / Indigo

80,7%
CONTRAST

The Tarastep range can be coordinated with Taralay ranges (<http://www.gerflor.com/media/virtual-library/other-technical-documents/gerflor-matching-tarastep-en.pdf>)



LUXURY
VINYL TILE

.....PAGES.....

90/191

**Saga²** **94-99****NEW****Creation 70** **100-131**

- Creation 70 Exclusive Edition
- Creation 70
- Creation 70 Clic System
- Creation 70 X'Press
- Accessories

NEW 100-105
106-115
116-123
124-127
128-131**Creation 55** **132-167**

- Creation 55 Exclusive Edition
- Creation 55
- Creation 55 Clic System
- Creation 55 X'Press
- Accessories

NEW 132-137
138-149
150-159
160-163
164-167**Creation 30** **168-191**


- Creation 30
- Creation 30 Lock
- Creation 30 X'Press
- Accessories

168-177
178-183
184-187
188-191

LUXURY VINYL TILE




Interlocking



CREATION 30 LOCK

INSTALLATION

Looselay - Removable



CREATION 30 X'PRESS

Permanent Adhesive



CREATION 30



TRAFFIC



WEARLAYER THICKNESS

> 0.30 mm

Our LVT designs show contrast and character.

Do not hesitate to visit our

Interior Designer service on www.gerflor.com





reddot award 2016
winner



CREATION 55 CLIC SYSTEM


CREATION 70 CLIC SYSTEM



CREATION 55 X'PRESS



SAGA² **New**




CREATION 70 X'PRESS



CREATION 55

New
EXCLUSIVE EDITION



CREATION 70

New
EXCLUSIVE EDITION



> 0.55 mm




> 0.70 mm

LUXURY VINYL TILE

SAGA²

New

► SAGA²

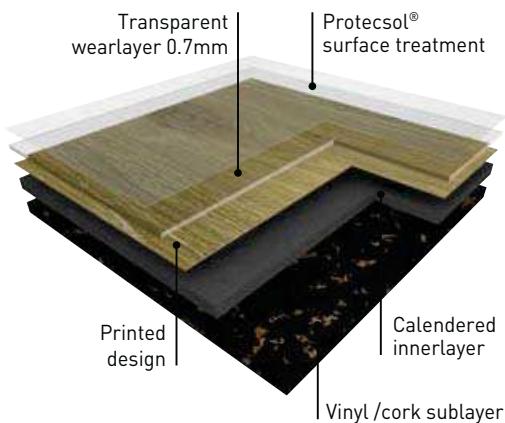


SAGA² is a noise reducing, decorative, group T, Vinyl flooring, available in 500 x 500 mm tiles.

It is made up of a transparent 0.7 mm thick surface layer with a decorative film, a calendered innerlayer and a Vinyl / Cork sublayer.

The total thickness of the tile is 4.6 mm.

SAGA² tiles are 100% recyclable.

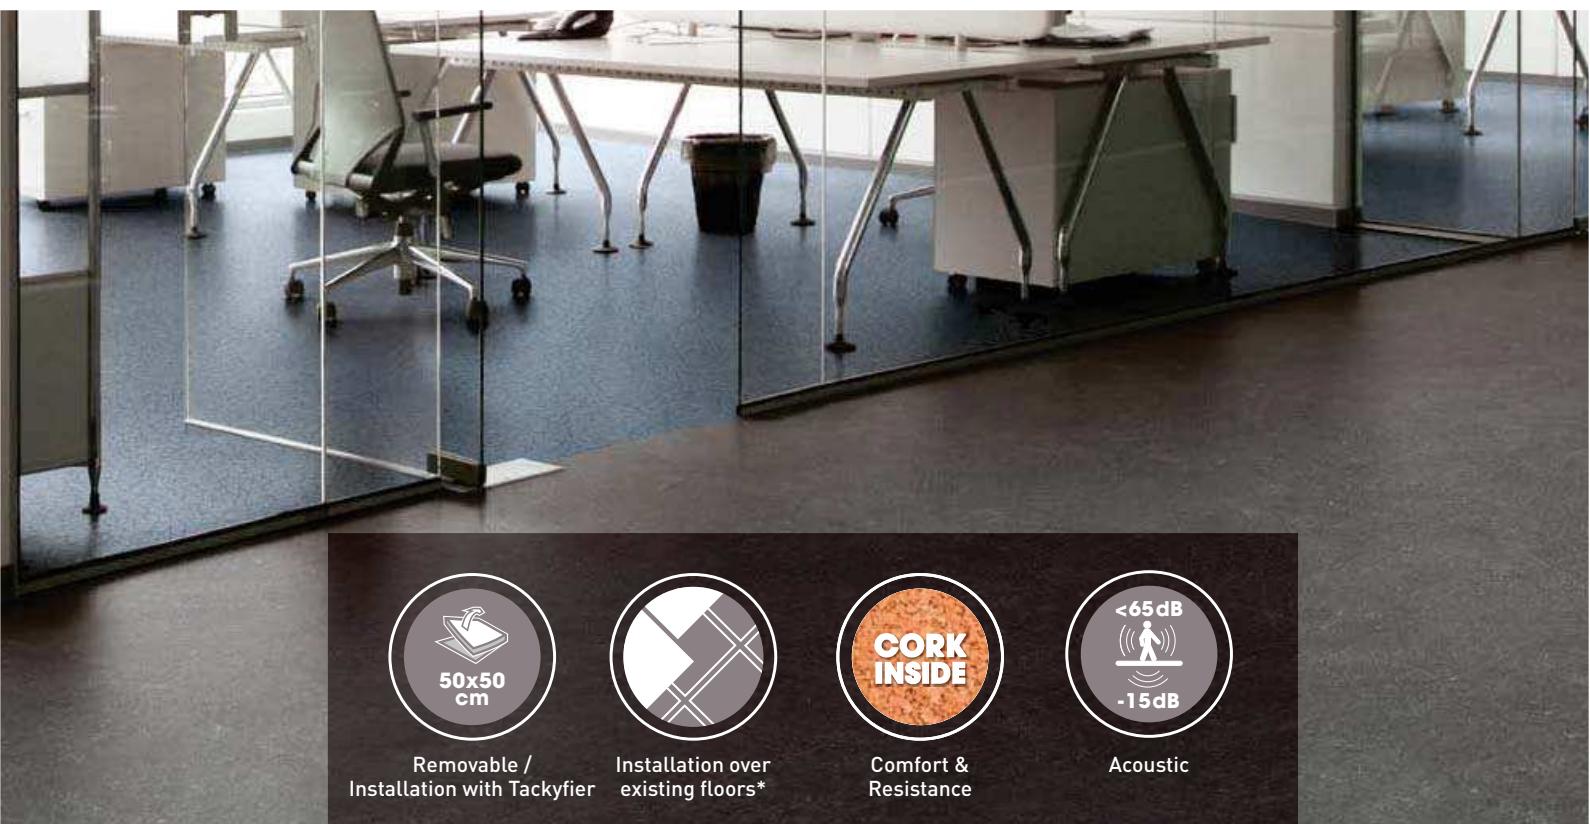

*For more information please refer to Gerflor's installation guidelines

SAGA²

New



Removable

15dB

Protecsol®



100% recyclable

► Fast track looselay tiles suitable for heavy traffic areas: offices , shops, public areas...

- Reusable
- Protecsol® surface treatment: easy to maintain
- Ideal for use alongside carpet tiles.

SAGA ²			
DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	4.6
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.70
Weight	EN ISO 23997 (EN 430)	g/sq.m	5595
Tile size	EN ISO 24342 (EN 427)	mm	500.5 x 500.5
Number of tiles per package	-	-	10
CLASSIFICATION			
Norm / Product specification	-	-	EN 652
European classification	EN ISO 10874 (EN 685)	class	34-42
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet ⁽¹⁾	DIN 51130	class	R9 - R10 ⁽²⁾
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	NF 189	group	T
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.15
Residual indentation	EN ISO 24343-1 (EN 433)	mm	< 0.13
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Impact sound insulation	EN ISO 717-2	dB	15
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Protecsol®
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg / m ³	<100
Certification	-	-	Floorscore®
CE MARKING			
CE	EN 14041		

(1) Ramp test with oil

(2) Slip resistance wet: details on website gerflor.com

LUXURY VINYL TILE

SAGA²

New



Removable

15dB

Protecsol®



100% recyclable

303



SAGA²

New



Removable

15dB

Protecsol®



100% recyclable



0063 Rough Textile Grey



0088 Gentleman Grey



0017 Kadina City




0021 Barma Sweet




0023 Barma Mystery




0030 Gentleman Blue




0028 Fiber Silver METAL EFFECT



0085 Dock Grey




0039 Spider Blue



0032 Mozaic Grey



0027 Fiber
Heavy Metal METAL EFFECT



0031 Mozaik Blue

Scale: 1/5

Luxury Vinyl Tile

LUXURY VINYL TILE

SAGA²

New



Removable

15dB

Protecsol®



100% recyclable



Gentleman Beige / Amarante

SAGA²

New



Removable

15dB


Protecsol®



100% recyclable



0572 Amarante Dark



0035 Spider Taupe



0026 Fiber
Copper


METAL EFFECT



0089 Gentleman Taupe



0087 Dock Taupe



0033 Spider Beige



0062 Rough Textile Beige



0029 Gentleman Beige



0579 Amarante



0025 Barma Beige



0577 Albion

Scale: 1/5

DESIGN SHADE VARIATION:



Light




Medium

New

CREATION 70

EXCLUSIVE / EDITION



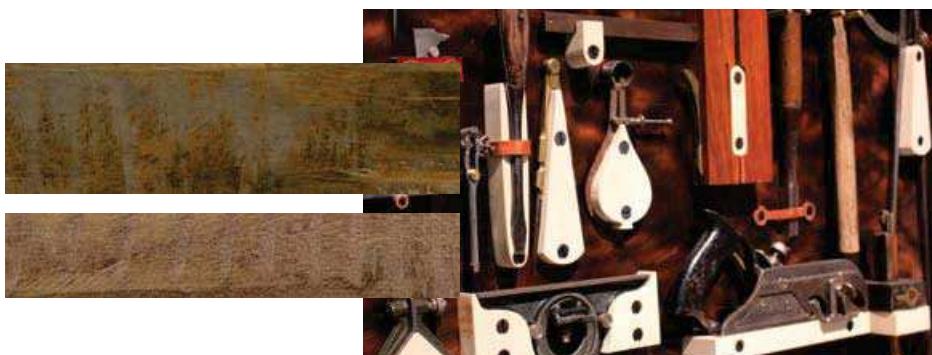

LUXURY VINYL TILE

CREATION 70 EXCLUSIVE EDITION New




PUR+

100% recyclable



CREATION 70 EXCLUSIVE EDITION New




Compact Compact PUR+ 100% recyclable



0805 Regimental Navy Blue 18.4x121.9 cm



0801 Solid Glam Navy Blue 18.4x121.9 cm

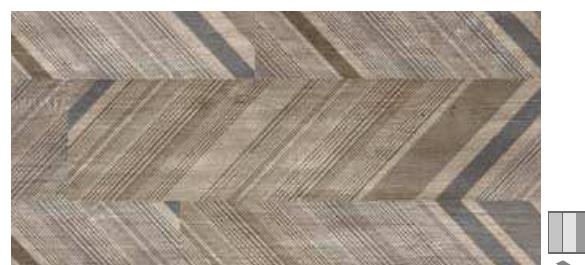

0807 Regimental Picadilly 18.4x121.9 cm



0803 Solid Glam Picadilly 18.4x121.9 cm



0808 Regimental Sherwood 18.4x121.9 cm



0804 Solid Glam Sherwood 18.4x121.9 cm



0799 Toasted Wood Cafe 23x150 cm



0800 Toasted Wood Roadster 23x150 cm

DESIGN SHADE VARIATION: Light Medium High

LUXURY VINYL TILE

CREATION 70 EXCLUSIVE EDITION New




PUR+



100% recyclable



CREATION 70 EXCLUSIVE EDITION New



PUR+



100% recyclable



0797 Cervino Oak Beige

23x150 cm




0798 Cervino Oak Nature

23x150 cm



0088 Oxyd Pure

45.7x91.4 cm

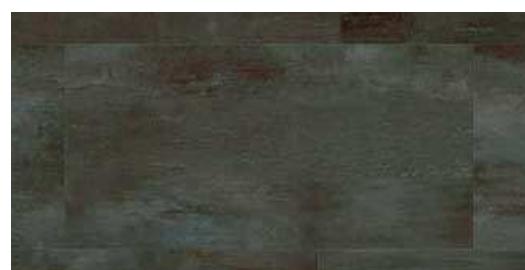

0089 Oxyd Iron

45.7x91.4 cm

DESIGN SHADE VARIATION:



Light



Medium




High

LUXURY VINYL TILE

CREATION 70

► CREATION 70

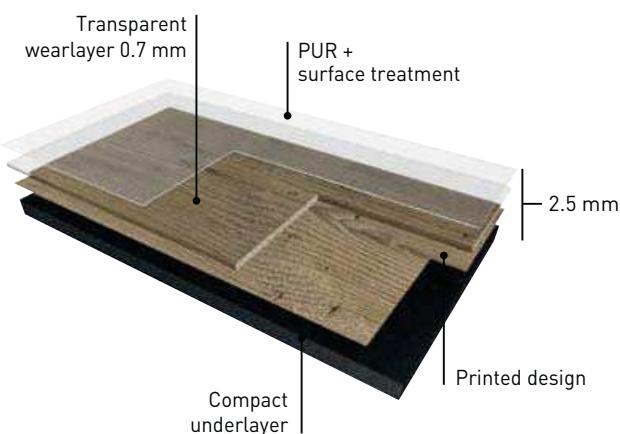

CREATION 70 are synthetic, decorative, flexible, antistatic, abrasion group T floorcoverings available in tile or plank forms.


CREATION 70 comprises a transparent wearlayer 0.7mm thick and bevelled edges.

CREATION 70 comprise a design film and a compact underlayer.

They are compressed and grained at high pressure.

CREATION 70 are treated with a polyurethane treatment **PUR+** providing excellent cleaning characteristics and improved resistance to scratching and chemicals. PUR+ significantly delays the application of wax.

► CREATION 70 SLATE

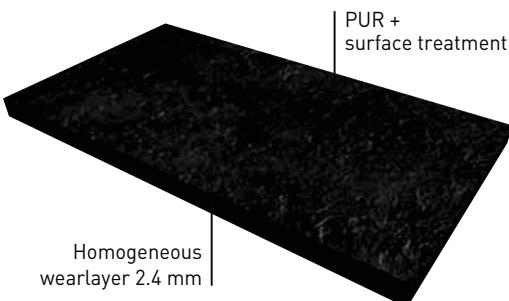

CREATION 70 SLATE is a synthetic, flexible bonded floor-covering available in tile form with bevelled edges.

It consists of a homogeneous wearlayer 2.4mm thick.

The floorcovering is compressed and grained at high pressure.

CREATION 70 SLATE is treated with a polyurethane treatment **PUR+** providing excellent cleaning characteristics and improved resistance to scratching and chemicals. PUR+ significantly delays the application of wax.




CREATION 70



PUR+



reddot award 2016
winner



► **CREATION 70** is the first choice for public and commercial areas and is designed for high traffic wear.

► **CREATION 70:** low maintenance is due to Polyurethane surface treatment PUR+.

CREATION 70				
	DESIGN		SLATE	
DESCRIPTION				
Total thickness	EN ISO 24346 (EN 428)	mm	2.50	2.40
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.70	2.40
Weight	EN ISO 23997 (EN 430)	g/sq.m	4100	3400
Size	EN ISO 24342 (EN 427)	mm	Plank - 184x1371 / 184x1219 / 152x914 / 228x914 / 230x1500 Tile - 457x914 / 457x457/ 610x610 / 305x610/ Creation Mix : 152x914 / 228x914 / 76x914	Tile - 305x610
CLASSIFICATION				
Norm / Product specification	-	-	EN ISO 10582 (EN 649)	EN ISO 10581 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet	DIN 51 130	class	R9 / R10 / R11 ^[1]	
PERFORMANCES				
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 4.0
Wear group	NF 189	group	T	P
Type Binder content	ISO 10582	type	I	-
	ISO 10581		-	I
Room impact	NF S 31074	dB	76	76
Sound Insulation	EN ISO 717-2	dB	4	4
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.15	≤ 0.25
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10	≤ 0.13
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	OK
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PUR+	PUR+
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK	OK
ENVIRONMENT /INDOOR AIR QUALITY				
TVOC after 28 days	ISO 16000-6	µg / m ³	<100	<100
Certification	-	-	-	-
CE MARKING				
	EN 14041			

[1] Slip resistance wet: details on website gerflor.com

LUXURY VINYL TILE

CREATION 70



0258 Muir Oak

10.1x91.4 cm
15.2x91.4 cm




0262 Elm

15.2x91.4 cm



0338 Bedgebury Oak

15.2x91.4 cm

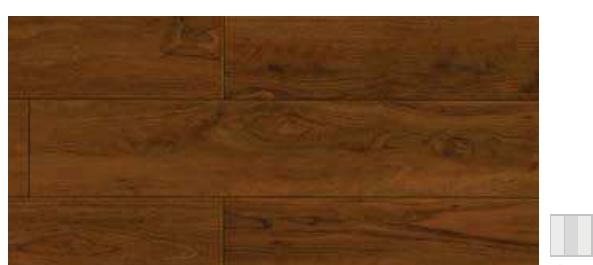

0265 Walnut


10.1x91.4 cm
15.2x91.4 cm



0541 Flamingo

15.2x91.4 cm

CREATION 70



PUR+

100% recyclable



0272 Sorb
10.1x91.4 cm
15.2x91.4 cm



0335 Sycamore
15.2x91.4 cm



0337 Victoria Oak
15.2x91.4 cm



0260 Classic Oak
15.2x91.4 cm



0545 Serena
15.2x91.4 cm



0329 Limed Oak
15.2x91.4 cm



0544 Cobargo
15.2x91.4 cm



0537 Aberdeen
15.2x91.4 cm



0360 Deep Forest
15.2x91.4 cm



0572 Carrington
18.4x121.9 cm

DESIGN SHADE VARIATION:



Light



Medium



High

LUXURY VINYL TILE

CREATION 70



PUR+



100% recyclable



0538 Midwest

15.2x91.4 cm



0539 Beverly

15.2x91.4 cm




0552 Tanami

15.2x91.4 cm



0556 Clifton

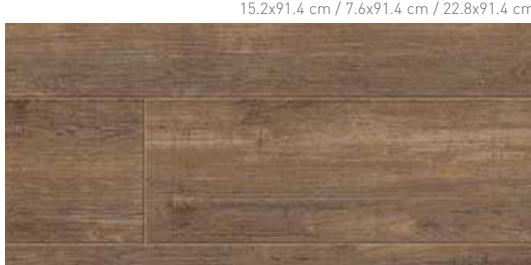Creation 70 Mix
15.2x91.4 cm / 7.6x91.4 cm / 22.8x91.4 cm


0573 Lawson

18.4x121.9 cm



0566 Fairview

18.4x121.9 cm

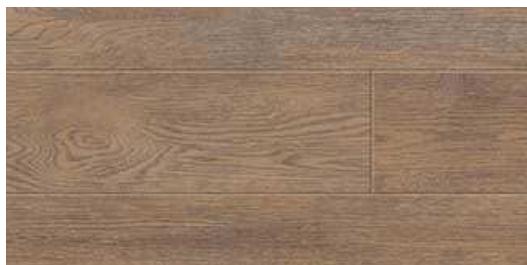

0547 Duchess

15.2x91.4 cm




0575 Spencer

18.4x137.1 cm



0359 Wild Oak

15.2x91.4 cm

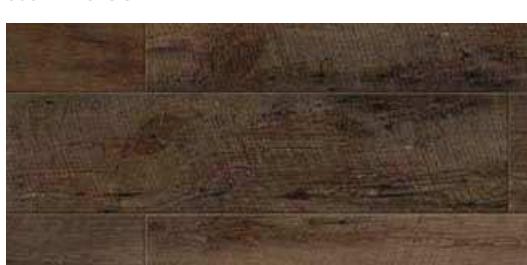


0554 Columbus

15.2x91.4 cm



CREATION 70




PUR+

100% recyclable



0535 Douglas 15.2x91.4 cm

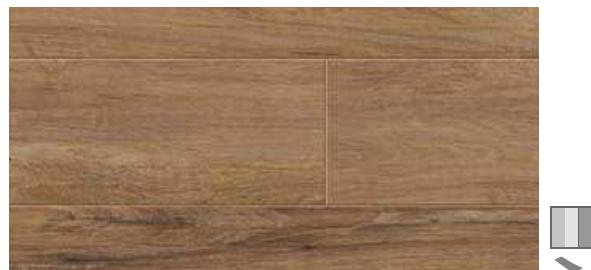

0577 Albion 18.4x137.1 cm

0557 Gilmore Creation 70 Mix
15.2x91.4 cm / 7.6x91.4 cm / 22.8x91.4 cm0558 Bautista Creation 70 Mix
15.2x91.4 cm / 7.6x91.4 cm / 22.8x91.4 cm

0340 Buxton Oak 15.2x91.4 cm



DESIGN SHADE VARIATION:



Light



Medium



High

LUXURY VINYL TILE

CREATION 70



PUR+



100% recyclable



0085 Dock Grey

45.7x91.4 cm



0564 Masseria

18.4x121.9 cm




0563 Red Spirit

18.4x121.9 cm



0525 Atok

45.7x45.7 cm

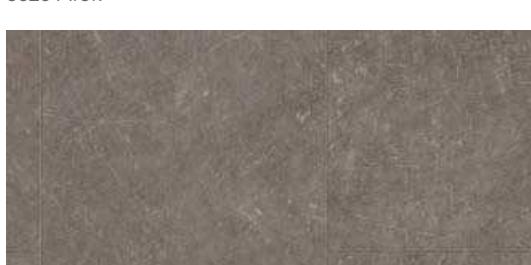


0087 Dock Taupe

45.7x91.4 cm



CREATION 70



PUR+


100% recyclable



0570 Marutea 18.4x121.9 cm




0561 Carassi 22.8x91.4 cm

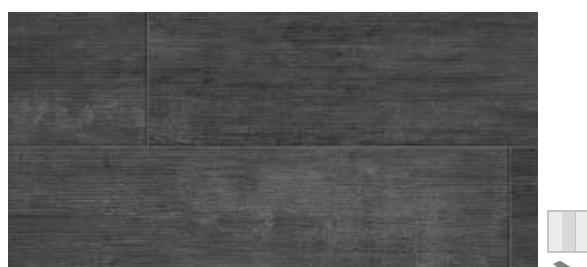

0562 Fidelio 22.8x91.4 cm



0394 Welsh Slate 45.7x45.7 cm

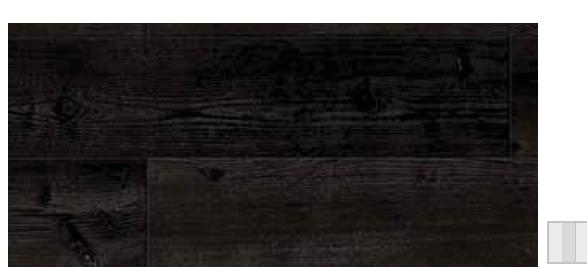

0540 Black Creek 15.2x91.4 cm



0560 Calabria 22.8x91.4 cm




0550 Hamilton 15.2x91.4 cm



0529 Somerset 61x61 cm



0512 Lewis Town 30.5x61 cm

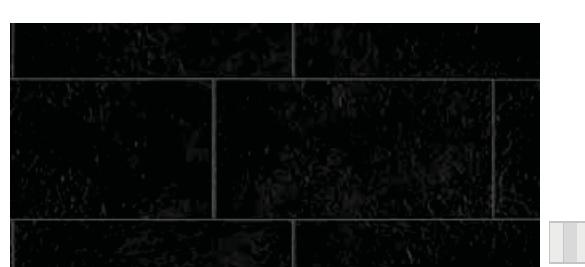

0114 Dark Slate 30.5x61 cm

DESIGN SHADE VARIATION:



Light



Medium



High

LUXURY VINYL TILE

CREATION 70



PUR+



100% recyclable



0414 Travertin Stone

30.5x61 cm



0576 Ocean Side

18.4x137.1 cm



0324 Silversands

15.2x91.4 cm



0565 Sheridan

18.4x121.9 cm



0528 Flagstaf

61x61 cm



0356 Denim Wood

15.2x91.4 cm



0569 Waterland

18.4x121.9 cm



0357 Portobello

15.2x91.4 cm



0358 Moon Island

15.2x91.4 cm



0568 Fargo

18.4x121.9 cm



DESIGN SHADE VARIATION:



Light



Medium



High

CREATION 70





PUR+

100% recyclable



reddot award 2016
winner



0402 Greenwich 45.7x45.7 cm



0089 Gentleman Taupe* 50 x 50 cm



0522 East Village 45.7x45.7 cm
61x61 cm



0088 Gentleman Grey* 50 x 50 cm



0531 Halifax 61x61 cm



0021 Barma Sweet* 50 x 50 cm

DECORATIVE STRIPS



0330 Silver Strip



0331 Black Strip



0332 Light Concrete Strip



0333 Dark Concrete Strip



0334 Brown Concrete Strip



0335 White Concrete Strip

SIZE	PACKAGING	CODE
Strip 4 x 914 mm	1 pack = 80 units	3203



0023 Barma Mystery* 50 x 50 cm

*On demand for a minimum order quantity of 2100 sqm.

CREATION CLIC (R)EVOLUTION

**EXCLUSIVE
VERTICAL CLIC**
NO ADHESIVE



**+EASY
+FAST
+QUIET**

NEW TOOL:
THE PRESSURE ROLLER

+RESISTANT


HIGH RESISTANCE
TO VERTICAL FORCE
AND TO HEAVY TRAFFIC

INSTALLATION ON GERFLOR ACOUSTIC UNDERLAY:

- BETTER IMPACT SOUND INSULATION



INSTALL DIRECTLY ON ANY SUBFLOOR**

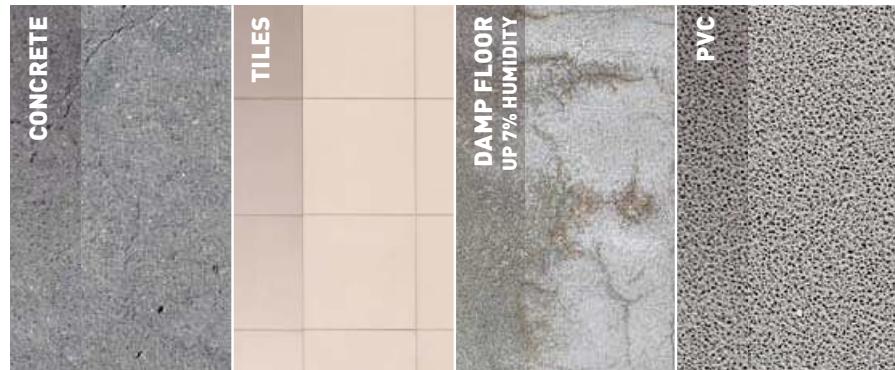

* *For more information please refer to Gerflor's installation guidelines.

EASY TO REPLACE




LUXURY VINYL TILE

CREATION 70 CLIC SYSTEM



► CREATION 70 CLIC SYSTEM

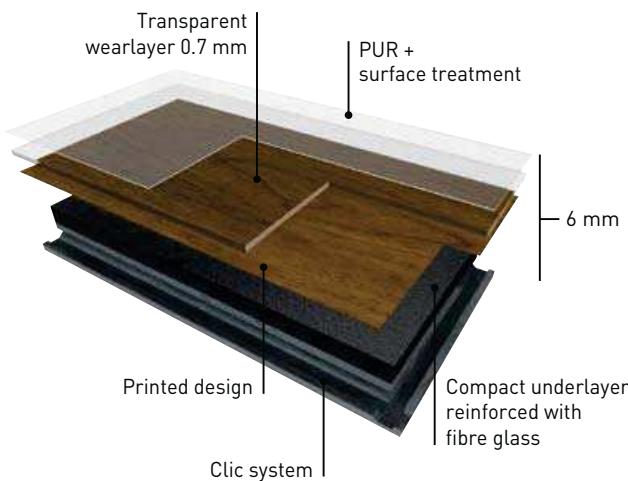

CREATION 70 CLIC SYSTEM is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering, available in planks 17.6x100cm, 20.4x123.9cm and tiles 36x69.6cm with bevelled edges.

It consists of a 0.7mm thick transparent wear layer, a design film, a reinforced compact underlayer. They are compressed and grained at high pressure.

CREATION 70 CLIC SYSTEM is treated with a polyurethane treatment **PUR+** providing excellent cleaning characteristics and improved resistance to scratching and chemicals. PUR+ significantly delays the application of wax.

The overall thickness is 6mm.



Possible installation on Gerflor underlayer for better sound insulation.




LVT pressure roller
code: 058V

CREATION 70 CLIC SYSTEM



reddot award 2016
winner



► The one installation solution

- Interlocking planks that can be laid without adhesive, with the benefit of easier installation and removal
- Rapid installation system by vertical clipping > simplified finishing (angles, pillar surrounds, etc...)
- Easy replacement of individual planks when required
- No need to close the premises, no loss of revenue
- Minimum sub-floor preparation
- Installation also possible on existing floor coverings

		CREATION 70 CLIC SYSTEM		CREATION 70 CLIC SYSTEM ACOUSTIC	
				Gerflor Acoustic 15dB	Creation 70 Clic System + Gerflor Acoustic 15dB
DESCRIPTION					
Total thickness	EN ISO 24346 (EN 428)	mm	6	0.93	6.93
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.70	-	0.70
Weight	EN ISO 23997 (EN 430)	g/sq.m	9895	200	10095
Length of sheet	EN ISO 24341 (EN 426)	ml	-	15	-
Width of sheet	EN ISO 24341 (EN 426)	cm	-	100	-
Size	EN ISO 24342 (EN 427)	mm	176x1000 / 204x1239 / 360x696	-	176x1000 / 204x1239 / 360x696
CLASSIFICATION					
Norm / Product specification	-	-	EN ISO 10582 (EN 649)	-	-
European classification	EN ISO 10874 (EN 685)	class	34-43	-	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Efl	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	-	-
Slip resistance wet: ramp test with oil	DIN 51 130	class	R9 / R10 ⁽¹⁾	-	R9 / R10 ⁽¹⁾
PERFORMANCES					
Wear resistance	EN 660.2	mm ³	≤ 2.0	-	≤ 2.0
Wear group	NF 189	group	T	-	T
Type Binder content	ISO 10582	type	I	-	I
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.15	-	≤ 0.15
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10	0.16	0.14
Impact sound insulation	EN ISO 717-2	dB	5	-	15
Room impact	NF S 31074	dB	72	-	72
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	-	OK
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25	-	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	-	≥ 6
Surface treatment	-	-	PUR+	-	PUR+
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK	-	OK
ENVIRONMENT / INDOOR AIR QUALITY					
TVOC after 28 days	ISO 16000-6	µg / m ³	<100	-	<100
Certification	-	-	Floorscore®	-	-
CE MARKING					
CE	EN 14041				

⁽¹⁾ Slip resistance wet: details on website gerflor.com

LUXURY VINYL TILE

CREATION 70 CLIC SYSTEM



PUR+



0337 Victoria Oak

17.6x100 cm



0335 Sycamore

17.6x100 cm



0258 Muir Oak

17.6x100 cm



0272 Sorb

17.6x100 cm




0260 Classic Oak

17.6x100 cm




0262 Elm

17.6x100 cm

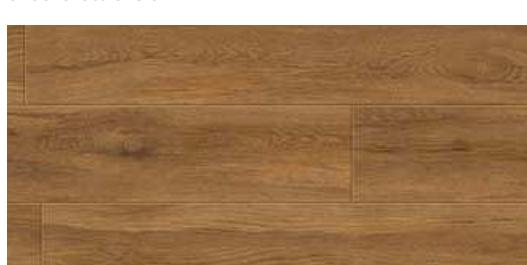

0545 Serena

20.4x123.9 cm

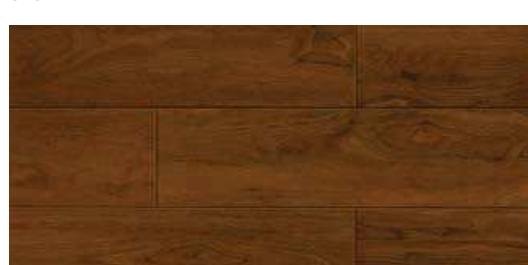


0265 Walnut

17.6x100 cm



0360 Deep Forest

17.6x100 cm
20.4x123.9 cm

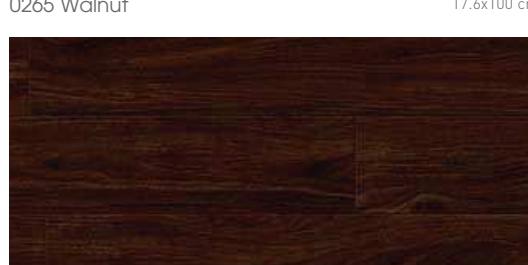

0541 Flamingo

20.4x123.9 cm

DESIGN SHADE VARIATION:



Light



Medium




High

CREATION 70 CLIC SYSTEM



reddot award 2016
winner



PUR+



0324 Silversands

20.4x123.9 cm



0358 Moon Island

17.6x100 cm



0538 Midwest

20.4x123.9 cm



0577 Albion

20.4x123.9 cm



0359 Wild Oak

17.6x100 cm



Luxury Vinyl Tile

LUXURY VINYL TILE

CREATION 70 CLIC SYSTEM



0576 Ocean Side 20.4x123.9 cm



0565 Sheridan 20.4x123.9 cm



0356 Denim Wood 17.6x100 cm



0357 Portobello 17.6x100 cm
20.4x123.9 cm




0568 Fargo 20.4x123.9 cm

CREATION 70 CLIC SYSTEM



reddot award 2016
winner



Compact Compact PUR+ 100% recyclable



0414 Travertin Stone 36x69.6 cm



0522 East Village 36x69.6 cm



0528 Flagstaf 36x69.6 cm




0531 Halifax 36x69.6 cm



0087 Dock Taupe 36x69.6 cm



0529 Somerset 36x69.6 cm

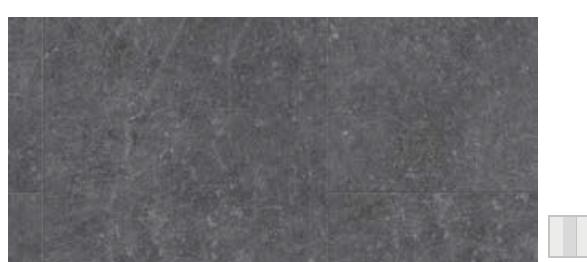

0085 Dock Grey 36x69.6 cm




0394 Welsh Slate 36x69.6 cm

DESIGN SHADE VARIATION: Light Medium High

LUXURY VINYL TILE

CREATION 70 X'PRESS

► CREATION 70 X'PRESS

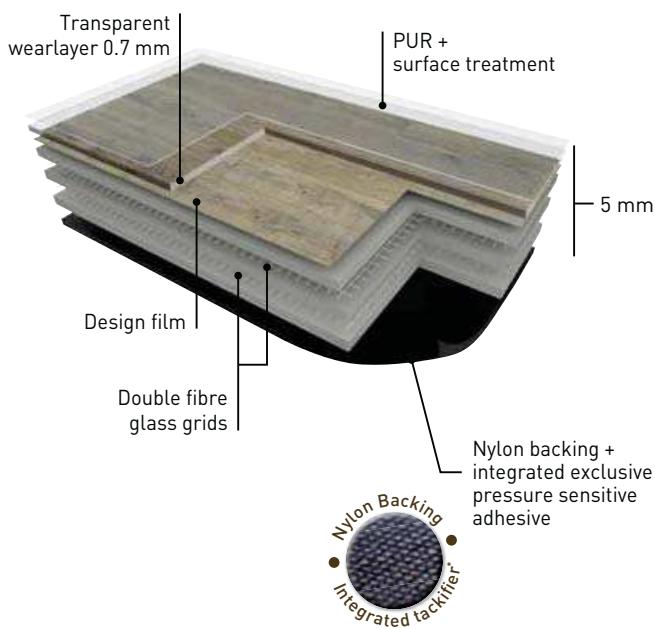

*Exclusive "Pressure Sensitive Adhesive" (PSA) on clean subfloor



CREATION 70 X'PRESS is a synthetic, decorative, flexible, abrasion group T, available in tiles and planks with beveled edges. Composed of a transparent wear layer 0.7mm thick, a design film and three compact underlayers reinforced with two fiber grids, **CREATION 70 X'PRESS** is 5mm compact product. Compressed and embossed at high temperatures.

The product includes "Pressure Sensitive Adhesive" (PSA) on the nylon backing, specifically for high traffic use. Subfloor is clean after removal. The product is treated with a **PUR +** treatment for easy maintenance properties.



Product **CREATION 70 X'PRESS** is made with 83% of mineral and 6% inexhaustible materials. It does not contain formaldehyde, any heavy metals or substances CMR 1&2, vPvB (very persistent and very bioaccumulative) and PBT (persistent, bioaccumulative and toxic), and they are 100% compliant with REACH.

The product emission rate of volatile organic compounds is <100µg/m³ (TVOC<28 days - ISO 16000-6) and is rated A+ (the best class) as part of the health labeling. It is 100% recyclable.

CREATION 70 X'PRESS



reddot award 2016
winner



PUR+



► Ready to use:

- Looselay = Pressure Sensitive Adhesive (PSA) included on the backing, specifically for high traffic use
- Direct installation on existing subfloor (In compliance with GERFLOR's installation guidelines)
- Clean and quiet Installation for easy installation in busy areas

► Removable:

- No tools needed to remove floor
- Easy to replace a single plank/tile
- Subfloor is clean after removal*

► Easy :

- One tool required : a sharp blade
- Just press to install the product

* For more information please refer to Gerflor's guidelines.

CREATION 70 X'PRESS

DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	5.00
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.70
Weight	EN ISO 23997 (EN 430)	g/sq.m	8960
Plank size	EN ISO 24342 (EN 427)	mm	184 x 1219
Tile size	EN ISO 24342 (EN 427)	mm	610 x 610 / 457 x 914 / 500 x 500
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R9 / R10 / R11 ⁽¹⁾
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	< 2.0
Wear group	NF 189	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	72
Impact sound insulation	EN ISO 717-2	dB	8
Dimensional stability	EN ISO 23999 (EN 434)	%	< 0.15
Residual indentation	EN ISO 24343-1 (EN 433)	mm	< 0.10
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	> 6
Surface treatment	-	-	PUR+
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg / m ³	<100
CE MARKING			
CE	EN 14041		

⁽¹⁾ Slip resistance wet: details on website gerflor.com

LUXURY VINYL TILE

CREATION 70 X'PRESS



0538 Midwest

18.4 x 121.9 cm



0358 Moon Island

18.4 x 121.9 cm



0260 Classic Oak

18.4 x 121.9 cm



0360 Deep Forest



18.4 x 121.9 cm



0265 Walnut

18.4 x 121.9 cm

CREATION 70 X'PRESS



PUR+



0356 Denim Wood 18.4 x 121.9 cm



0357 Portobello 18.4 x 121.9 cm



0087 Dock Taupe 45.7 x 91.4 cm



0089 Gentleman Taupe 50 x 50 cm



0531 Halifax 61 x 61 cm



0529 Somerset 61 x 61 cm



0085 Dock Grey 45.7 x 91.4 cm



0088 Gentleman Grey 50 x 50 cm



0021 Barma Sweet 50 x 50 cm



0023 Barma Mystery 50 x 50 cm

DESIGN SHADE VARIATION:



Light



Medium



High


LUXURY VINYL TILE

CREATION 70




EXCLUSIVE EMBOSSES FOR ENHANCED DESIGNS

HAMMERED

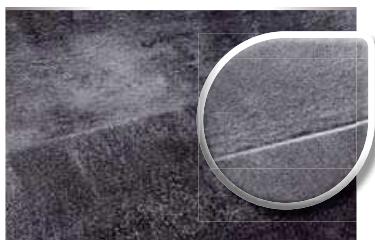

STONE

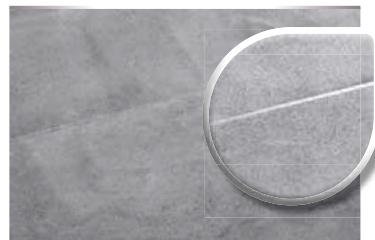

AUTHENTIC



SLATE



SAND



SAW EFFECT



PERFORATED



RIB WOOD



RAW



BRUSHED



NATURAL



TEXTILE



LIGHT



RUSTIC WOOD



CREATION 70



CREATION 70 CLIC SYSTEM X'PRESS



Code	Slip Resistance wet (DIN 51130) / Embosses		
CLASSIC OAK	0260	R9 - NATURAL	R9 - NATURAL
DEEP FOREST	0360	R10 - BRUSHED	R10 - BRUSHED
DENIM WOOD	0356	R9 - SAW EFFECT	R9 - HAMMERED LIGHT
DOCK GREY	0085	R10 - HAMMERED	R9 - HAMMERED LIGHT
DOCK TAUPE	0087	R10 - HAMMERED	R9 - HAMMERED LIGHT
HALIFAX	0531	R9 - STONE	R10 - HAMMERED
MIDWEST	0538	R9 - NATURAL	R9 - NATURAL
MOON ISLAND	0358	R10 - BRUSHED	R10 - BRUSHED
PORTOBELLO	0357	R10 - BRUSHED	R10 - BRUSHED
SOMERSET	0529	R11 - PERFORATED	R10 - HAMMERED
WAINEUT	0265	R9 - NATURAL	R9 - NATURAL
ALBION	0577	R9 - NATURAL	R9 - NATURAL
EAST VILLAGE	0522	R9 - STONE	R10 - HAMMERED
ELM	0262	R9 - NATURAL	R9 - NATURAL
FARGO	0568	R9 - SAW EFFECT	R9 - HAMMERED LIGHT
FLAGSTAF	0528	R9 - STONE	R9 - HAMMERED LIGHT
FLAMINGO	0541	R9 - NATURAL	R9 - NATURAL
MUIR OAK	0258	R9 - NATURAL	R9 - NATURAL
OCEAN SIDE	0576	R9 - SAW EFFECT	R9 - HAMMERED LIGHT
SERENA	0545	R9 - NATURAL	R9 - NATURAL
SHERIDAN	0565	R10 - AUTHENTIC	R10 - BRUSHED
SILVERSANDS	0324	R9 - NATURAL	R9 - NATURAL
SORB	0272	R9 - NATURAL	R9 - NATURAL
SYCAMORE	0335	R9 - NATURAL	R9 - NATURAL
TRAVERTIN STONE	0414	R9 - SAND	R9 - HAMMERED LIGHT
VICTORIA OAK	0337	R9 - NATURAL	R9 - NATURAL
WELSH SLATE	0394	R10 - SLATE	R10 - HAMMERED
WILD OAK	0359	R10 - BRUSHED	R10 - BRUSHED
ABERDEEN	0537	R10 - BRUSHED	-
ATOK	0525	R9 - STONE	-
BAUTISTA	0558	R9 - SAW EFFECT	-
BEDGEUBURY OAK	0338	R9 - NATURAL	-
BEVERLY	0539	R10 - BRUSHED	-
BLACK CREEK	0540	R10 - BRUSHED	-
BUXTON OAK	0340	R9 - NATURAL	-
CALABRIA	0560	R9 - SAW EFFECT	-
CARASSI	0561	R10 - RIB WOOD	-
CARRINGTON	0572	R10 - RUSTIC WOOD	-
CERVINO OAK BEIGE	0797	R9 - NATURAL	-
CERVINO OAK NATURE	0798	R9 - NATURAL	-
CLIFTON	0556	R9 - NATURAL	-
COBARGO	0544	R9 - NATURAL	-
COLOMBUS	0554	R9 - SAW EFFECT	-
DARK SLATE	0114	R10 - NATURAL	-
DOUGLAS	0535	R10 - BRUSHED	-
DUCHESS	0547	R9 - NATURAL	-
FAIRVIEW	0566	R9 - SAW EFFECT	-
FIDELIO	0562	R10 - RIB WOOD	-
GILMORE	0557	R9 - NATURAL	-
GREENWICH	0402	R10 - HAMMERED	-
HAMILTON	0550	R10 - BRUSHED	-
LAWSON	0573	R9 - SAW EFFECT	-
LEWIS TOWN	0512	R9 - STONE	-
LIMED OAK	0329	R9 - NATURAL	-
MARUTEA	0570	R9 - SAW EFFECT	-
MASSERIA	0564	R10 - RAW	-
OXYD PURE	0088	R11 - PERFORATED	-
OXYD IRON	0089	R11 - PERFORATED	-
RED SPIRIT	0563	R10 - RAW	-
REGIMENTAL NAVY BLUE	0805	R9 - NATURAL	-
REGIMENTAL PICADILLY	0807	R9 - NATURAL	-
REGIMENTAL SHERWOOD	0808	R9 - NATURAL	-
SOLID GLAM NAVY BLUE	0801	R9 - NATURAL	-
SOLID GLAM PICADILLY	0803	R9 - NATURAL	-
SOLID GLAM SHERWOOD	0804	R9 - NATURAL	-
SPENCER	0575	R9 - NATURAL	-
TANAMI	0552	R9 - LIGHT	-
TOasted WOOD CAFE	0799	R9 - NATURAL	-
TOasted WOOD ROADSTER	0800	R9 - NATURAL	-
WATERLAND	0569	R9 - SAW EFFECT	-
BARMA MYSTERY	0023	-	R9 - STONE
BARMA SWEET	0021	-	R9 - STONE
GENTLEMEN GREY	0088	-	R10 - TEXTILE
GENTLEMEN TAUPE	0089	-	R10 - TEXTILE

LUXURY VINYL TILE

CREATION 70

	Code	CREATION 70	CLIC SYSTEM	CREATION 70 X'PRESS	SKIRTING 100% Matching
CLASSIC OAK	0260	•	•	•	0260
DEEP FOREST	0360	•	•	•	0360
DENIM WOOD	0356	•	•	•	0356
DOCK GREY	0085	•	•	•	-
DOCK TAUPE	0087	•	•	•	-
HALIFAX	0531	•	•	•	-
MIDWEST	0538	•	•	•	0504
MOON ISLAND	0358	•	•	•	0358
PORTOBELLO	0357	•	•	•	0357
SOMERSET	0529	•	•	•	0476
WALNUT	0265	•	•	•	0265
ALBION	0577	•	•	-	-
EAST VILLAGE	0522	•	•	-	-
ELM	0262	•	•	-	0262
FARGO	0568	•	•	-	-
FLAGSTAF	0528	•	•	-	-
FLAMINGO	0541	•	•	-	0528
MUIR OAK	0258	•	•	-	0258
OCEAN SIDE	0576	•	•	-	0576
SERENA	0545	•	•	-	-
SHERIDAN	0565	•	•	-	-
SILVERSANDS	0324	•	•	-	-
SORB	0272	•	•	-	0272
SYCAMORE	0335	•	•	-	0335
TRAVERTIN STONE	0414	•	•	-	0414
VICTORIA OAK	0337	•	•	-	0337
WELSH SLATE	0394	•	•	-	-
WILD OAK	0359	•	•	-	0359
ABERDEEN	0537	•	-	-	-
ATOK	0525	•	-	-	-
BAUTISTA	0558	•	-	-	-
BEDGEBURY OAK	0338	•	-	-	-
BEVERLY	0539	•	-	-	-
BLACK CREEK	0540	•	-	-	-
BUXTON OAK	0340	•	-	-	-
CALABRIA	0560	•	-	-	-
CARASSI	0561	•	-	-	-
CARRINGTON	0572	•	-	-	-
CERVINO OAK BEIGE	0797	•	-	-	0797
CERVINO OAK NATURE	0798	•	-	-	0798
CLIFTON	0556	•	-	-	-
COBARGO	0544	•	-	-	-
COLOMBUS	0554	•	-	-	-
DARK SLATE	0114	•	-	-	-
DOUGLAS	0535	•	-	-	-
DUCHESS	0547	•	-	-	-
FAIRVIEW	0566	•	-	-	-
FIDELIO	0562	•	-	-	-
GILMORE	0557	•	-	-	-
GREENWICH	0402	•	-	-	-
HAMILTON	0550	•	-	-	-
LAWSON	0573	•	-	-	-
LEWIS TOWN	0512	•	-	-	-
LIMED OAK	0329	•	-	-	-
MARUTEA	0570	•	-	-	-
MASSERIA	0564	•	-	-	-
OXYD PURE	0088	•	-	-	0088
OXYD IRON	0089	•	-	-	0089
RED SPIRIT	0563	•	-	-	-
REGIMENTAL NAVY BLUE	0805	•	-	-	0801
REGIMENTAL PICADILLY	0807	•	-	-	0803
REGIMENTAL SHERWOOD	0808	•	-	-	0804
SOLID GLAM NAVY BLUE	0801	•	-	-	0801
SOLID GLAM PICADILLY	0803	•	-	-	0803
SOLID GLAM SHERWOOD	0804	•	-	-	0804
SPENCER	0575	•	-	-	-
TANAMI	0552	•	-	-	-
TOasted WOOD CAFE	0799	•	-	-	0799
TOasted WOOD ROADSTER	0800	•	-	-	0800
WATERLAND	0569	•	-	-	-
BARMA MYSTERY	0023	-	-	•	-
BARMA SWEET	0021	-	-	•	-
GENTLEMEN GREY	0088	-	-	•	-
GENTLEMEN TAUPE	0089	-	-	•	-

• : Available

PACKAGING

Product size (cm)	m ² / box	m ² / palette
-------------------	----------------------	--------------------------

CREATION 70

10.1 x 91.4 ⁽¹⁾	3.34	240.48
15.2 x 91.4 ⁽¹⁾	3.34	257.18
15.2 x 91.4	3.34	220.44
18.4 x 121.9	3.37	252.75
23 x 150	2.80	198.72
Mix: 15.2/7.6/22.8 x 91.4	3.34	213.76
18.4 x 137.1	3.03	242.40
22.8 x 91.4	3.34	213.76
45.7 x 91.4	3.34	213.76
30.5 x 61 ⁽²⁾	3.72	133.92
61 x 61	3.34	160.32
30.5 x 61	3.34	140.28
45.7 x 45.7	3.34	213.76

CREATION 70 CLIC SYSTEM

17.6 x 100	1.40	78.40
36 x 69.6	1.50	81.20
20.4 x 123.9	1.52	97.06

CREATION 70 X'PRESS

18.4 x 121.9	1.35	114.75
61 x 61	1.49	80.46
45.7 x 91.4	1.67	73.48
50 x 50	1.50	102.00

(1) Silversands / Classic Oak / Muir Oak / Limed Oak / Elm / Bedgebury Oak / Sorb / Sycamore / Walnut / Buxton Oak / Denim Wood / Victoria Oak / Moon Island / Wild Oak / Portobello / Deep Forest / Douglas / Aberdeen / Serena / Duchess.

(2) Slate


CREATION 70



reddot award 2016
winner

► DECOR SKIRTING

To be installed with clip [5935] or mastic adhesive.



PACKAGING

5934: 5 x 2.4 lm / package
5935: 30 clip / package



► CREATION 70 WOOD: 15 matching decors



0260
Classic Oak



0360
Deep Forest



0356
Denim Wood



0262
Elm



0528
Flamingo



0504
Midwest



0358
Moon Island



0258
Muir Oak



0576
Ocean Side



0357
Portobello



0272
Sorb



0335
Sycamore



0337
Victoria Oak



0265
Walnut



0359
Wild Oak

► CREATION 70 MINERAL: 9 decors



0006



0004



0007



0002



0001



0005



0008



0476
Somerset




0414
Travertin Stone

► ALUMINIUM PROFILES



ALUMINIUM
RAMP 2.8 mm
ref. 0504

Dedicated to:
• Creation 70,
• Creation 55.



ALUMINIUM RAMP
5-6 mm / ref. 0505
+ ALUMINIUM CORNER
5-6 mm / ref. 1513

Dedicated to:
• Creation 70 (Clic System),
• Creation 55 (Clic System).



LOOSELAY ALUMINIUM
RAMP 5-6 mm / ref. 0609
+ LOOSELAY ALUMINIUM CORNER
5-6 mm / ref. 0629

Dedicated to:
• Creation 70 (Clic System),
• Creation 55 (Clic System).

For further details see page 283

New

CREATION 55

EXCLUSIVE / EDITION





LUXURY VINYL TILE

CREATION 55 EXCLUSIVE EDITION New



PUR+





100% recyclable



CREATION 55 EXCLUSIVE EDITION

New




PUR+

100% recyclable



0810 Chevron Moka

18.4x121.9 cm

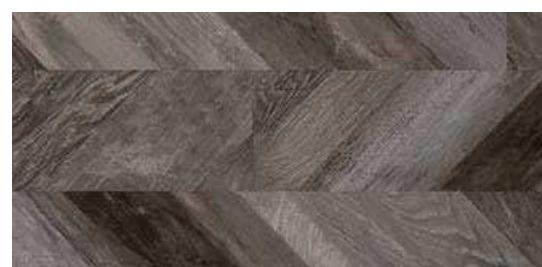

0809 Chevron Hurricane

18.4x121.9 cm



0811 Chevron Buckwheat

18.4x121.9 cm



0817 North Wood Mokaccino

18.4x121.9 cm



0816 North Wood Macchiato

18.4x121.9 cm

DESIGN SHADE VARIATION:



Light



Medium



High

LUXURY VINYL TILE

CREATION 55 EXCLUSIVE EDITION New



PUR+




100% recyclable



CREATION 55 EXCLUSIVE EDITION

New



PUR+

100% recyclable



0795 Swiss Oak Cashmere

23x150 cm



0796 Swiss Oak Golden

23x150 cm



0815 Bostonian Oak Honey

18.4x121.9 cm



0814 Bostonian Oak Gold

18.4x121.9 cm



0812 Royal Oak Blond

18.4x121.9 cm



0740 Royal Oak Coffee

18.4x121.9 cm



0095 Rust Corten

45.7x91.4 cm



0094 Rust Metal

45.7x91.4 cm


DESIGN SHADE VARIATION: Light Medium High

LUXURY VINYL TILE

CREATION 55



CREATION 55.....

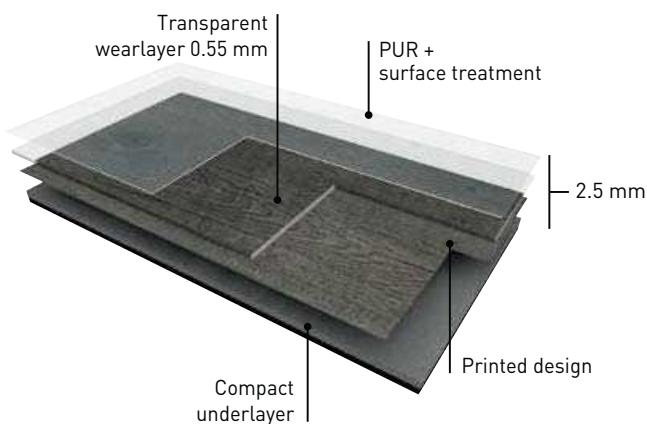


CREATION 55 are synthetic, decorative, flexible, antistatic, abrasion group T floorcoverings available in tile or plank forms, with bevelled edges.


They comprise a transparent wearlayer 0.55 mm thick, a design film and a compact underlayer. They are compressed and grained at high pressure.

CREATION 55 are treated with a polyurethane treatment **PUR+** providing excellent cleaning characteristics and improved resistance to scratching and chemicals. PUR+ significantly delays the application of wax.

Their overall thickness is 2.5mm.



CREATION 55



Compact



Compact



PUR+ 100% recyclable

- **CREATION 55** is designed for medium and high traffic wear.
- A large palett of Wood and Mineral designs.
- Low maintenance due to Polyurethane surface treatment **PUR+**.
- Plank with large format: Long Effect.

DESIGN			
CREATION 55			
DESIGN			
DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	2.50
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.55
Weight	EN ISO 23997 (EN 430)	g/sq.m	4410
Size	EN ISO 24342 (EN 427)	mm	Plank - 184x1371 / 184x1219 / 152x914 / 230x1500 Tile - 457x914 / 610x610 / 305x610 Creation Mix: 152 x 914 / 228 x 914 / 76 x 914
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	33-42
Fire rating	EN 13501-1	class	B _{fl} -s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	DIN 51 130	class	R9 / R10 / R11 ⁽¹⁾
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	< 2.0
Wear group	NF 189	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	76
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability	EN ISO 23999 (EN 434)	%	< 0.15
Residual indentation	EN ISO 24343-1 (EN 433)	mm	< 0.10
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	> 6
Surface treatment	-	-	PUR+
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg / m ³	<100
CE MARKING			
CE	EN 14041		

(1) Slip resistance wet: details on website gerflor.com

LUXURY VINYL TILE

CREATION 55



PUR+



100% recyclable



0070 Elegant Oak

15.2x91.4 cm



0449 Natural Cherry

15.2x91.4 cm



0442 Millington Oak

15.2x91.4 cm



0462 Eastern Oak

15.2x91.4 cm



0461 Michigan

15.2x91.4 cm



0463 Fudge

15.2x91.4 cm




0386 Pasadena

Creation 55 Mix
15.2x91.4 cm / 7.6x91.4 cm / 22.8x91.4 cm

0459 Brownie

15.2x91.4 cm

CREATION 55



PUR+

100% recyclable



0465 Cambridge

15.2x91.4 cm



0347 Ballerina

15.2x91.4 cm



0464 Piccadilly

15.2x91.4 cm



0578 Alisier

18.4x121.9 cm



DESIGN SHADE VARIATION:



Light



Medium



High

LUXURY VINYL TILE

CREATION 55



PUR+



0441 Honey Oak

15.2x91.4 cm



0455 Long Board

15.2x91.4 cm
18.4x121.9 cm

0488 Caldwell

15.2x91.4 cm




0503 Quartet

15.2x91.4 cm



CREATION 55



PUR+



100% recyclable



0445 Rustic Oak 15.2x91.4 cm



0069 Mansfield Natural 18.4x121.9 cm



0425 Britany Oak 18.4x121.9 cm



0071 Solero Creme 18.4x137.1 cm



0579 Amarante 18.4x121.9 cm



0504 Twist 18.4x121.9 cm



0457 Buffalo 15.2x91.4 cm



0060 Arena 18.4x121.9 cm

DESIGN SHADE VARIATION: Light Medium High

LUXURY VINYL TILE

CREATION 55



PUR+



100% recyclable



0489 Morena

18.4x121.9 cm



0584 White Lime

18.4x121.9 cm



0068 Mansfield Light

18.4x121.9 cm




0582 Deer

18.4x121.9 cm



CREATION 55



PUR+

100% recyclable



0073 Spicy Brown 18.4x137.1 cm



0426 Vintage Oak 18.4x121.9 cm



0061 Oxford 18.4x121.9 cm



0583 Deep Oak 18.4x121.9 cm



0064 Gravity Dark 18.4x121.9 cm



0042 Mansfield Dark 18.4x137.1 cm



0065 Gravity Wood 18.4x121.9 cm



0458 Aspen 15.2x91.4 cm
18.4x121.9 cm

DESIGN SHADE VARIATION: Light Medium High

LUXURY VINYL TILE

CREATION 55



PUR+



100% recyclable



0448 Malua Bay

15.2x91.4 cm
18.4x121.9 cm

0581 Arya

18.4x121.9 cm



0456 Ranch

15.2x91.4 cm
18.4x121.9 cm

0067 Mahe Grey

18.4x121.9 cm



0446 Lorenzo

15.2x91.4 cm



0066 Mahe

18.4x121.9 cm



0447 Amador

15.2x91.4 cm



0072 Spicy Grey Blue

18.4x137.1 cm



DESIGN SHADE VARIATION:



Light




Medium



High

CREATION 55



PUR+

100% recyclable




0062 Eramosa Gold

18.4x121.9 cm
45.7x91.4 cm




0063 Eramosa Creme

18.4x121.9 cm
45.7x91.4 cm

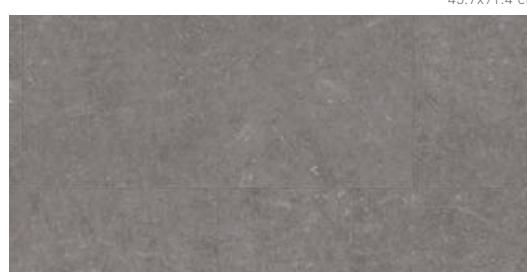

0618 Carmel

30.5x61 cm

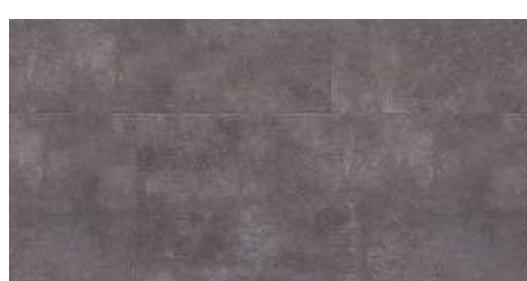

0373 Silver City

61x61 cm



LUXURY VINYL TILE

CREATION 55



PUR+




100% recyclable



0966 Lava Light

45.7x91.4 cm

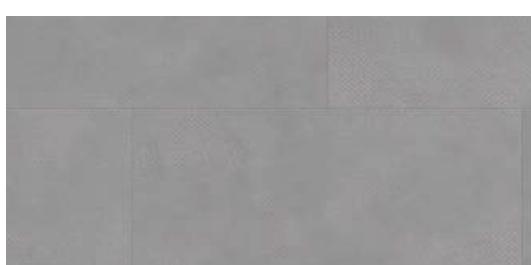


0048 Rockaway

30.5x61 cm



0620 Preston

61x61 cm

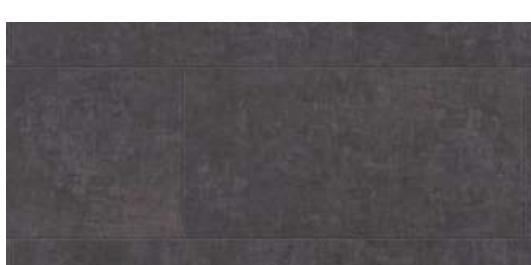

0487 Factory

30.5x61 cm




0374 Parker Station

61x61 cm



CREATION 55



PUR+

100% recyclable



0045 Moma 30.5x61 cm



0476 Staccato 61x61 cm



0436 Riverside 61x61 cm



0438 Norwegian Slate 30.5x61 cm



0967 Lava Grey 45.7x91.4 cm



0500 Anathema 30.5x61 cm



0964 Roxbury 30.5x61 cm



0437 Sweet Cloud 61x61 cm

Luxury Vinyl Tile

DECORATIVE STRIPS

0330 Silver Strip

0331 Black Strip

0332 Light Concrete Strip

0333 Dark Concrete Strip

0334 Brown Concrete Strip

0335 White Concrete Strip

SIZE	PACKAGING	CODE
Strip 4 x 914 mm	1 pack = 80 units	3203

DESIGN SHADE VARIATION:



Light



Medium



High

CREATION CLIC (R)EVOLUTION

**EXCLUSIVE
VERTICAL CLIC**
NO ADHESIVE



**+EASY
+FAST
+QUIET**

NEW TOOL:
THE PRESSURE ROLLER

+RESISTANT


HIGH RESISTANCE
TO VERTICAL FORCE
AND TO HEAVY TRAFFIC

INSTALLATION ON GERFLOR ACOUSTIC UNDERLAY:

- BETTER IMPACT SOUND INSULATION



INSTALL DIRECTLY ON ANY SUBFLOOR**

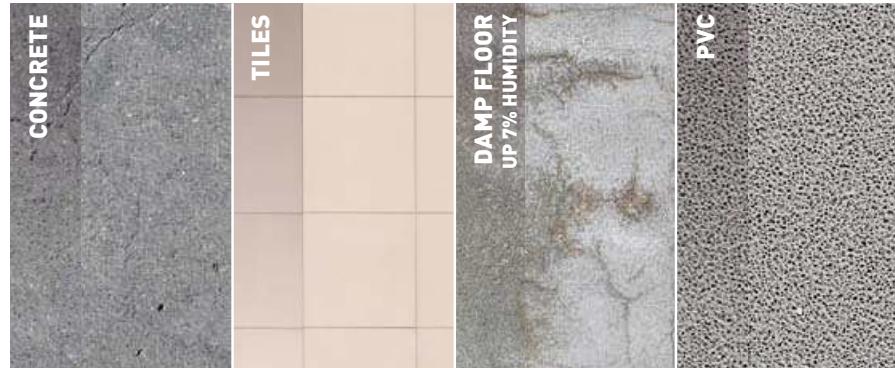

* *For more information please refer to Gerflor's installation guidelines.

EASY TO REPLACE




LUXURY VINYL TILE

CREATION 55 CLIC SYSTEM



CREATION 55 CLIC SYSTEM

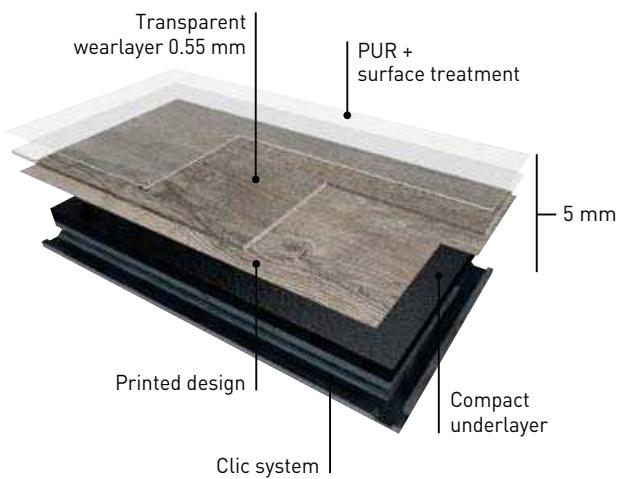

CREATION 55 CLIC SYSTEM is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering, available in planks 17.6x100cm, 20.4x123.9cm and tiles 36x69.6cm with bevelled edges.

It consists of a 0.55mm thick transparent wear layer, a design film, a reinforced compact underlayer. They are compressed and grained at high pressure.


CREATION 55 CLIC SYSTEM is treated with a polyurethane treatment **PUR+** providing excellent cleaning characteristics and improved resistance to scratching and chemicals. PUR+ surface treatment significantly delays the application of wax.

The overall thickness is 5mm.



Possible installation on Gerflor underlayer for better sound insulation.

CREATION 55 CLIC SYSTEM



► The one installation solution

- Interlocking planks and tiles which can be laid without adhesive, with the benefit of easier installation and removal
- Rapid installation system by vertical clipping > simplified finishing (angles, pillar surrounds, etc...)
- Easy replacement of individual planks and tiles when required
- No need to close the premises, no loss of revenue
- Minimum sub-floor preparation
- Installation also possible on existing floor coverings

CREATION 55 CLIC SYSTEM			CREATION 55 CLIC SYSTEM ACOUSTIC		
			Gerflor Acoustic 15dB	Creation 55 Clic System + Gerflor Acoustic 15dB	
DESCRIPTION					
Total thickness	EN ISO 24346 (EN 428)	mm	5.00	0.93	5.93
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.55	-	0.55
Weight	EN ISO 23997 (EN 430)	g/sq.m	8260	200	8460
Plank size	EN ISO 24342 (EN 427)	mm	176 x 1000 / 204x1239	-	176 x 1000 / 204x1239
Tile size	EN ISO 24342 (EN 427)	mm	360 x 696	-	360 x 696
Length of sheet	EN ISO 24341 (EN 426)	m	-	15	-
Width of sheet	EN ISO 24341 (EN 426)	cm	-	100	-
CLASSIFICATION					
Norm / Product specification	-	-	EN ISO 10582 (EN 649)	-	-
European classification	EN ISO 10874 (EN 685)	class	33-42	-	33-42
Fire rating	EN 13501-1	class	Bfl-s1	Efl	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	-	-
Slip resistance wet: ramp test with oil	DIN 51 130	class	R9 / R10 / R11 ⁽¹⁾	-	R9-R10 ⁽¹⁾
PERFORMANCES					
Wear resistance	EN 660.2	mm ³	< 2.0	-	≤ 2.0
Wear group	NF 189	group	T	-	T
Type Binder content	ISO 10582	type	I	-	I
Room impact	NF S 31074	dB	73	-	70
Impact sound insulation	EN ISO 717-2	dB	5	-	15
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.15	-	≤ 0.15
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10	0.16	0.13
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	-	OK
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25	-	-
Colour fastness	EN 20 105 - B02	degree	≥ 6	-	≥ 6
Surface treatment	-	-	PUR+	-	PUR+
Chemical products resistance	EN 423	-	OK	-	OK
ENVIRONMENT / INDOOR AIR QUALITY					
TVOC after 28 days	ISO 16000-6	µg / m ³	<100	-	<100
Certification	-	-	Floorscore®	-	-
CE MARKING					
CE	EN 14041			-	

(1) Slip resistance wet: details on website gerflor.com

LUXURY VINYL TILE

CREATION 55 CLIC SYSTEM



PUR+



100% recyclable



0489 Morena

17.6x100 cm



0071 Solero Creme

20.4x123.9 cm



0455 Long Board

20.4x123.9 cm



0488 Caldwell

17.6x100 cm




0503 Quartet

20.4x123.9 cm



CREATION 55 CLIC SYSTEM



Compact | Compact | PUR+ | 100% recyclable



0448 Malua Bay 17.6x100 cm



0465 Cambridge 17.6x100 cm



0504 Twist 20.4x123.9 cm



0464 Picadilly 17.6x100 cm



0579 Amarante 20.4x123.9 cm



0347 Ballerina 20.4x123.9 cm




0445 Rustic Oak 17.6x100 cm



0578 Alisier 20.4x123.9 cm



0457 Buffalo 17.6x100 cm

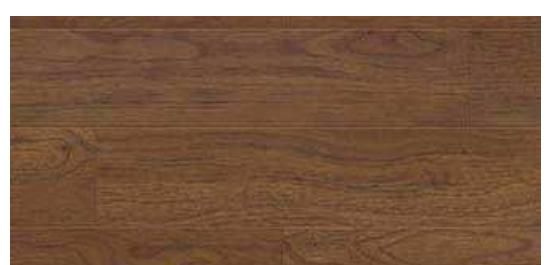

0459 Brownie 17.6x100 cm

DESIGN SHADE VARIATION: Light Medium High

LUXURY VINYL TILE

CREATION 55 CLIC SYSTEM



PUR+



100% recyclable



0462 Eastern oak

17.6x100 cm



0442 Milington oak

17.6x100 cm



0441 Honey Oak

17.6x100 cm



0461 Michigan

17.6x100 cm




0386 Pasadena

17.6x100 cm



CREATION 55 CLIC SYSTEM



Compact | Compact | PUR+ | 100% recyclable



0446 Lorenzo 17.6x100 cm



0456 Ranch 17.6x100
20.4x123.9 cm



0447 Amador 17.6x100
20.4x123.9 cm



0042 Mansfield Dark 20.4x123.9 cm



0458 Aspen 17.6x100 cm



0584 White Lime 20.4x123.9 cm



0060 Arena 20.4x123.9 cm



0582 Deer 20.4x123.9 cm



0061 Oxford 20.4x123.9 cm




0583 Deep Oak 20.4x123.9 cm

DESIGN SHADE VARIATION: Light Medium High



LUXURY VINYL TILE

CREATION 55 CLIC SYSTEM



PUR+

100% recyclable



0964 Roxbury

36 x 69.6 cm



0966 Lava Light

36 x 69.6 cm




0618 Carmel

36 x 69.6 cm



0967 Lava Grey

36 x 69.6 cm

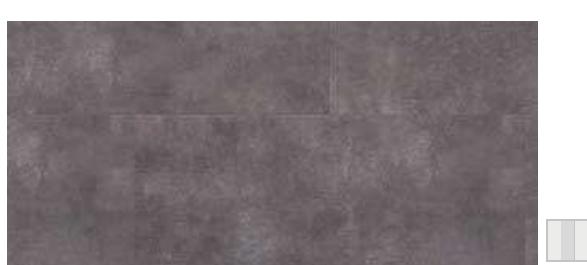


0373 Silver City

36 x 69.6 cm



0620 Preston

36 x 69.6 cm

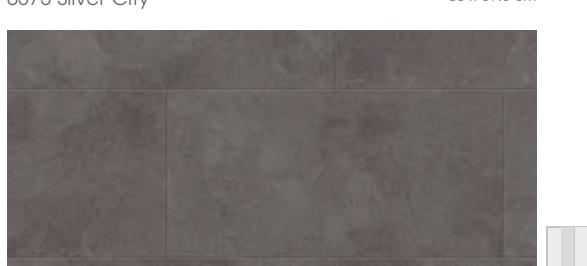

0436 Riverside

36 x 69.6 cm



0438 Norwegian Slate

36 x 69.6 cm



0374 Parker Station

36 x 69.6 cm



DESIGN SHADE VARIATION:



Light



Medium




High

LUXURY VINYL TILE

CREATION 55 X'PRESS

► CREATION 55 X'PRESS

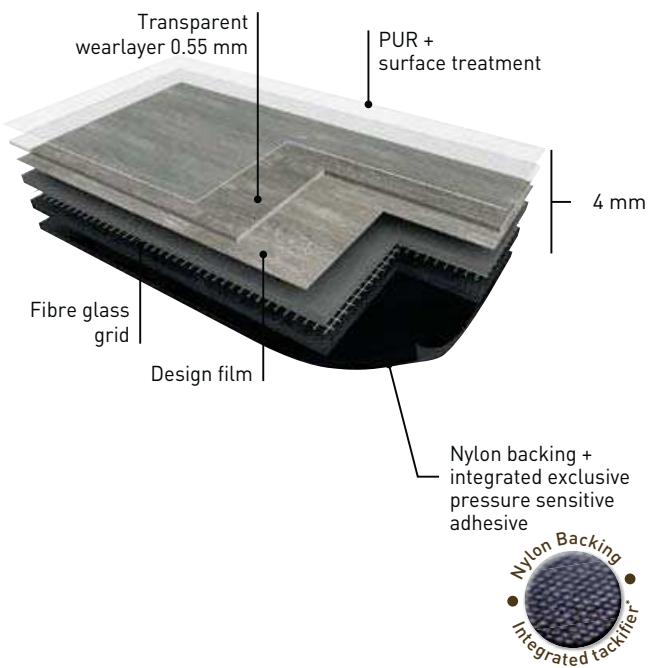

*Exclusive "Pressure Sensitive Adhesive" (PSA) on clean subfloor

CREATION 55 X'PRESS is a synthetic, decorative, flexible, abrasion group T product available in tiles and planks with beveled edges. It comprises a 0,55mm thick transparent wear layer.


It is a 4mm compact product, compressed and grained at high pressure, made with a design film, two compact underlayers reinforced with a fibre grid. The product includes "Pressure Sensitive Adhesive" (PSA) on the nylon backing, specifically for high traffic use. Subfloor is clean after removal.

CREATION 55 X'PRESS is treated with a **PUR+** treatment for easy maintenance properties.

CREATION 55 X'PRESS is made with 73% of mineral and 12% inexhaustible materials. It is made with 100% control recycled materials. It is 100% compliant with REACH. The product emission rate of organic compounds is < 100µg/m³ (TVOC <28 days – ISO 16000-6). It is 100% recyclable.



CREATION 55 X'PRESS



PUR+

100% recyclable

► Ready to use:

- Looselay = Pressure Sensitive Adhesive (PSA) included on the backing of the product
- Direct installation on existing subfloor (In compliance with Gerflor's installation guidelines)
- Clean and quiet for easy installation in busy areas

► Removable:

- No tools needed to remove floor
- Easy to replace a single plank/tile
- Subfloor is clean after removal*

► Easy:

- One tool required: a sharp blade
- Just press to install the product

* For more information please refer to Gerflor's guidelines.

CREATION 55 X'PRESS

DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	4.00
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.55
Weight	EN ISO 23997 (EN 430)	g/sq.m	7200
Plank size	EN ISO 24342 (EN 427)	mm	184 x 1219
Tile size	EN ISO 24342 (EN 427)	mm	305 x 610
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	33-42
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R9 / R10 / R11 ⁽¹⁾
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	NF 189	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	74
Room sound insulation	EN ISO 717-2	dB	5
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.15
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg / m ³	<100
CE MARKING			
CE	EN 14041		

LUXURY VINYL TILE

CREATION 55 X'PRESS



PUR+



100% recyclable



0500 Anathema

30.5 x 61 cm



0578 Alisier

18.4 x 121.9 cm



0579 Amarante

18.4 x 121.9 cm




0456 Ranch

18.4 x 121.9 cm



CREATION 55 X'PRESS



PUR+



0584 White Lime




18.4 x 121.9 cm



0447 Amador

18.4 x 121.9 cm

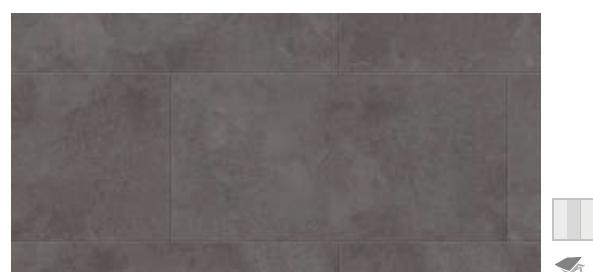

0436 Riverside

30.5 x 61 cm



0618 Carmel

30.5 x 61 cm



0583 Deep Oak

18.4 x 121.9 cm



0374 Parker Station

30.5 x 61 cm



DESIGN SHADE VARIATION:



Light



Medium



High


LUXURY VINYL TILE

CREATION 55




EXCLUSIVE EMBOSSES FOR ENHANCED DESIGNS

HAMMERED

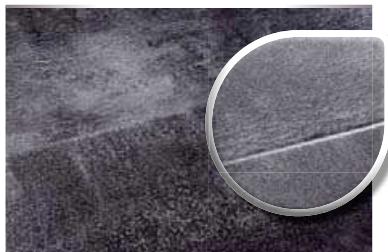

STONE

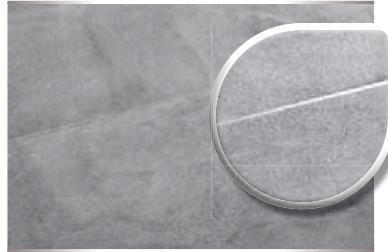

RUSTIC WOOD



SLATE



SAND



AUTHENTIC



PERFORATED




BRUSHED




SAW EFFECT



NATURAL

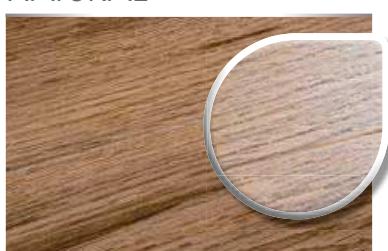

LIGHT

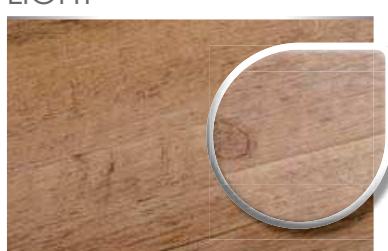

CREATION 55



CREATION 55 CLIC SYSTEM X'PRESS



Code	Slip Resistance wet (DIN 51130) / Embosses		
AISIER	0578	R9 - SAW EFFECT	R9 - HAMMERED LIGHT
AMADOR	0447	R9 - SAW EFFECT	R9 - HAMMERED LIGHT
AMARANTE	0579	R10 - RUSTIC WOOD	R10 - BRUSHED
ANATHEMA	0500	R9 - SAND	-
CARMEL	0618	R10 - HAMMERED	R9 - HAMMERED LIGHT
DEEP OAK	0583	R10 - RUSTIC WOOD	R10 - BRUSHED
PARKER STATION	0374	R10 - HAMMERED	R10 - HAMMERED
RANCH	0456	R10 - BRUSHED	R10 - BRUSHED
RIVERSIDE	0436	R10 - HAMMERED	R10 - HAMMERED
WHITE LIME	0584	R9 - SAW EFFECT	R9 - HAMMERED LIGHT
ARENA	0060	R9 - SAW EFFECT	R9 - HAMMERED LIGHT
ASPEN	0458	R10 - BRUSHED	R10 - BRUSHED
BALLERINA	0347	R9 - NATURAL	R9 - NATURAL
BROWNIE	0459	R9 - NATURAL	R9 - NATURAL
BUFFALO	0457	R10 - BRUSHED	R10 - BRUSHED
CALDWELL	0488	R9 - NATURAL	R9 - NATURAL
CAMBRIDGE	0465	R9 - NATURAL	R9 - NATURAL
DEER	0582	R9 - SAW EFFECT	R9 - HAMMERED LIGHT
EASTERN OAK	0462	R9 - NATURAL	R9 - NATURAL
HONEY OAK	0441	R9 - NATURAL	R9 - NATURAL
AVA GREY	0967	R9 - STONE	R9 - HAMMERED LIGHT
AVA LIGHT	0966	R9 - STONE	R9 - HAMMERED LIGHT
LONG BOARD	0455	R10 - BRUSHED	R10 - BRUSHED
LORENZO	0446	R9 - SAW EFFECT	R9 - HAMMERED LIGHT
MALUA BAY	0448	R10 - BRUSHED	R10 - BRUSHED
MANSFIELD DARK	0042	R10 - BRUSHED	R10 - BRUSHED
MICHIGAN	0461	R9 - SAW EFFECT	R9 - NATURAL
MILLINGTON OAK	0442	R9 - NATURAL	R9 - NATURAL
MORENA	0489	R10 - BRUSHED	R10 - BRUSHED
NORVEGIAN SLATE	0438	R10 - SLATE	R10 - HAMMERED
OXFORD	0061	R10 - BRUSHED	R10 - BRUSHED
PASADENA	0386	R10 - BRUSHED	R10 - BRUSHED
PICADILLY	0464	R9 - NATURAL	R9 - NATURAL
PRESTON	0620	R10 - HAMMERED	R9 - HAMMERED LIGHT
QUARTET	0503	R9 - NATURAL	R9 - NATURAL
ROXBURY	0964	R10 - HAMMERED	R10 - HAMMERED
RUSTIC OAK	0445	R9 - LIGHT	R9 - NATURAL
SILVER CITY	0373	R10 - HAMMERED	R10 - HAMMERED
SOLERO CREME	0071	R9 - NATURAL	R9 - NATURAL
TWIST	0504	R9 - NATURAL	R9 - NATURAL
ARYA	0581	R10 - RUSTIC WOOD	
BOSTONIAN OAK GOLD	0814	R9 - NATURAL	
BOSTONIAN OAK HONEY	0815	R9 - NATURAL	
BRITANY OAK	0425	R10 - AUTHENTIC	
CHEVRON BUCKWHEAT	0811	R9 - NATURAL	
CHEVRON HURRICANE	0809	R9 - NATURAL	
CHEVRON MOKA	0810	R9 - NATURAL	
ELEGANT OAK	0070	R9 - NATURAL	
ERAMOSA CREME	0063	R9 - NATURAL	
ERAMOSA GOLD	0062	R9 - NATURAL	
FACTORY	0487	R9 - SAND	
FUDGE	0463	R9 - NATURAL	
GRAVITY DARK	0064	R10 - BRUSHED	
GRAVITY WOOD	0065	R10 - BRUSHED	
MAHE	0066	R9 - NATURAL	
MAHE GREY	0067	R9 - NATURAL	
MANSFIELD LIGHT	0068	R10 - BRUSHED	
MANSFIELD NATURAL	0069	R10 - BRUSHED	
MOMA	0045	R10 - HAMMERED	
NATURAL CHERRY	0449	R9 - NATURAL	
NORTH WOOD MACCHIATO	0816	R10 - BRUSHED	
NORTH WOOD MOKACCINO	0817	R10 - BRUSHED	
ROCKAWAY	0048	R10 - HAMMERED	
ROYAL OAK COFFEE	0740	R9 - GENUINE	
ROYAL OAK BLOND	0812	R9 - GENUINE	
RUST METAL	0094	R11 - PERFORATED	
RUST CORTEX	0095	R11 - PERFORATED	
SPICY BROWN	0073	R9 - NATURAL	
SPICY GREY BLUE	0072	R9 - NATURAL	
STACCATO	0476	R11 - PERFORATED	
SWEET CLOUD	0437	R9 - STONE	
SWISS OAK CASHMERE	0795	R9 - NATURAL	
SWISS OAK GOLDEN	0796	R9 - NATURAL	
VINTAGE OAK	0426	R10 - AUTHENTIC	

LUXURY VINYL TILE

CREATION 55

	Code	CREATION 55	CREATION 55 CLIC SYSTEM	CREATION 55 X'PRESS	SKIRTING	100% Matching
ALISIER	0578	•	•	•	-	
AMADOR	0447	•	•	•	0447	
AMARANTE	0579	•	•	•	-	
CARMEL	0618	•	•	•	-	
DEEP OAK	0583	•	•	•	-	
PARKER STATION	0374	•	•	•	-	
RANCH	0456	•	•	•	0357	
RIVERSIDE	0436	•	•	•	-	
WHITE LIME	0584	•	•	•	0582	
ANATHEMA	0500	•	-	•	0414	
ARENA	0060	•	•	-	0356	
ASPEN	0458	•	•	-	0458	
BALLERINA	0347	•	•	-	0347	
BROWNIE	0459	•	•	-	0265	
BUFFALO	0457	•	•	-	0359	
CALDWELL	0488	•	•	-	0488	
CAMBRIDGE	0465	•	•	-	0272	
DEER	0582	•	•	-	0584	
EASTERN OAK	0462	•	•	-	0258	
HONEY OAK	0441	•	•	-	0441	
LAVA GREY	0967	•	•	-	-	
LAVA LIGHT	0966	•	•	-	-	
LONG BOARD	0455	•	•	-	0358	
LORENZO	0446	•	•	-	0446	
MALUA BAY	0448	•	•	-	0448	
MANSFIELD DARK	0042	•	•	-	-	
MICHIGAN	0461	•	•	-	0461	
MILINGTON OAK	0442	•	•	-	0442	
MORENA	0489	•	•	-	0489	
NORVEGIAN SLATE	0438	•	•	-	-	
OXFORD	0061	•	•	-	-	
PASADENA	0386	•	•	-	0386	
PICADILLY	0464	•	•	-	0337	
PRESTON	0620	•	•	-	-	
QUARTET	0503	•	•	-	0503	
ROXBURY	0964	•	•	-	-	
RUSTIC OAK	0445	•	•	-	0445	
SILVER CITY	0373	•	•	-	-	
SOLEIRO CREME	0071	•	•	-	-	
TWIST	0504	•	•	-	0504	
ARYA	0581	•	-	-	-	
BOSTONIAN OAK GOLD	0814	•	-	-	0814	
BOSTONIAN OAK HONEY	0815	•	-	-	0815	
BRITANY OAK	0425	•	-	-	-	
CHEVRON BUCKWHEAT	0811	•	-	-	0811	
CHEVRON HURRICANE	0809	•	-	-	0809	
CHEVRON MOKA	0810	•	-	-	0810	
ELEGANT OAK	0070	•	-	-	0260	
ERAMOSA CREME	0063	•	-	-	0063	
ERAMOSA GOLD	0062	•	-	-	0062	
FACTORY	0487	•	-	-	-	
FUDGE	0463	•	-	-	0262	
GRAVITY DARK	0064	•	-	-	-	
GRAVITY WOOD	0065	•	-	-	-	
MAHE	0066	•	-	-	-	
MAHE GREY	0067	•	-	-	-	
MANSFIELD LIGHT	0068	•	-	-	-	
MANSFIELD NATURAL	0069	•	-	-	-	
MOMA	0045	•	-	-	-	
NATURAL CHERRY	0449	•	-	-	-	
NORTH WOOD MACCHIATO	0816	•	-	-	0816	
NORTH WOOD MOKACCINO	0817	•	-	-	0817	
ROCKAWAY	0048	•	-	-	-	
ROYAL OAK COFFEE	0740	•	-	-	0740	
ROYAL OAK BLOND	0812	•	-	-	0812	
RUST METAL	0094	•	-	-	0094	
RUST CORTEN	0095	•	-	-	0095	
SPICY BROWN	0073	•	-	-	-	
SPICY GREY BLUE	0072	•	-	-	-	
STACCATO	0476	•	-	-	0476	
SWEET CLOUD	0437	•	-	-	-	
SWISS OAK CASHMERE	0795	•	-	-	0795	
SWISS OAK GOLDEN	0796	•	-	-	0796	
VINTAGE OAK	0426	•	-	-	-	

•: Available

PACKAGING

Product size (cm)	m ² / box	m ² / palette
CREATION 55		
15.2 x 91.4 [1]	3.34	257.18
15.2 x 91.4	3.34	220.44
18.4 x 121.9	3.37	252.75
23 x 150	2.80	198.72
Mix: 15.2/7.6/22.8 x 91.4	3.34	213.76
18.4 x 137.1	3.03	242.40
45.7 x 91.4	3.34	213.76
61 x 61	3.34	160.32
30.5 x 61	3.34	140.28
CREATION 55 CLIC SYSTEM		
17.6 x 100	1.76	98.56
36 x 69.6	1.75	94.70
20.4 x 123.9	1.77	113.20
CREATION 55 X'PRESS		
18.4 x 121.9	1.79	144.00
30.5 x 61	1.86	83.70

[1] Ranch/Cambridge/Brownie/Longboard

CREATION 55


► DECOR SKIRTING

To be installed with clip [5935] or mastic adhesive.

PACKAGING
5934: 5 x 2.4 lm / package
5935: 30 clip / package




► CREATION 55 WOOD: 28 matching decors

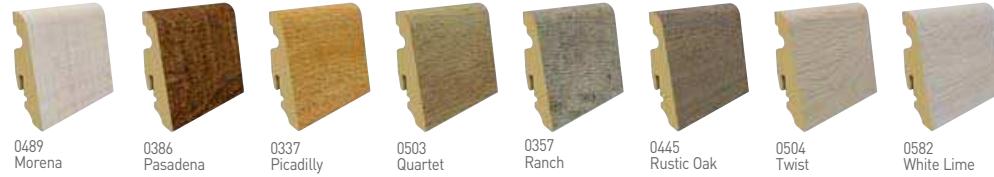

► CREATION 55 MINERAL : 10 decors




► ALUMINIUM PROFILES



ALUMINIUM
RAMP 2.8 mm
ref. 0504

Dedicated to:
• Creation 70,
• Creation 55.



ALUMINIUM RAMP
5-6 mm / ref. 0505
+ ALUMINIUM CORNER
5-6 mm / ref. 1513

Dedicated to:
• Creation 70 (Clic System),
• Creation 55 (Clic System).



LOOSELAY ALUMINIUM
RAMP 5-6 mm / ref. 0609
+ LOOSELAY ALUMINIUM CORNER
5-6 mm / ref. 0629

Dedicated to:
• Creation 70 (Clic System),
• Creation 55 (Clic System).


For further details see page 283

LUXURY VINYL TILE

CREATION 30



CREATION 30

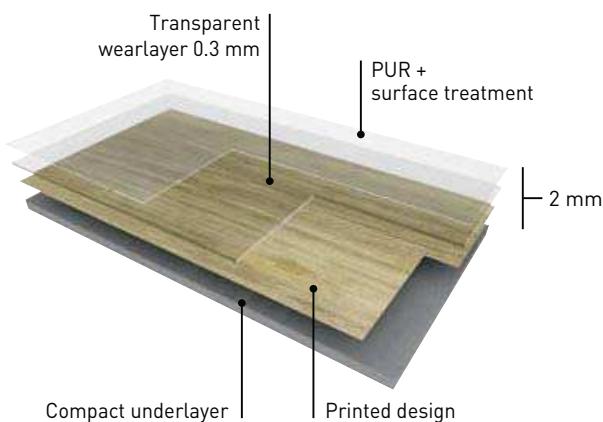


CREATION 30 are synthetic, decorative, flexible, antistatic, abrasion group T floorcoverings in tile and plank form, with micro-bevelled edges.

They consist of a 0.3 mm thick transparent wear layer, a design film and a compact underlayer. They are compressed and grained at high pressure.

Their overall thickness is 2 mm. They are treated with **PUR+** surface treatment providing excellent cleaning characteristics and improved resistance to scratching. PUR+ treatment significantly delays the build-up of wax.



CREATION 30



PUR+

100% recyclable

- Micro-bevelled edges: unique and realistic design.
- Large palette of designs and formats.
- Durability.
- PUR+ surface treatment: ease of maintenance.

CREATION 30

DESIGN

DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	2.00
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.30
Weight	EN ISO 23997 (EN 430)	g/sq.m	3460
Size	EN ISO 24342 (EN 427)	mm	Planks - 184x1371 / 184x1219 / 152x914 / 114x610 Tiles - 457x914 / 610x610 / 305x610 Creation Mix: 152x914 / 228x914 / 76x914
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	23 - 31
Fire rating	EN 13501-1	class	B _{fl-s1}
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	DIN 51 130	class	R9-R10-R11 ⁽¹⁾
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	NF 189	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	77
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.15
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Castor chair test [type W]	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg / m ³	<100
CE MARKING			
	EN 14041	 	 <small>B_{fl-s1}</small>

⁽¹⁾ Slip resistance wet: details on website gerflor.com

LUXURY VINYL TILE

CREATION 30



0441 Honey Oak 15.2x91.4 cm



0589 Break Dance 18.4 x 121.9 cm




0445 Rustic Oak 15.2x91.4 cm



0502 Rumba 15.2x91.4 cm



CREATION 30



PUR+ 100% recyclable



0465 Cambridge 15.2x91.4 cm



0488 Folk 15.2x91.4 cm



0588 Bossa Nova 18.4 x 121.9 cm



0262 Tempo 15.2x91.4 cm



0347 Ballerina 15.2x91.4 cm



0499 Pavane 15.2x91.4 cm



0503 Quartet 15.2x91.4 cm



0349 Mazurka 15.2x91.4 cm



0498 Tango 15.2x91.4 cm



0265 Morris 15.2x91.4 cm

DESIGN SHADE VARIATION:



Light



Medium



High

LUXURY VINYL TILE


CREATION 30



PUR+



100% recyclable

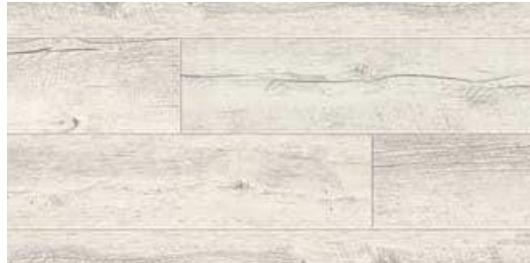

0489 Calypso

15.2x91.4 cm



0743 North Wood

18.4 x 121.9 cm



0060 Arena

18.4 x 121.9 cm



0593 Salsa

18.4 x 121.9 cm



0591 Milonga

18.4 x 121.9 cm



0737 Alamo Ash

18.4 x 121.9 cm



0061 Oxford

18.4 x 121.9 cm



0447 Amador

15.2x91.4 cm



0592 Paso Doble


18.4 x 121.9 cm



0587 Cumbia

18.4 x 121.9 cm

CREATION 30



Compact Compact PUR+ 100% recyclable



DESIGN SHADE VARIATION: Light Medium High

LUXURY VINYL TILE

CREATION 30



PUR+



100% recyclable



0490 Boogie

15.2x91.4 cm
18.4 x 121.9 cm

0492 Bamba

15.2x91.4 cm




0457 Buffalo

15.2x91.4 cm




0738 Alamo Sand

18.4 x 121.9 cm



CREATION 30



Compact

Compact

PUR+

100% recyclable



0739 Royal Oak Gold

18.4 x 121.9 cm



0742 Timber Camel

11.4 x 61 cm
18.4 x 121.9 cm



0501 Charleston

15.2x91.4 cm



0741 Timber Rust

11.4 x 61 cm
18.4 x 121.9 cm



0386 Pasadena

Creation 30 Mix
15.2x91.4 cm / 7.6x91.4 cm / 22.8x91.4 cm



0740 Royal Oak Coffee

18.4 x 121.9 cm



0749 Bostonian

18.4 x 137.1 cm



0493 Flamenco

15.2x91.4 cm

DESIGN SHADE VARIATION:



Light



Medium



High

LUXURY VINYL TILE

CREATION 30



0414 Soprano 30.5 x 61 cm




0751 Durango Taupe 61x61 cm



0750 Durango Moka 61x61 cm




0618 Carmel 30.5 x 61 cm

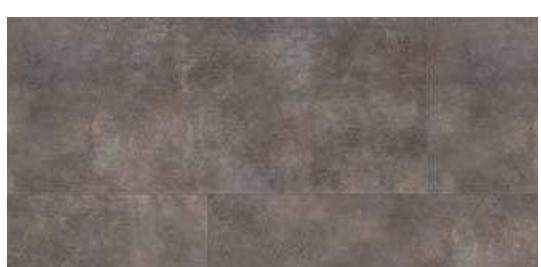

0373 Silver City 61x61 cm

CREATION 30



PUR+


100% recyclable



0476 Staccato 61x61 cm



0744 Carrare 30.5 x 61 cm
18.4 x 121.9 cm

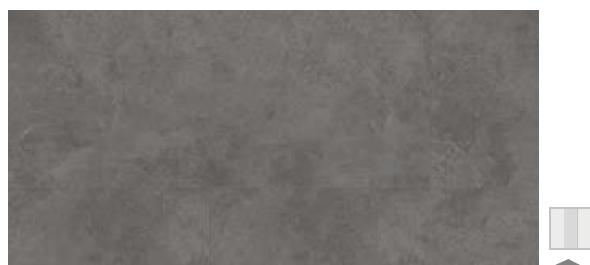

0436 Riverside 61x61 cm



0475 Bolero 30.5 x 61 cm



0505 Andante 61x61 cm



0748 Back Street 30.5 x 61 cm



0374 Parker Station 61x61 cm



0747 Pashmina Cloud 45.7 x 91.4 cm



0438 Norwegian Slate 30.5 x 61 cm



0746 Pashmina Storm 45.7 x 91.4 cm

DESIGN SHADE VARIATION:



Light



Medium




High

LUXURY VINYL TILE

CREATION 30 LOCK

► CREATION 30 LOCK

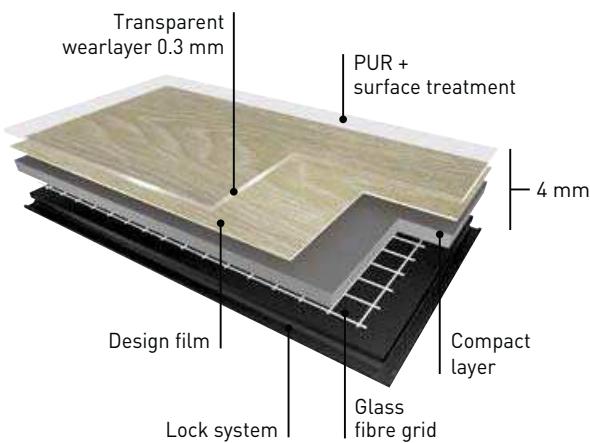


CREATION 30 LOCK is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in planks and tiles with micro-bevelled edges. **CREATION 30 LOCK** is a 4mm thick product, it consists of a transparent wearlayer 0.3mm thick, a design film and two compact underlayers reinforced with a fibre grid. The product is compressed and grained at high pressure.


CREATION 30 LOCK is treated with polyurethane treatment **PUR+** that provides good cleaning properties and improved resistance to scratches and chemicals.

CREATION 30 LOCK is made with 73% of mineral and 12% inexhaustible materials. It is made with 100% control recycled materials. It is 100% compliant with REACH. The product emission rate of organic compounds is < 100 $\mu\text{g}/\text{m}^3$ (TVOC <28 days - ISO 16000-6). It is 100% recyclable.

CREATION 30 LOCK is a looselay product that can be installed without adhesive thanks to the interlocking system.

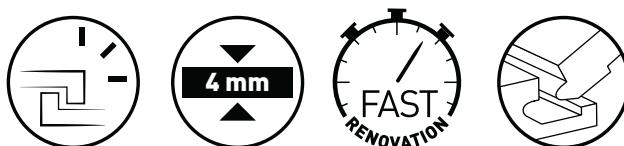

CREATION 30 LOCK



PUR+

100% recyclable

EASY INSTALLATION / EASY RENOVATION

- Looselay interlocking system
 - Installation with no adhesive
 - Quick installation
 - Few tools: cutter and mallet
- Minimum subfloor preparation: CREATION 30 LOCK is compatible with seamless tile, concrete, PVC compact, wood floor (if subfloor rigid & stable)*


*(In compliance with Gerflor's installation guidelines)

CREATION 30 LOCK			
DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	4.00
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.30
Weight	EN ISO 23997 (EN 430)	g/sq.m	7760
Plank size	EN ISO 24342 (EN 427)	mm	178 x 1245
Tile size	EN ISO 24342 (EN 427)	mm	303 x 607
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	23 - 31
Fire rating	EN 13501-1	class	B _{fl} -s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	DIN 51 130	class	R9-R10-R11 ⁽¹⁾
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	NF 189	group	T
Type Binder content	ISO 10582	type	I
Room impact	NFS 31074	dB	76
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.15
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg / m ³	<100
CE MARKING			
	EN 14041	 	

(1) Slip resistance wet: details on website gerflor.com

LUXURY VINYL TILE

CREATION 30 LOCK

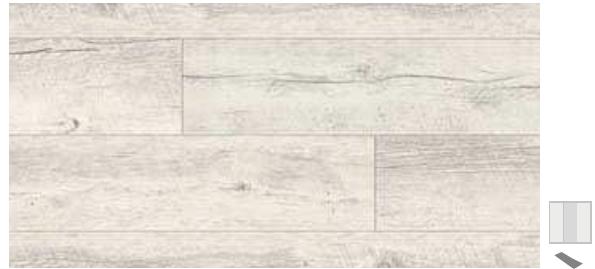

0489 Calypso 17.8x124.5 cm



0586 Tamoure 17.8x124.5 cm




0491 Madison 17.8x124.5 cm



0504 Twist 17.8x124.5 cm

CREATION 30 LOCK



PUR+

100% recyclable



0441 Honey Oak 17.8x124.5 cm



0585 Bebop 17.8x124.5 cm



0347 Ballerina 17.8x124.5 cm



0445 Rustic Oak 17.8x124.5 cm



0503 Quartet 17.8x124.5 cm



0589 Break Dance 17.8x124.5 cm



0265 Morris 17.8x124.5 cm



0490 Boogie 17.8x124.5 cm

DESIGN SHADE VARIATION:



Light



Medium



High

LUXURY VINYL TILE

CREATION 30 LOCK



PUR+



100% recyclable



0060 Arena

17.8x124.5 cm



0593 Salsa

17.8x124.5 cm



0447 Amador

17.8x124.5 cm



0061 Oxford

17.8x124.5 cm



0414 Soprano

30.3x60.7 cm




0475 Bolero

30.3x60.7 cm



0618 Carmel

30.3x60.7 cm

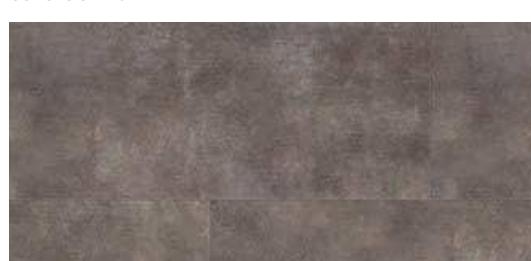

0373 Silver City

30.3x60.7 cm



DESIGN SHADE VARIATION:



Light




Medium



High

CREATION 30 LOCK




PUR+

100% recyclable



0476 Staccato

30.3x60.7 cm

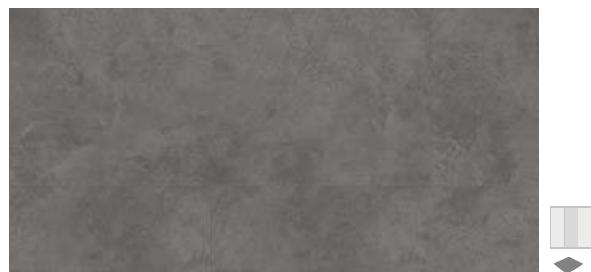

0436 Riverside

30.3x60.7 cm



0505 Andante

30.3x60.7 cm



0374 Parker Station


30.3x60.7 cm



LUXURY VINYL TILE

CREATION 30 X'PRESS

► CREATION 30 X'PRESS

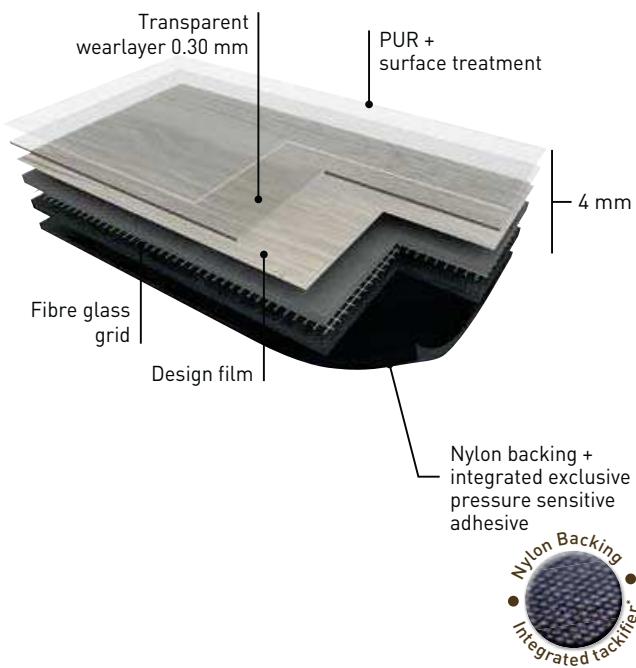

*Exclusive "Pressure Sensitive Adhesive" (PSA) on clean subfloor

CREATION 30 X'PRESS is a synthetic, decorative, flexible, abrasion group T product available in tiles and planks with bevelled edges. It comprises a 0,30mm thick transparent wearlayer.



It is a 4mm compact product, compressed and grained at high pressure, made with a design film, two compact underlayers reinforced with a fibre grid. The product includes "Pressure Sensitive Adhesive" (PSA) on the nylon backing. Subfloor is clean after removal.

CREATION 30 X'PRESS is treated with a **PUR+** treatment for easy maintenance properties.

CREATION 30 X'PRESS is made with 73% of mineral and 12% inexhaustible materials. It is made with 100% control recycled materials. It is 100% compliant with REACH. The product emission rate of organic compounds is < 100µg/m³ (TVOC <28 days – ISO 16000-6). It is 100% recyclable.



CREATION 30 X'PRESS



PUR+

100% recyclable

► Ready to use:

- Looselay = Pressure Sensitive Adhesive (PSA) included on the backing of the product
- Direct installation on existing subfloor (In compliance with Gerflor's installation guidelines)
- Clean and quiet for easy installation in busy areas

► Removable:

- No tools needed to remove floor
- Easy to replace a single plank/tile
- Subfloor is clean after removal*

► Easy:

- One tool required: a sharp blade
- Just press to install the product

* For more information please refer to Gerflor's guidelines.

CREATION 30 X'PRESS

DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	4.00
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.30
Weight	EN ISO 23997 (EN 430)	g/sq.m	7600
Plank size	EN ISO 24342 (EN 427)	mm	184 x 1219
Tile size	EN ISO 24342 (EN 427)	mm	305 x 610
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	23 - 31
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R9-R10-R11 ⁽¹⁾
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	NF 189	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	74
Impact sound insulation	EN ISO 717-2	dB	5
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.15
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg / m ³	<100
CE MARKING			
	EN 14041		

(1) Slip resistance wet: details on website gerflor.com

LUXURY VINYL TILE

CREATION 30 X'PRESS



0618 Carmel 30.5 x 61 cm



0476 Staccato 30.5 x 61 cm





0436 Riverside 30.5 x 61 cm



0374 Parker Station 30.5 x 61 cm



CREATION 30 X'PRESS



PUR+



0504 Twist 18.4x121.9 cm



0585 Bebop 18.4x121.9 cm



0347 Ballerina 18.4x121.9 cm



0503 Quartet 18.4x121.9 cm



0265 Morris 18.4x121.9 cm



0586 Tamoure 18.4x121.9 cm



0593 Salsa 18.4x121.9 cm



0589 Break Dance 18.4x121.9 cm



0490 Boogie 18.4x121.9 cm



0447 Amador 18.4 x 121.9 cm

DESIGN SHADE VARIATION:



Light



Medium



High


LUXURY VINYL TILE

CREATION 30



EXCLUSIVE EMBOSSES FOR ENHANCED DESIGNS

HAMMERED

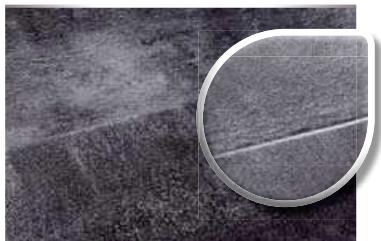

BRUSHED



STAMPED



SLATE



LIGHT



SAW EFFECT



PERFORATED




NATURAL



GENUINE



STONE

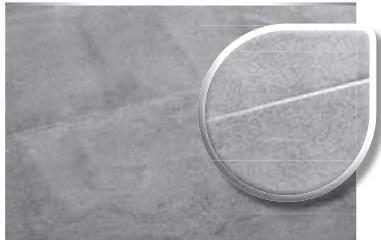

RUSTIC WOOD



CREATION 30



CREATION 30 CREATION 30 CREATION 30

LOCK



X'PRESS



Code Slip Resistance wet (DIN 51130) / Embosses

AMADOR	0447	R9 - SAW EFFECT	R9 - SAW EFFECT	R9 - SAW EFFECT
BALLERINA	0347	R9 - NATURAL	R9 - NATURAL	R9 - NATURAL
bebop	0585	R10 - BRUSHED	R10 - BRUSHED	R10 - BRUSHED
BOOGIE	0490	R10 - BRUSHED	R10 - BRUSHED	R10 - BRUSHED
BREAK DANCE	0589	R10 - RUSTIC WOOD	R10 - RUSTIC WOOD	R10 - RUSTIC WOOD
CARMEL	0618	R10 - HAMMERED	R10 - HAMMERED	R10 - HAMMERED
MORRIS	0265	R9 - NATURAL	R9 - NATURAL	R9 - NATURAL
PARKER STATION	0374	R10 - HAMMERED	R10 - HAMMERED	R10 - HAMMERED
QUARTET	0503	R9 - NATURAL	R9 - NATURAL	R9 - NATURAL
RIVERSIDE	0436	R10 - HAMMERED	R10 - HAMMERED	R10 - HAMMERED
SALSA	0593	R9 - SAW EFFECT	R9 - SAW EFFECT	R9 - SAW EFFECT
STACCATO	0476	R11 - PERFORATED	R11 - PERFORATED	R11 - PERFORATED
TAMOURE	0586	R10 - BRUSHED	R10 - BRUSHED	R10 - BRUSHED
TWIST	0504	R9 - NATURAL	R9 - NATURAL	R9 - NATURAL
ANDANTE	0505	R9 - STONE	R9 - STONE	
ARENA	0060	R9 - SAW EFFECT	R9 - SAW EFFECT	
BOLERO	0475	R9 - STONE	R9 - STONE	
CALYPSO	0489	R10 - BRUSHED	R10 - BRUSHED	
HONEY OAK	0441	R9 - NATURAL	R9 - NATURAL	
MADISON	0491	R10 - BRUSHED	R10 - BRUSHED	
OXFORD	0061	R10 - BRUSHED	R10 - BRUSHED	
RUSTIC OAK	0445	R9 - LIGHT	R9 - LIGHT	
SILVER CITY	0373	R10 - HAMMERED	R10 - HAMMERED	
SOPRANO	0414	R10 - HAMMERED	R10 - HAMMERED	
ALAMO ASH	0737	R9 - STAMPED		
ALAMO SAND	0738	R9 - STAMPED		
BACK STREET	0748	R10 - HAMMERED		
BAMBA	0492	R10 - BRUSHED		
BOSSA NOVA	0588	R9 - SAW EFFECT		
BOSTONIAN	0749	R9 - NATURAL		
BUFFALO	0457	R10 - BRUSHED		
CAMBRIDGE	0465	R9 - NATURAL		
CARRARE	0744	R9 - STONE		
CHARLESTON	0501	R9 - SAW EFFECT		
CUMBIA	0587	R10 - RUSTIC WOOD		
DURANGO MOKA	0750	R10 - HAMMERED		
DURANGO TAUPE	0751	R10 - HAMMERED		
FLAMENCO	0493	R9 - SAW EFFECT		
FOLK	0488	R9 - NATURAL		
MAZURKA	0349	R9 - NATURAL		
MILONGA	0591	R9 - SAW EFFECT		
NORTH WOOD	0743	R10 - BRUSHED		
NORVEGIAN SLATE	0438	R10 - SLATE		
PASADENA	0386	R10 - BRUSHED		
PASHMINA CLOUD	0747	R9 - STONE		
PASHMINA STORM	0746	R9 - STONE		
PASO DOBLE	0592	R10 - RUSTIC WOOD		
PAVANE	0499	R9 - NATURAL		
ROYAL OAK COFFEE	0740	R9 - GENUINE		
ROYAL OAK GOLD	0739	R9 - GENUINE		
RUMBA	0502	R10 - BRUSHED		
SIRTAKI	0590	R10 - RUSTIC WOOD		
TANGO	0498	R9 - NATURAL		
TEMPO	0262	R9 - NATURAL		
TIMBER CAMEL	0742	R10 - BRUSHED		
TIMBER RUST	0741	R10 - BRUSHED		

LUXURY VINYL TILE

CREATION 30

	Code	CREATION 30 (ARTLINE)	CREATION 30 LOCK (ARTLINE LOCK)	CREATION 30 X'PRESS	SKIRTING 100% Matching
AMADOR	0447	•	•	•	0447
BALLERINA	0347	•	•	•	0347
BEBOP	0585	•	•	•	0358
BOOGIE	0490	•	•	•	0357
BREAK DANCE	0589	•	•	•	-
CARMEL	0618	•	•	•	-
MORRIS	0265	•	•	•	0265
PARKER STATION	0374	•	•	•	-
QUARTET	0503	•	•	•	0503
RIVERSIDE	0436	•	•	•	-
SALSA	0593	•	•	•	0582
STACCATO	0476	•	•	•	0476
TAMOURE	0586	•	•	•	0448
TWIST	0504	•	•	•	0504
ANDANTE	0505	•	•	-	-
ARENA	0060	•	•	-	0356
BOLERO	0475	•	•	-	-
CALYPSO	0489	•	•	-	1489
HONEY OAK	0441	•	•	-	0441
MADISON	0491	•	•	-	0491
OXFORD	0061	•	•	-	-
RUSTIC OAK	0445	•	•	-	0445
SILVER CITY	0373	•	•	-	-
SOPRANO	0414	•	•	-	0414
ALAMO ASH	0737	•	-	-	-
ALAMO SAND	0738	•	-	-	-
BACK STREET	0748	•	-	-	-
BAMBA	0492	•	-	-	0492
BOSSA NOVA	0588	•	-	-	-
BOSTONIAN	0749	•	-	-	-
BUFFALO	0457	•	-	-	0359
CAMBRIDGE	0465	•	-	-	0272
CARRARE	0744	•	-	-	-
CHARLESTON	0501	•	-	-	-
CUMBIA	0587	•	-	-	0458
DURANGO MOKA	0750	•	-	-	-
DURANGO TAUPE	0751	•	-	-	-
FLAMENCO	0493	•	-	-	-
FOLK	0488	•	-	-	-
MAZURKA	0349	•	-	-	0442
MILONGA	0591	•	-	-	0584
NORTH WOOD	0743	•	-	-	-
NORVEGIAN SLATE	0438	•	-	-	-
PASADENA	0386	•	-	-	0386
PASHMINA CLOUD	0747	•	-	-	-
PASHMINA STORM	0746	•	-	-	-
PASO DOBLE	0592	•	-	-	-
PAVANE	0499	•	-	-	-
ROYAL OAK COFFE	0740	•	-	-	0740
ROYAL OAK GOLD	0739	•	-	-	-
RUMBA	0502	•	-	-	0360
SIRTAKI	0590	•	-	-	-
TANGO	0498	•	-	-	-
TEMPO	0262	•	-	-	0262
TIMBER CAMEL	0742	•	-	-	-
TIMBER RUST	0741	•	-	-	-

• : Available



PACKAGING

Product size (cm)	m ² / box	m ² / palette
-------------------	----------------------	--------------------------

CREATION 30 (ARTLINE)

11.4 x 61	3.34	293.92
15.2 x 91.4	3.34	240.48
18.4 x 121.9	3.36	302.40
18.4 x 137.1	3.03	287.85
30.5 x 61	3.34	160.32
61 x 61	3.35	187.04
45.7 x 91.4	3.34	240.48
7.6 x 15.2 x 22.8 x 91.4	3.34	240.48

CREATION 30 LOCK (ARTLINE LOCK)

17.8 x 124.5	1.77	141.60
30.3 x 60.7	1.84	143.52


CREATION 30 X'PRESS

18.4 x 121.9	1.79	143.20
30.5 x 61	1.86	83.70

CREATION 30

► DECOR SKIRTING


To be installed with clip [5935] or mastic adhesive.

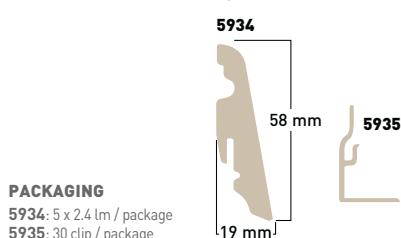

► CREATION 30 WOOD : 24 matching decors



► CREATION 30 MINERAL : 13 decors

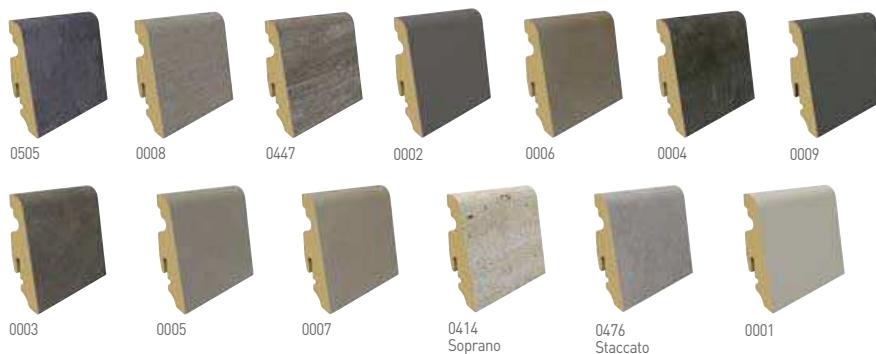



FAST TRACK
LOOSELAY TILE

PAGES
192 / 207





GTI **196-203**

- GTI MAX **NEW** 196-199
- GTI EL5 **NEW** 200-203

Attraction® **204-207**

FAST TRACK LOOSELAY TILE

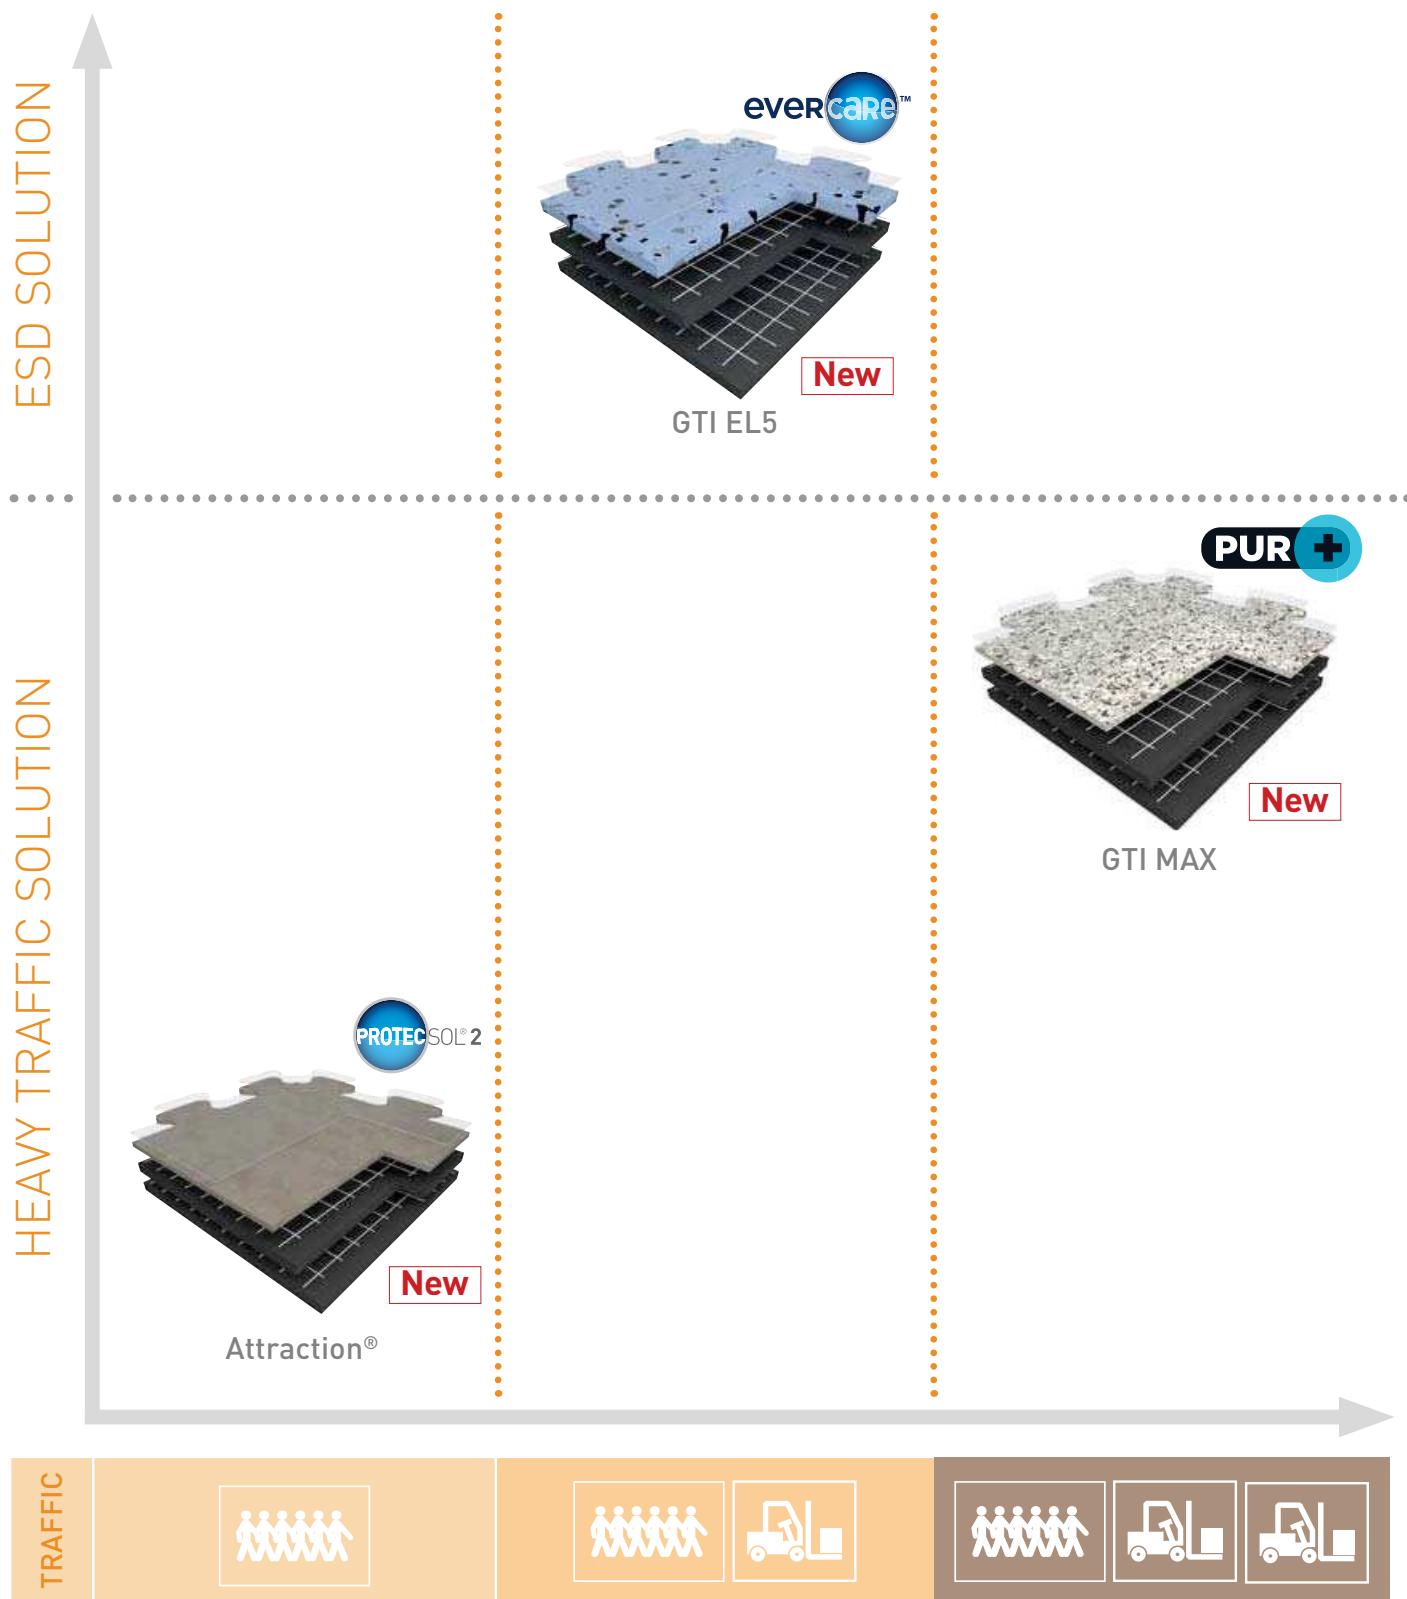

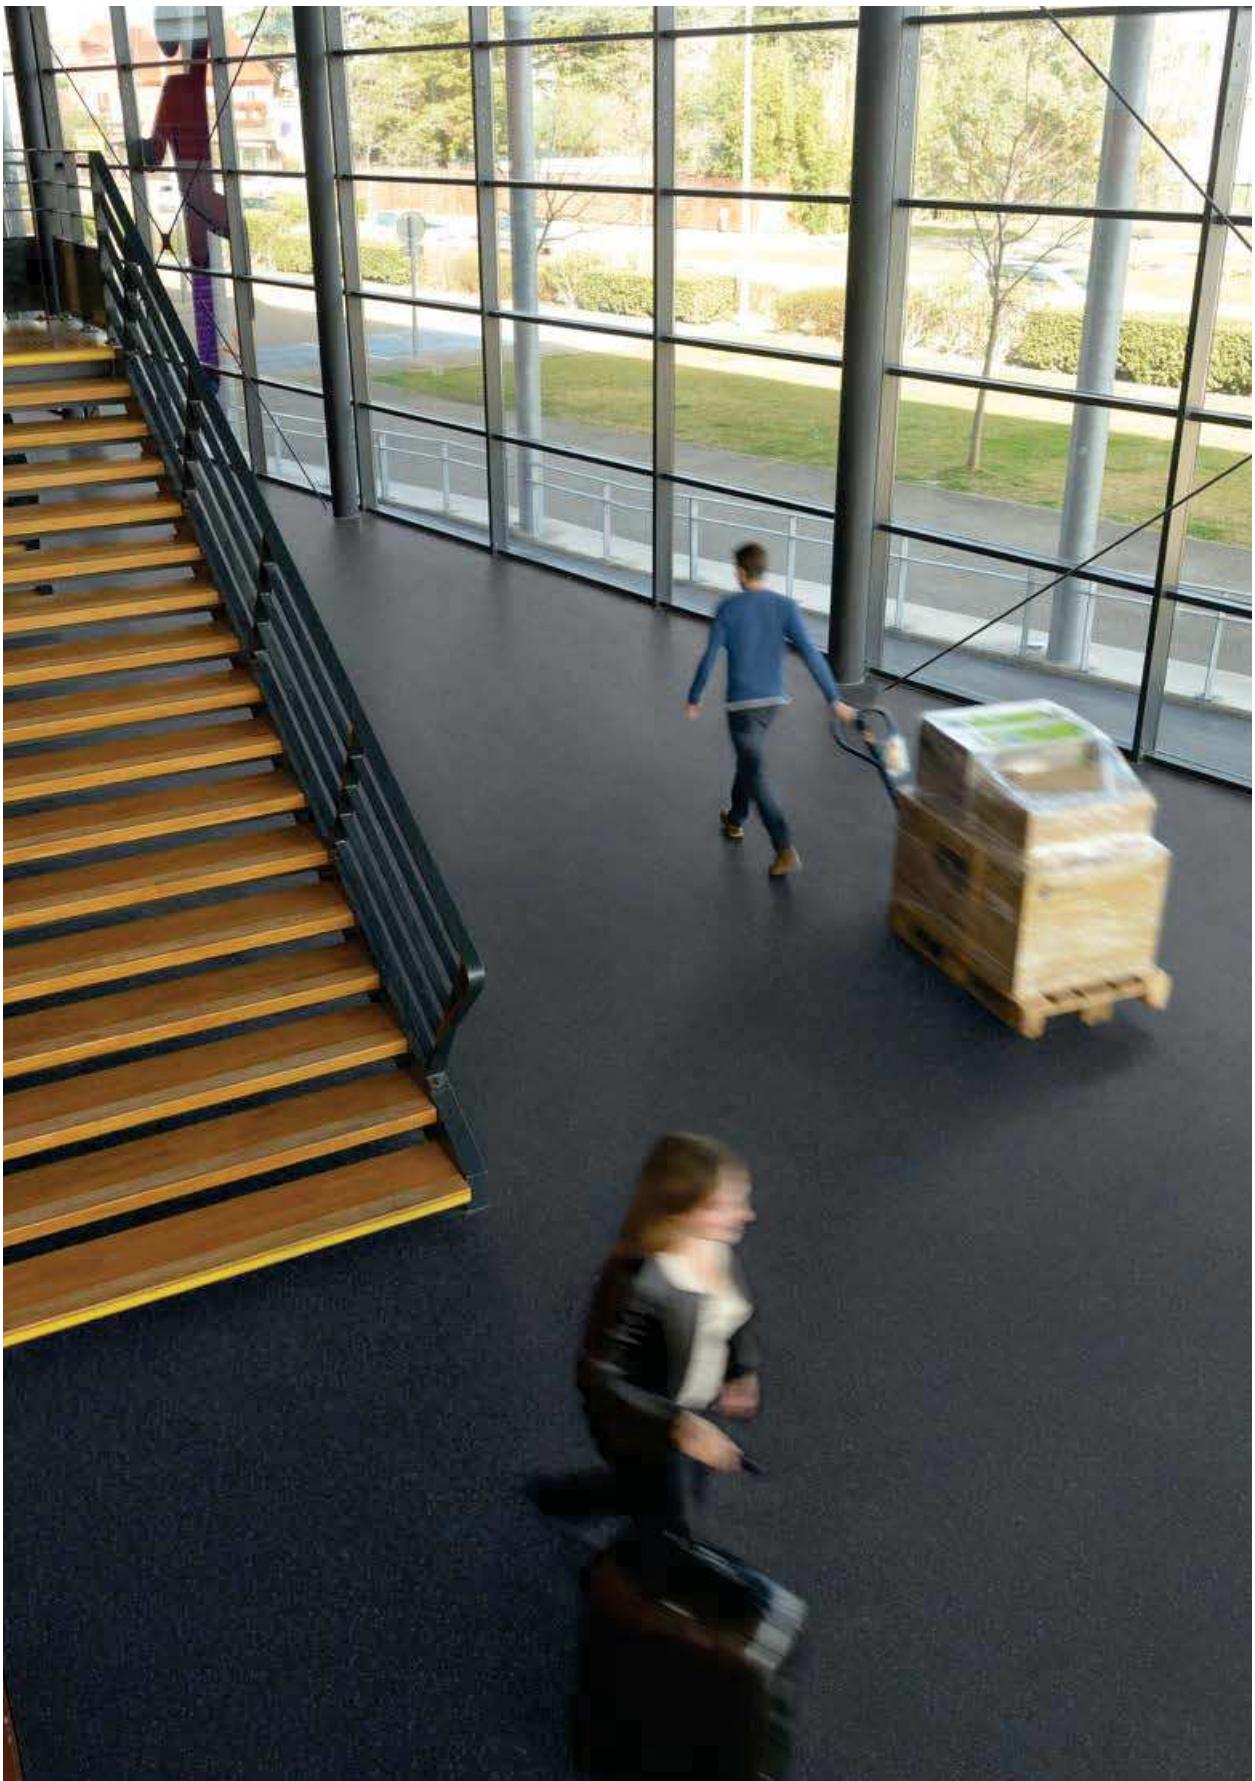


Fast Track
Looselay Tile


FAST TRACK LOOSELAY TILE

GTI MAX **NEW**

► GTI MAX CONNECT & CLEANTECH



GTI CONNECT

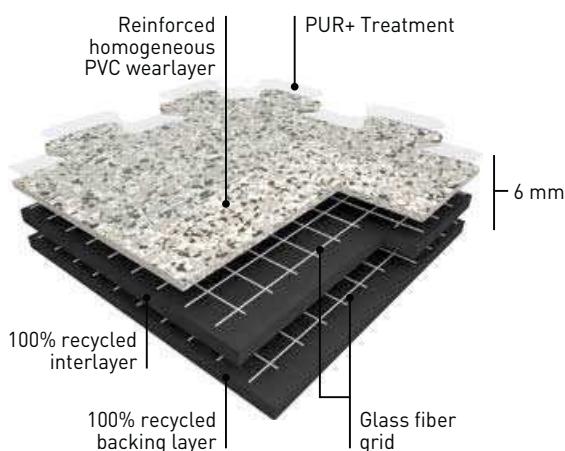


GTI MAX is a multi-layered interlocking looselay vinyl tile with polyurethane treatment (**PUR+**), 6 mm thick with a dovetail joint for the **CONNECT** configuration and with welded joints for the **CLEANTECH** configuration.

GTI is manufactured by Gerflor using a continuous high pressure process, abrasion group T. The **GTI MAX** wearlayer is reinforced by specific oblong fillers that offers an outstanding resistance to traffic.

GTI MAX is reinforced with 2 glass fibre grids on either side of an intermediate pressed homogeneous layer.

GTI MAX backing is a 4 mm thick black pressed homogeneous sheet, its surface is a coloured and reinforced homogeneous sheet 2 mm thick. The product is 100% recyclable.

GTI CLEANTECH

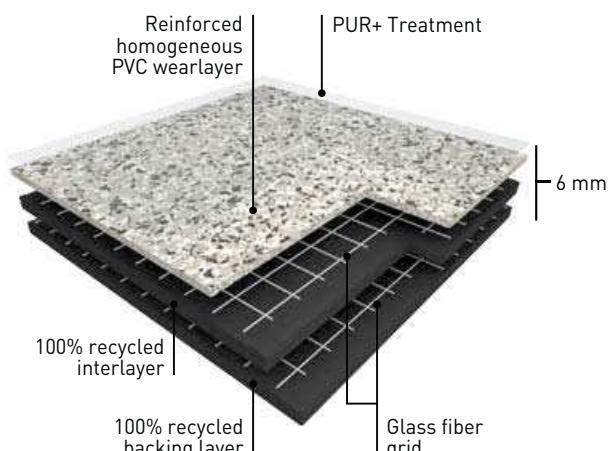

GTI Access are ramps that provide continuity between the tile and the existing floor.

GTI Corner enable covering of inaccessible corners or finishing central patterns.

GTI LOGOS



0001 Caution

0002 Forklift

0006 Pedestrian

0003 Arrow

0005 No entry

0004 Stop

GTI MAX **NEW**




- **Resistant to heavy traffic**
- **Fast renovation: can be installed over existing floorcovering**
- **No subfloor preparation, no adhesive and no production stop (no loss of money)**
- **Polyurethane surface treatment PUR+ for ease of maintenance**
- **6 Standard logos: Mix and match colours to create corners and walkways**

GTI MAX			
DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	6
Wearlayer thickness	EN ISO 24340 (EN 429)	mm	2
Weight	EN ISO 23997 (EN 430)	g/m ²	9365
Size	EN ISO 24342 (EN 427)	mm	635 x 635 GTI CONNECT 600 x 600 GTI CLEANTECH (without dovetail) ^[1]
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815 IEC 61340-4-5	kV V	< 2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R10
Pendulum test	BS7976	-	Concrete emboss ^[2] : HSE 36 compliant Rice emboss ^[2] : NO
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	EN 649	group	T
Type Binder content	EN ISO 10582	type	I
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.15
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Shore Hardness	EN ISO 868	H _D	≥ 55
Shifting resistance	CAHIER CSTB 3562	N/mm ²	≥ 30
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg/m ³	<100
Certification	-	-	Floorscore®
CE MARKING			
CE	EN 14041		

(1) Available upon request
(2) See pages 198-199

FAST TRACK LOOSELAY TILE


GTI MAX **NEW** Rice Emboss

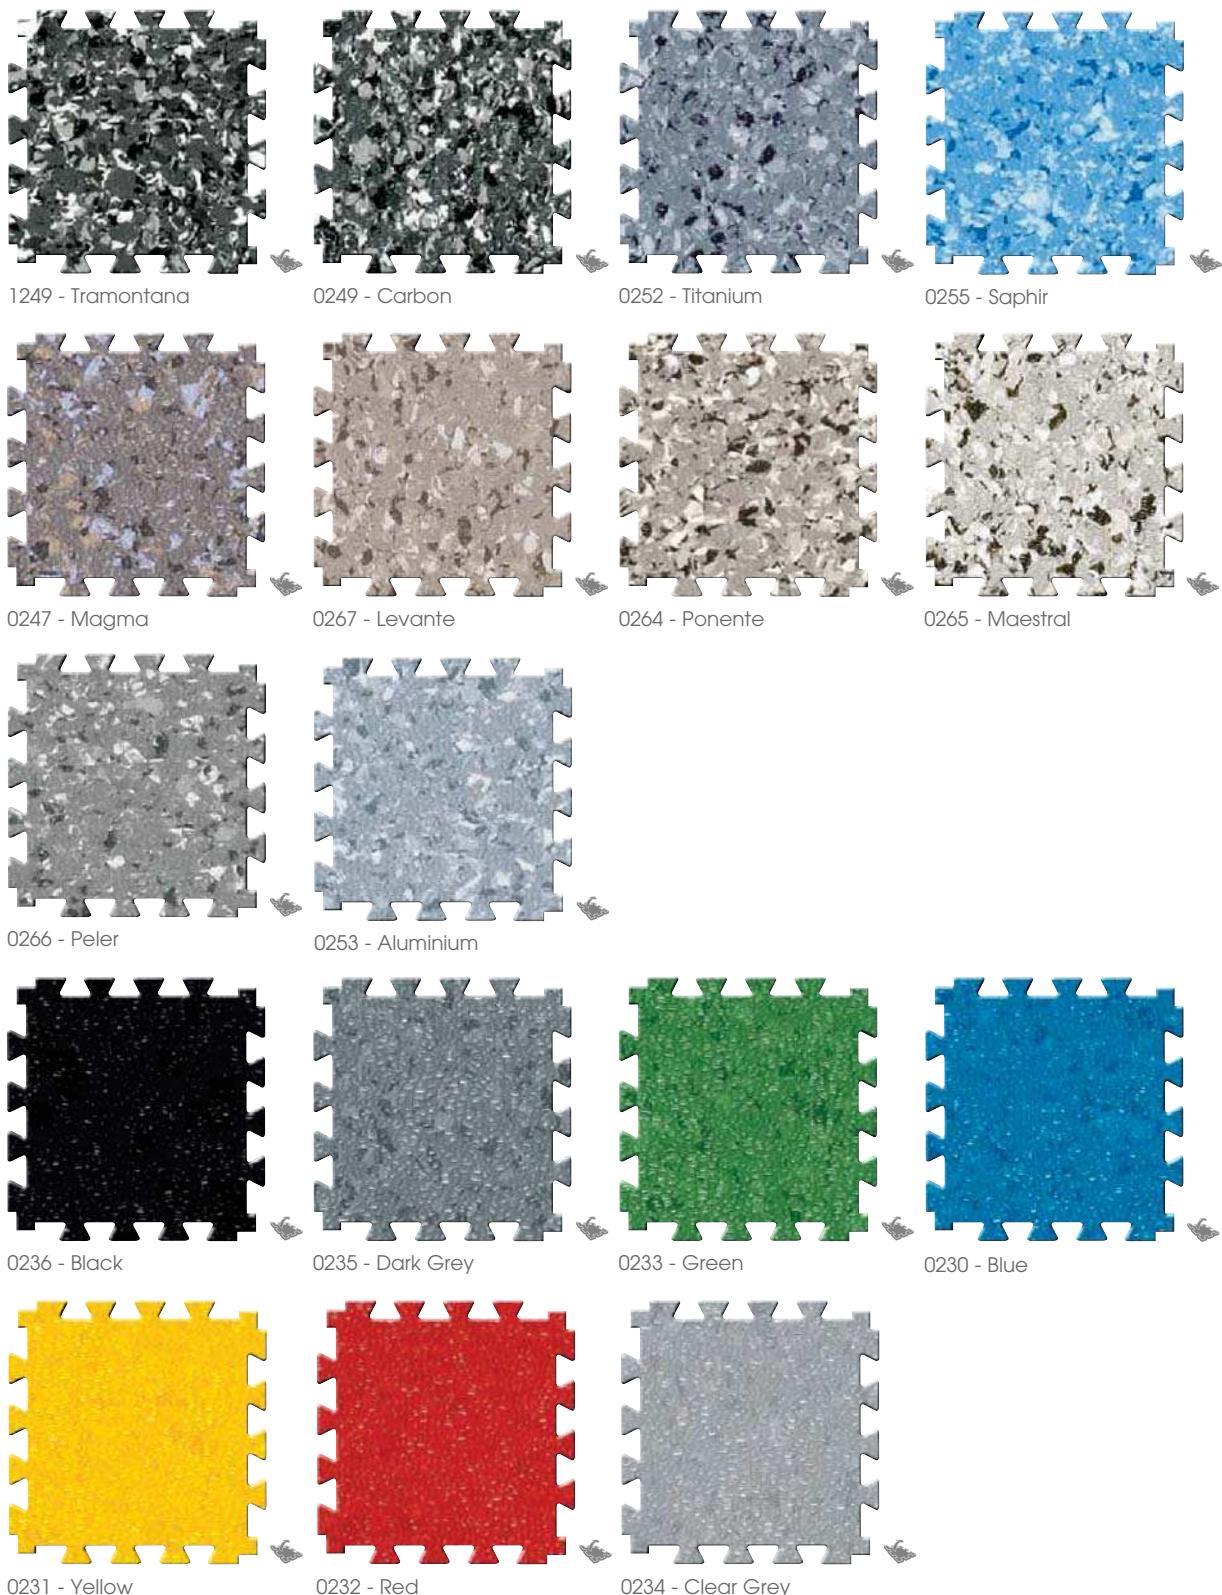

GTI MAX **NEW** Concrete Emboss




Removable R10 PUR+ 100% recyclable

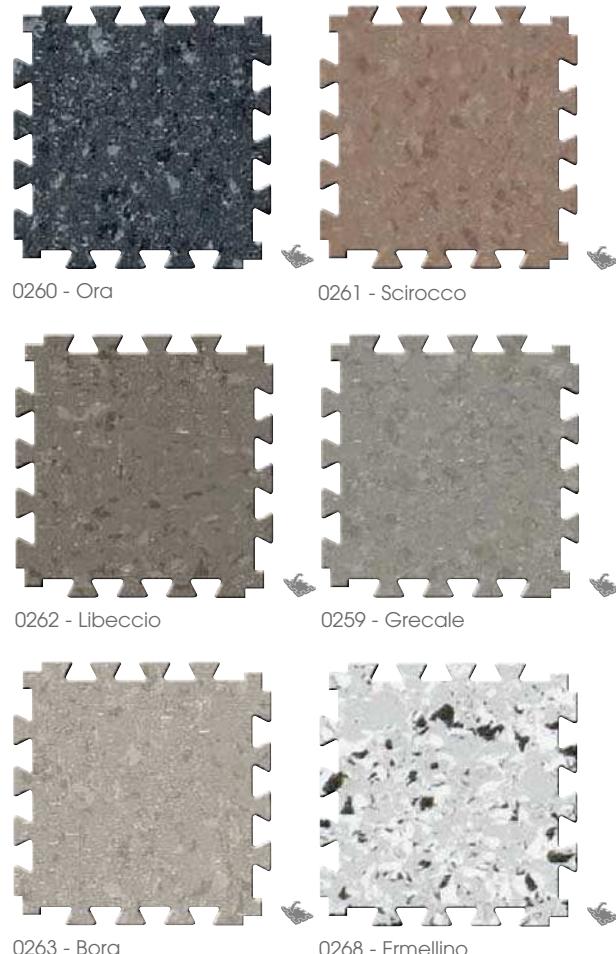

Fast Track
Looselay Tile

ACCESSORIES GTI MAX

LOOSELAY RAMP 5-6 MM



Aluminium Ramp 5-6 mm /
Ref. 0505
+ ALUMINIUM CORNER 5-6 mm /
Ref. 1513
See page 283

KIT ROMAT GT FOR GTI MAX



Ref. 1719
See page 287

CORNER & ACCESS

GTI CORNER CONNECT

320 x 320 mm




GTI ACCESS CONNECT

635 x 320 mm




GTI CORNER CLEANTECH

300 x 300 mm



GTI ACCESS CLEANTECH

600 x 300 mm

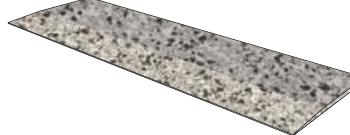


For more information, please refer to our GTI MAX brochure.
Solutions for asbestos support, see page 306 "Safecape".


FAST TRACK LOOSELAY TILE

GTI EL5


► GTI EL5 CONNECT & CLEANTECH



GTI EL5 CONNECT

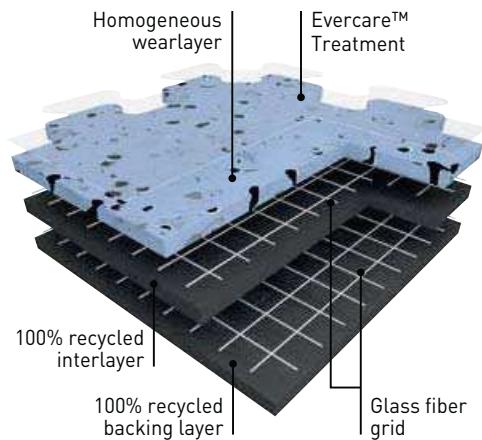

GTI EL5 CLEANTECH

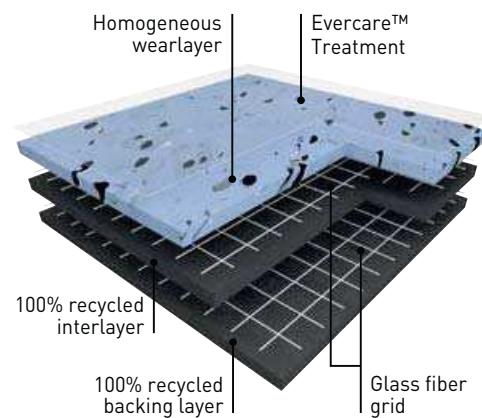

GTI EL5 is a multi-layered looselay vinyl tile, 6 mm thick, reinforced with 2 glass fibre grids.

GTI EL5 CONNECT tiles can be installed using interlocking system with dove tails.

GTI EL5 CLEANTECH is available in square format with welded joints for clean environments and watertight systems requirements.

GTI EL5 wearlayer is 2 mm vinyl homogeneous manufactured with continuous high pressure process, abrasion group P.

It offers an outstanding resistance to traffic.

This floorcovering is treated with **Evercare™** technology: the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. Evercare™ offers **easy maintenance and resistance against staining** of chemical products used in healthcare like betadine, eosin or anti-bacterial hand gel ; and **decontamination protocols**.

This treatment has excellent maintenance characteristics; it requires no wax for life!

The carbon encapsulated granules throughout its full thickness and the **conductive backing** and **conductive surface treatment** ensure optimal and consistent conductive properties throughout its full life expectancy:

- $5 \times 10^4 \leq Rt \leq 10^6$ according to **EN 1081**
- $Rt \leq 10^3$ according to **IEC 61.340-4-1**

It has permanent antistatic properties:

- $< 2000V$ according to EN 1815
- $< 100V$ according to IEC 61.340-4-5

The product is non-emissive of volatile organic compounds with $<10 \mu\text{g}/\text{m}^3$ (TVOC after 28 days ISO 16000-6).

COMPLEMENTARY FINISHES:

GTI EL5 CLEANTECH ACCESS (access ramp), GTI EL5 CLEANTECH CORNER (corner finishes), GTI EL5 CLEANTECH covings (COVING / COVING CORNER IN and COVING CORNER OUT) and conductive welding rods (GTI EL5 CLEANTECH WELDING RODS).

GTI EL5 CONNECT ACCESS (access ramp), GTI EL5 CONNECT CORNER (corner finishes).



GTI EL5



Removable

R9

Evercare™

100% recyclable

CONNECT

- Fast Installation
- Resistance to heavy traffic

CLEANTECH

- Watertight System (hot welding)
- Resistance to heavy traffic

GTI EL5


DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	6
Wearlayer thickness	EN ISO 24340 (EN 429)	mm	2
Weight	EN ISO 23997 (EN 430)	g/m ²	9240
Size	EN ISO 24342 (EN 427)	mm	635 x 635 (GTI EL5 CONNECT) 650 x 650 (GTI EL5 CLEANTECH)
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Electrical resistance ⁽¹⁾	EN 1081 IEC 61340-4-1 IEC 61340-4-5 ANSI/ESD STM 7.1	W	5 x 10 ⁴ ≤ Rt ≤ 10 ⁶ ≤ 10 ⁹ ≤ 10 ⁹ ≤ 10 ⁹
Static electrical propensity	EN 1815 IEC 61340-4-5	kV V	< 2 ≤ 100 ⁽²⁾
Protection against electrostatic discharges	ESD S20.20 IEC 61340-5-1	-	OK OK
Slip resistance wet: ramp test with oil	DIN 51 130	class	R9
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	≤ 4.0
Wear group	EN 649	group	P
Type Binder content	EN ISO 10582	type	I
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.25
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Shore Hardness	EN ISO 868	H _D	≥ 90
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Evercare™
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg/m ³	<10
Certification	-	-	Floorscore®
CE MARKING			
CE	EN 14041		

(1) Measured before installation

(2) Measured with ESD shoes (type ABEBA and Uvex)

FAST TRACK LOOSELAY TILE

GTI EL5

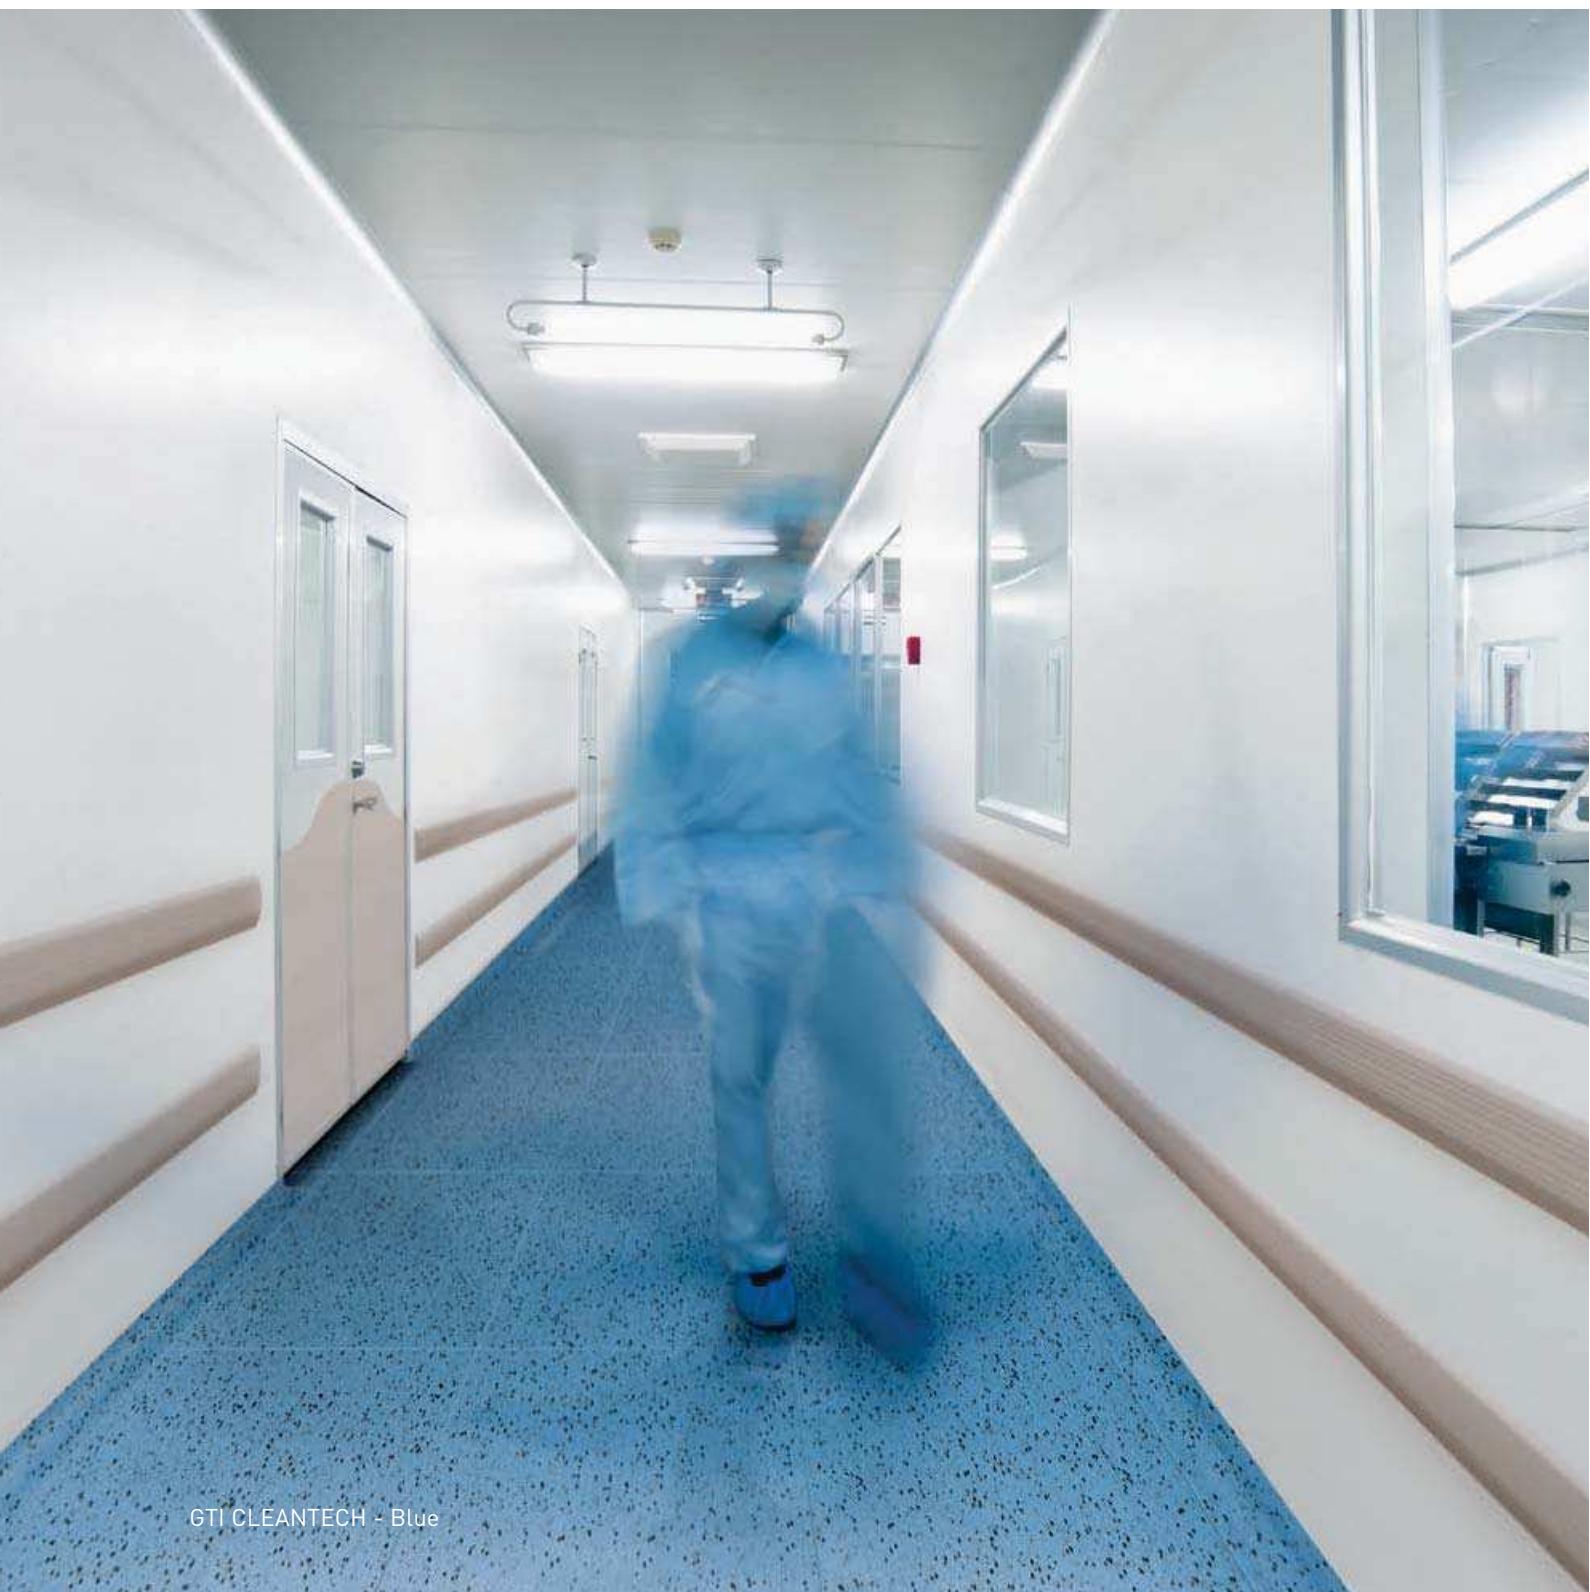

GTI CLEANTECH - Blue

GTI EL5


GTI EL5 CONNECT




R9

Evercare™


Removable




0350 Light Grey




0354 Blue



0353 Beige



0352 Grey



0351 Black

Fast Track
Loose Lay Tile



GTI EL5 CLEANTECH




R9

Evercare™


Removable




0350 Light Grey




0354 Blue



0353 Beige



0352 Grey




0351 Black


FAST TRACK LOOSELAY TILE

Attraction® NEW

► ATTRACTION® CONNECT & CLEANTECH



Attraction® Connect

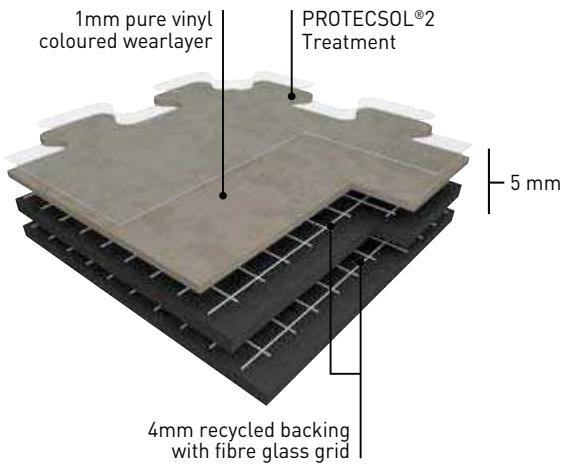

Attraction® is a semi-flexible tile constructed by compacting, at high temperature and over 3000 T, a 4mm recycled backing and a 1mm **pure vinyl wear layer**. This **wear layer** is incorporating very densely pressed coloured chips, with a **mat finishing** and **without a transparent wear layer**. The product comprises a compact backing which is pressed and reinforced with two glass fibre grids.

Attraction® has a unique dovetail joint which allows fast loose lay installation and replacement.

Attraction® is treated with **Protecsol®2**, a surface treatment obtained by UV laser crosslinking.

This Protecsol®2 ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.


It has a Bfl-s1 fire classification in accordance with standard EN 13501-1. The products emission rate of volatile organic compounds is **<10µg/m³ (TVOC after 28 days - ISO 16000-6)**.

It is made of 100% controlled recycled materials.

It does not contain any heavy metals or CMR 1&2 and they are 100% compliant with REACH.

It is 100% recyclable and made with up to 80% recycled content.

Attraction® CleanTech

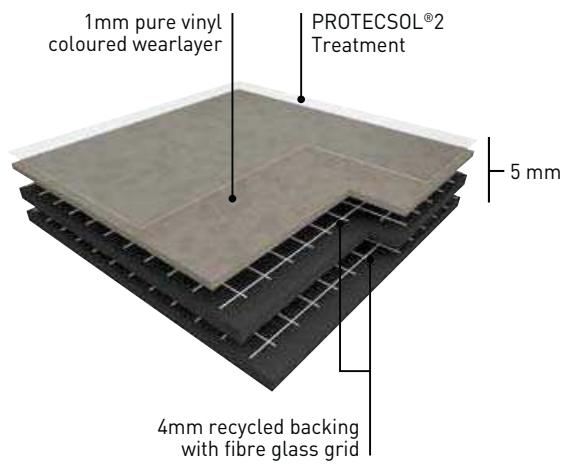

ATTRACTION® NEW



Removable

R10

Protecsol®2



The Taralay Premium range in the looselay Attraction® format for an easy and longlasting renovation!

- Fast track and easy installation
- No immobilisation of the premises and no loss of turnover
- Little or no subfloor preparation
- Low maintenance cost: UV cured polyurethane PUR+ treatment.

ATTRACTION®

DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	5.00
Wearlayer thickness	EN ISO 24340 (EN 429)	mm	1.00
Weight	EN ISO 23997 (EN 430)	g/m²	7460
Size	EN ISO 24342 (EN 427)	mm	635 x 635 CONNECT 600 x 600 CLEANTECH (without dovetail) ⁽¹⁾
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815 IEC 61340-4-5	kV V	<2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R10
PERFORMANCES			
Wear resistance	EN 660.2	mm³	< 2.0
Wear group	EN 649	group	T
Type Binder content	EN ISO 10582	type	I
Dimensional stability	EN ISO 23999 (EN 434)	%	< 0.25
Residual indentation	EN ISO 24343-1 (EN 433)	mm	< 0.10
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Protecsol®2
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg/m³	<10
Certification	-	-	Floorscore®
CE MARKING			
	EN 14041	 	

(1) Available upon request

FAST TRACK LOOSELAY TILE

ATTRACTION® NEW




Removable

R10


Protecsol®2



100% recyclable




8386 Boa Vista (Brazilia)



4342 Juara (Brazilia)




4343 Tokelau (Indiana)




4351 Greige (Osmoz)



8736 Recife (Brazilia)




4003 Tao (Indiana)



3709 Ceara (Brazilia)



8053 Anambas (Indiana)

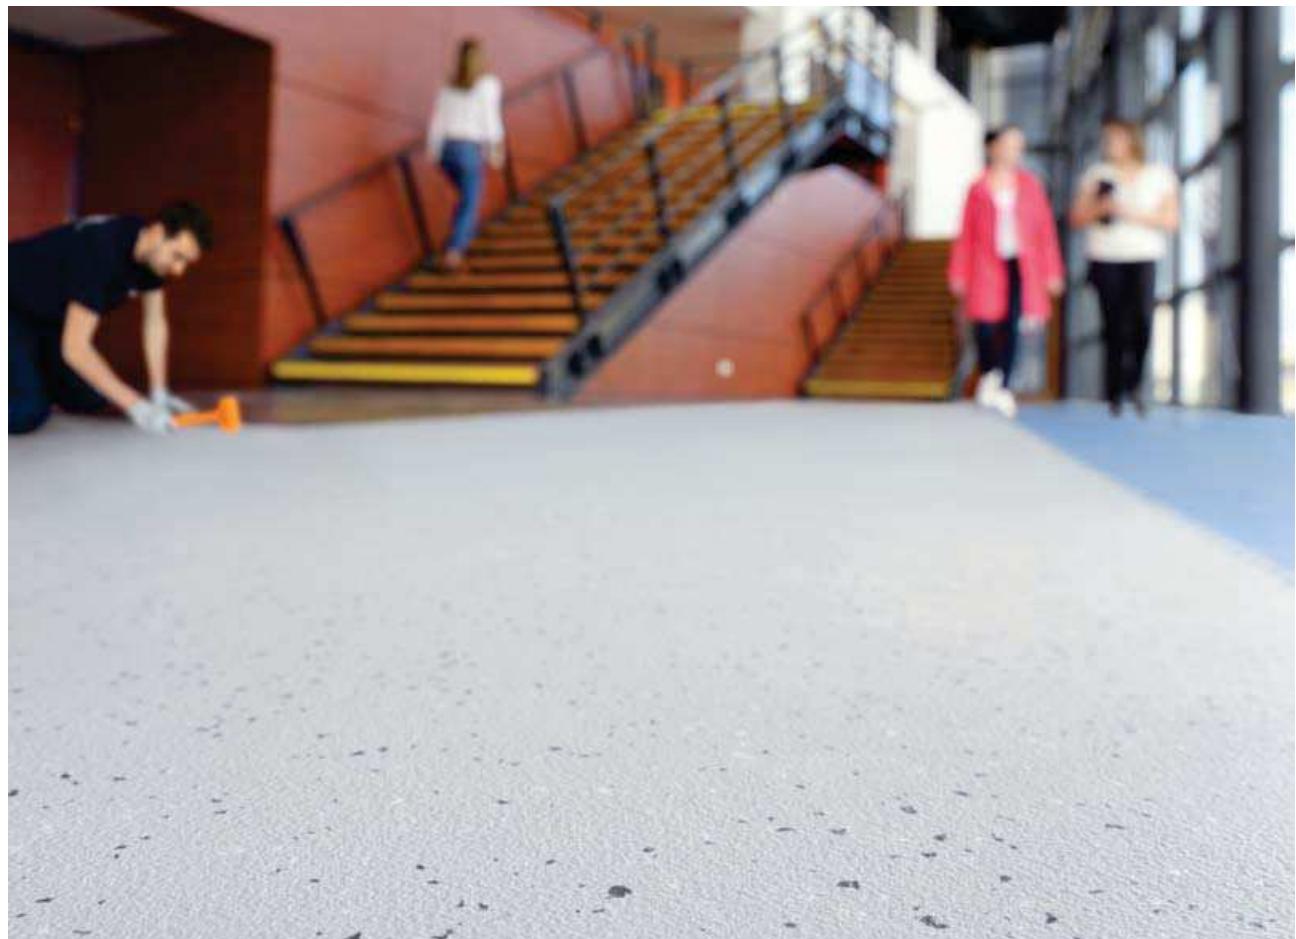

Attraction® NEW




Removable

R10


Protecsol®2




100% recyclable




4004 Pago (Indiana)




3707 Paraiba (Brazilia)




8837 Songo (Indiana)




4476 Wattaru (Indiana)



4146 Moheli (Indiana)



8157 Goias (Brazilia)

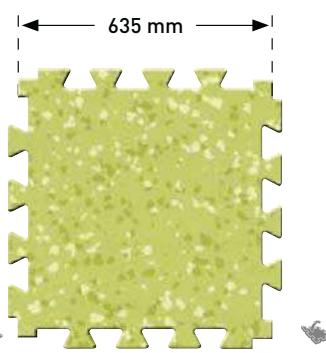

8577 Amazonas (Brazilia)


Fast Track
Looselay Tile

15 interlocking edges per side

All these colours are available in Attraktion® CLEANTECH.

ACCESSORIES ATTRACTION®

LOOSELAY RAMP 5-6 MM



Aluminium Ramp 5-6 mm /
Ref. 0609
+ ALUMINIUM CORNER 5-6 mm /
Ref. 0629
See page 288

KIT ROMAT GT FOR ATTRACTION®




Ref. 1719
See page 287

CORNER & ACCESS

Attraktion® CORNER CONNECT
320 x 320 mm




Attraktion® ACCESS CONNECT
635 x 320 mm

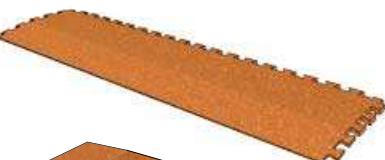

Attraktion® CORNER CLEANTECH
300 x 300 mm



Attraktion® ACCESS CLEANTECH
600 x 300 mm

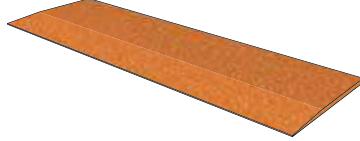

For more information, please refer to our Attraktion® brochure.
Solutions for asbestos support, see page 306 "Safecape".



SPECIALITY
FLOORING
AND
WALLCOVERING

.....PAGES.....

208 / 235

.....



ESD solution

(Static control flooring) **212-217**

- Mipolam Accord EL7 **NEW** 214
- Mipolam Robust EL7 214
- Mipolam Elegance EL5 **NEW** 215
- Mipolam Technic EL5 215
- GTI EL5 216

Safety flooring **218-225**

- Tarasafe Geo SparClean® 221
- Tarasafe Ultra & Ultra Comfort SparClean® 223
- Tarasafe Ultra H2O 224
- Tarasafe Standard/ Plus/Super 225

Taradouche

Shower System **226-231**

- Elegance SD 228
- Tarasafe Ultra H2O 228
- Mural Calypso 229

Wallcovering

..... **232-235**


- Mural Ultra 234
- Mural Club 234
- Mural Calypso 235

SPECIALITY FLOORING

ESD SOLUTIONS

Dissipative Flooring

EN 1081 (Ω): $10^6 \leq R_t \leq 10^8$



New


Mipolam Accord EL7




Mipolam Robust EL7

SLIP RESISTANT
FLOORING

SparClean® Treatment



Tarasafe Geo /
Tarasafe Ultra




Tarasafe Ultra Comfort

SHOWER
SYSTEM

Floorcovering




Elegance SD



Tarasafe Ultra H₂O

WALL COVERING



Mural Ultra

Conductive Flooring

EN 1081 (Ω): $10^4 \leq R_t \leq 10^6$



Mipolam Elegance EL5


New

EN 1081 (Ω): $10^4 \leq R_t \leq 10^6$




Mipolam Technic EL5


EN 1081 (Ω): $5 \times 10^4 \leq R_t \leq 10^6$



GTI EL5



Tarasafe Ultra H₂O



Tarasafe Standard
Tarasafe Super & Plus

Wall Covering



Mural Calypso



Mural Club

SPECIALITY FLOORING

ESD SOLUTIONS - MIPOLAM EL

Dissipative flooring



MIPOLOM ACCORD EL7 - MIPOLOM ROBUST EL7

MIPOLOM ACCORD EL7

NEW




P

$10^6 \leq R_t \leq 10^8 \Omega$

Evercare™



100% recyclable

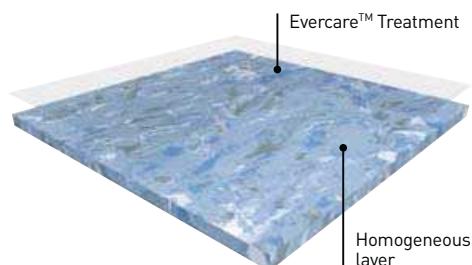

MIPOLOM ACCORD EL7 is a dissipative flexible homogeneous vinyl floorcovering available in both sheet and tile. Calendered and compacted.

This floorcovering is treated with **Evercare™**: the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. Evercare™ avoids stain of chemical products used in healthcare like betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring. This treatment has excellent maintenance characteristics; it requires no wax for life!

MIPOLOM ACCORD EL7 acts as a continuous dissipater $10^6 \leq R_t \leq 10^8$.

The product is non-reactive to residual indentation with a value $\leq 0,02$ mm.

The flooring is a group P wear rating suitable for heavy duty traffic areas and Bfl-s1 fire resistance. The product is non-emissive of volatile organic compounds with $<10 \mu\text{g}/\text{m}^3$ (TVOC after 28 days ISO 16000-6).

MIPOLOM ROBUST EL7



M

$10^6 \leq R_t \leq 10^8 \Omega$



100% recyclable

MIPOLOM ROBUST EL7 is a dissipative flexible homogeneous vinyl floorcovering available in both sheet and tile. Calendered and compacted. It acts as a continuous dissipater $10^6 \leq R_t \leq 10^8$ (EN 1081).

Conductive flooring



MIPOLOM ELEGANCE EL5 - MIPOLOM TECHNIC EL5



MIPOLOM ELEGANCE EL5

NEW




P

$10^4 \leq R_t \leq 10^6 \Omega$

Evercare™




100% recyclable

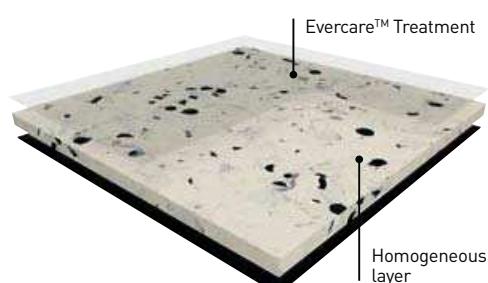

MIPOLOM ELEGANCE EL5 is a conductive flexible homogeneous vinyl floorcovering available in sheet. The 2 mm homogeneous material incorporates carbon encapsulated granules throughout its full thickness. It has a **conductive backing** to ensure optimal and consistent conductive properties throughout its full life expectancy. This floorcovering is treated with **Evercare™**: the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. Evercare™ avoids stain of chemical products used in healthcare like betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring. This treatment has excellent maintenance characteristics; it requires no wax for life!

MIPOLOM ELEGANCE EL5 acts as a continuous conductive $10^4 \leq R_t \leq 10^6$. It has permanent antistatic properties (< 100 V). The product has to be grounded with an ESD copper strip (cf. finishes) to meet its full performance. The product is non-reactive to residual indentation with a value $\leq 0,02$ mm. The flooring is a group P wear rating suitable for heavy duty traffic areas and Bfl-s1 fire resistance. The product is non-emissive of volatile organic compounds with $<10 \mu\text{g}/\text{m}^3$ (TVOC after 28 days ISO 16000-6).

MIPOLOM TECHNIC EL5

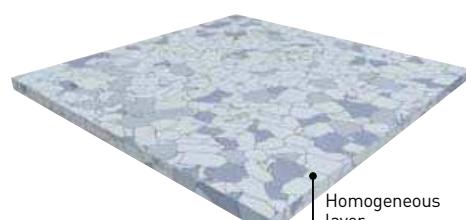

P

$10^4 \leq R_t \leq 10^6 \Omega$



100% recyclable

MIPOLOM TECHNIC EL5 is a conductive flexible homogeneous compacted vinyl floorcovering available in tiles.

The conductive carbon coated PVC pellets create a perfect conductive network for permanent conductive properties and antistatic properties (< 100 V) throughout its full life expectancy.

It acts as a continuous conductive $10^4 \leq R_t \leq 10^6$ (EN 1081).

ESD SOLUTIONS - MIPOLAM EL



100% recyclable

A complete range for Hi-tech applications: electronics and telecommunication areas, computer rooms, operating theatres, radiology...

- **Compacted floorcovering for better hygiene, maintenance, and traffic resistance.**
- **Available in tiles and sheets with specific formats especially adapted to raised floors (608 x 608 mm).**

		MIPOLAM ELEGANCE EL5	MIPOLAM TECHNIC EL5	MIPOLAM ACCORD EL7	MIPOLAM ROBUST EL7	
DESCRIPTION						
Total thickness	EN ISO 24346 (EN 428)	mm	2	2	2	
Weight	EN ISO 23997 (EN 430)	g/sq.m	3060	3800	3100	
Width of sheet	EN ISO 24341 (EN 426)	cm	200	-	200	
Length of sheet	EN ISO 24341 (EN 426)	lm	20	-	20	
Tile size	EN ISO 24342 (EN 427)	mm	-	608 x 608	608 x 608	
Number of tiles per package	-	-	-	20	20	
CLASSIFICATION						
Norm / Product specification	-	-	EN ISO 10581 (EN 649)	EN ISO 10581 (EN 649)	EN ISO 10581 (EN 649)	
European classification	EN ISO 10874 (EN 685)	class	34-43	34-43	34-43	
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	
Electrical resistance ^[1]	EN 1081 IEC 61340-4-1 IEC 61340-4-5 ANSI / ESD-STM 7.1	Ohm	$10^4 \leq Rt \leq 10^6$ $\leq 10^9$ $\leq 10^9$ $\leq 10^9$	$10^4 \leq Rt \leq 10^6$ $\leq 10^9$ - $\leq 10^9$	$10^6 \leq Rt \leq 10^8$ - - -	$10^6 \leq Rt \leq 10^8$ - - -
Static electrical propensity	EN 1815 IEC 61340-4-5	kV V	< 2 $\leq 100^{[2]}$	< 2 $\leq 100^{[2]}$	< 2 -	< 2 -
Protection against electrostatic discharges	ESD 20.20 IEC 61340-5-1	-	OK	OK	-	-
Slip resistance wet ^[3]	DIN 51 130	class	R9	-	R9	-
PERFORMANCES						
Wear resistance	EN 660.2	mm ³	≤ 4.0	≤ 4.0	≤ 4.0	≤ 7.5
Wear group	NF 189	-	P	P	P	M
Type Binder content	EN ISO 10581	type	I	II	II	II
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40	$\simeq 0.25$	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25
Residual indentation	EN ISO 24343-1 (EN 433)	mm	$\simeq 0.02$	$\simeq 0.03$	$\simeq 0.02$	$\simeq 0.03$
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	OK	OK	OK
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.k)	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Evercare™	-	Evercare™	-
Chemical products resistance ^[4]	EN ISO 26987 (EN 423)	-	OK	OK	OK	OK
ENVIRONMENT / INDOOR AIR QUALITY						
TVOC after 28 days	ISO 16000-6	$\mu\text{g} / \text{m}^3$	<10	<10	<10	<10
Certification	-	-	Floorscore®	-	Floorscore®	-
CE MARKING						
	EN 14041					

(1) Measured before installation.

(2) Measured with ESD shoes (ABEBA and Uvex).

(3) For lifetime sustainable wet resistance, please refer to Tarasafe ranges.

(4) Staining table available upon request.

Important: please refer to Gerflor installation guidelines - www.gerflor.com

SPECIALITY FLOORING

MIPOLAM EL ACCORD EL7 - ROBUST EL7

MIPOLAM ACCORD EL7

NEW



P

$10^6 \leq R_t \leq 10^8 \Omega$

Evercare™



100% recyclable



3113 Manitoba




3111 Huron




3147 Grunsee



3150 Thames



3116 Mälaren



3160 Balaton

MIPOLAM ROBUST EL7



M

$10^6 \leq R_t \leq 10^8 \Omega$



100% recyclable



0003 Ivory



0002 Platinum



0112 Storm



0306 Green



0005 Steel



0013 Pewter

MIPOLAM EL ELEGANCE EL5 - TECHNIC EL5

MIPOLAM ELEGANCE EL5

NEW



P

$10^4 \leq R_t \leq 10^6 \Omega$


Evercare™



100% recyclable




0350 Light Grey




0352 Grey



0353 Beige



0355 Green



0354 Blue



0351 Black

MIPOLAM TECHNIC EL5




P


$10^4 \leq R_t \leq 10^6 \Omega$




100% recyclable



0635 White



0636 Grey




0640 Beige



0638 Blue



0637 Light Blue




0639 Green

SPECIALITY FLOORING


ESD SOLUTIONS - GTI EL5



GTI EL5 CONNECT & CLEANTECH



GTI EL5 CONNECT

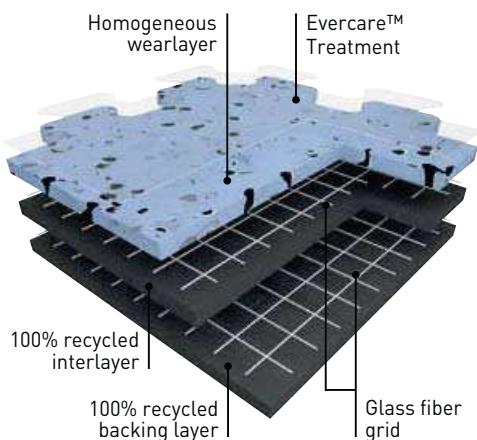

GTI EL5 is a multi-layered looselay vinyl tile, 6 mm thick, reinforced with 2 glass fibre grids.

GTI EL5 CONNECT tiles can be installed using interlocking system with dove tails.

GTI EL5 CLEANTECH is available in square format with welded joints for clean environments and watertight systems requirements.

GTI EL5 wearlayer is 2 mm vinyl homogeneous manufactured with continuous high pressure process, abrasion group P.

It offers an outstanding resistance to traffic.

This floorcovering is treated with **Evercare™** technology: the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. Evercare™ offers **easy maintenance and resistance against staining** of chemical products used in healthcare like betadine, eosin or anti-bacterial hand gel ; **and decontamination protocols**.

This treatment has excellent maintenance characteristics; it requires no wax for life!

The carbon encapsulated granules throughout its full thickness and the **conductive backing** and **conductive surface treatment** ensure optimal and consistent conductive properties throughout its full life expectancy:


- $5 \times 10^4 \leq Rt \leq 10^6$ according to **EN 1081**
- $Rt \leq 10^3$ according to **IEC 61.340-4-1**

It has permanent antistatic properties:

- $< 2000V$ according to EN 1815
- $< 100V$ according to IEC 61.340-4-5

The product is non-emissive of volatile organic compounds with $< 10 \mu\text{g}/\text{m}^3$ (TVOC after 28 days ISO 16000-6).

GTI EL5 CLEANTECH

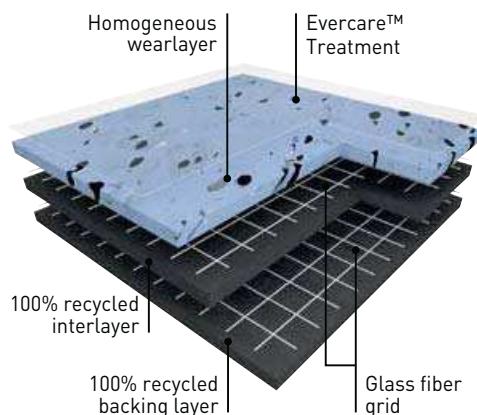

COMPLEMENTARY FINISHES:


GTI EL5 CLEANTECH ACCESS (access ramp), GTI EL5 CLEANTECH CORNER (corner finishes), GTI EL5 CLEANTECH covings [COVING / COVING CORNER IN and COVING CORNER OUT] and conductive welding rods [GTI EL5 CLEANTECH WELDING RODS].

GTI EL5 CONNECT ACCESS (access ramp), GTI EL5 CONNECT CORNER (corner finishes).


CONNECT




635 x 635 mm



0350 Light Grey




0354 Blue



0353 Beige



0352 Grey



0351 Black


CLEANTECH




650 x 650 mm



0350 Light Grey



0354 Blue



0353 Beige



0352 Grey



0351 Black

ESD SOLUTIONS - GTI EL5



Removable

R9

Evercare™



CONNECT

- Fast Installation
- Resistance to heavy traffic

CLEANTECH

- Watertight System (hot welding)
- Resistance to heavy traffic

GTI EL5

DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	6
Wearlayer thickness	EN ISO 24340 (EN 429)	mm	2
Weight	EN ISO 23997 (EN 430)	g/m²	9240
Size	EN ISO 24342 (EN 427)	mm	635 x 635 (GTI EL5 CONNECT) 650 x 650 (GTI EL5 CLEANTECH)
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Electrical resistance ⁽¹⁾	EN 1081 IEC 61340-4-1 IEC 61340-4-5 ANSI/ESD STM 7.1	W	5 x 10 ⁴ ≤ Rt ≤ 10 ⁶ ≤ 10 ⁹ ≤ 10 ⁹ ≤ 10 ⁹
Static electrical propensity	EN 1815 IEC 61340-4-5	kV V	< 2 ≤ 100 ⁽²⁾
Protection against electrostatic discharges	ESD S20.20 IEC 61340-5-1	-	OK OK
Slip resistance wet: ramp test with oil	DIN 51 130	class	R9
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	≤ 4.0
Wear group	EN 649	group	P
Type Binder content	EN ISO 10582	type	I
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.25
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Shore Hardness	EN ISO 868	H _D	≥ 90
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Evercare™
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg/m³	<10
Certification	-	-	Floorscore®
CE MARKING			
CE	EN 14041		


(1) Measured before installation

(2) Measured with ESD shoes (type ABEBA and Uvex)

SPECIALITY FLOORING

SAFETY FLOORING - TARASAFE

► TARASAFE GEO: SPARCLEAN® TREATED

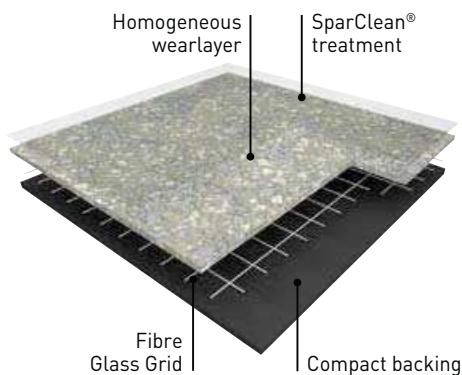


TARASAFE GEO is a slip resistant vinyl floorcovering, with a PVC wear layer and deeply inlaid mineral crystal particles and coloured chips for a decorative design. It is an ideal solution for traffic applications where enhanced slip resistance and durability are required. **TARASAFE GEO** is suitable for most contract & commercial areas. It is eco-friendly, 100% recyclable, Floorscore® certified and does not contain any heavy metals or CMR 1&2, it is also 100% compliant with REACH.

The product emission rate of volatile organic compounds is < 100 µg/m³ (TVOC after 28 days – ISO 16000 -6).

The **SparClean®** surface treatment improves the product performance in terms of stain and dirt resistance and designs last longer for extended durability.


► TARASAFE ULTRA / ULTRA COMFORT: SPARCLEAN® TREATED

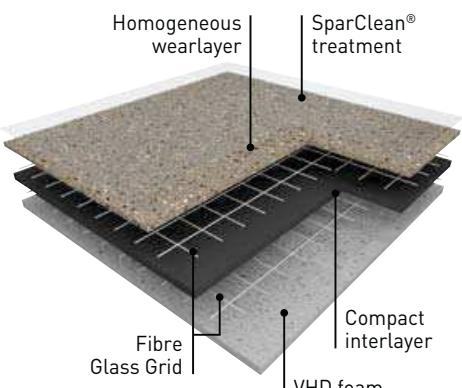

TARASAFE ULTRA & ULTRA COMFORT are slip resistant safety vinyl floorcoverings, with a PVC wear layer and deeply inlaid mineral crystal particles (patent pending) and coloured chips for a decorative design. They are reinforced with a glass fibre grid and are available in a sheet format. The ranges are ideal for heavy traffic applications where slip resistance, durability, hygiene and easy maintenance are required. Suitable for most contract & commercial areas, they are a popular choice in the education and healthcare environments, the matt finish surface is also perfectly suitable for dementia care units. They are eco-friendly, 100% recyclable, Floorscore® certified and do not contain any heavy metals or CMR 1&2. They are also 100% compliant with REACH. The product emission rate of volatile organic compounds is < 100 µg/m³ (TVOC after 28 days – ISO 16000 -6). The **SparClean®** surface treatment improves the product performance in terms of stain and dirt resistance and designs last longer for extended durability.

TARASAFE ULTRA COMFORT has a VHD closed cell foam backing yielding a 16dB sound insulation.

► TARASAFE ULTRA H2O

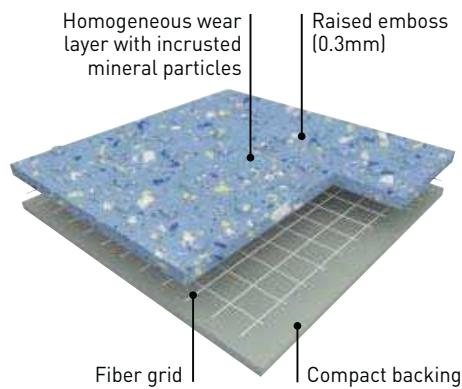


TARASAFE ULTRA H2O is a slip resistant vinyl floorcovering, with a PVC wear layer and deeply inlaid mineral particles and coloured chips for a decorative design together with a raised emboss for better slip resistance.

TARASAFE ULTRA H2O is an ideal solution for traffic applications where enhanced slip resistance with barefoot and durability are required such as wet areas. The specific embossing together with the mineral particles gives a Class C barefoot slip resistance (DIN 51 097) and R11 slip resistance (DIN 51 130) which makes **TARASAFE ULTRA H2O** ideal for barefoot or shod applications. It is reinforced with a glass fibre grid in sheet form. Its homogeneous wear layer provides a group P of abrasion. It does not contain any heavy metals or CMR 1&2 and it is 100% compliant with REACH. The product emission rate of volatile organic compounds is < 100 µg/m³ (TVOC after 28 days – ISO 16000 -6). This product is 100% recyclable and contents 13% of recycled products.

TARASAFE

► TARASAFE STANDARD: PUR® TREATED

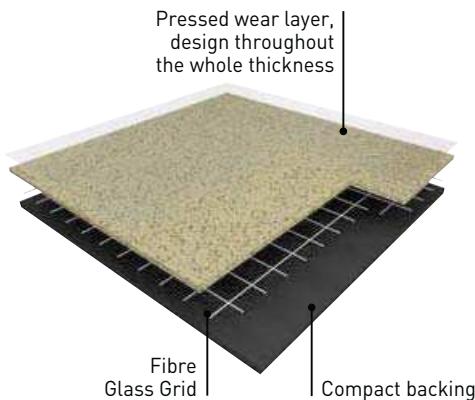

TARASAFE STANDARD with **PUR** surface treatment is a slip resistant safety vinyl floorcovering, with a PVC wear layer and deeply inlaid mineral crystal particles (patent pending). It is reinforced by a glass fibre grid and available in a sheet format. It is an ideal solution for heavy traffic applications where slip resistance, durability, hygiene and easy maintenance are required.


TARASAFE STANDARD is suitable for most contract & commercial areas. It is eco-friendly, 100% recyclable, Floorscore® certified and does not contain any heavy metals or CMR 1&2, it is also 100% compliant with REACH.

The product emission rate of volatile organic compounds is < 100 µg/m³ (TVOC after 28 days – ISO 16000 -6).

The **PUR** surface treatment improves the product performance in term of stain resistance and durability.

► TARASAFE PLUS / TARASAFE SUPER: NON-TREATED

TARASAFE SUPER

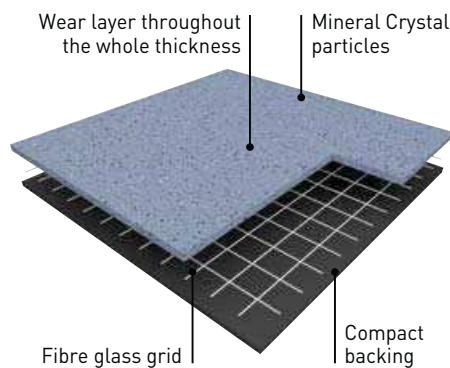


TARASAFE PLUS and **TARASAFE SUPER** are slip resistant safety vinyl floorcoverings, with a PVC wear layer and deeply inlaid mineral crystal particles (patent pending). They are reinforced with a glass fibre grid and available in a sheet format. They are an ideal solution for heavy traffic applications where slip resistance, durability, hygiene and easy maintenance are required.

TARASAFE PLUS comprises a textile backing for better adherence in wet areas. It helps reducing telegraphing.

TARASAFE SUPER and **PLUS** are suitable for most contract & commercial areas. They are eco-friendly, 100% recyclable, Floorscore® certified and do not contain any heavy metals or CMR 1&2, they are also 100% compliant with REACH.

The product emission rate of volatile organic compounds is < 100 µg/m³ (TVOC after 28 days – ISO 16000 -6).

TARASAFE PLUS

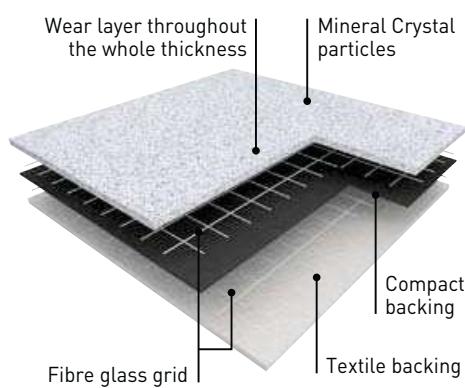

SPECIALITY FLOORING

TARASAFE



- **Easy to clean and maintain:** due to a compacted non porous surface made of vinyl content
- **Permanent slip resistance:** dense concentration of deep inlaid mineral crystal particles throughout the wear layer
- **Enhanced colour, design and brightness:** due to the mineral crystal particles
- **Highest abrasion rating**
- **Indoor Air Quality:** low VOC emission

TARASAFE ULTRA H₂O

- Complements the Tarasafe Ultra range
- Ideal solution for showers and changing rooms and high level risk wet areas.

		TARASAFE							
		GEO	ULTRA	STANDARD	ULTRA COMFORT	ULTRA H ₂ O	SUPER	PLUS	
DESCRIPTION									
Total thickness	EN ISO 24346 (EN 428)	mm	2.0	2.0	3.2	2.0	2.2	2.5	
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	1.00	0.85	0.85	0.85	1.00	1.12	1.14
Weight	EN ISO 23997 (EN 430)	g/sq.m	2370	2460	2460	2960	2400	2880	3090
Width/Length of sheet	EN ISO 24341 (EN 426)	cm/ml	200/20	200/20	200/20	200/20	200/20	200/20	200/20
CLASSIFICATION									
Norm/Product specification	-	-	EN ISO 10582 (EN 649)	EN 651	EN ISO 10582 (EN 649)				
European classification	EN ISO 10874 (EN 685)	class	34-43	34-43	34-42	34-43	34-43	34-43	
Fire rating	EN 13501-1	class	B _{f1} -s1	B _{f1} -s1	B _{f1} -s1	C _{f1} -s1	B _{f1} -s1	B _{f1} -s1	
Static electrical propensity	EN 1815	kV	<2	<2	<2	<2	<2	<2	
SLIP RESISTANCE									
Pendulum Test (dry & wet)	BS 7976-2	PTV (degree)	> 36	> 36	-	≥ 36	-	-	
Surface roughness	-	µm	Rz ≥ 20	Rz ≥ 20	-	Rz > 20	-	-	
Ramp test with oil	DIN 51 130	class	R10	R10	R10	R11	R12	R10	
Ramp test with water	DIN 51 097	class	B	B	-	C	-	-	
Ramp test	EN 13845 (annex C)	class	ESf / ESb	ESf / ESb	-	ESb	-	-	
Slip resistance wet areas	CTE	class	-	-	-	3	-	-	
PERFORMANCES									
Wear resistance	EN 660.2	mm ³	≤2	≤2	≤2	≤4	≤2	≤2	
Wear group	NF 189	-	T	T	T	P	T	T	
Type Binder content	EN ISO 10582	type	I	I	-	I	I	I	
Dimensional stability	EN ISO 23999 (EN 434)	%	≤0.40	≤0.40	≤0.40	≤0.40	≤0.40	≤0.40	
Residual indentation: exigency	EN ISO 24343-1 (EN 433)	mm	≤0.10	≤0.10	≤0.20	≤0.10	≤0.10	≤0.10	
Residual indentation (average measure)	-	mm	≈ 0.03	≈ 0.05	≈ 0.03	≈ 0.03	≈ 0.03	≈ 0.03	
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	OK	OK	OK	OK	OK	
Impact sound Insulation	EN ISO 717-2	dB	-	-	16	-	-	-	
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.K)	0.25	0.25	0.25	0.25	0.25	0.25	
Colour fastness	EN 20 105-B02	degree	≥6	≥6	≥6	≥6	≥6	≥6	
Surface treatment	-	-	SparClean®	PUR	SparClean®	-	-	-	
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK	OK	OK	OK	OK	OK	
Anti-bacterial activity (MRSA) (1)	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth				
ENVIRONMENT / INDOOR AIR QUALITY									
TVOC after 28 days	ISO 16000-6	µg / m ³	<100	<100	<100	<100	<100	<100	
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®	Floorscore®	Floorscore®	
CE MARKING									
CE	EN 14041								

(1) The implementation of an effective cleaning regime is the most important defence against infection.

TARASAFE GEO

Compact 2m

R 10

SparClean®



3775 Crystalline




3772 Cliff



3771 Rock




8081 Trail



3409 Ocean Wave



3303 Desert



3405 Turquoise




3105 Sunspot



SPECIALITY FLOORING


TARASAFE ULTRA, TARASAFE ULTRA COMFORT

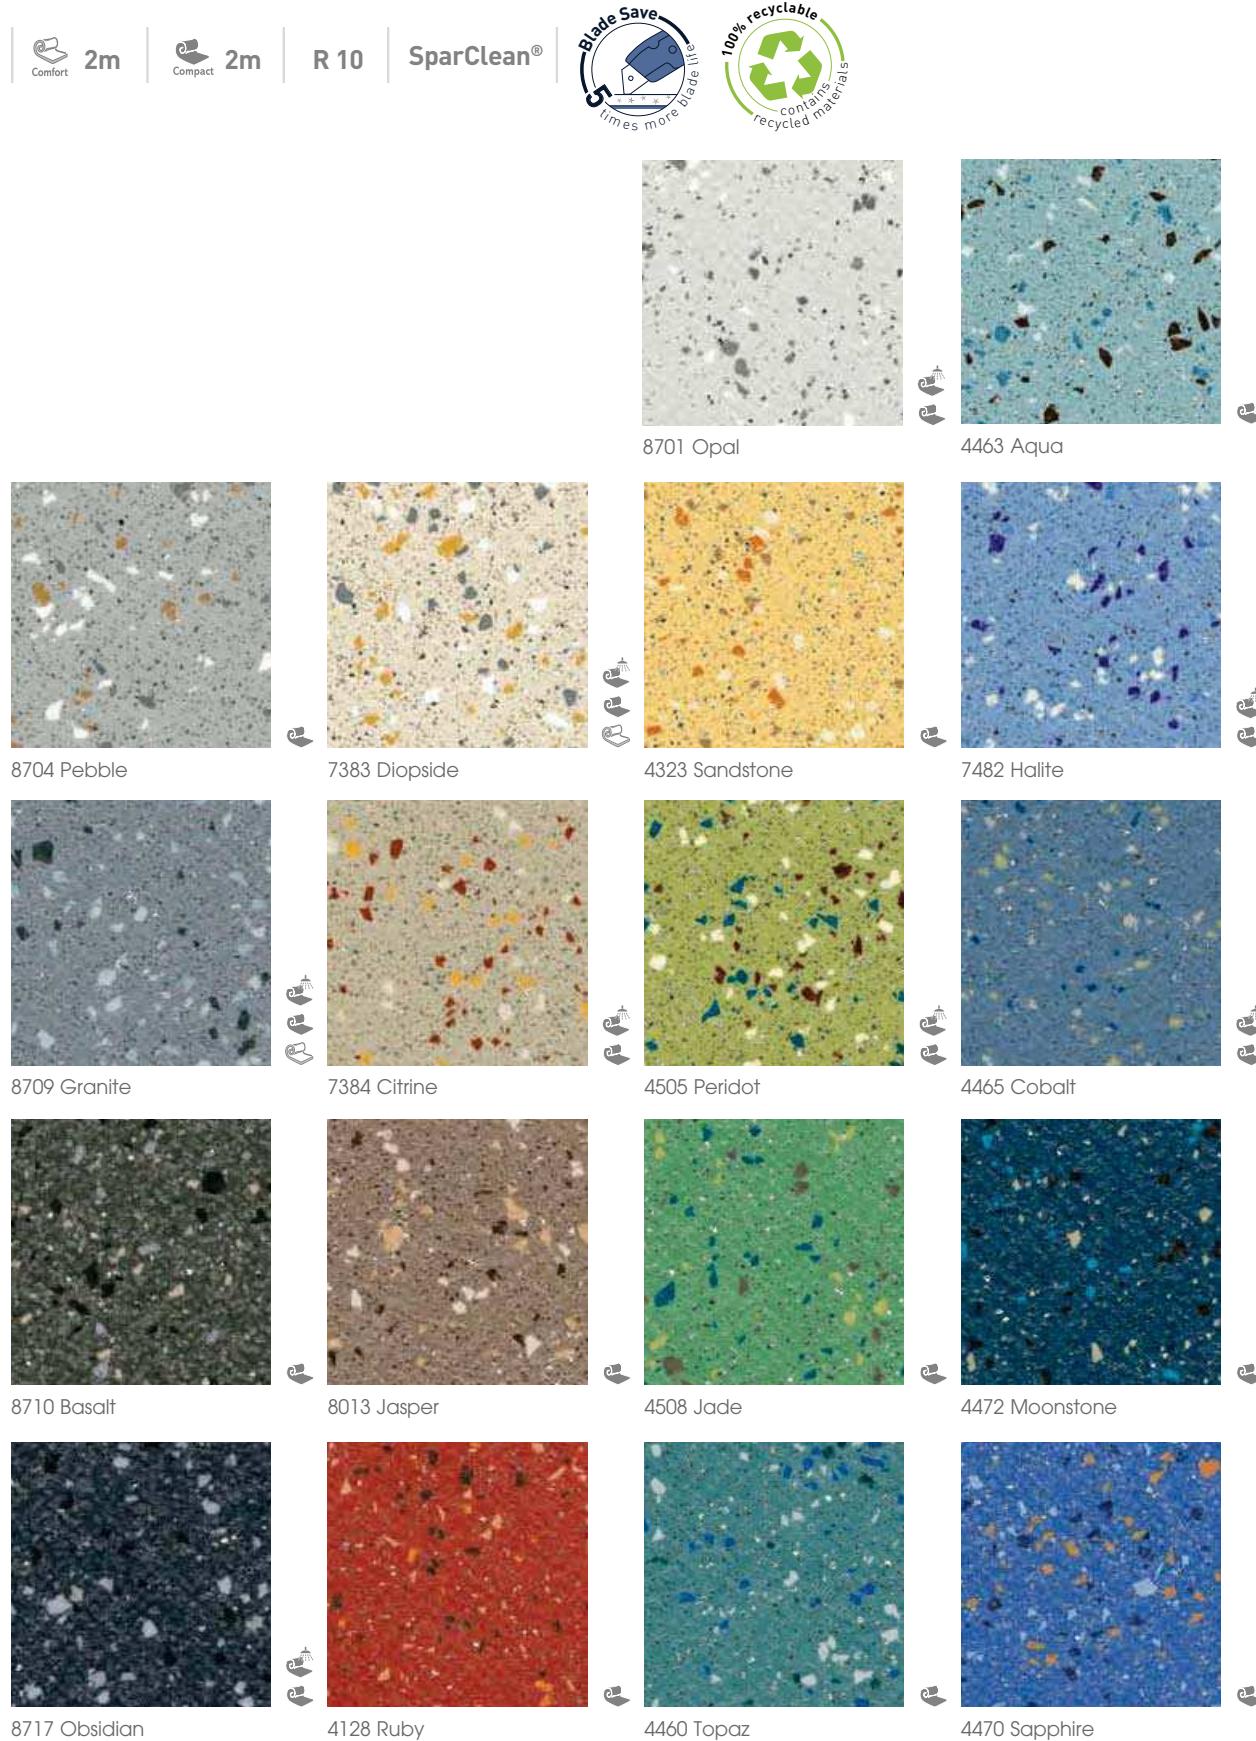


SPECIALITY FLOORING

TARASAFE ULTRA H₂O


Compact | 2m | R 11




7325 Seashore




7720 Iceberg




7314 Sand




7416 Stone




7513 Seagrass



7418 Marine



7732 Gravel



7413 Ocean Blue



Suitable for both
barefoot and shod use

TARASAFE STANDARD - PLUS - SUPER

TARASAFE
STANDARD |  2m | R 10 | PUR

TARASAFE PLUS |  2m | R 10


TARASAFE SUPER |  2m | R 12




7731 Marbre⁽¹⁾



7618 Edelweiss



7767 Dove Grey^{(1) (2)}



7386 Savana^{(1) (2)}



7312 Dune



7704 Sky Blue



7773 Storm



7302 Sahara⁽¹⁾



7115 Flame



7438 Baleine^{(1) (2)}



7801 Noir



7508 Avocado



7107 Poppy



7709 Royal Blue

[1] Tarasafe Plus - [2] Tarasafe Super


Specialty
Flooring

SPECIALITY FLOORING

TARADOUCHE SHOWER SYSTEM



ELEGANCE SD

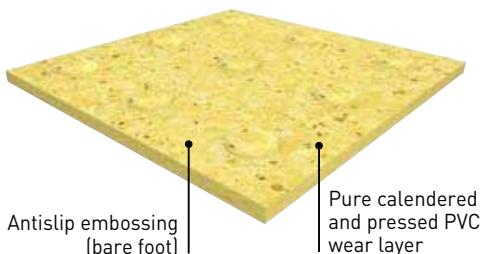

SHOWER SYSTEM ELEGANCE SD is a flexible homogeneous calendered compacted floorcovering available in 2 m sheet, with a non directional polychrome design, to offer an even colour throughout the thickness. It should be hot welded with a CR 40 welding rod.


SHOWER SYSTEM ELEGANCE SD is specifically embossed for wet barefoot traffic and has a group P wear rating.

ELEGANCE SD is compliant with antislip resistance norms (R9 according to DIN 51130 and A classification according to DIN 51097) for a **safe usage** in barefoot or shod applications such as showers. The Taradouche System enables access for all in showers especially for disabled people.

It is made of 32% mineral material and 34% renewable material. It uses 100% controlled recycled material. The TVOC emissions in the air at 28 days (EN 16000) are < 10 µg / m³. It is 100% recyclable.



TARASAFE ULTRA H2O

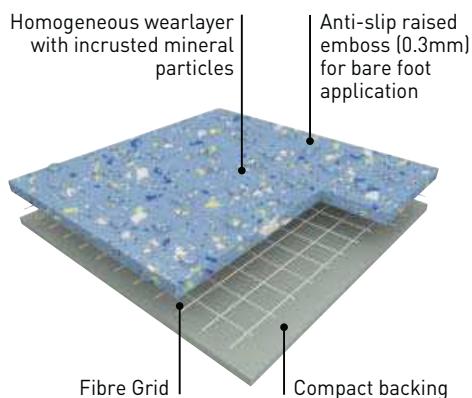

TARASAFE ULTRA H2O is a slip resistant vinyl floorcovering, with a PVC wear layer and deeply inlaid mineral particles and coloured chips for a decorative design together with a raised emboss for better slip resistance.


TARASAFE ULTRA H2O is an ideal solution for traffic applications where enhanced slip resistance with barefoot and durability are required such as wet areas. The specific embossing together with the mineral particles gives a Class C barefoot slip resistance (DIN 51 097) and R11 slip resistance (DIN 51 130) which makes **TARASAFE ULTRA H2O** ideal for barefoot or shod applications.

It is reinforced with a glass fibre grid in sheet form. Its homogeneous wear layer provides a group P of abrasion.

It does not contain any heavy metals or CMR 1&2 and it is 100% compliant with REACH. The product emission rate of volatile organic compounds is < 100 µg/m³ (TVOC after 28 days – ISO 16000 -6). This product is 100% recyclable and contains 18% of mineral material and 22% of inexhaustible material.



MURAL CALYPSO

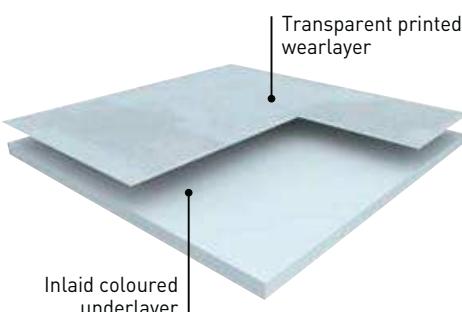

MURAL CALYPSO is a multilayered wall covering in 2m width roll and with a **B-s2,d0 fire classification** according to EN 13501.

It is hot welded with CR41 welding rods for a perfect water tightness.

It is made of a printed transparent wear layer and a coloured under layer for a better aspect of the welding. This layer comprises 20% of recycled products. It does not contain any CMR 1 & 2 component and is 100% compliant with REACH.

It is 100% recyclable.

This wall covering is specially recommended for wet room areas and makes the installation in angles easier thanks to its flexibility.

The Shower System is compliant with most laws on "access for all" thanks to the installation in shower without tray.

Gerflor also recommends the Tarasafe compact ranges with surface treatments (SparClean®: Geo & Ultra / PUR: Standard) for the use in wet room areas.

See pages 218-225

ELEGANCE SD / TARASAFE ULTRA H2O / MURAL CALYPSO



100% recyclable

The TARADOUCHE SHOWER SYSTEM provides a safe and hygienic solution thanks to:

► Anti-slip resistance floorings

► 100% waterproof installation

			ELEGANCE SD	TARASAFE ULTRA H2O	MURAL CALYPSO
DESCRIPTION					
Total thickness	EN ISO 24346 (EN 428)	mm	2.4 (on grainside)	2.0 (on grainside)	0.92
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	2.40	1.0	0.10
Weight	EN ISO 23997 (EN 430)	g/sq.m	3100	2400	1610
Width/Length of sheet	EN ISO 24341 (EN 426)	cm/ml	200/20	200/20	200/30
CLASSIFICATION					
Product specification	-	-	EN ISO 10581 (EN 649)	EN ISO 10582 (EN 649)	EN 15 102
European classification	EN ISO 10874 (EN 685)	class	34-43	34-43	-
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1	B-s2,d0
Static electrical propensity	EN 1815	kV	< 2	< 2	-
Slip resistance wet : ramp test with oil	DIN 51130	class	R9	R11	-
Slip resistance wet: bare foot	DIN 51 097	class	A	C	-
Determination of slip resistance barefoot & shod + water	EN 13845-annexe C	class	-	ESb	-
Water tightness	EN 13553	-	OK	In progress	-
PERFORMANCES					
Wear resistance	EN 660.2	mm ³	≤ 4.0	≤ 4.0	-
Wear group	NF 189	group	P	P	-
Type Binder content	ISO 10581	type	I	-	-
Type Binder content	ISO 10582	type	-	I	-
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40	≤ 0.40	-
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10	≤ 0.10	-
Residual indentation (measure)	-	mm	≈ 0.03	≈ 0.03	-
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25	0.25	-
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽¹⁾	ISO 22196	-	-	> 99% inhibits growth	> 99% inhibits growth
ENVIRONMENT / INDOOR AIR QUALITY					
TVOC after 28 days	ISO 16000-6	µg / m ³	<10	<100	-
Certification	-	-	Floorscore®	Floorscore®	-
CE MARKING					
CE	EN 15102		-	OK	-
	EN 14041				

(1) The implementation of an effective cleaning regime is the most important defence against infection.

SPECIALITY FLOORING

ANTISLIP FLOORING

ELEGANCE SD



100% recyclable



0341 Bilberry



0338 Kiwi



0333 Ananas



0700 Melon



0704 Raspberry grey



0705 Patisson



0322 Jicama




0329 Hazelnut

TARASAFE ULTRA H2O




100% recyclable




7720 Iceberg




7746 Stone




7418 Marine




7413 Ocean Blue




7325 Seashore



7314 Sand



7513 Seagrass



7732 Gravel



MURAL CALYPSO



Bs2d0



100% recyclable



7110 Fushia



7751 Steel



7744 Nordic Milk



7112 Lilac




7714 Frost



7753 Nordic Zen



7408 Skyline




7715 Crystal



7734 Manhattan Concrete



7412 Glow




7711 Ice




7728 Manhattan Stone




7420 Lagoon



7611 Snow



7721 Manhattan Mist



7505 Anise



7309 Lotus



7740 Fabric Silk



7201 Moonlight



7712 Shadow



7736 Fabric Wool



7104 Melon



7311 Linen



7315 Fabric Jute



7323 Ochre




7414 Fabric Denim




Specialty
Flooring

SPECIALITY FLOORING


TARADOUCHE SHOWER SYSTEM




Cove former for internal
wall angles CA 12 - H204



Perfect wall weld with CR41- H231



Diminishing profile - 0490




Cove former - 4011

PVC drain with inox grid
H090



Tarafoam: acoustic
insulation sub-layer
997C 6792



Shower threshold - 0469



PVC SITAR / SITAR V Drains
H112 / H113

The threshold has been developed in 3 colours - grey,
beige and blue in order to answer to the specific
requirement of Alzheimer units (no contrast).







grey ●
beige ○
blue ●

Accessories: Drains, floor/wall diminishing strip, cove former, weldable Vinyl shower threshold, CA12 angle cove former.

Installation: Installation should be carried out in accordance with local standards. Subfloor to be flat, smooth hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise for 24 hours prior to installation at a room temperature of between 18-24°C. All seems must be heat welded using Gerflor matching weld rod.

Maintenance: No emulsion dressings or polish required. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser.

Further installation and maintenance instructions are available from Gerflor.




SPECIALITY FLOORING

WALLCOVERING - MURAL ULTRA / MURAL CLUB / MURAL CALYPSO




MURAL ULTRA

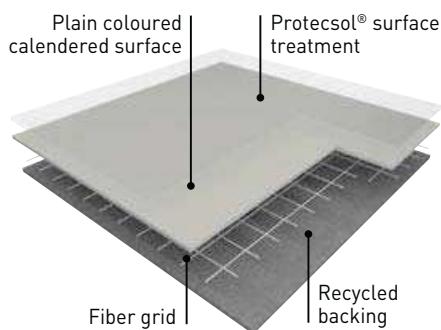

MURAL ULTRA is a flexible wall covering vinyl sheet which has a thickness of 1.5mm for an extended durability. It has a B-s2,d0 fire classification (EN 13501-1) which complies with most European fire regulations. It is made of a pure PVC coloured surface and a backing which comprises 25% of recycled products. This multi-layered product is reinforced with a non-woven glassfibre grid for improved resistance to tearing and excellent dimensional stability. It has a great resistance to chemical products staining thanks to its **Protecsol®** surface treatment. The joins are hot-welded to ensure perfect water-tightness. It is 100 % recyclable and the components are 100% compliant with REACH.



MURAL CLUB

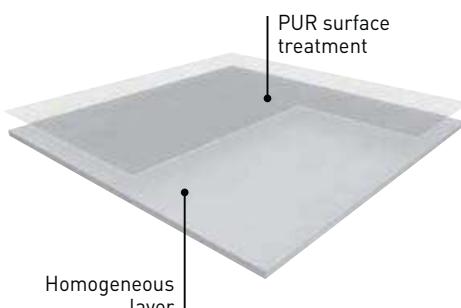


MURAL CLUB is a homogeneous wall covering in 2m width roll and with a B-s2,d0 fire classification. It is designed to be a permanent wall covering. It is hot welded with CR40 welding rods for better hygiene. It is made of calendered layer with colour throughout the whole thickness for an nicer aspect of the welding. This layer comprises at least 10% of recycled products. It does not contain any CMR 1 & 2 component and is 100% compliant with REACH. It is 100% recyclable.

MURAL CLUB benefits from a **PUR** surface treatment which provides good resistance to chemical products and makes maintenance easier. Full resistant to impact, it acts as a buffer against damage from beds, trolleys and indoor motorized vehicles and other transportation systems. **MURAL CLUB** is fully impact resistant and is therefore ideal for use as a cladding in large public buildings such as hospitals care institutions dental and veterinary surgeries, clean rooms, stores and supermarkets, warehouse and storage areas.



MURAL CALYPSO

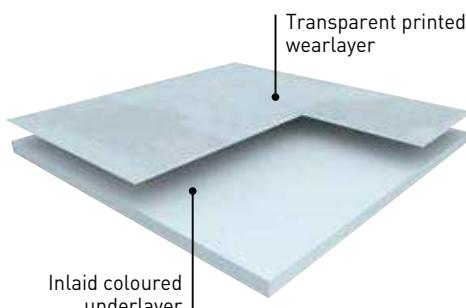

MURAL CALYPSO is a multilayered wall covering in 2m width roll and with a **B-s2,d0 fire classification** according to EN 13501.

It is hot welded with CR41 welding rods for a perfect water tightness. It is made of a printed transparent wear layer and a coloured under layer for a better aspect of the welding. This layer comprises 20% of recycled products. It does not contain any CMR 1 & 2 component and is 100% compliant with REACH.

It is 100% recyclable.

This wall covering is specially recommended for wet room areas and makes the installation in angles easier thanks to its flexibility.

The Shower System is compliant with most laws on "access for all" thanks to the installation in shower without tray.

WALLCOVERING - MURAL ULTRA / MURAL CLUB / MURAL CALYPSO

- Easily seam welded to produce continuous surfaces.
- Create a safe and hygienic environment.
- Flexible and easy to cove.
- Ideal for walls and ceilings.
- Recyclable and Eco responsible.

		MURAL ULTRA	MURAL CLUB	MURAL CALYPSO
DESCRIPTION				
Total thickness	EN ISO 24346 (EN 428)	mm	1.5	1.00
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.65	1.00
Weight	EN ISO 23997 (EN 430)	g/sq.m	2600	1780
Width/Length of sheet	EN ISO 24341 (EN 426)	cm/ml	200 / 21	200 / 30
CLASSIFICATION				
Product specification	-	-	EN 15 102	EN 15 102
Fire rating	EN 13501-1	class	B-s2,d0	B-s2,d0
PERFORMANCES				
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	Protecsol®	PUR
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽¹⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
CE MARKING				
	EN 15102		OK	

⁽¹⁾ The implementation of an effective cleaning regime is the most important defence against infection.



SPECIALITY FLOORING


MURAL ULTRA / MURAL CLUB

MURAL ULTRA




Protecsol®


100% recyclable



3765 Flannel




3735 Arctic




8608 Lily



4345 Ecru



4150 Cranberry



4116 Apricot




4346 Sand




8253 Lemon




4118 Violet



4494 Pacific



4497 Lobelia



4525 Lime


MURAL CLUB



PUR




100% recyclable



0001 White



0003 Sand



0006 Grey



0005 Yellow



0004 Green



0007 Blue

MURAL CALYPSO



Bs2d0



100% recyclable



7110 Fushia



7751 Steel



7744 Nordic Milk



7112 Lilac




7714 Frost



7753 Nordic Zen



7408 Skyline




7715 Crystal




7734 Manhattan Concrete



7412 Glow



7711 Ice




7728 Manhattan Stone



7420 Lagoon



7611 Snow



7721 Manhattan Mist



7505 Anise




7309 Lotus



7740 Fabric Silk



7201 Moonlight



7712 Shadow



7736 Fabric Wool



7104 Melon



7311 Linen



7315 Fabric Jute



7323 Ochre



7414 Fabric Denim



Specialty
Flooring

SPORTS
FLOORING

PAGES


236/269



Taraflex™ Sports Flooring**242-259**

**Hardwood flooring
systems Connor Sports®.....****260-265**

**Outdoor play areas
Sport Court****266-269**

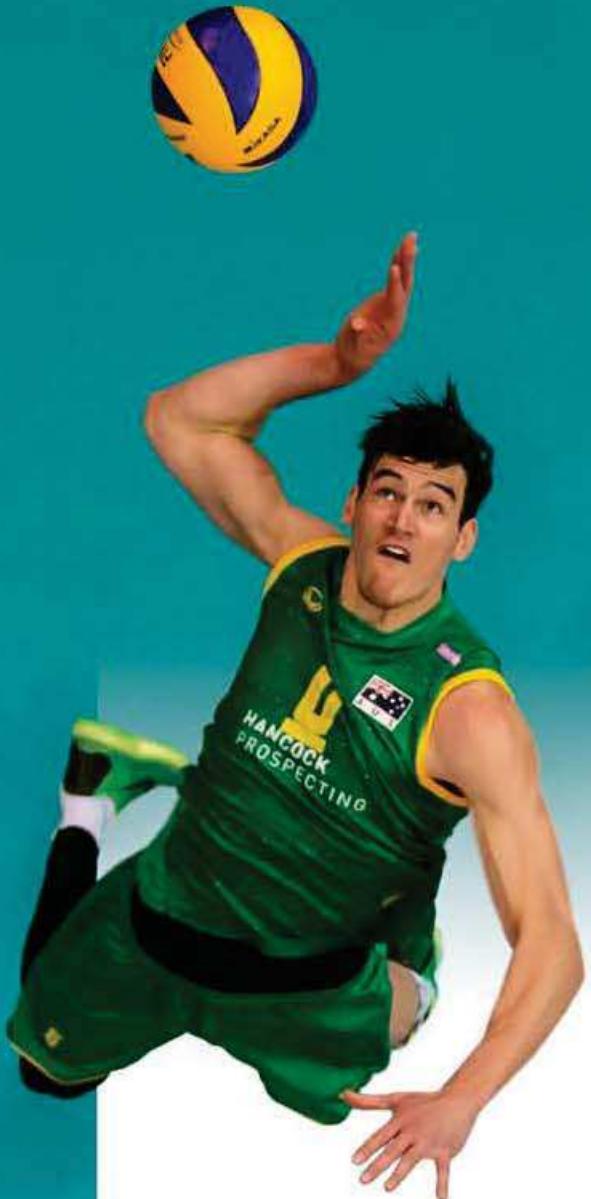

Gerflor®

Where Champions Play™

TARAFLEX
—
SPORTS

C
CONNOR
SPORTS

SG
SPORT
COURT

GERFLOR YOUR UNIQUE PROVIDER FOR INDOOR AND OUTDOOR SPORTS INSTALLATIONS

GERFLOR HAS REVOLUTIONISED INDOOR SPORTS PRACTICES & KEEPS ON INNOVATING!



INDOOR SYNTHETIC FLOOR
THE BEST PERFORMING
PRODUCT ON THE MARKET



Taraflex™ has been around since 1947 when synthetic sports floors were first invented.

Protection and safety are the main concerns when we are developing a new floor. With a complete range of P1/P2/P3 products, Gerflor offers the perfect solution adapted to all users and usages, from low impact activities through elite and performance sports. Gerflor is committed to ongoing sustainability; incorporated into its floor performance and properties.



HARDWOOD FLOORING SYSTEMS
MORE THAN 100 YEARS OF EXPERIENCE



Founded in 1872, Connor Sports® is the market leader in portable and permanent hardwood sports flooring systems.

Connor Sports® professional engineers have lead the industry in new product design and development, setting the standard for innovative solutions in sports surfacing. In 1914, Connor Sports® installed the first basketball court in the USA. In the late 90's, Boston Celtics selected Connor Sports® to repurpose their famed parquet into a portable flooring system.



OUTDOOR PLAY AREAS
WORLD'S LEADING OUTDOOR SPORT SURFACE



In 1974, Sport Court created the outdoor game court. Since then, over 150,000 courts have been installed worldwide.

Sport Court's superior outdoor play surface is designed to:

- keep athletes safe
- allow for year-round sports activity
- eliminate costly annual maintenance

PAGES 242 - 259

PAGES 260 - 265


PAGES 266 - 269

THE UNIQUE PROVIDER OF YOUR NEXT INTERNATIONAL EVENT

TARAFLEX®
— SPORTS —

LEADER IN INDOOR SPORTS

floorball, handball, volleyball, futsal,
table tennis, Badminton, Boccia, Goalball,
sitting volleyball

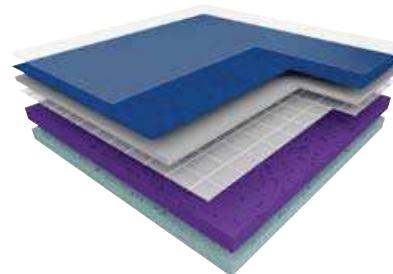

TECHNICAL PARTNER OF FIBA & NCAA

NBA's preferred
hardwood flooring

Floating system
REZILLSLEEPER




Anchored system
ALLIANCE



OFFICIAL 3X3 FIBA PARTNER

Original outdoor event tiles
(FIVB Technical Partner)

POWERGAME™

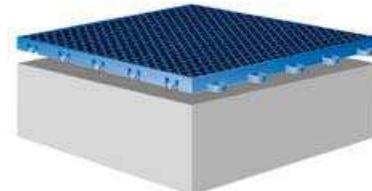


THE MOST PREFERRED FLOOR PARTNER
OF INTERNATIONAL SPORT FEDERATIONS





Portable system
QUICKLOCK

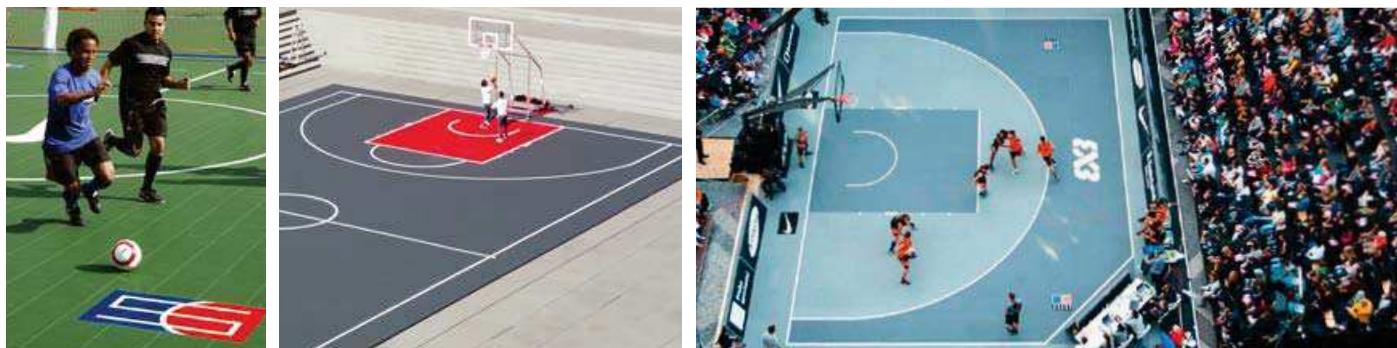

Sports Flooring

3X3
OFFICIAL BASKETBALL
COURT OF FIBA 3X3



AFC

VELUX
EHF
CHAMPIONS LEAGUE

ITTF

WORLD ParaVolley

FISU

BADMINTON 2014
10th World University Badminton

PRODUCT SELECTION GUIDANCE

IPI

100%

PROTECTION...

...is a major mechanical property of the sports floor to provide the right level of **immediate comfort** to the users when falling, sliding or diving on the floor:
less pains, less bruises, less bone traumas.



IPI = IMPACT PROTECTION INDEX

< 50%	low protection
50% < IPI < 80%	medium protection
> 80%	high protection

P2

80%

PROTECTION Immediate comfort

50%




TARAFLEX™
SURFACE
Protecsol

P1

2.1mm



IPI = 52%




TARAFLEX™
MULTI-USE 6.2

Protecsol® D-Max+ CXP HD

7mm



IPI = 73%



TARAFLEX™
SPORT M EVOLUTION

Dry-Tex™
SYSTEM

Protecsol® D-Max CXP HD

35%


25%

SAFETY Protection against long-term injuries


APPLICATIONS


- Toddlers (0-6 years old)
- Education
- Clubs / Competitions
- Adults / Seniors / Leisure
- Multipurpose

TARAFLEX™ MULTI-USE 6.2




TARAFLEX™ SPORT M EVOLUTION




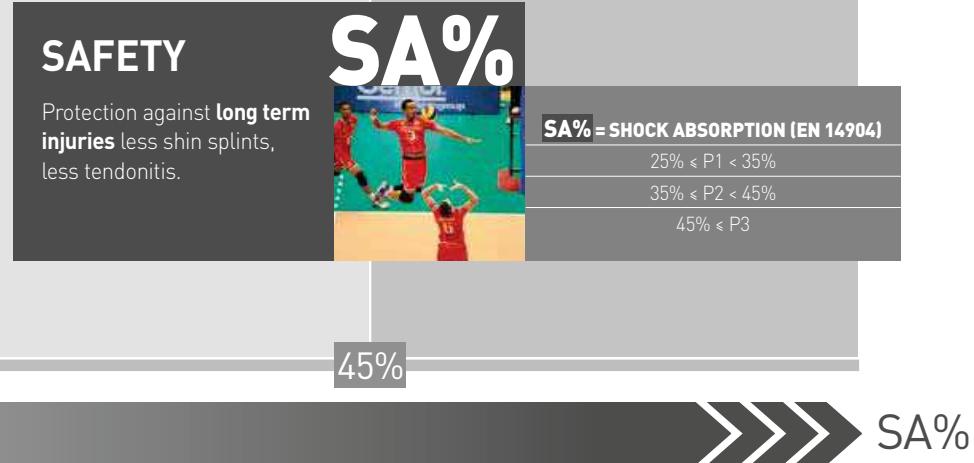

TARAFLEX™ SPORT M PERFORMANCE



TARAFLEX™ SPORT M COMFORT




TARAFLEX™ SPORTS FLOORING 242-259

- Why you should choose Taraflex™ 244
- The secrets of Taraflex™ sports flooring 246
- EN 14904 European Sports Flooring Standard 247
- Turn your design into reality 248
- Taraflex™ Multi-Use 6.2 250
- Taraflex™ Surface Mask 250
- 3D Court designer 251
- My Taraflex™ 251
- My Logos 251
- Performance Sports 252
- Product specification guidelines 254
- Technical solutions 255
- A full and technical range of accessories 256
- Technical data 258

FOR PROTECTION

The floor that brings **immediate protection** on impact to all users when falling, diving or sliding on the floor.

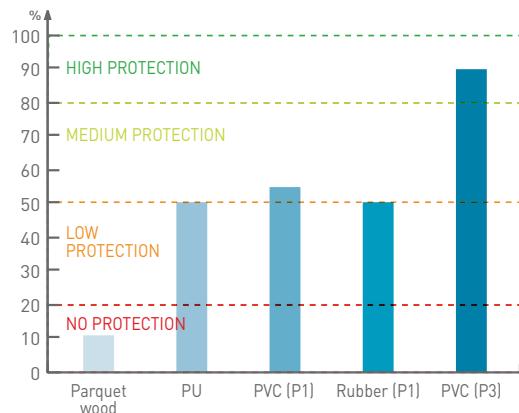

Gerflor offers Taraflex™ Sport M Comfort, a P3 floor with the **highest level of comfort on the market.**



1



FOR SAFETY

Shock absorption minimizes the force of impact on the body and reduces long term injury risk.

2

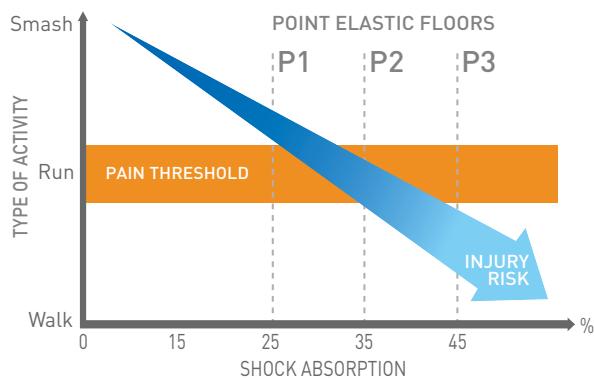

With a complete range of shock absorption P1/P2/P3, Gerflor provides the right solution and the best safety for users.


TARAFLEX™ SPORTS FLOORING IS RECOGNISED ALL OVER THE WORLD

3



FOR LIFE

Taraflex™ technology ensures a long lasting high performance of the products for the **LIFETIME OF THE FLOORS.**

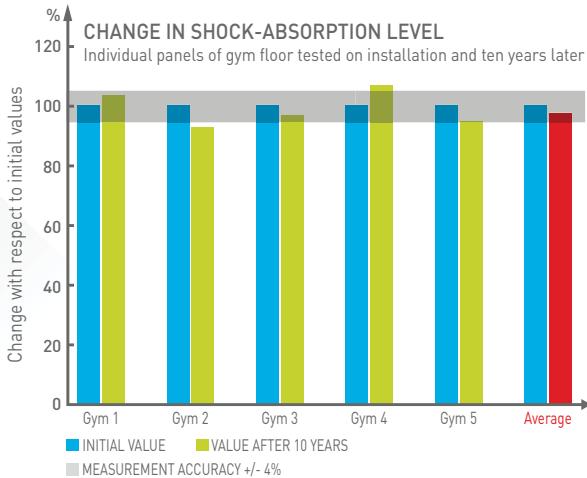

Study available on demand.

Gerflor guarantees the category P1/P2/P3 **after 10 years use.**



4

FLOORS FOR CHAMPIONS

PARTNER OF MAJOR SPORTS EVENTS



Gerflor, through IHF and FIVB agreements, has supplied courts for Handball and Volleyball tournaments during the last Olympic Games in Rio in 2016. Taraflex™ is the most widely specified sports surface in the world; it has been selected for 11 consecutive Olympic Games from Montreal to Rio 2016 for indoor surfaces like Handball, Volleyball, Badminton, Table Tennis and Sitting Volleyball.

Every day more than **6 million children** play on a Taraflex™ sports floor.

3500 high level competitions per year are played on Taraflex™ sports floor.

THE SECRETS OF TARAFLEX™ SPORTS FLOORING

① Protecsol®


A **surface treatment** with the unique and patented triple action Protecsol®, offers three key benefits:

- ▶ An ‘intelligent’ **surface treatment**, forming the ideal compromise between slide and grip for sports shoes. The floor provides safe grip and resistance as the athlete accelerates but allows the feet to move freely as they rotate.
- ▶ A **skin-burn free surface**, on which the temperature during a fall is reduced by 25%, thus minimising the risk of friction burns.
- ▶ A **surface that is cost effective and easy to maintain.**


② D-Max™ / D-Max™+

D-Max™ surface is a **UNIQUE** complex made up of calendered PVC sheets reinforced with **fibreglass grids** ensuring high durability of Taraflex™ Sports Flooring.


- D-Max™ +**, an exclusivity Taraflex™, is reinforced with two fibreglass grids providing:
- ▶ Outstanding dimensional stability (>0.1%)
 - ▶ An indentation resistance improved by 35% to increase the range of floor usages

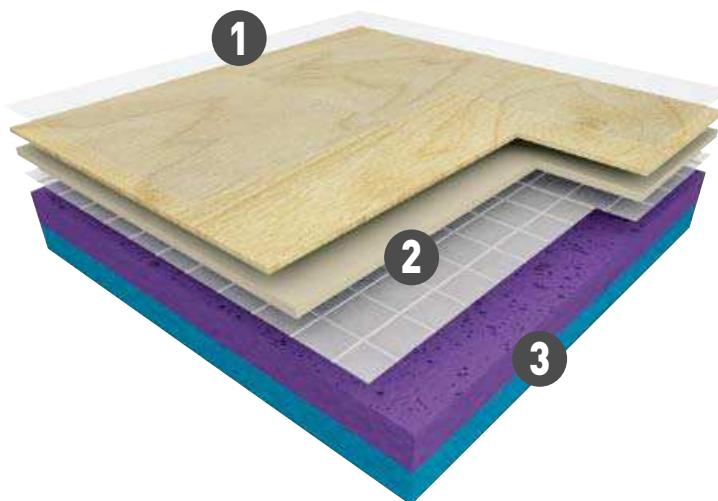

D-Max™



D-Max™+




③ CXP™ HD

The manufacturing process for **CXP** (Cellular Xtreme Process) **closed-cell foams** has now been combined with the ‘very high density’ **VHD** foam technology developed by Gerflor.

Why use a double density foam?

At the moment of impact on the floor:


- ▶ The light and elastic foam of the lower layer compresses totally in order to ensure **protection and safety**.
- ▶ The VHD foam of the upper layer remains firm, making the deformation trough around the foot two times larger for more freedom of movement in rotation and secure foothold to minimise **the injury risk**.

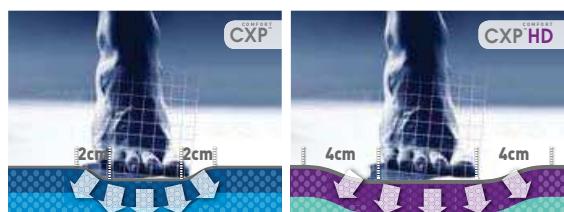

- ▶ The combination of Protecsol®, D-Max™/D-Max™+, CXP™HD foam ensures that Taraflex™ Sports Flooring are durable and high performing.

EN 14904 EUROPEAN SPORTS FLOORING STANDARD

EN 14904 Standard: minimal performance requirements to be met by indoor sports floors

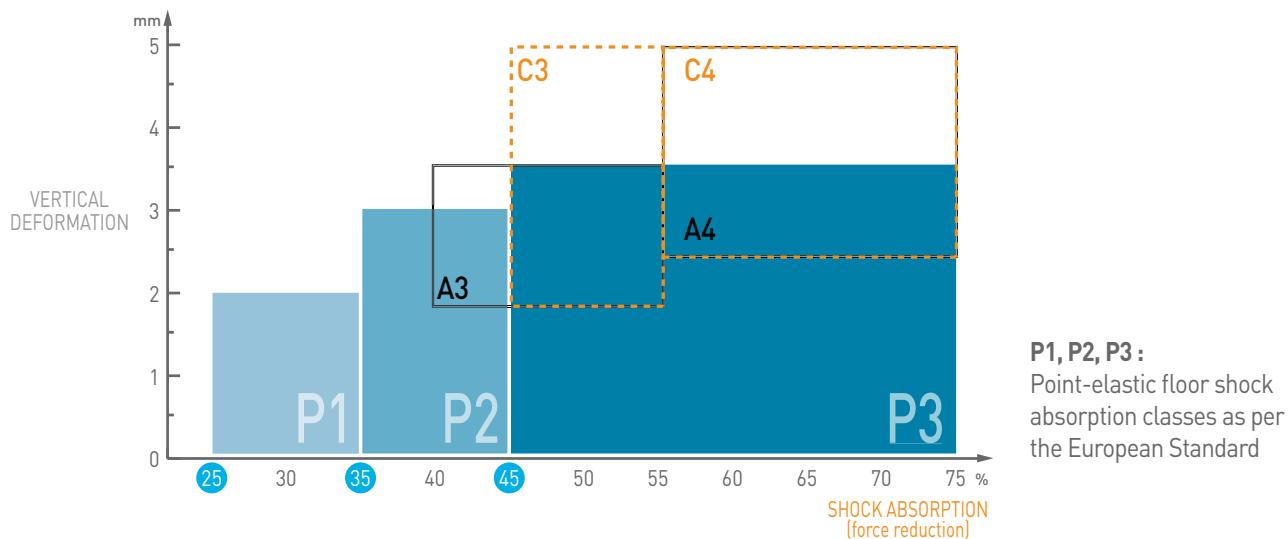

3 types of sports floors:


- Point-elastic floors** such as Taraflex™ (Taraflex™ Sport M Evolution, Taraflex™ Sport M Performance, Taraflex™ Sport M Comfort and Taraflex™ Multi-Use 6.2).
- Area-elastic floors** such as sprung wooden floors.
- Combined floors**, providing a combination of point-elastic and area-elastic floor features.

Standard values:

The EN 14904 standard determines force reduction classes for all floors. The objective is to draw attention to the necessity of installing safe, comfortable floors that reduce the risk of injuries.

EN 14904	DESCRIPTION	STANDARD	REQUIREMENT	UNITS
SPORTS PROPERTIES	Vertical deformation	EN 14809	≤ 3.5	mm
	Shock absorption (Force Reduction)	EN 14808	≥ 25	%
	Friction coefficient	EN 13036-4	80 - 110	-
TECHNICAL CHARACTERISTICS	Ball bounce	EN 12 235	≥ 90	%
	Indentation resistance	EN 1516	≤ 0.5	mm
	Wheel resistance	EN 1569	≥ 1500	N
	Impact resistance	EN 1517	≥ 8	N/m
	Abrasion resistance	EN ISO 5470-1	≤ 1000	mg
	Gloss	EN ISO 2813	≤ 30	%
	Flatness	EN 13036-7	< 6mm/3m	-
	Fire rating	EN 13501-1	Cfl-s1	-
CLASSIFICATION	Formaldehyde emission	EN 717-1/2	≥ E1	-
	Pentachlorophenol emission	EN 12673	< 0.1	%

TURN YOUR DESIGN INTO REALITY

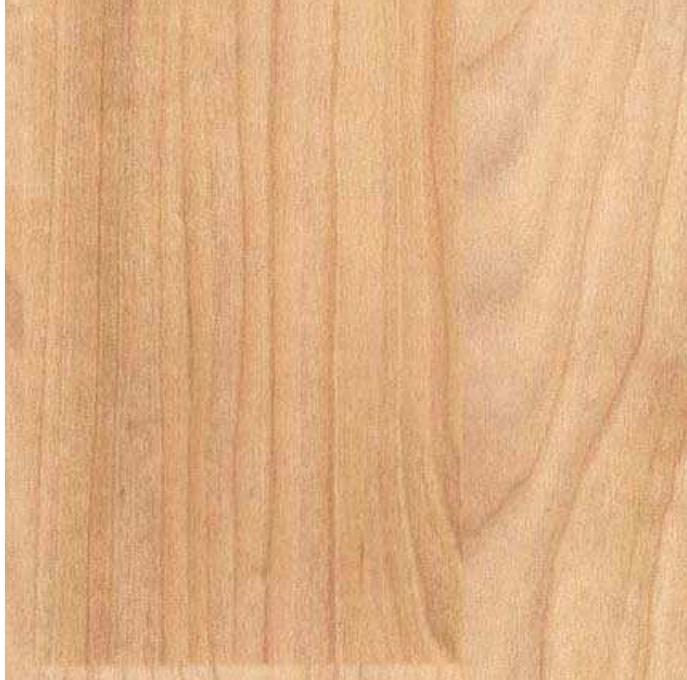


6350 - Light Cherry Design / Y = 43,3




6873 - Anthracite / Y = 20,5



6159 - Pink / Y = 19,1

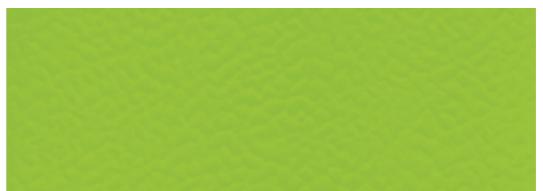

6559 - Spring / Y = 47,1

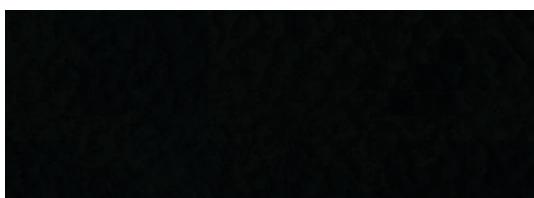

6830 - Black / Y = 4,2

All colours are available with Taraflex™ Surface,
Taraflex™ Sport M Evolution, Taraflex™ Sport M Performance
and Taraflex™ Sport M Comfort



6347 - Beige / Y = 39,7



6570 - Mint Green / Y = 16,9



6557 - Forest / Y = 10,9



6375 - Oak Design / Y = 29,7

(Y): Light reflectance values according to the EN 13 745
Participates to lighting energy saving when Y > 20


Create and visualise your surface thanks to the 3D court designer
on gerflor.com



6381 - Maple Design / Y = 39,9




6180 - Red / Y = 10,9

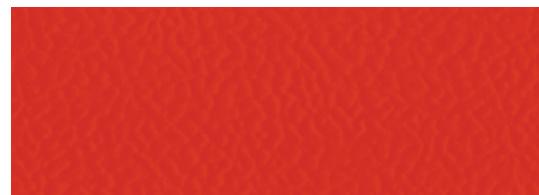

6038 - Terracotta / Y = 19,9



6211 - Gold / Y = 45,7

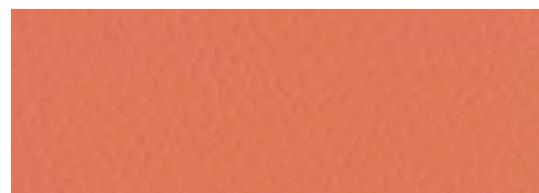

6146 - Coral / Y = 28,7



6431 - Teal / Y = 21,4



3764 - Taupe / Y = 17,9



6758 - Silver Gray / Y = 36



6445 - Lagoon / Y = 25,7



6430 - Blue / Y = 8,3



2404 - London Light Blue / Y = 33,8

TARAFLEX™ MULTI-USE 6.2




8068 - Wood Chocolate / Y = 9,4



4453 - Wood Blue / Y = 17,9



8840 - Wood Black / Y = 17,2

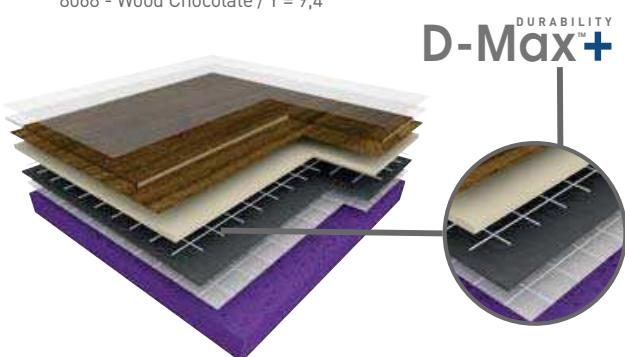

4331 - Wood Natural / Y = 29,9



3708 - Wood Grey / Y = 34,2

TARAFLEX™ SURFACE MASK


Only available on a wood under-carriage system



6032 - München / Y = 55,4



6031 - Berlin / Y = 48,5



6009 - Frankfurt / Y = 52,4



6029 - Bonn / Y = 32,5



6035 - Dresden / Y = 33,1



6027 - Aachen / Y = 44,6



6016 - Hamburg / Y = 30,5



6055 - Freiburg / Y = 14,9



6046 - Celle / Y = 10,6

3D COURT DESIGNER TO VISUALISE YOUR PROJECT IN 3D



- 1 Choose your surface:
monosport or multisports



- 2 Choose your colours



- 3 Visualise
your surface in 3D

Also available on gerflor.com



MY TARAFLEX® FOR CUSTOMISED FLOORS

- 1 Choose your colours from 130 references



- 2 Receive your prototype free of charge within 15 working days of your request (excluding shipping time and maximum of 3 per completed form)



- 3 Validate ✓

**Condition: minimum order quantity 1000 sqm
per colour and per project**

Visualise your harmonies on mytaraflex.gerflor.com

MY LOGOS FOR A STUNNING RESULT



Thanks to the waterjet cutting technology,
customise your floor with your city or club colours.

For further information, please contact your sales representative.

PERFORMANCE SPORTS

BADMINTON

"The use of a Gerflor surface improves the quality of our training environment because it replicates the type of floors used at international competitions. The level of impact absorption achieved by Gerflor also helps to reduce foot traction problems and impact injuries, compared with a wooden floor."

Jens Grill - Performance Director, Badminton England - UK



VOLLEYBALL

"The first time I played on Taraflex™ was at the Olympics. It's the best volleyball surface in the world. Every player and child deserves to play on Taraflex™."

Caren Kemner - Owner of Riverfront Athletic Club
Voted best female volleyball player in the world by the FIVB - USA



SITTING VOLLEYBALL

"The American team loved the Paralympic Floor. This is my third Paralympic Games so I've played on a lot of different types of flooring but this was by far my favorite. It was easy to move on which allowed for some really exciting play throughout the tournament! We wanted to roll it up and take it home with us."

Kendra Lancaster - USA Olympic Committee - USA





NETBALL / BASKETBALL

"The feed back so far from the players, coaches and referees regarding the surface has been very encouraging. It looks great on TV and we feel it will have a positive effect against injuries usually sustained playing on timber."

Mike Watson - Performance Competition Manager - UK



HANDBALL

"We've been partner with Gerflor since 2004, flooring is an essential part of our identity and is an indispensable asset for our sport."

Michael Wiederer - EHF Secretary General - AUSTRIA



TABLE TENNIS

"For me the floor has a crucial importance. The grip should be perfect balanced so the moves during the exchanges should be easy and comfortable."

Werner Schlager - Table Tennis World Champion - AUSTRIA



PRODUCT SPECIFICATION GUIDELINES


Choose your floor according to your usage

	Basketball	Volleyball	Handball	Netball	Floorball	Futsal	Tennis	Table Tennis	Badminton	Multi-sports	Multi-purpose	Rolling Sports / Disability sports
TARAFLEX™ SPORT M COMFORT (P3)		■	■	■	■					■		
TARAFLEX™ SPORT M PERFORMANCE (P2)	■	■	■	■	■	■				■		
TARAFLEX™ SPORT M EVOLUTION (P1)		■				■		■	■	■		
TARAFLEX™ MULTI-USE 6.2 (P1)						■					■	
TARAFLEX™ SURFACE	Installed over undercarriage system							Installed over undercarriage system				■
TARAFLEX™ TENNIS (P1)							■					
TARAFLEX™ TABLE TENNIS 3.7 PORTABLE / 4.5 PERMANENT / 6.2 PERMANENT								■				
TARAFLEX™ BADMINTON 3.9 PORTABLE / 4.5 PERMANENT / 7 PERMANENT									■			

■ = Recommended / ■ = Possible


TECHNICAL SOLUTIONS

► DRY-TEX™ SYSTEM: The all in one moisture solution

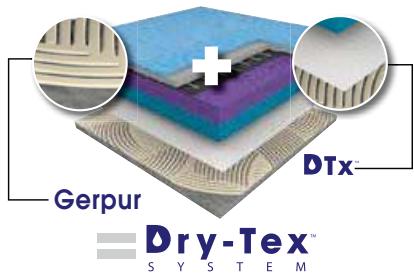

Textile backing

► TARAFLEX™ ISOLSPORT: Solution for renovation work and moisture barrier

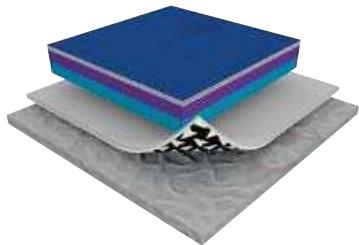


► TARAFLEX™ BATECO: Removable protective layer




Made from 100% post manufacturing recycled waste

A FULL AND TECHNICAL RANGE OF ACCESSORIES



STORAGE RACK

- Bateco Storage racks for 4, 6 or 8 rolls. Can be also used for storing portable courts (Handball, Volleyball,...).

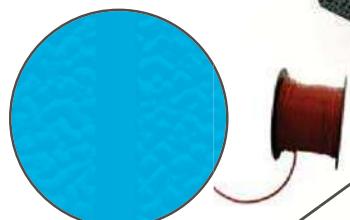

WELDING RODS

- CR 50 for Taraflex™ Range
- CR 40 for Taraflex™ Surface
- CR 60 for repairs
100 lm rod



MY LOGOS WATERJET CUTTING TECHNOLOGY

- Customise your floor with your city or club colours



PERMANENT MARKING

- TLD AQUA Paint Available in red, blue, yellow, white and black



TEMPORARY MARKING


- 3M Tapes Available in red, blue, yellow, white and black



WALL PROTECTION

- Decochoc For storing area or behind the goals
- Can also be customised with digital printing on the back for sustainable effect



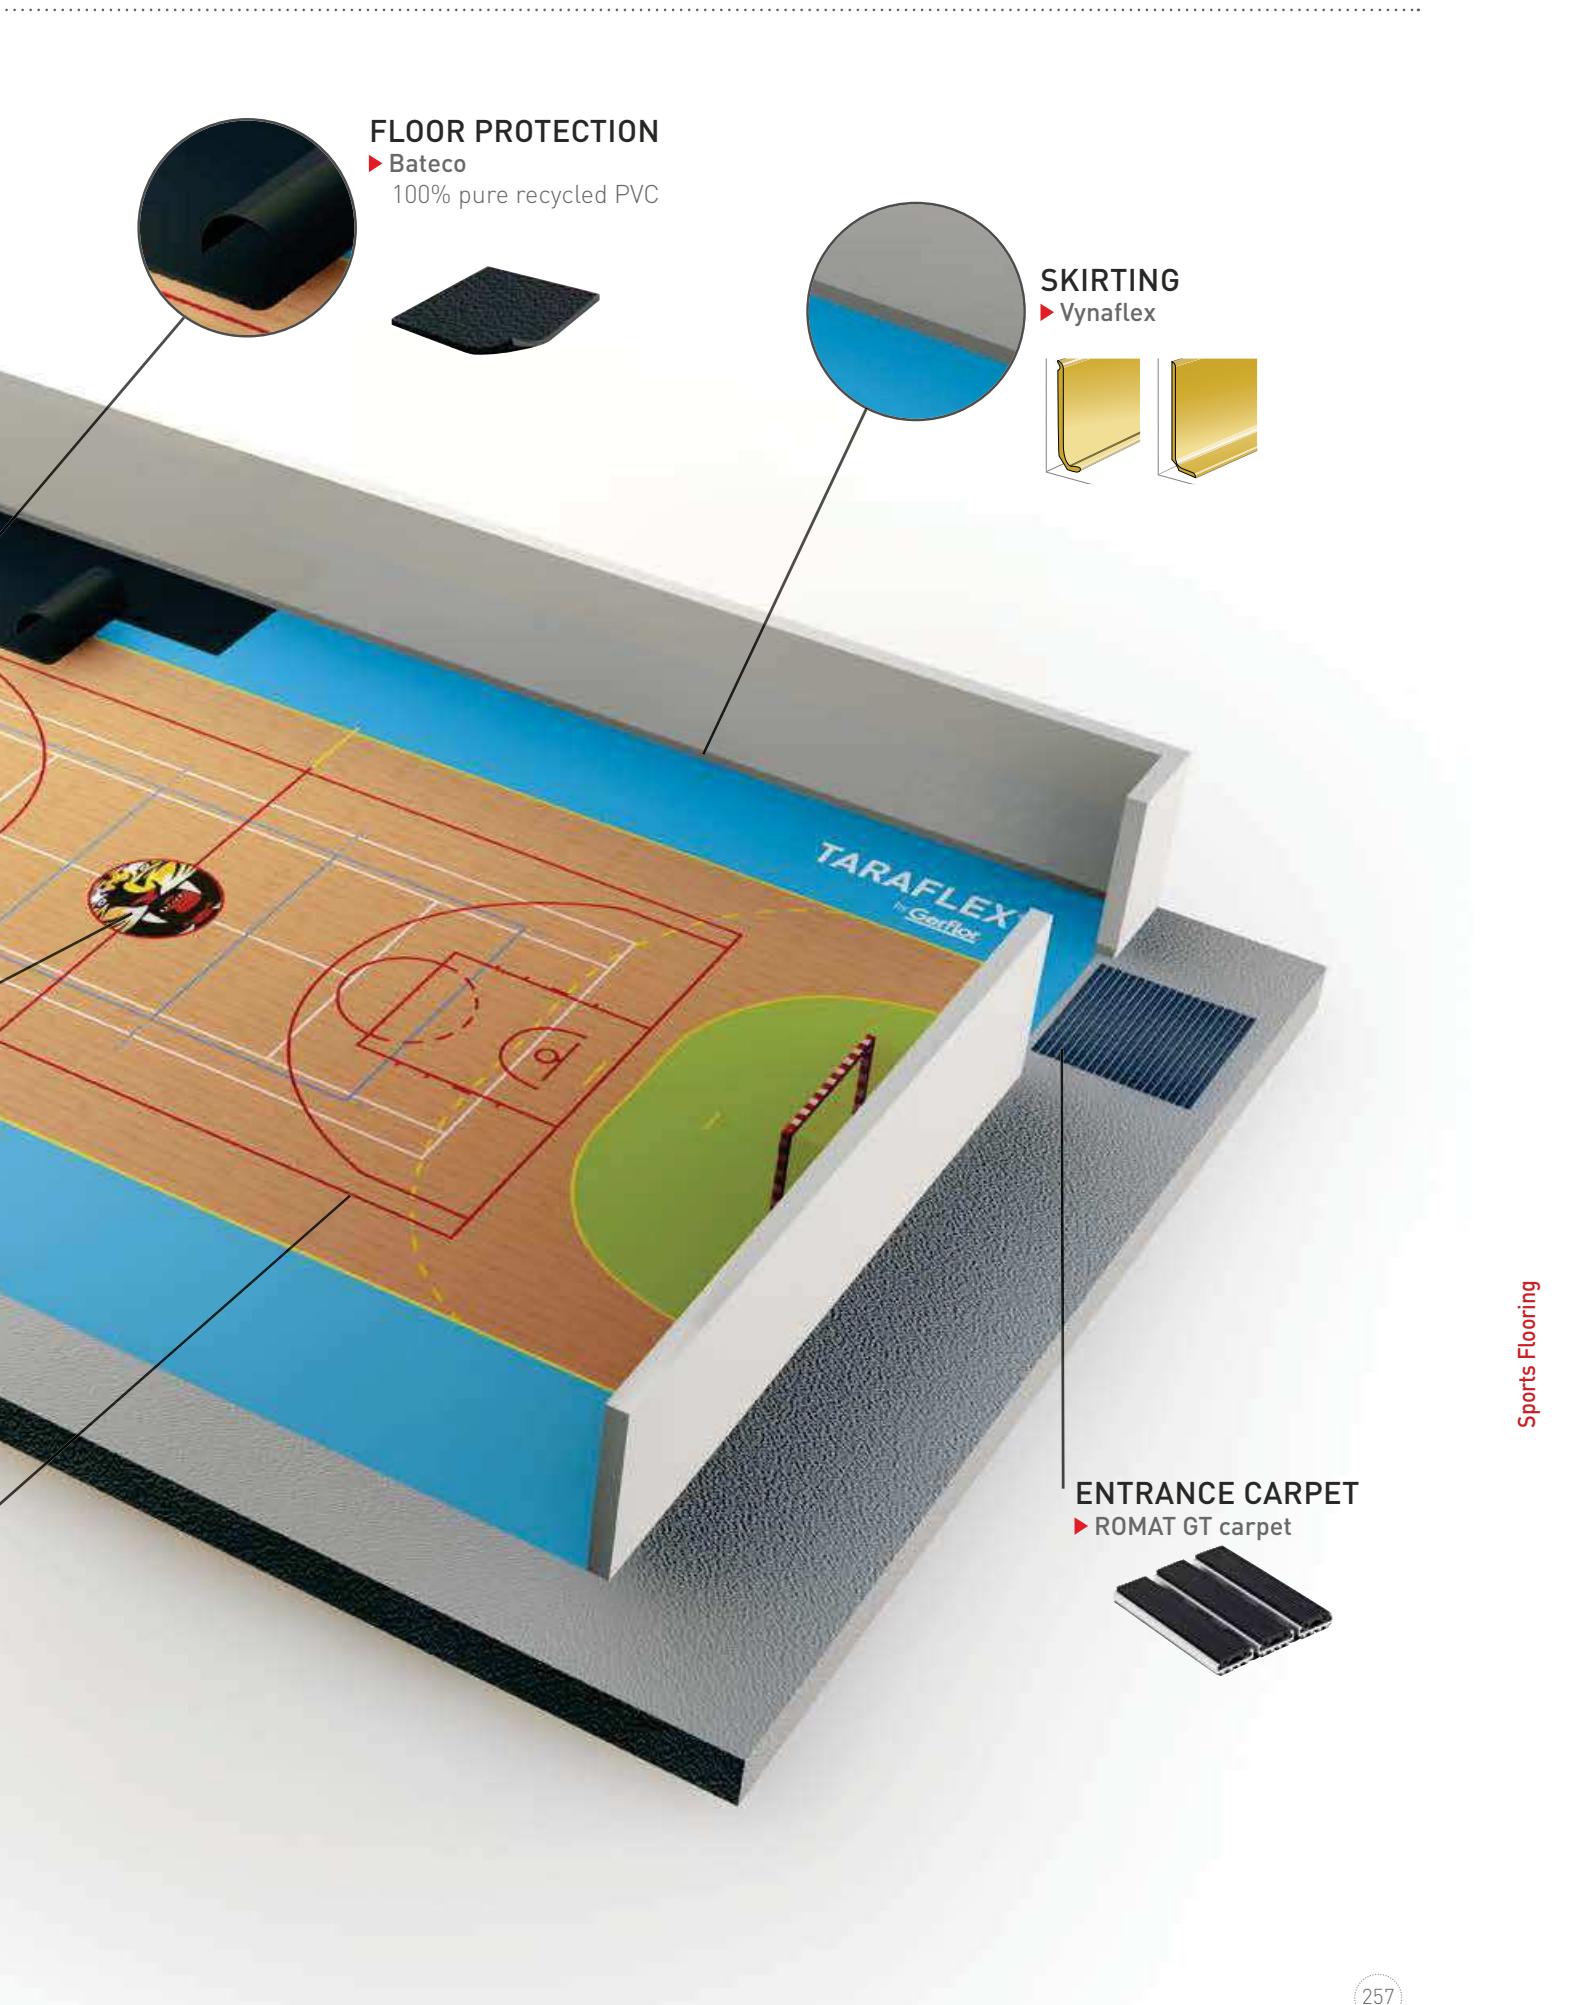

TECHNICAL DATA

Description	Standard	Requirement	Units	Taraflex™ Surface	Taraflex™ Surface Mask	Taraflex™ Multi-Use 6.2	Taraflex™ Sport M Evolution	Taraflex™ Sport M Performance	Taraflex™ Sport M Comfort
Dry-Tex™ System	-	-	-	-	-	-			-
Product Description									
Surface treatment	-	-	-	Triple-Action Protecsol®	Triple-Action Protecsol®	Triple-Action Protecsol®	Triple-Action Protecsol®	Triple-Action Protecsol®	Triple-Action Protecsol®
Surface complex	-	-	-	D-Max™	100% PVC	D-Max+™	D-Max™	D-Max™	D-Max™
Foam	-	-	-	-	-	CXP-HD™	Double density CXP-HD™	Double density CXP-HD™	Double density CXP-HD™
Thickness	EN ISO 24346 (EN 428)	-	mm	2.1	2	6.2	7	9	12
Weight	EN ISO 23997 (EN 430)	-	kg/m²	2.9	2.58	4.2	4.6	5.4	5.1
Length*	EN ISO 24341 (EN 426)	-	lm	26.5 Max	20 Max	20.5 STD	26.5 Max	26.5 Max	26.5 Max
Width	EN ISO 24341 (EN 426)	-	lm	1.5	2	1.5	1.5	1.5	-
Sport Properties									
Shock absorption	EN 14808	> 25	%	-	-	P1	P1	P2	P3
Impact Protection Index (IPI)	AC-P90-205	-	%	-	-	52	73	82	88
Vertical deformation	EN 14809	< 3.5	mm	< 2	< 2	< 2	< 2	< 3	< 3.5
Energy return	NFP 90 203	≥ 0.31	m/s	≥ 0.31	≥ 0.31	≥ 0.31	≥ 0.31	≥ 0.31	≥ 0.31
Sliding coefficient	EN 13036-4	80 to 110	-	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110
Ball bounce	EN 12235	> 90	%	> 90	> 90	> 90	> 90	> 90	> 90
Ball speed	ITF	-	-	-	-	-	-	-	-
Technical Characteristics									
Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 350	≤ 350	≤ 350	≤ 350	≤ 350	≤ 350
Impact resistance	EN 1517	≥ 8	N/m	≥ 8	≥ 8	≥ 8	≥ 8	≥ 8	≥ 8
Indentation resistance	EN 1516	≤ 0.5	mm	≤ 0.5	≤ 0.5	≤ 0.25	≤ 0.5	≤ 0.5	≤ 0.5
Classification									
Fire	EN 13501-1	-	-	B _{fl} -s1	B _{fl} -s1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1
Anti-bacterial activity (E. coli - S. aureus - MRSA) ^[1]	ISO 22196	-	-	> 99% inhibits growth					
CE Marking									
	EN 14 904	-	-	Fire Sliding Coefficient Abrasion Resistance Rolling load Resistance	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Rolling load Resistance				

The proposed specifications fall within the tolerance limits usually accepted in this sector whilst still complying with standards.

^[1]The implementation of an effective cleaning method is the best defence against infection.

* For different roll lengths please contact us.



For further information please refer to our "Taraflex™ Sports Flooring" brochure.

Taraflex™ Tennis	Taraflex™ Badminton			Taraflex™ Table Tennis			Taraflex™ Bateco	Taraflex™ Isolsport
	Portable	4.5	7.0	Portable	4.5	6.2		
-	-	-	-	-	-	-	-	-
-	Triple-Action Protecsol®	PUR Protect®	Triple-Action Protecsol®	Triple-Action Protecsol®	PUR Protect®	Triple-Action Protecsol®	-	-
D-Max™	100% Pur PVC	100% Pur PVC	D-Max™	100% Pur PVC	100% Pur PVC	D-Max+™	-	-
CXP-HD™	CXP™	-	Double density CXP-HD™	CXP™	-	CXP-HD™	-	-
6.2	3.9	4.5	7	3.7	4.5	6.2	1.5	1.65
3.8	1.95	2.6	4.6	1.9	2.6	4.2	2.05	1.35
24 STD	16 STD	20.5 STD	26.5 Max	16 STD	20.5 STD	20.5 STD	30 Max	45 Max
1.5	3 x 2.7	1.5	1.5	1.5	1.5	1.5	1.5	2
P1	-	-	P1	-	-	P1	-	-
52	-	-	73	-	-	52	-	-
≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	-	-
≥ 0.31	≥ 0.31	≥ 0.31	≥ 0.31	≥ 0.31	≥ 0.31	≥ 0.31	-	-
80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	-	-
≥ 90	-	≥ 90	-	-	≥ 90	≥ 90	-	-
Class 5 (Fast)	-	-	-	-	-	-	-	-
≤ 350	≤ 350	≤ 350	≤ 350	≤ 350	≤ 350	≤ 350	≤ 300	-
≥ 8	-	-	≥ 8	-	-	≥ 8	-	-
≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.25	≤ 0.5	≤ 0.5
Cfl-s1	Bfl-s1	Cfl-s1	Cfl-s1	Bfl-s1	Cfl-s1	Cfl-s1	Bfl-s1	Cfl-s1
> 99% inhibits growth		-	> 99% inhibits growth			> 99% inhibits growth	-	-
Fire Shock Absorption	Fire Sliding Coefficient	Fire Abrasion Resistance	Fire Rolling load Resistance	Fire Shock Absorption	Fire Sliding Coefficient	Fire Abrasion Resistance	Fire Rolling load Resistance	Fire
Sliding Coefficient	Sliding Coefficient	Abrasion Resistance	Rolling load Resistance	Sliding Coefficient	Sliding Coefficient	Abrasion Resistance	Rolling load Resistance	
Abrasion Resistance	Abrasion Resistance			Abrasion Resistance	Abrasion Resistance	Abrasion Resistance	Abrasion Resistance	
Rolling load Resistance				Rolling load Resistance		Rolling load Resistance	Rolling load Resistance	



HARDWOOD FLOORING SYSTEMS



WHERE CHAMPIONS PLAY™

TOP COMPETITIONS TAKE PLACE ON CONNOR
SPORTS®

BASKETBALL

- ▶ 2016 Olympic Men's and Women's competitions
- ▶ 2015 European Championship
- ▶ 2014 World Championship

International Federations approved Connor Sports® hardwood systems

WORLD
SQUASH

WSF



FIBA

EQUIPMENT
& VENUE



CHAMPIONS OF ENVIRONMENT

ALL CONNOR SPORTS® PRODUCTS ARE MANUFACTURED WITH THE GOAL OF MINIMIZING THE ENVIRONMENTAL IMPACT AT EVERY STATE OF THE PRODUCT'S LIFE.



Since its establishment in 1897, the Maple Flooring Manufacturers Association (MFMA) is the authoritative source of technical and general information about maple flooring and related sports flooring systems. Connor Sports® is a charter member of the MFMA and the 1st member of that group to be certified by the Rainforest Alliance.



Connor Sports® is proud to be the only ZeroWaste company in the sports flooring industry. Recycling, avoiding waste, developing innovative technology and a strong environmental consciousness are a major part of Connor Sports® corporate policy.



Connor Sports® works with FSC (Forest Stewardship Council®). This organization oversees high conservation value forest and protects the communities and indigenous people that rely on the forest. FSC ensures that everyone delivers the most environmentally friendly product.

Connor Sports® is the first MFMA member to introduce FSC environmentally conscious maple flooring.

HARDWOOD FLOORING SYSTEMS CONNOR SPORTS®

260-265

- Where champions play™ 260
- Champions of environment 261
- Champions of sport 261
- Why North American Maple? 262
- One material, three natural grades 263
- A complete range of hardwood systems 264

CHAMPIONS OF SPORT

HARDWOOD SYSTEMS FOR PROFESSIONAL TEAMS

More than half of the teams in the NBA have purchased a Connor Sports® hardwood system:



Boston Celtics



Brooklyn Nets



Philadelphia 76ers



Oklahoma City Thunder



Atlanta Hawks



Golden State Warriors



Sacramento Kings



Utah Jazz

WHY NORTH AMERICAN MAPLE?

"Hard maple has a fine, uniform texture. It is strong, stiff, hard and resistant to shock and has high resistance to shrinkage"

Wood Handbook 2010 - US department of Agriculture

2/3 of the hard maple forest are located in a few hours radius of the manufacturing facility.



Connor Sports® hand selects maple trees grown north of the 35th parallel where the shorter growing season produces a more uniform grain.

Hard-fibered

Resistant to point pressure without abrasion

FREE FROM SLIVERING AND SPLINTERING


EXTREME DURABILITY




ONE MATERIAL, THREE NATURAL GRADES



Aesthetically pure wood.
First grade is hand selected
to create more cosmetic symmetry.

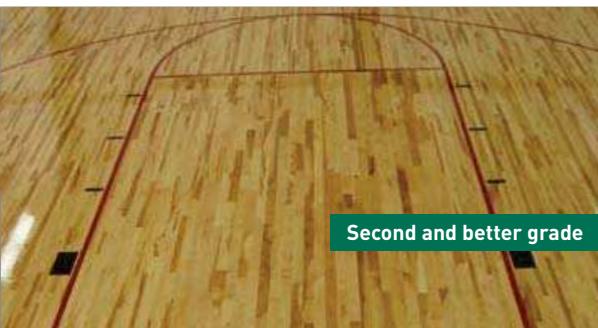


The most commonly specified flooring.
Second and better grade exhibits natural
variations, consistent with hardwood flooring.

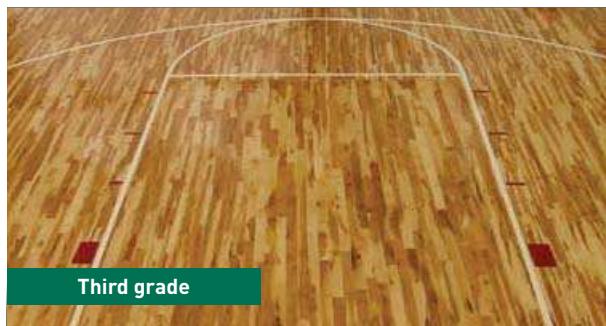

Increased tonal variation.
Third grade has the same structural integrity
with increased colour variations.

**THESE 3 GRADES ARE AVAILABLE
ON ALL CONNOR SPORTS® HARDWOOD SYSTEMS**

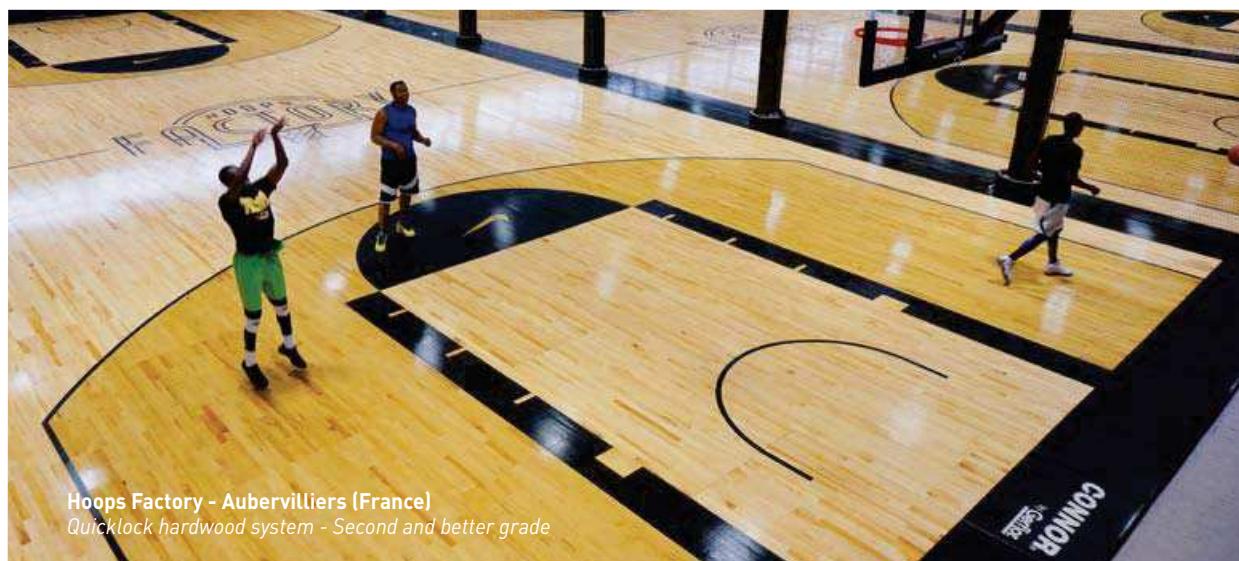

Hoops Factory - Aubervilliers (France)
Quicklock hardwood system - Second and better grade

A COMPLETE RANGE OF HARDWOOD SYSTEMS

(in accordance with EN 14904 requirements)

REZILL SLEEPER FLOATING SYSTEM



FLOORING

North American Maple
Thickness 20mm / Width 57mm

RESILIENCE

12mm Rezill pads

SUBFLOOR CONSTRUCTION

Plywood sleepers
Thickness: 24mm / length of each sleeper: 2.44m

OVERALL THICKNESS: 56MM

→ Ideal for multisport activities

ALLIANCE™ ANCHORED SYSTEM



FLOORING

North American Maple
Thickness 20mm / Width 57mm

ANCHORAGE

Steel pin with anti-squeak collar

RESILIENCE

19mm Rezill pads

SUBFLOOR CONSTRUCTION

Double plywood pre-assembled sleepers
Panels of 2.44m x 1.22m

OVERALL THICKNESS: 57MM

→ Ideal for high intensive sport activities

NEOSHOK™ FLOORING SYSTEM



FLOORING

North American Maple
Thickness 20mm / Width 57mm

RESILIENCE

19mm polyurethane Neoshok pads

SUBFLOOR CONSTRUCTION

Two layers of plywood panels
Thickness: 24mm / length : 2.44m / width: 1.22m

OVERALL THICKNESS: 63MM

→ Subfloor recommended
for multipurpose activities

- ✓ High resistance to impacts and heavy loads
- ✓ High level of shock absorption

CONNOR SPORTS® HARDWOOD FLOORING SYSTEMS ARE SANDED AND VARNISHED ON SITE:

Perfectly smooth
seamless surface

Game-lines & graphics
encapsulated in several
coats of varnish

INJURY PREVENTION


MAINTENANCE COST REDUCTION

Narrow strips are less subjected to shrinkage than wider strips, 2-strip boards or 3-strip boards. That's why **Connor Sports® supplies 20mm x 57mm hardwood maple strips** ensuring extreme dimensional stability and durability.

- ✓ Long life span: **30 YEARS +**
- ✓ Flexible design: **UP TO 6** refinishing works



QUICKLOCK™ PORTABLE SYSTEM



- ✓ Easy & fast installation and removal
- ✓ Customised solutions



INSTALLATION
OF 1 BASKETBALL
COURT IN **3H**

→ Ideal for temporary use in arenas



OUTDOOR PLAY AREAS



PARTNER OF SPORTS FEDERATIONS

LEADING SPORT FEDERATIONS CHOOSE
SPORT COURT

Outdoor surfaces for the world's most demanding athletes.

AS THE OFFICIAL COURT OF FIBA 3X3

Sport Court enabled FIBA to popularize the sport.



Member of the
ITF
Foundation



DESIGNED FOR MULTI-SPORTS

Sport Court is where teams form, friendships grow and champions start.

Sport Court surfaces are multi-use and can be outfitted for all the sports your athletes play and for all the facilities in your community.

Build a new court, retrofit an existing space, or set up portable courts for a tournament or event.



OUTDOOR PLAY AREAS SPORT COURT

266-269

- Partner of sports federations **266**
- Designed for multi-sports **267**
- Quick and cost-effective renovation **268**
- Comfort & safety **268**
- Powergame™ **269**

QUICK AND COST-EFFECTIVE RENOVATION



PowerGame™ surfaces are designed to overlay outdated concrete or asphalt surfaces, transforming them to colorful play surfaces in the blink of an eye.

Sport Court floors do not require yearly, costly refinishing.




COMFORT & SAFETY



The standardized head impact test [EN1177] measures how far a child can fall before sustaining an injury.

PowerGame™ significantly improves the playing comfort in comparison to asphalt or concrete.

PowerGame™
Unparalleled safety for sports


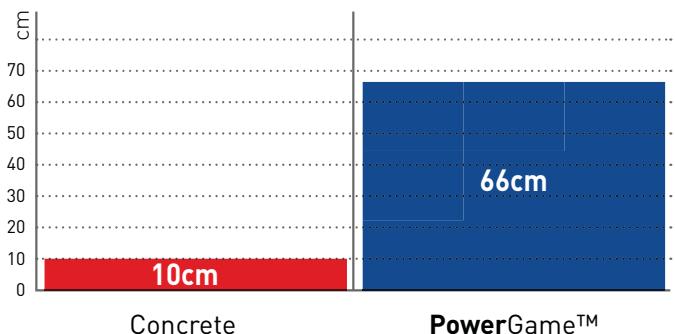


ENGINEERED FOR ATHLETES

Players develop their skills on a championship-tested surface that allows them to unleash their full potential. Sport Court delivers an unmatched combination of shock absorption, ball response, traction, and playability.

Hard courts increase injury risk for athletes.

Sport Court surfaces provide optimal comfort and protect athletes from overuse and stress injuries as well as reduce the likelihood of concussion and stress fractures.

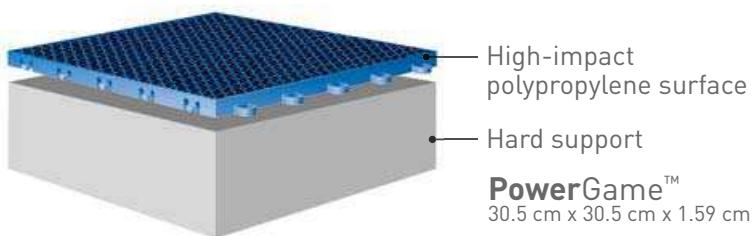

- ① **Double-tier** for increased shock absorption
- ② **Patented interlocking system** designed to support the movements of athletes and reduce the risk of injury
- ③ **UV stabilizers** maximize colour-fastness
- ④ **Backing** designed to promote drainage

LOWEST SKIN ABRASION
of any outdoor surface ✓



AVAILABLE COLOURS

Custom colours make the court uniquely yours.



ACCESSORIES

Polypropylene edges





.....

FINISHES AND
TECHNICAL
SOLUTIONS

.....

PAGES

270/311

.....



Finishes **272-287**

Sport Finishes **288-289**

Technical Solutions **290-311**

FINISHES


- Skirting solutions** 273-277
- Stair solutions** 278-280
- Profile solutions** 281-283
- Welding solutions** 284-285
- Entrance solutions** 286-287

Gerflor provides a complete range of solutions including skirting, stairs, profiles and welds.




FINISHES


SKIRTING AND COVING SOLUTIONS




Flexible full
cove former




Full cove former
Clip system




Capping strip




Capping strip -
Clip system



PVC Cove former





MDF Skirting




Semi-rigid skirting

There are two ways of finishing the junction between the floor and wall:

- 1 Installing the PVC covering up to the edge of the wall and using a skirting insert.
This is cost effective and time saving.

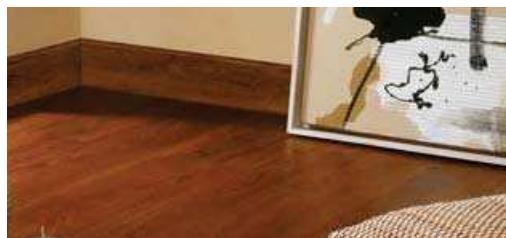








- 2 Making a cove.
This solution makes it easier to clean inside angles and edges.
It gives a waterproof connection wall/floor covering.



FINISHES


COVING SOLUTIONS

PVC Capping strips

Description	 <p>FLEXIBLE FULL COVE FORMER</p> <p>PVC profile combining the cover former and the capping strip into a single product.</p> <ul style="list-style-type: none"> Adapted to the hospital sector and any room requiring a waterproof skirting. <p>0488</p>	 <p>FULL COVE FORMER CLIP-SYSTEM</p> <p>PVC profile combining the cover former and the capping strip into a single product.</p> <ul style="list-style-type: none"> Adapted to the hospital sector and any room requiring a waterproof skirting. <p>0487</p>	 <p>P1509 / P769</p> <p>Finishes that can be welded to the floor covering</p> <ul style="list-style-type: none"> Do not use in commercial kitchens and showers <p>0496 0493</p>
Colours			
Benefits	<ul style="list-style-type: none"> Maximum floor covering thickness 4 mm Guarantees watertightness Quick to install 	<ul style="list-style-type: none"> Maximum floor covering thickness 4 mm Guarantees watertightness Quick & easy to install thanks to the capping strips with clip 	<ul style="list-style-type: none"> P769: Adapted to 2 mm floors P1509: Adapted to 2.2 mm floors
Packaging	 <p>15 x 3 lm strips.</p>	 <p>20 x 3 lm strips.</p>	 <p>P1509 0496 P769 0493</p> <p>30 x 3 lm strips.</p> <p>2 rolls of 25 lm</p>
Tips	<ul style="list-style-type: none"> Heat the skirting with a heat gun in order to match the shape of the wall Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting 	<ul style="list-style-type: none"> Heat the skirting with a heat gun in order to match the shape of the wall Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting 	<ul style="list-style-type: none"> May also be used as a floor stopping profile Weld with SG916 Use either a double bonding adhesive, a dispersion contact adhesive or a two-side adhesive compatible with the PVC skirting

COVING SOLUTIONS

PVC Capping strips




0491

CAPPING STRIPS

Rigid capping strip with flexible lip

- Do not use in commercial kitchens and showers




0486

CAPPING STRIP CLIP SYSTEM

Rigid clipped finishing profile with 2 flexible lips



- Capping strip that covers the skirting




4011 - 4012 - 4014

PVC COVE FORMER **NEW**

This accessory allows the floor-wall cove to be formed

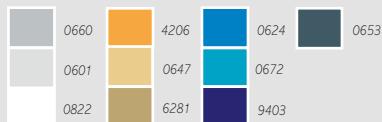


- Maximum covering thickness: 4 mm
- **Hygienic**
- **Easy to install**




Packaging
25 x 3 lm strips.

- Slightly heat the strip if it whitens once installed
- Use a miter shear for a perfect cut
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting

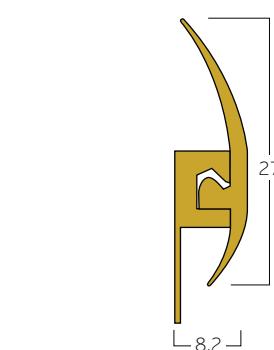

Packaging
20 x 3 lm strips.

- Heat the profile with a heat gun (temperature about 150°C) for the installation of the external corners
- Use a miter shear for a perfect cut
- Use SG916 for a perfect finish of the internal corners
- Slightly heat the profile if it whitens once installed
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting





Packaging
30 x 2 lm strips.

- Use a mitre shear for a perfect cut

Colours and images are not contractual.

FINISHES

SKIRTINGS

Description	MDF⁽¹⁾ skirting
	 <p>DECOR SKIRTING MDF⁽¹⁾ Skirting with digital printed foil</p>
	5934
	<ul style="list-style-type: none">▶ 52 designs developed to match with many of our LVT references.▶ To be installed with clip (5935) or mastic adhesive.
Benefits / Colours	  <p>For further information relating to matching references please refer to: Creation 70 Creation 55 Creation 30</p>
Tips	<p>Packaging 5934: 5 x 2,4 lm strips. / 5935: 1 box of 30 clips.</p> <ul style="list-style-type: none">• Use a wood saw with fine teeth• Use a mitre box for the corner• For more information contact the customer service


⁽¹⁾ Medium Density Fiber.

⁽²⁾ Call your customer service for further information.

SKIRTINGS

Description

Semi-rigid skirting



VYNAFLEX WOOD

Semi-rigid PVC skirting
to be placed on the wall


0457 - 0455 - 0456



Washed wood
8788

Tender wood
8785

Sunny wood
8786



VYNAFLEX


Semi-rigid PVC skirting
to be placed on the wall

0483 - 0482 - 0477




- Wood designs
- Resistant to washing water
- 2 soft lips (60 & 100 mm)

- Solid colour
- Resistant to washing waters

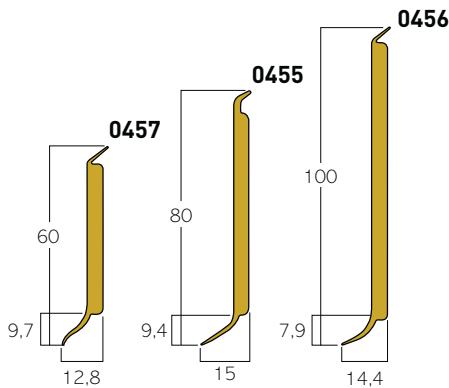

Packaging

20 x 2,5 lm strips.

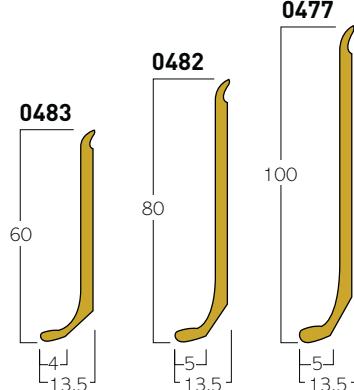

Packaging


0483 / 0477: 25 x 3 lm strips.
0482: 32 x 3 lm strips.

- Use skirting corner Cutter to handle internal and external angles
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting
- Apply an adhesion primer if the sub-floor is porous

- Use skirting corner Cutter to handle internal and external angles
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting
- Apply an adhesion primer if the sub-floor is porous

FINISHES


STAIR SOLUTIONS



Stair clip system



Aluminium stair nosing

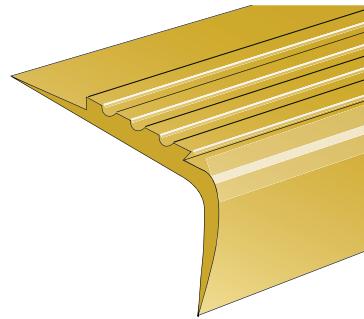


Grooved stair nosing

Gerflor has developed 2 solutions for installing a Vinyl floor on stairs to complement its range of floors:

1 Tarastep

- ▶ Install the base of the finishing clip onto the flat angle of the stair
- ▶ Install the Tarastep
- ▶ Clip the stair clip system


Adapted to rounded stair nosing.
Mill the angle for straight stair nosing.
For bird's beak stair nosing, fill the void beforehand.

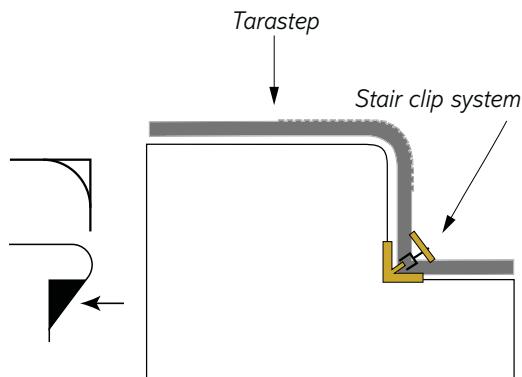

2 Stair nosing insert

- ▶ Install the vinyl flooring and the stair nosing by starting at the bottom of the stair
- ▶ Install the riser
- ▶ Install the stair nosing
- ▶ Install the flat of the stair
- ▶ Weld


Adapted to straight stair nosing, rounded stair nosing and bird's beak stair nosing.

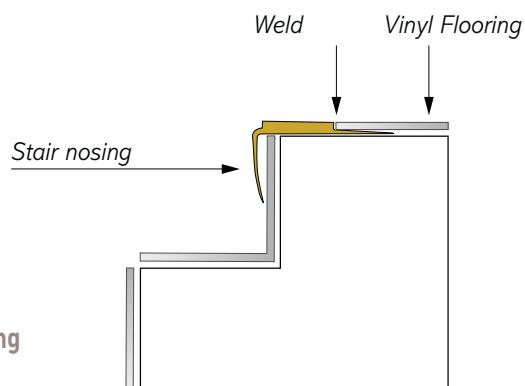

STAIR SOLUTIONS

Description

PVC product installed with the Tarastep



STAIR CLIP SYSTEM

- ▶ Perfect stair finish, highlights the bottom of the stair

H138



Colours

Stair nosing insert



0503

ALUMINIUM STAIR NOSING T67 ALU


- ▶ Landing/stair harmony
- ▶ Guarantees floor covering durability

0001

Benefits


Ensures:

- ▶ Better **watertight seal**,
- ▶ A better **look**,
- ▶ **Durability** of the floor covering
- ▶ **Easy maintenance**

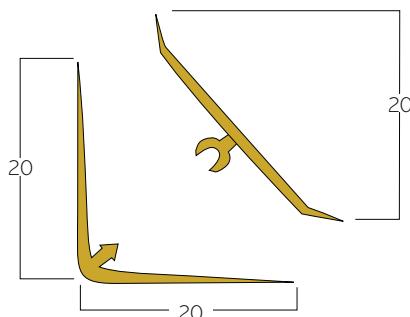

- ▶ **For a state-of-the-art stair finish**

- ▶ Delivered with a black strip made out of carborundum for an improved anti-slipping action of the stair nosing.

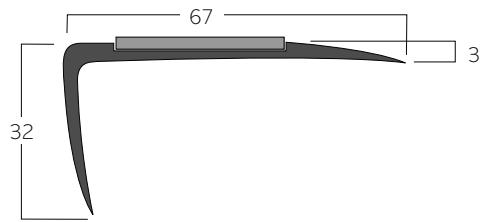

Tips

Packaging

9 x 2,7 lm strips.

- *Tip: Slightly heat the stair clip system if it whitens once installed.*
- *Use a miter shear for perfect cut*
- *The base is installed prior to the floor covering, then clip in the cover.*





Packaging

10 x 3 lm strips + 10 carborundum strips

- *Secure with flat head cross head countersunk stainless steel screws (not included).*


FINISHES

STAIRS

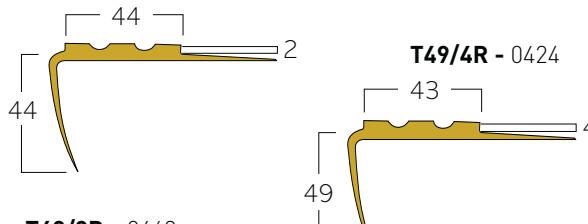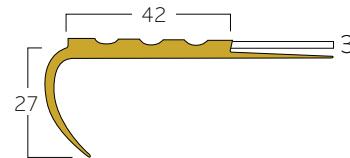
		Stair nosing insert		
Description		GROOVED PVC STAIR NOSING T49/4R - T49/3R - T49/2R Straight angles		GROOVED PVC STAIR NOSING T27/3R Rounded angles and bird's beak
Colours	 Gris 4203  Noir 6512	 Beige 6281	 Gris 4203  Noir 6512	 Beige 6281
Benefits	<p>T49/4R - T49/3R - T49/2R</p> <ul style="list-style-type: none"> ► Adapted to 2, 3 or 4 mm floor covering ► Weldable <p>T49/2R - 0461</p>  <p>T49/3R - 0462</p>  <p>T49/4R - 0424</p>  <p>Packaging 10 x 3 lm strips.</p>	<p>T27/3R :</p> <ul style="list-style-type: none"> ► Adapted to 3 mm floor covering ► Weldable <p>T27/3R - 0467</p>  <p>Packaging 10 x 3 lm strips.</p>		
Tips	<ul style="list-style-type: none"> ● Do not apply adhesive to the vertical part of the stair nosing ● Double bonding 			
<i>Colours and images are not contractual.</i>				

PROFILE SOLUTIONS


Our profiles provide solutions to several problems concerning links between floors, walls or bare spots depending on the flooring thickness and technical requirements




Diminishing profile




Connection profile



Shower threshold profile



Ramp edges



Aluminium profiles


They in particular, allow two types of connections to be dealt with:

1 Connecting profiles

The connections between two floor coverings

- ▶ Floor/Floor
- ▶ Floor/wall


Allow the link between two floor coverings with different thicknesses.

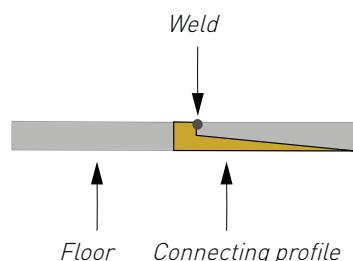

2 Ramp edges







The vinyl floor/bare spot connections

Protect the edging and prevent the floor covering from delaminating.

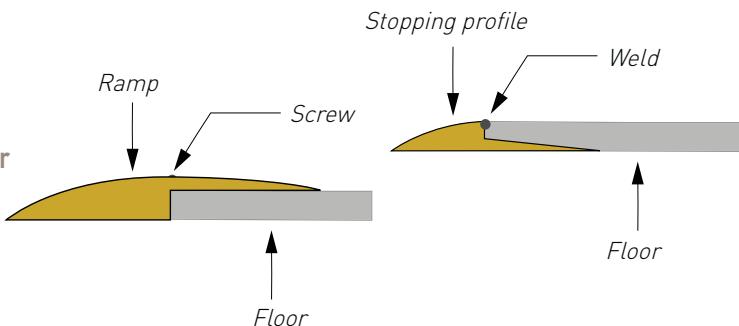

FINISHES

PVC PROFILES

Description	Floor to wall connecting profile	Floor to floor connecting profile	Ramp edges
Colours	 <p>0490</p> <p>DIMINISHING PROFILE</p> <ul style="list-style-type: none"> ► Coving/wall covering connection ► Used in laboratories, hospital shower systems, commercial kitchens 	 <p>0496</p> <p>P1509</p> <ul style="list-style-type: none"> ► These products allow the link between two-floor coverings to be made 	 <p>P769</p> <ul style="list-style-type: none"> ► Connect other surfaces and vinyl floors <p>0493</p>
Benefits	<ul style="list-style-type: none"> ► Makes it easier to link the floor covering and wall. ► Hygienic. Avoids bacteria accumulation ► Prevents the floor covering from tearing, improves durability and ensures watertightness. 	<ul style="list-style-type: none"> ► Junction between two floors of 2.2 mm and 5 mm ► Floor covering can be welded to profile to create a watertight seal ► Can also be used as a finishing profile 	<ul style="list-style-type: none"> ► Floor covering welding system ► Suitable for 2 mm floors ► Ensures watertight seal ► Can also be used as a capping strip
Packaging	 <p>2 rolls of 25 lm</p>	 <p>30 x 3 lm strips.</p>	 <p>2 rolls de 25 lm</p>
Tips	<ul style="list-style-type: none"> • Bonding with acrylic adhesive 	<ul style="list-style-type: none"> • Polychloroprene double bonding 	<ul style="list-style-type: none"> • Double bonding

ALUMINIUM PROFILES

Ramp edges




0504

ALUMINIUM
RAMP
2.8 MM


- ▶ Access ramps
resistant to
high traffic
and humidity

ALUMINIUM
RAMP
5-6 MM




0505

ALUMINIUM
CORNER
5-6 MM




1513

LOOSELAY
ALUMINIUM
RAMP 5-6MM



0609

LOOSELAY
ALUMINIUM
CORNER 5-6MM



0629

- ▶ Access ramps resistant to high traffic and humidity

0001

0001


Product suitable for floor coverings of:

- ▶ 2-3 mm
(Creation 70, Creation 55, Creation 30,...)

- ▶ Smooth shape for more utilisation comfort
- ▶ Connectors for a perfect connection of 2 profiles
- ▶ Pre-assembled corners for an easier installation and a perfect finish


Products suitable for floor coverings of:

- ▶ 5-6 mm **(Attraction®, GTI MAX, Creation 70 Clic System, Creation 55 Clic System, Creation 30 Lock,...)**




0504


Packaging
10 x 3 lm ramps

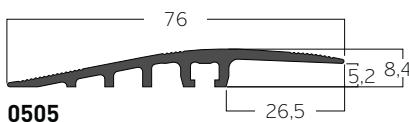


0505



Packaging
5 x 3 lm ramps (0505) / 4 corners (1513)



0609



Packaging
5 x 3 lm ramps (0609) / 4 corners (0629)

- Delivered with fixation kit
- Screwing of the ramp to the floor with flat cross head countersunk stainless steel screws (Aluminium ramp 5-6mm and aluminium corner)

- Looselay installation without damaging the subfloor (looselay ramp and looselay corner)

Colours and images are not contractual.

FINISHES

WELDING SOLUTIONS


Two types of welding solution exist:

1 Hot weld

- This is used for all types of PVC floors, for coving sport floors
- Ensures a complete watertight seal

Gerflor has a large range of rods available

The welding rod is placed in the chamfer between two floor coverings. When heated, it melts and fills the entire space to ensure complete watertight seal.

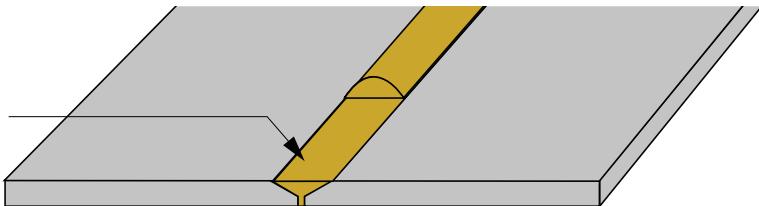


2 Cold weld

- Quick to implement
- Application on all types of PVCs except homogeneous ones
- Does not require specific equipment
- No watertightness

Gerflor offers SG916, a solution for cold treatment of joints:

The product is inserted by dry joint between the floor coverings to ensure the weld (SG 916)

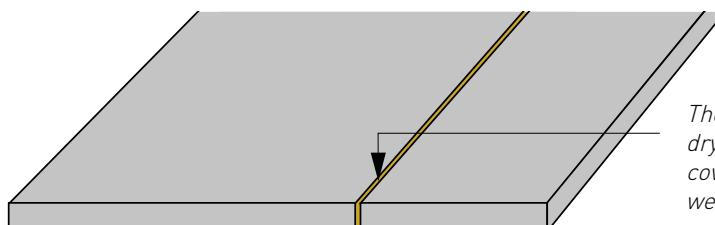

WELDS

Hot weld




WELD RODS

- Ø 4 mm
- Ø 4,1 mm
- Ø 5 mm
- Ø 6 mm

WELDING ROD AND FLOORING MATCHING TOOL

[http://www.gerflor.com/
servicesprofessionals/
welding-rods-
matching.html](http://www.gerflor.com/servicesprofessionals/welding-rods-matching.html)



Cold weld



SG 916

In kit - code 0548
In tube - code 0518

- **CR40:** Floor/floor weld - *Code 0585*
- **CR41:** Shower wall weld - *Code H231*
- **CR50:** Welding of sport floors - *Code H209*

Specific weld rods

- **CR50:** Weld, Tarasafe Plus, floor repairs on special order - *Code H009*
- **CA72:** Triangular rod for commercial kitchen floor to base welding - *Code H007*
- **CR60:** Welding of sport floors, repair on special order - *Code H011*
- **BBR40:** 100% Bio-based plasticizer rod for Mipolam Symbioz

Packaging

CR40, BBR40, CR41, CR50, CA72: 100 lm. coil
CR60: 60 lm. coil

Please contact us for further information on weld rods

- For a better weld the correct grooving should be performed.
- Use an adapted nozzle (Ultra Speed Nozzle).

- Cold treatment of joints for sheet floor coverings, **except homogeneous ones**
- **Colourless** solution used irrespective of the material colour
- **Excellent finishing quality:** prevents all visible joint line traces joint

Packaging

1 x 500 ml metal can
1 x plastic bottle
2 nozzles
3 adhesive-tape rolls of 50 lm

- Wait at least four hours before using the rooms
- Observe all the usual precautions: contains a flammable solvent.

Colours and images are not contractual.

FINISHES

ENTRANCE SOLUTIONS

Three cleaning zones to be covered at the entrance to a building

Each zone has a specific "cleaning" role:



ENTRANCE MATS

Description

ZONE 1



RIBBED RUBBER INSERT

Romat
Frequent traffic (500 p/day)



Romat GT
Heavy traffic (500 to 2,000 p/day)



Reversible
Intensive traffic (>2,000 p/day)



ZONE 2



TEXTILE INSERT

Romat
Frequent traffic (500 p/day)



Romat GT
Heavy traffic (500 to 2,000 p/day)



Reversible
Intensive traffic (>2,000 p/day)



ZONE 3



DIRT-TRAPPING MAT

Ronet
Frequent traffic (500 p/day)



Roclean
Heavy traffic (>500 p/day)



RUBBER GRATE INSERT

Reversible
Intensive traffic (>2,000 p/day)



ROMAT GT FOR GTI MAX FOR PEDESTRIAN TRAFFIC ONLY



1719 - 1500 x 1000 mm

In order to keep clean areas where 6 or 5 mm floorcoverings (GTI MAX / Creation 70 Clic System / Attraction® / Creation 70 X'Press / Creation 55 Clic System) are installed we are now offering a kit with a 1500 x 1000 mm Romat GT. It can be installed without damaging the subfloor (looselay).

This kit contains:

- ▶ 1 mat
- ▶ 4 frames composed of 4 inferior profiles and 4 superior profiles
- ▶ 4 external pre-assembled corners
- ▶ 60 5-7 screws
- ▶ 1 Installation guideline

- ▶ Eliminate dust, moisture and other residue from visitors' feet as efficiently as possible at the entrance to a building
- ▶ Prevent premature soiling and wear of floor coverings.

Benefits

SPORT FINISHES

We provide finishing solutions suitable for sports floor coverings such as permanent or temporary line marking solutions.



LINE MARKING OF SPORTS FLOORS

Gerflor provides a full range of products for marking temporary and permanent game lines.

Each colour is adapted to a specific line depending on the sport in question



1 Permanent marking

Permanent marking withstands cleaning and friction from shoes

- Kits specific to each sport
- TLD Aqua (Très Longue Durée – Very Long Term) paint (retail)



2 Temporary marking


Temporary marking enables quick implementation and removal

- Coloured adhesive tape

These colours are the official line colours however customised colours can be provided upon request

SPORTS FINISHES

MARKING

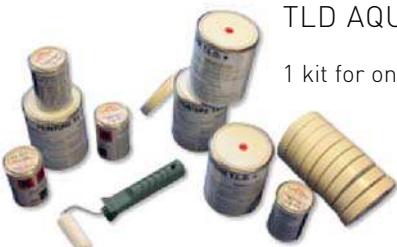Description	Permanent marking	Temporary marking																				
Colours	 <p>TLD AQUA PAINT KIT 1 kit for one line</p> <p>TLD AQUA (Très Longue Durée – Long long Term) Paint was specifically developed to resist the stresses from sports being played on gymnasium floors.</p> <p>These kits include:</p> <ul style="list-style-type: none">► Paint in the same colour as official lines► Hardener► Protective adhesive► Paint roller <p>Colours</p> <table><tbody><tr><td></td><td>085V - Basket Ball</td><td></td><td>085X - Tennis</td></tr><tr><td></td><td>085Y - Hand Ball</td><td></td><td>085W - Badminton</td></tr><tr><td></td><td>085Z - Volley Ball</td><td></td><td></td></tr></tbody></table> <p><i>Please contact us for customised paint and kits.</i></p>		085V - Basket Ball		085X - Tennis		085Y - Hand Ball		085W - Badminton		085Z - Volley Ball			 <p>COLOURED ADHESIVE STRIPS</p> <p>Coloured adhesive strips are ideal for temporary installations</p>								
	085V - Basket Ball		085X - Tennis																			
	085Y - Hand Ball		085W - Badminton																			
	085Z - Volley Ball																					
Benefits	<p>HEALTHY:</p> <ul style="list-style-type: none">► Paint with water action► No risk for players and workers► No substances belonging to REACH regulation (EC)► Inodorous: for game line painters and for players <p>SAFE</p> <p>ROBUST</p> <p>AESTHETIC</p> <p>EASY OF USE</p>	<p>Adhesive strips 3M 471</p> <table><tbody><tr><td></td><td>H197 0005</td><td></td><td>H197 0004 - H211 0009</td></tr><tr><td></td><td>H373 0201</td><td></td><td>H197 0002</td></tr><tr><td></td><td>H197 0006</td><td></td><td></td></tr></tbody></table> <p>Packaging H197 0005 / H373 0201 / H197 0006 / H197 0004 / H197 0002: 33 lm x 50 mm roll H211 0009: 33 lm x 80 mm roll</p> <p>NUMBER OF ADHESIVE STRIPS FOR 1 LINE</p> <table><tbody><tr><td>Handball</td><td>10 yellow 3M adhesive strips</td></tr><tr><td>Volleyball</td><td>4 white 3M adhesive strips</td></tr><tr><td>Futsal</td><td>10 white 3M adhesive strips</td></tr><tr><td>Basketball</td><td>9 red 3M adhesive strips</td></tr></tbody></table> <p><i>White is recommended in a single set</i></p>		H197 0005		H197 0004 - H211 0009		H373 0201		H197 0002		H197 0006			Handball	10 yellow 3M adhesive strips	Volleyball	4 white 3M adhesive strips	Futsal	10 white 3M adhesive strips	Basketball	9 red 3M adhesive strips
	H197 0005		H197 0004 - H211 0009																			
	H373 0201		H197 0002																			
	H197 0006																					
Handball	10 yellow 3M adhesive strips																					
Volleyball	4 white 3M adhesive strips																					
Futsal	10 white 3M adhesive strips																					
Basketball	9 red 3M adhesive strips																					

TECHNICAL SOLUTIONS

Taradouche Shower system291-295

**Taralay Premium
Dry-Tex™ System296-297**

Specific products298-305

- Isolating membranes 299
- ESD copper strip 300
- Maintenance 300-301
- Accessibility 302-303
- Clean Corner System 304-305

**Safe' Cap: solution
for asbestos support306-307**

Adhesives and tapes.....308-309

Tools310-311


Gerflor offers a full range of technical solutions such as the shower system, copper strips, adhesives or tools in order to provide all the technical requirements on site.




TECHNICAL SOLUTIONS

SHOWER SYSTEM


A complete floor and wall solution with a choice of two floor coverings, one wall covering and seven accessories.



Diminishing profile - 0490



Cove former - 4011



Cove former for internal wall angles CA 12 - H204



Perfect wall weld with CR41-H231



- Safety
Grained floor covering with slip resistance (Elegance SD, Tarasafe Ultra H₂O, Standard, Geo, Ultra Compact)
- Watertight system floor/wall junction
- System which guarantees hygiene
- Combination of colours 26 wall references and 56 floor references
- Access for all




PVC SITAR / SITAR V Drains
H112 / H113



PVC drain with inox grid - H090



Tarafoam: acoustic insulation sub-layer - 997C 6792



Shower threshold - 0469

grey
beige
blue

The threshold has been developed in 3 colours - grey, beige and blue in order to answer to the specific requirement of Alzheimer units (no contrast).

TECHNICAL SOLUTIONS

SHOWER SYSTEM

PVC Drains

Description



H112

SITAR
DRAIN

Drains are made from white injected PVC.
They enable:

- ▶ Drainage of water
- ▶ Compatibility with the Shower System
- ▶ Complete watertightness by PVC/PVC bonding
- ▶ Fire rating NF-M1

SITAR V
DRAIN



H113


Colours



0001


Benefits

- ▶ An **adjustable ring** depending on the screeds
- ▶ Height adjustment
- ▶ **2 outlets (horizontal and vertical)** allow for flexibility on site
- ▶ 50 mm trap seal

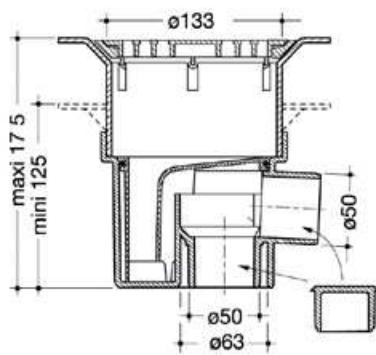

Packaging
Unit

- ▶ **Integral** drain with **vertical drainage**
- ▶ 50 mm trap seal

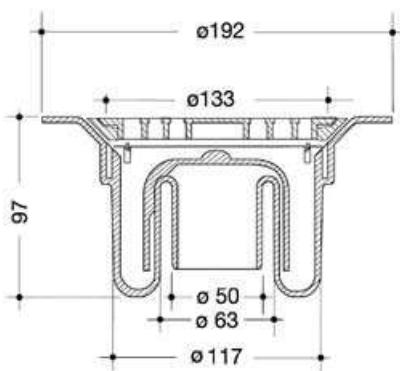

Packaging
Unit

Tips

- The floor covering is filled into the gully to a watertight seal

Colours and images are not contractual.

SHOWER SYSTEM

PVC Drain with inox grid





H090

PVC DRAIN
WITH INOX GRID


0001

- ▶ Adjustable height (up to 85 mm with extension)
- ▶ For vertical exit (or horizontal when an elbow - not supplied - is fitted)
- ▶ Flow rate: 0,6 liter per second

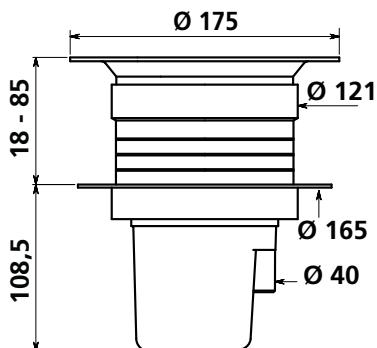

Packaging
Unit

Cove former for internal angles




H204

CA12
Angle cove former to be placed in the internal angles before installing the wall covering

0719

- ▶ Eliminates potential puncture damage to internal corners.
- ▶ **Size:** 12 mm

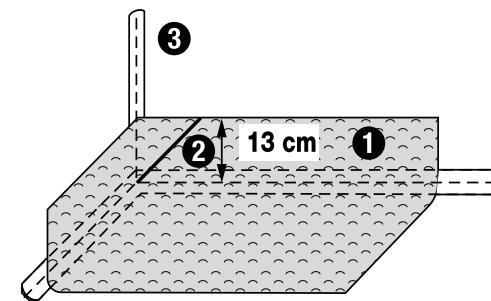

- 1 Cove the floor up to a height of 130 mm.
- 2 Cut the floor covering at 45° and weld the CR 40 rod.
- 3 Wall angle: double bonding of the CA 12 to the entire height.





Packaging
1 x 50 lm coil



The CR41 welding rod is specially adapted for shower system wall welds. Use the ultra fast nozzle


TECHNICAL SOLUTIONS

SHOWER SYSTEM
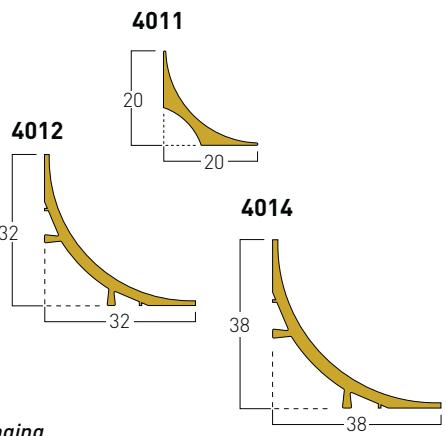
<p>Description</p>	<p>PVC wall covering/coving junction</p>  <p>0490</p> <p>DIMINISHING PROFILE</p> <ul style="list-style-type: none"> ▶ Coving/wall covering connection ▶ Used in laboratories, hospital shower systems, commercial kitchens 	<p>Cove former</p>  <p>4011 - 4012 - 4014</p> <p>PVC COVE FORMER</p> <p>NEW</p> <p>This accessory allows the floor-wall cove to be formed</p>
<p>Colours</p>	 <p>Noir 6512</p>	 <p>Noir 6512</p>
<p>Benefits</p>	<ul style="list-style-type: none"> ▶ Makes it easier to link the floor covering and wall. ▶ Hygienic. Avoids bacteria accumulation ▶ Prevents the floor covering from tearing, improves durability and ensures watertightness. 	<ul style="list-style-type: none"> ▶ Enables coving and allows watertightness ▶ Its rounded shape makes it easier to clean the floor/wall junction ▶ Offers a better look ▶ Limits the risk of piercing the floor covering ▶ Prevents accumulation of bacteria 
<p>Tips</p>	<p>Packaging 2 x 25 lm rolls</p> <ul style="list-style-type: none"> • Bond with acrylic adhesive 	<p>Packaging 30 x 2 lm strips</p> <ul style="list-style-type: none"> • Only a single 45° angle is cut • Double bonding (polychloroprene type) • Use a miter shear for a perfect cut

SHOWER SYSTEM


PVC shower threshold profile




0469

PVC SHOWER THRESHOLD PROFILE

- ▶ Makes the junction between a floor covering and a shower covering



- ▶ Allows welding of 2 mm or 3.5 mm floor covering thanks to the tab system
- ▶ Weld system with the covering which ensures perfect watertightness

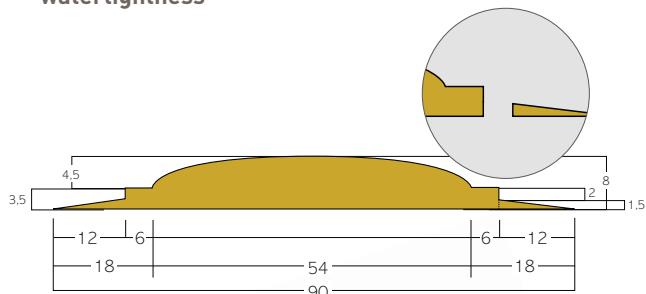

- The tab can be cut to suit a thicker floor
- Polychloroprene double bonding
- Application of sealant around the door jamb (PU or MS polymer sealant)

Colours and images are not contractual.




TECHNICAL SOLUTIONS

TARALAY PREMIUM DRY-TEX™ SYSTEM*

THE ALL-IN-ONE
MOISTURE SOLUTION




TARALAY PREMIUM DRY-TEX™ SYSTEM*

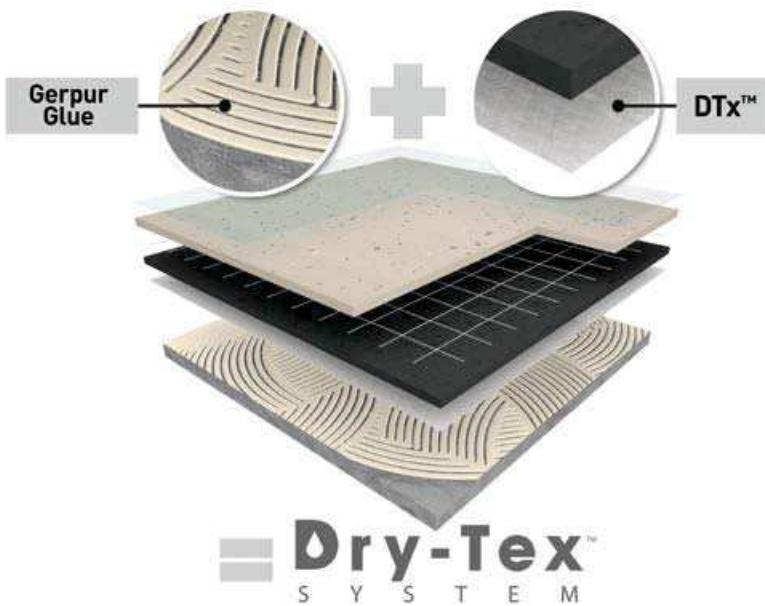


All the performance of Taralay Premium

See page 44




4343 Tokelau



8053 Anambas



4004 Pago



4003 Tao

And much more for any slab
with high moisture

SAVE MONEY

- ✓ up to 70% cost savings compared to other third-party mitigation systems

SAVE TIME

- ✓ the only one-step, full-spread adhesive solution

TECHNICAL SOLUTIONS

SPECIFIC PRODUCTS

Gerflor provides a set of products providing solutions to specific problems such as accessibility, insulation, maintenance of floors and electrical conductivity of our floors.



Isolating membranes



ESD copper strip



Accessibility




Gerflor Corner System



Maintenance

SPECIFIC PRODUCTS - ISOLATING MEMBRANES

Description	Isolsport	Bateco	Protection	Tarafoam
VINYL ISOLATING MEMBRANE	PROTECTIVE SURFACE	FLOOR PROTECTION NEW	COMFORT VERSION OF THE SHOWER SYSTEM	
				
0829 0002 Specially designed for sports For installation on concrete subfloors	H375 6801 Specially designed for sports Suitable for gymnasium / reception hall versatility	058X 0001 Preserve the floors laid down until the site is delivered.	997C 6792	
<ul style="list-style-type: none"> ▶ Vinyl isolating membrane, double side on non woven glass fibre with backing design made up of 3-branch star foam pads. ▶ Its design enables loose laying on sensitive subfloors (risks of humidity, coated, etc.) when it is associated with a Taraflex sporting floor. The raised effect allows humidity to circulate. ▶ Thickness: 1.7mm 	<ul style="list-style-type: none"> ▶ Protective surface made from black calendered and grained plasticised vinyl. ▶ Taraflex Bateco is especially designed to protect sport floors in the event of non-sports use of the room. It prevents marking by chairs, tables, heels on the sport floor. ▶ Thickness: 1.5mm 	<ul style="list-style-type: none"> ▶ Effective protection against scratches, stains, slip and other external stresses. ▶ Good hold on the floor for a safe use ▶ Reusable 	<ul style="list-style-type: none"> ▶ Provides acoustic insulation for the shower system (15 dB) and comfort under foot. ▶ Thickness: 2mm 	
Packaging 1 x 45 lm roll	Packaging 1 x 30 lm roll	Packaging Roll of 1 x 50 lm - 50 m ²	Packaging Roll of 2 m x 20 lm - 40 m ²	
<ul style="list-style-type: none"> ● Bond well at doors with PU adhesive to prevent delamination. ● Keep the raised surface, floor side, on the periphery ● Edge to edge installation ● Bond vinyl floors with Gertec adhesive 	<ul style="list-style-type: none"> ● Edge to edge installation ● Strips can be secured with single-sided adhesive tape 		<ul style="list-style-type: none"> ● Levels out around the edge of the room ● Acrylic bonding ● Edge to edge installation 	
Colours and images are not contractual.				

TECHNICAL SOLUTIONS

SPECIFIC PRODUCTS - ACCESSORIES

Description	Copper strip	Sport floor maintenance
0586 0001	 <p>Copper strip ESD COPPER STRIP Copper strip enabling earthing</p>	 <p>085P 0001 TRACIFLEX</p>
Benefits	<ul style="list-style-type: none">For electro-conductive floor coverings such as Elegance EL5, Technic EL5, Accord EL7Width 10 mm, thickness 0.08 mm.	<ul style="list-style-type: none">Removes resin from Handball courtsRecommended in sport room
Packaging	<i>1 x 200 lm roll</i>	 Packaging <i>1 l can</i>
Tips	<ul style="list-style-type: none">Prevent discontinuity between the angles by folding it back onto itself	<ul style="list-style-type: none">Traciflex may be sprayed on stubborn stains

SPECIFIC PRODUCTS - ACCESSORIES

Sport floor maintenance



DYNATECH TROPHY

085E 0001

- ▶ Multipurpose detergent for cleaning the vinyl sport floors (shoe marks and contact marks)
 - ▶ Also suitable for floors which are difficult to clean
-
- ▶ For all sport floors



Packaging
5 l can

Protecsol® Floor Maintenance



SPRAY
TARACLEAN

085A 0010


- ▶ Spray cleaner to remove occasional and tough stains
-
- ▶ Suited to all types of floors treated with Protecsol®
 - ▶ Easy and quick to use

Packaging
Box of 12 pieces

Colours and images are not contractual.

TECHNICAL SOLUTIONS

SPECIFIC PRODUCTS - ACCESSIBILITY

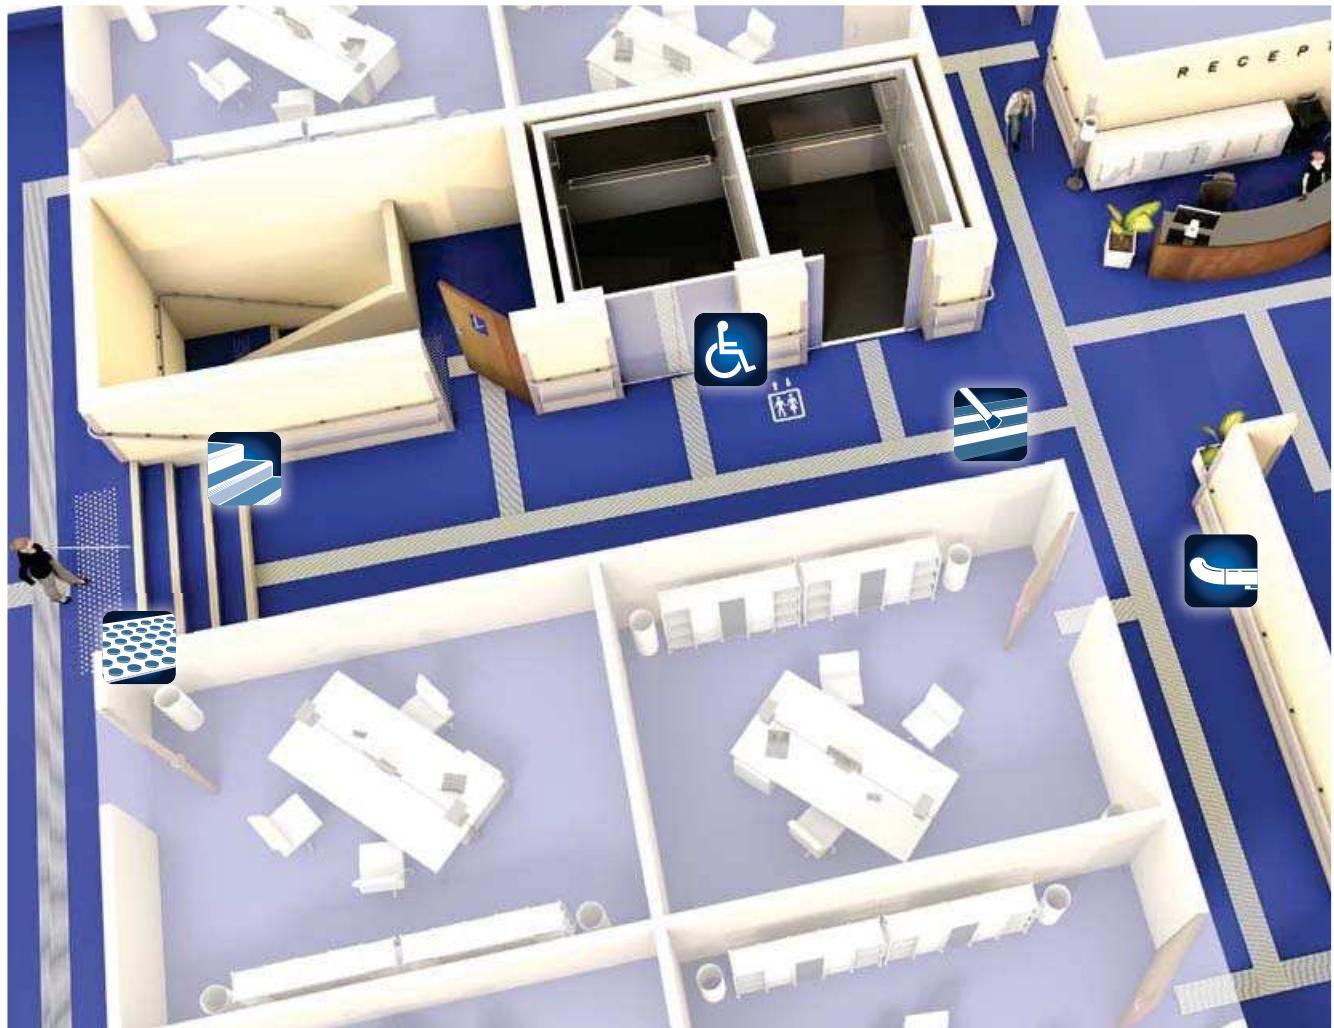

SPECIFIC PRODUCTS - ACCESSIBILITY



Warning Surfaces

Weldable tactile warning strip



Formats: 400 x 1350 mm - code: L009 /
400 x 2000 mm - code: L008

Self-adhesive tactile tile
ideal for renovation projects



Formats: 420 x 825 mm - code: 058D /
420 x 1350 mm - code: 058F

Self-adhesive tactile studs
for a more aesthetic look



Format: 5 h x 25 Ø mm - code: 058K



Self-adhesive Orientation Strip


Linear Guiding Strip



Format: 600 x 150 mm - code: 058I



Vibration Guiding Strip



Format: 600 x 150 mm - code: 058J



Other colours available (available on order of 2 packs for the tiles or 1 kit for the studs):



Signage

Personalised cut-to-size system



For more information,
please refer to the
"A Global Solution for
Accessibility" brochure.

TECHNICAL SOLUTIONS

SPECIFIC PRODUCTS - CLEAN CORNER SYSTEM

AN INNOVATIVE CORNER SYSTEM




Contamination control in technical platforms and clean rooms is an ongoing issue. Corners, in particular, are the focal point of most negligence in respect of hygiene rules:

- If not properly welded, they tear or subside under the weight of traffic;
- Their hollow shape makes them difficult to clean and decontaminate;
- Weakened by use, they eventually lose their watertightness.

Based on the experience of professionals in the field, Gerflor has developed **Clean Corner System**: a patent pending innovative corner solution stemming from several years of research and development (system only functioning with Gerflor floors).

With ultra-resistant and versatile profiles (picture 1) **Clean Corner System** can be used for all your projects with a perfect result (picture 2).

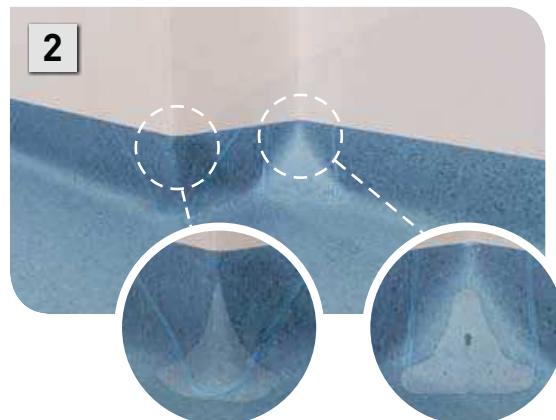

PATENT PENDING SYSTEM



058R Profile for external corners^[1]



058S Profile for internal corners^[2]



058T Installation templates kit

(1) External angle is covered by the respective pending patent applications: WO2016/005695 A1, FR3023313
(2) Internal angle is covered by the french pending patent application FR3013065

A TECHNOLOGY SERVING HYGIENE

Suitable for all Gerflor PVC floors, **Clean Corner System** technology makes it possible to meet Healthcare professional requirements and ensure full compliance with Industrial Clean Room hygiene and decontamination guidelines.

Internal & external corners
and Installation templates kit



Gerflor Floorings
(Mipolam, Taralay,
Tarasafe,...)



Wall Coverings
(Mural Ultra, SPM
Decochoc & Decoclean)



CLEANER AND MORE DURABLE INSTALLATIONS

REGARDLESS OF THE CONFIGURATIONS AND CONSTRAINTS FOR USE

SPECIFIC PRODUCTS - CLEAN CORNER SYSTEM

FOR UNIQUE RESULTS



WATERTIGHT

- Compliant with GMP
- Suitable for E2 and E3 zones
- Easy coving
- Limited and easy welding



RESISTANT & DURABLE

- Ultra-resistant bi-material corner profiles



CLEAN

- Quick and easy cleaning and decontamination
- Easy manoeuvring of twist upright vacuum cleaner
- No blind spot



VERSATILE

- Suitable for all Gerflor floors
- Suitable for all skirting heights (7 to 15 cm)
- Suitable for all cove formers (20 x 20 mm to 38 x 38 mm)
- Suitable for all angles (85° to 95°) with or without coving sections



ATTRACTIVE

- Neat and uniform design for all your corners



TECHNICAL SOLUTIONS

NEW

SAFE'CAP: DRILLING CAPSULE FOR ASBESTOS SUPPORTS

Asbestos has been recognised as carcinogenic, however it was not until 2002

that its use was banned in the European Union. A large number of buildings constructed prior to that are still operational and need to be renovated. The risks associated with inhalation of asbestos fibres (asbestos related lung cancer, asbestosis, mesothelioma, ...) affect both the users and workers at the renovation sites.

It is therefore essential to take all necessary measures to protect workers who may be in contact with asbestos fibres.

What solutions are used today to drill an asbestos support ?

VACUUM CLEANER WITH HIGH DENSITY FILTER

- > Bulky
- > Expensive
- > Needs electricity at the site




COVERING THE AREA TO BE DRILLED WITH WALLPAPER ADHESIVE / GEL

- > Messy
- > No set procedure
- > Not safe enough



Drilling with Safe'Cap

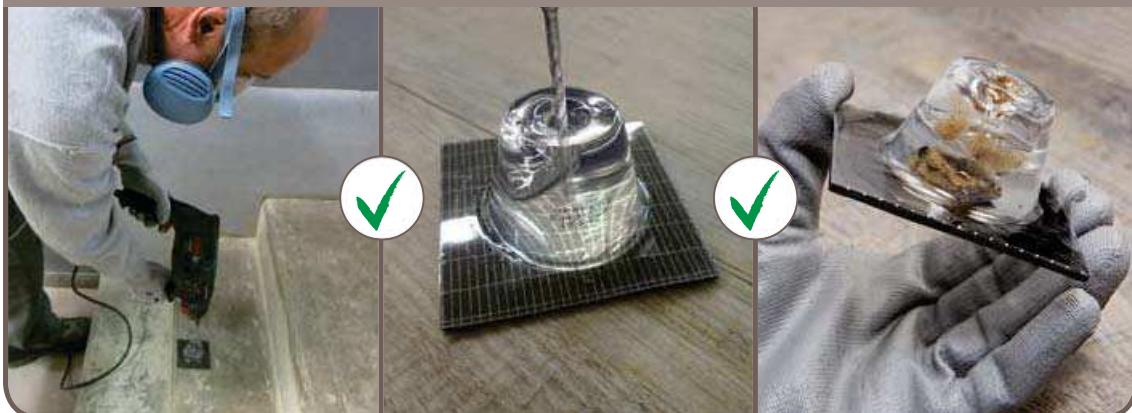

Safe'Cap

THE SOLUTION FOR DRILLING YOUR ASBESTOS FLOORS AND WALLS WITH COMPLETE SAFETY!



SAFE

- Collects asbestos dust
- Tested for dust concentration lower than the French public health threshold of 5 fibres per litre⁽¹⁾



ECONOMICAL

Quick and handy: No need for special equipment for asbestos protection (vacuum cleaner and dust-proof overalls)⁽²⁾



EASE OF USE

Locate, Fit, Drill:
Drilling asbestos **floors & walls***
is now easier!



CLEANLINESS

- Encapsulated dust
- No trace of asbestos on the support


* For more information, please refer to Gerflor's Installation Guidelines.

⁽¹⁾ These measurements have been taken by an accredited body. They can be used as a reference for drafting the procedures of companies when they carry out works in accordance with the Safe'Cap capsule installation guideline.


⁽²⁾ This procedure can be partially carried out without using any respiratory protection provided the company has validated its procedures by conclusive dust concentration measurements.




SINGLE USE



Maximum support roughness
 $< 1,5\text{mm}$



$\varnothing \leq 8\text{mm}$
 $\geq 80\text{mm}$



WALL ✓



FLOOR ✓



PACKAGING OF
36 CAPSULES

TECHNICAL SOLUTIONS

ADHESIVES AND TAPES

Gerflor has developed specific bonding solutions to make it easier to install its products.

Adhesives

Description	GERPUR M	GERTEC	GERFIX SUPER E 120
086C 0083			
Specially designed for sports			
Only for Dry Tex™ System (bonding of Taraflex sport floors with non-woven backing)		Application on floors with old vinyl floor covering for renovation or on Isolsport	Apply on a hydraulic base or resurfacing
Benefits	<ul style="list-style-type: none">Bonding on new and old humid concrete subfloorMono component PU adhesive, reactive to humidity which enables the DTX material to be fully bonded in humid environment (no restriction of humidity levels with the exception of surface water)Consumption: 400 to 450g/m²	<ul style="list-style-type: none">Acrylic adhesiveAdapted to Isolsport and other sport floorsConsumption: 150 to 200 g/m²	<ul style="list-style-type: none">Acrylic adhesiveConsumption: 300 to 350g/m²
Packaging	15 kg bucket	20 kg bucket	20 kg bucket
Tips	<ul style="list-style-type: none">To be applied with ergonomic trowel for rigid adhesive and B1 blade	<ul style="list-style-type: none">To be applied with a stiff aluminium trowel and blade A4 Standard TKB	<ul style="list-style-type: none">To be applied with a stiff aluminium trowel and blade A2 Standard TKB

ADHESIVES AND TAPES

Hook & loop and double sided tapes for textile backing

V107



0556 0001

D75



0534 0001

Non-migrating double sided tapes

FIX & FREE
100 **NEW**



0584 0001

FIX & FREE
740 **NEW**



058W 0001

Double sided tapes for sport floors

D 200 / D 300



H208 0007 / 085R 0001

D 200: Special double sided tape for wood floors

D 300: Special double sided tape for concrete

AT7



H206 0001

Single-side tape

Width: 107 mm

Width: 75 mm

Width: 100 mm

Width: 740 mm

Width: 100 mm

Width: 100 mm

- ▶ V107 and D75 enable installation of vinyl floor coverings with textile backing on the perimeter and under joints.
- ▶ Time saving and cleanliness by comparison with a bonded system.
- ▶ No gumming time and no smell.

- ▶ New double-sided tapes in order to install and uninstall our floorcovering easily, without damaging the subfloor. This is particularly useful for "ephemeral areas" (in retail for instance) or for renovation of subfloor containing asbestos.
- ▶ Fix & Free 100 is suitable for textile backing floorcovering. Fix & Free 740 is suitable for Creation Clic and GTI.
- ▶ Time saving and cleanliness by comparison with a bonded system.
- ▶ No gumming time and no smell.

- ▶ Adapted to temporary installation on wood floors or concrete
- ▶ Requires a test on site for validation

- ▶ Black
- ▶ Bonds without leaving marks, non migrating

Holds strips:

1. During non sportive events
2. Enables the material to be secured on the tube at the time of winding
3. Holds strips during the storage time

Packaging
4 x 25 lm rolls

Packaging
1 x 25 lm roll

Packaging
1 x 50 lm roll

Packaging
1 x 25 lm roll

Packaging
1 x 50 lm roll

Packaging
1 x 33 lm roll

Required material:
• Double side tape reel


Required material:
• AT7 tape reel

Refer to the product glossary for information on colours and packaging

TECHNICAL SOLUTIONS

TOOLS

Gerflor provides tools to facilitate installation and treatment of floor coverings.

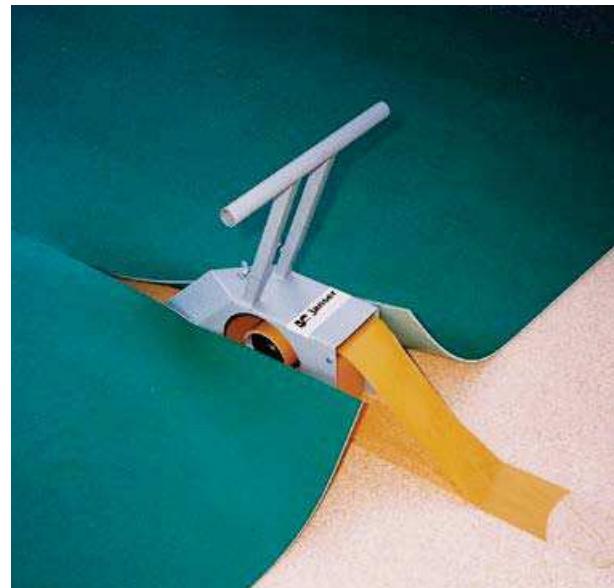

TOOLS - SPORT

Storers



DOUBLE-SIDED TAPE REEL

Accessories used for unwinding double-sided tapes D200, D300.

H372 0001



WALL ATTACHED FLOOR COVERING STORAGE

Gerflor also offers:
Wall attached floor covering storage for 4, 6 or 8 rolls
Width: 1.5 meters*



SINGLE SIDE TAPE REEL

Accessories used for unwinding single-sided tape AT7 and holding BATECO strips together.

H367 0003



SERVING TROLLEY - STORERS

A serving trolley; floor covering storers on wheels for 6 or 8 rolls. Motorised. Unwinds, winds up, raises and stores the floor covering rolls. Adapted to Bateco and sports floors.
Width: 1.5 meters*

*2 meters available on special request



RESTRAINING STRAP VELCRO STRIPS

L=2.10m for 60 cm dia. rolls approximately.

H295 0001



A RANGE OF ADDITIONAL ACCESSORIES FOR ASSISTING INSTALLATIONS (pressure rollers, strap hoists,...)

*Item codes: refer to glossary.
For more information, please contact the Gerflor sales department.*



SPECIFICATIONS,
INSTALLATION
&
MAINTENANCE

PAGES
312/323



Gerflor specifications314-319

Installation & maintenance.....320-323

GERFLOR SPECIFICATION

HEALTHCARE - HOSPITAL - CLINIC - RETIREMENT HOME

	HOMOGENEOUS FLOORINGS		MULTILAYERED FLOORINGS						 Comfort	
	 Compact	 Compact	 Comfort	 Compact	 Comfort	 Compact	 Comfort	 Compact	 Comfort	 Compact
HEALTHCARE - HOSPITAL - CLINIC										
Reception	•							•	•	
Corridors	•		•	•			•	•		
Waiting room	•		•	•	•		•	•	•	•
Bedroom	•		•		•			•	•	
Bathroom - Toilets										
Careroom - Medical - Sick bay	•		•		•		•	•	•	
Rehabilitation room			•	•	•					
Surgery	•		•		•		•	•	•	
Theatre block	•		•				•			
Intensive care unit	•		•				•			
Radiotherapy - Laboratory	•			•			•			
Laundry - Store room										
Stairs										•
RETIREMENT HOME										
Reception	•						•	•		
Corridors	•		•				•	•		
Bedroom	•		•		•		•			
Bathroom - Toilets										
Living room			•	•	•					
Laundry - Store room										
OFFICE - ADMINISTRATION										
Reception	•						•	•		
Office			•		•					
Bathroom - Toilets										
Meeting room - Board room			•		•					
Computer room										
Stairs										•

• GERFLOR's recommendation

□ Other possible solutions

OFFICE - ADMINISTRATION

FAST TRACK LOOSELAY TILES		LUXURY VINYL TILES				TECHNICAL SOLUTIONS		SAFETY FLOORING			
		Comfort	Compact	Compact	Compact	Compact	Compact	Comfort	Compact	Comfort	Compact
Attraction®											
	GTI Max										
	GTI EL5	Saga ²									
			Creation 70 Creation 70 Clic System		Creation 70 X'Press		Creation 30/ Creation 30 Lock / Creation 30 X'Press		Static Control flooring		Tarasafe Ultra Comfort
				Creation 55 Creation 55 Clic System		Creation 55 X'Press		Shower system		Wall covering	
											Tarasafe Ultra H2O
											Tarasafe Ultra / Geo / (SparClean®)
											Tarasafe Standard
											Tarasafe Plus / Super
•	•	•					•			•	
•	•	•					•			•	
•	•	•					•			•	
•	•	•					•			•	
•			•	•	•		•			•	
			•	•	•					•	
			•	•	•					•	
			•				•			•	

GERFLOR SPECIFICATION

EDUCATION - INDUSTRY - HOTEL - RESTAURANT



	HOMOGENEOUS FLOORINGS		MULTILAYERED FLOORINGS				
	Compact	Compact	Comfort	Compact	Comfort	Comfort	
Homogeneous Flooring [Evercare™]			Taralay Premium Comfort		Taralay Element Comfort	Taralay Impression Comfort	
Homogeneous Flooring [PUR/PU]					Taralay Uni Comfort	Taralay Initial Comfort	Taralay Premium Compact

EDUCATION

Reception	•					•	•		
Corridors	•		•			•	•		
Classroom	•		•		•	•		•	
Dormitory room				•	•	•			
Changing room									
Bathroom - Toilets									
Meeting - Library		•		•	•		•		
Computer room		•		•	•				
Laboratory	•					•		•	•
Student's residence				•	•				
Student's refectory	•		•		•				
Multipurpose room - Hall	•		•		•				
Stairs									•

INDUSTRY

Clean room / Laboratory	•					•			
Changing room	•					•			
Computer room									
Production	•					•			
Stocking and Packaging areas									
Stairs									•

HOTEL - RESTAURANT

Reception							•	•	
Bedroom						•			
Bathroom - Toilets									
Restaurant - Bar							•	•	
Conference - Exhibition	•					•		•	
Cinema - Show - Theatre			•		•		•		
Stairs									•

• GERFLOR's recommendation

□ Other possible solutions

GERFLOR SPECIFICATION

RETAIL - HOUSING - KITCHEN



HOMOGENEOUS FLOORINGS		MULTILAYERED FLOORINGS						
	Compact	Compact	Comfort	Compact	Comfort	Compact	Comfort	Tarastep
Homogeneous Flooring (Evercare™)			Taralay Premium Comfort		Taralay Impression Comfort		Taralay Premium Compact	
Homogeneous Flooring (PUR/PU)			Taralay Element Comfort		Taralay Uni Comfort		Taralay Element Compact	
								Taralay Initial Compact

RETAIL								
Shop	•						•	
Department store							•	
Supermarket							•	
Cafeterias		•		•		•		
Stocking areas								
Stairs								•

HOUSING								
Dry Private room						•		
Damp Private room						•		
Reception area - Corridor - Landing					•			
Other private home								

KITCHEN								
Collective kitchens								
Food preparation areas - Canteen								

- GERFLOR's recommendation
- Other possible solutions

RETAIL - HOUSING - KITCHEN

FAST TRACK LOOSELAY TILES			LUXURY VINYL TILES			TECHNICAL SOLUTIONS		SAFETY FLOORING		
Attraction®	GTI Max	GTI EEL5	Saga ²	Creation 70 Creation 70 Clic System	Creation 70 X'Press	Compact	Compact	Compact	Comfort	Compact
•				•	•					
•				•	•					
•	•			•	•					
	•									
						•				
						•				
						•		•	•	•
					•	•		•	•	
							•			•
							•			•

INSTALLATION & MAINTENANCE



INSTALLATION PROCEDURES

Please refer to our installation techniques on www.gerflor.com



MAINTENANCE

Surface treatments:

Protecsol®

The original no-polish-for-life solution.

This unique UV-cured polyurethane surface treatment protects the floorcovering and eliminates the need for costly emulsion dressings throughout the life of the product.

Developed exclusively by Gerflor back in 1987, Protecsol® is a permanent, factory applied treatment which has been proven independently to reduce both the time and costs required to protect standard, resilient floorcoverings.

Gerflor is an innovative manufacturer and continuously strives through heavy investment in R&D to meet and exceed its customers expectations both in terms of product quality and in low environmental impact.

Our plants are constantly being upgraded and improved with the latest round of investments for Protecsol® concluding in 2006.



All the advantages of Protecsol®, and more!

PROTECSOL® 2 technology combines all the advantages of Protecsol®, tested and approved over 20 years ago: ease of maintenance, no need for wax and polish for life, water and detergent savings, plus two additional benefits:

① The best stain shield


Highly durable: Exclusive surface treatment applied by UV laser cross-linking provides superior durability and an even surface thickness, creating an impenetrable barrier against stains and chemicals

Longer life expectancy.


Water-repellent effect:

The surface treatment creates a 100% non-porous barrier to prevent all liquids and chemicals from penetrating the materials, remaining on the surface


Simple and easy stain removal.

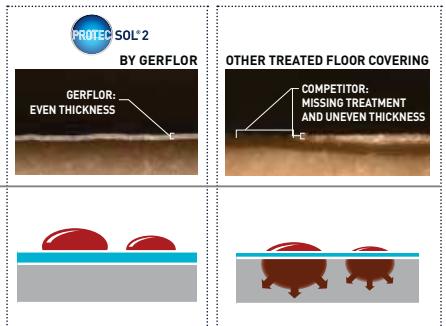

Exclusive to Gerflor

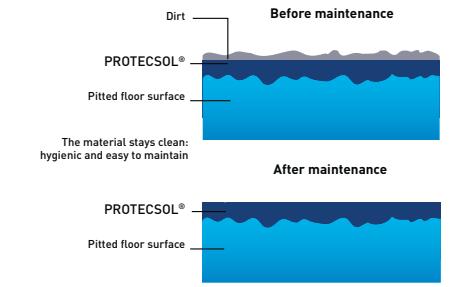

Low environmental impact

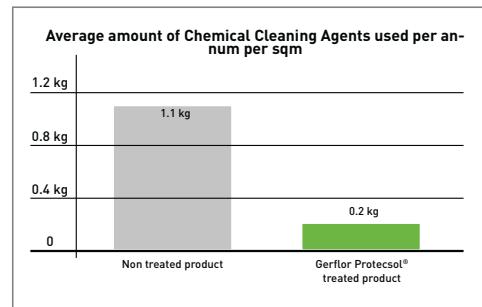

② Matt effect for enhanced design




SparClean®

New generation of surface treatment for Tarasafe safety flooring.

SparClean® is a powder coated treatment that when heated forms a totally smooth surface between the mineral crystal particles, eliminating dirt traps and setting new standards for cleanliness and hygiene. The unique method of manufacture ensures that the slip resistance of the Tarasafe safety flooring is not impaired in any way, yet provides a safety floor that is easy to clean.

SparClean® is a permanent surface treatment that gives extreme resistance to soiling and staining, offers excellent resistance to chemicals and ensures long term product durability.

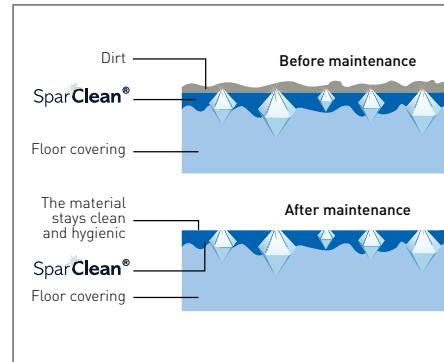

evercare™ TECHNOLOGY

An exclusive patented technology by Gerflor.

The best chemical stain resistance surface treatment

Highly Durable: Exclusive surface treatment applied by UV laser cross-linking provides superior durability and an even surface thickness, creating an impenetrable barrier against stains and chemicals found in healthcare like betadine, eosin or anti-bacterial hand gel.	 GERFLOR: EVEN THICKNESS	 COMPETITOR: MISSING TREATMENT AND UNEVEN THICKNESS
Longer life expectancy.		
100% non-porous surface: The surface treatment creates a 100% non-porous barrier to all liquids and chemicals, keeping all stains floating on the surface.		
Simple and easy stain removal.		



PUR +

Polyurethane surface treatment.

PUR+ surface treatment provides excellent cleaning characteristics and improved resistance to scratching. It significantly delays application of wax and provides excellent resistance to chemicals.

PUR

Polyurethane surface treatment.

PUR surface treatment is a good foundation for routine maintenance and avoids the immediate use of an acrylic emulsion after installation.

PU

Protective PU factory seal.

This factory coating initially applied is an installation protection and a good foundation for routine maintenance. Acrylic emulsion / polish is required after installation.

MAINTENANCE

Gerflor floorings, in common with all heavy duty floorings, require correct and regular maintenance. Whatever the manufacturing finish, satisfactory results can only be obtained by following certain basic maintenance rules.

Rubber leaves indelible stains on vinyl floorings:

- ▶ Do not use mats with rubber backing
- ▶ Replace tubular furniture feet with those made of Vinyl or polyamide (do not use rubber furniture feet and wheels). Never use solvent-based wax, seals, polishes or varnish, particularly those containing acetone and other Vinyl solvents. Place a barrier mat [which does not have a rubber backing] in doorways and entrances.
- Delay maintenance until 72 hours installation for rolls and an entire week after installation for tiles.

Six types of maintenance are recommended according to the floorcovering installed:

- Very low maintenance = floorings with PROTECSOL® and PROTECSOL® 2 treatments.
- Very low maintenance for high quality homogeneous flooring = Evercare™ treatment.
- Very low maintenance for slip-resistant flooring = SparClean® treatment.
- Low maintenance = floorings with polyurethane PUR & PUR+ treatments.
- Normal maintenance for homogeneous flooring = PU treatment.
- Normal maintenance = non treated floorings.
- Specific maintenance = antistatic and conductive floorings.

► VERY LOW MAINTENANCE PRODUCTS

With PROTECSOL® 2 treatment: Taralay Premium, Taralay Impression, Attraction®

With PROTECSOL® treatment: Taralay Element, Taralay Uni, Taralay Initial, Saga².

With Evercare™ treatment: Mipolam Symbioz™, Mipolam Esprit, Mipolam Affinity, Mipolam Accord, Mipolam Elegance, Mipolam Cosmo, Mipolam Troplan, Mipolam Accord EL7, Mipolam Elegance EL5, GTI EL5.

With SparClean® treatment: Tarasafe Geo, Tarasafe Ultra, Tarasafe Ultra Comfort.

It is not necessary to seal the floor during its lifetime, the maintenance cost will be greatly reduced during the life of the floor.

▶ INITIAL CLEANING

Remove loose debris after the installation of floor. Wash floor with a low speed cleaning machine (150-200 rpm) fitted with a red pad. Use neutral detergent. Ensure that all detergent residues are rinsed and removed from the floor.

▶ PROTECTION

This step also known as «metallisation», «self-shine», or «polishing», is not necessary for these treated products.

▶ DAILY MAINTENANCE

Remove dirt with a damp mop and neutral detergent. Dry sweeping is also possible. Mechanical maintenance provides better aesthetic results.

▶ PERIODIC MAINTENANCE

Clean with a high speed (450 rpm) machine fitted with a red pad or nylon brush or scrubbing machine + neutral detergent.

► LOW MAINTENANCE PRODUCTS

With PUR treatment: Mipolam Classic, Tarasafe Standard.

With PUR+ treatment: GTI MAX, Creation 70 (DB, Clic System, X'Press), Creation 55 (DB, Clic System, X'Press), Creation 30 (DB, Lock, X'Press).

PUR and PUR+ treatments are protective polyurethane surface treatments applied to the product during the manufacturing process. Results: it is not necessary to seal the floor after installation. Protection is required when aesthetic and hygienic properties are judged unappropriate by maintenance staff. In the meantime, maintenance costs are reduced.

▶ INITIAL CLEANING

Remove loose debris after the installation of the floor. Wash floor with a low speed cleaning machine (150-200 rpm) fitted with a red pad. Use neutral detergent. Ensure that all detergent residues are rinsed and removed from the floor.

▶ PROTECTION

This step also known as «metallisation», «selfshine», or «polishing» is only necessary when aesthetic and hygienic properties are judged unappropriate by maintenance staff.

▶ DAILY MAINTENANCE

Remove dirt with a damp mop and neutral detergent or floor maintainer. Dry sweeping is also possible.

▶ PERIODIC MAINTENANCE

Clean with a high speed (450 rpm) machine fitted with a red pad, or nylon brush, or a scrubbing machine + neutral detergent, or floor maintainer.

► NORMAL MAINTENANCE PRODUCTS

With PU factory seal: Architecton.

Non treated floorings: Tarasafe Super / Plus.

► INITIAL CLEANING

Remove loose debris after the installation of floor. Wash and clean off with a machine fitted with blue or green pad + stripping agent at 150-200 rpm. The brown pad is suitable for removal of heavy dirt and/or grease. Ensure that all detergent residues are rinsed and removed from the floor.

► PROTECTION

This step is also known as "metallisation", "self-shine", or "polishing". It is usual to apply 3 coats of polish to new floors, as this will impair the slip resistance, allowing one coat to dry before applying the next coat.

 Do not use this treatment with the Tarasafe products to keep their slip resistance properties.

► DAILY MAINTENANCE

Remove dirt with a damp mop and neutral detergent or disinfectant. Dry sweeping may be sufficient.

► PERIODIC MAINTENANCE

Clean with a high speed (450 rpm) machine fitted with a blue or red pad using a spray detergent or floor maintainer. For Tarasafe ranges, clean with a machine fitted with a blue or green pad (450 rpm) or a scrubbing machine + neutral detergent. Every year protection should be removed and reapplied.

► SPECIFIC MAINTENANCE PRODUCTS

Static control floorings: Mipolam Robust EL7, Mipolam Accord EL7, Mipolam Technic EL5, Mipolam Elegance EL5.

► INITIAL CLEANING

Remove loose debris after the installation of floor. Wash and clean off a machine fitted with blue pad + stripping agent (such as REMAT manufactured by WETROK) at 150-200 rpm. Ensure that all detergent residues are rinsed and removed from the floor. The green pad is suitable for removal of heavy dirt and/or grease.

► PROTECTION

This step is also known as «metallisation», «self-shine», or «polishing». Do not protect the floors in surgery rooms : only apply one coat of MEPOL HMA manufactured by WETROK or equivalent complying with electrical properties.

► DAILY MAINTENANCE

Damp mop and neutral detergent and disinfectant to remove dirt.

► PERIODIC MAINTENANCE

Clean with a high speed (450 rpm) machine fitted with a red pad or nylon brush + neutral detergent.

► STAIN REMOVAL TABLE

Blood - Urine - Faeces: Use diluted bleach and thoroughly rinse with water to remove all residues.

Vinegar - Tomato - Mustard: Add a few drops of ammonia to water, this may remove the stain.

Rust: Use either proprietary anti-rust treatment or oxalic acid (rinse thoroughly).

Heavy grease - Paint - Rubber scuffs - Hair colourings - Food fats - Ball point or felt-tip pens: Petrol. White Spirit. Scrub using an undiluted detergent, rinse thoroughly and remove all residues.

Cigarette burns: For calendered products : rub gently with a very fine grade sandpaper, or fine wirewool. Apply a self-shine emulsion over the entire surface.

► CLEANING & MAINTENANCE PRODUCTS


For the maintenance of its floorings Gerflor recommends contacting the following companies:

W & M FRANCE PROFESSIONAL SAS (wmprof.com) / **ECOLAB** (henkel-ecolab.com) / **DIVERSEY** (johnsondiversey.com)
KIEHL FRANCE (info@kiehl.fr)



GERFLOR WEB SITE

**NEW DESIGN,
NEW NAVIGATION!**

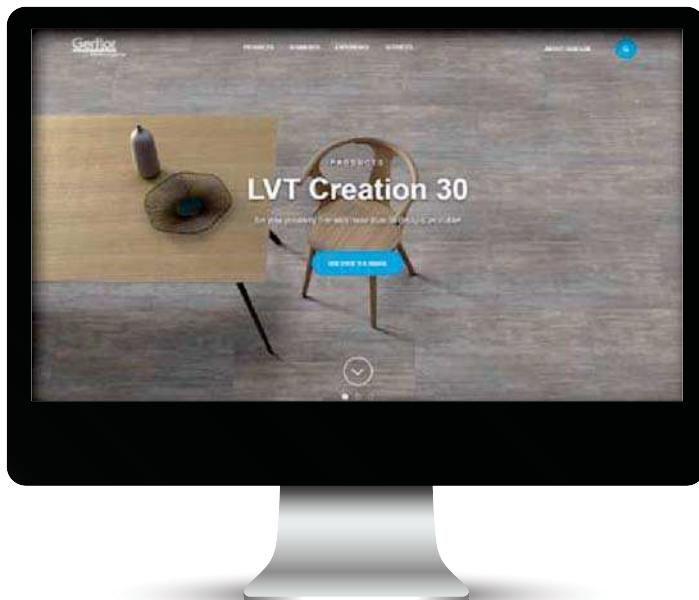

A website you can **access on your tablet or smartphone** everywhere!

&



Follow us on social media!

Gerflor

Be connected!



#Gerflor




www.gerflor.com




1 ON LINE VIRTUAL LIBRARY

Thanks to the **virtual library** find all types of documentation online, even the cards! You can take a look at the cards, download them or order them.

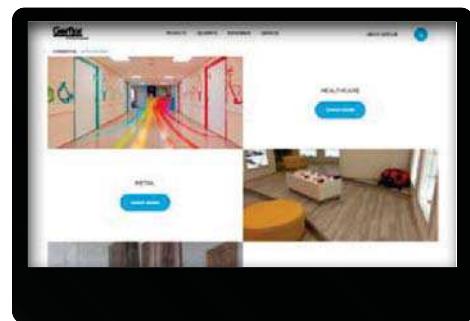

2 SECTION "SEGMENTS"


Navigate by market: find product recommendations, reference pictures and all information relating to **products**.

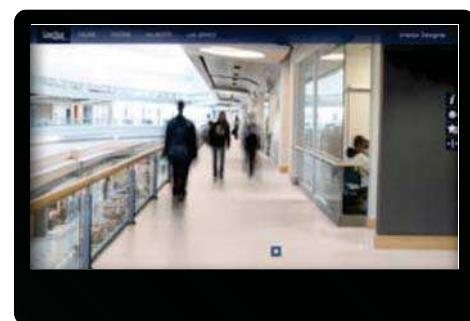

3 ROOM VISUALIZER "INTERIOR DESIGNER"

Interior designer

Choose a picture or upload the picture of your own project, select a Gerflor floor and visualize in few clicks the results!

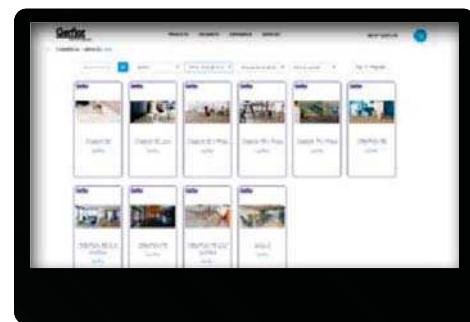

4 BIM SECTION

DOWNLOAD GERFLOR BIM OBJECTS!

In this section, we offer all our flooring in IFC, REVIT & Archicad formats.

GERFLOR INTERNATIONAL

Tel: +33 (0)4 74 05 40 00

Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

gerflor.com

**ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC**
Gerflor Don't forget our complementary ranges!

Handrails



Wall Coverings & Protections



Entrance mats



Skirtings & Profiles

Be connected!

www.gerflor.com

#Gerflor

GERFLOR, ECO-RESPONSIBLE SOLUTIONS
COMPOSITION
 100% REACH compliant
 FREE of formaldehyde
 FREE of heavy metals
 FREE of solvent
 
RECYCLED CONTENT
 25% average
 recycled content
 100% REACH compliant
 recycled content
 
RECYCLABILITY
 100% recyclable product
 
INDOOR AIR QUALITY
 TVOC emissions between
 10 and 100 times better than
 norms requirements
 Floorscore certified
 No formaldehyde emission
 
INSTALLATION
 Innovative adhesive
 free installation systems
 
 - Eco-designed according to a
 product specific Life Cycle Analysis
 - Product specific EPD
 (Environmental Products
 Declaration) available
 - Manufactured in an Iso 14001
 and Iso 50001 certified site
 - Contribution to many Green Building
 Schemes (LEED, HQE, BREEAM...)
 
WELLNESS
 Health: Antibacterial activity
 (inhibits growth > 99%)
 Safety: Anti slip performance
 Comfort: Walking comfort
 and impact noise reduction

Gerflor®

theflooringgroup