



# Experimental investigation of oxy-combustion behaviour of single biomass pellets using high-speed imaging and colour processing techniques

**G. Lu and Md M. Hossain**

*School of Engineering and Digital Arts, University of Kent*

**Q. Gu, T. Chen, F. Sher, and H. Liu**

*Faculty of Engineering, University of Nottingham*

# Outline



- **Background**
- **Experimental set-up**
- **Test conditions**
- **Measurement**
- **Results and discussions**
- **Concluding remarks**

# Background

- Biomass fuels have widely been accepted as renewable energy in new and retrofitted power/thermal plants (pulverised, fluidised bed, or grate chain boilers).
- Biomass fuels, however, can vary widely in properties, composition and structure, leading to drastically different 'fuel performance', particularly under oxy-combustion conditions.
- Limited work has been undertaken for the fundamental understanding of the combustion behaviours of biomass fuel under oxy-conditions.
- A combination of high-speed and spectroscopic imaging, and image processing techniques is employed to investigate the combustion behaviours of single biomass pellets in a V-DTF (Visual Drop Tube Furnace) under both air and oxy conditions.

# Experimental set-up

- **V-DTF**- an electrically heated drop tube furnace equipped with a quartz tube@50 mm inner dia and 1400mm long, capable of maintaining gas temperature up to 1050 °C.

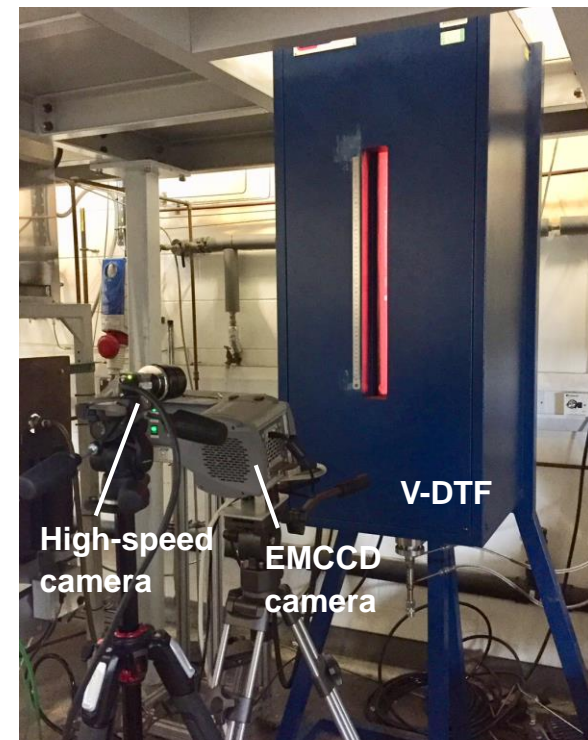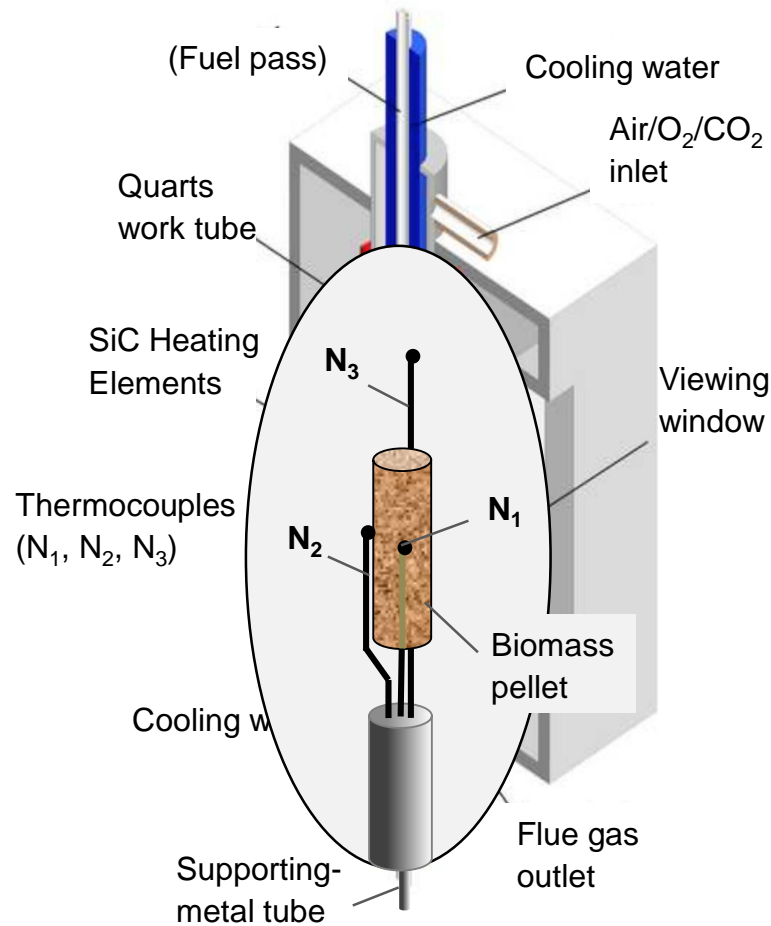

# Experimental set-up

- **Key features of imaging systems**

- A high-speed camera (IDS UI-3130CP Rev. 2)- acquiring videos of burning biomass pellets.
- An EMCCD camera (Andor iXonEM+ 897)- acquiring videos of spectral intensities of alkali metals (Na and K) during the biomass pellets combustion.

## High-speed camera

Sensor type: CMOS, RGB

Frame rate: 575 fps@800(H)x600(V),  
up to 900fps with a reduced image resolution

Resolution: 0.48 MPix

Interface: USB 3

## EMCCD camera


Spectral range: UV to near IR

Multiplication factor: 1000

Cooling temp:  $-85^{\circ}\text{C}$

Dark current:  $<0.001\text{ e}^{-}/\text{pix}/\text{s}$

Image resolution:  $512 \times 512$  pixels

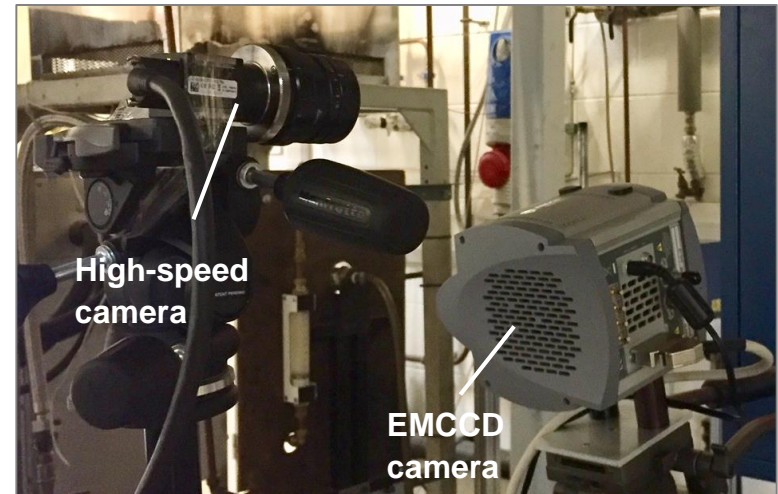

# Fuel properties and test conditions

- **Five typical biomass pellets**



Miscanthus

Peanut

Strew



Torrefied wood

Wood

## Proximate analysis (wt%, as received)

Biomass	Moisture	Ash	Volatile matter	Fixed carbon
Miscanthus	4.42	3.67	75.91	16.00
Peanut	7.73	2.78	68.50	20.99
Straw	4.00	7.57	73.96	14.47
Torrefied wood	6.40	1.97	72.90	18.73
Wood	7.32	0.35	76.96	15.37

## Ultimate analysis (averaged by wt%)

Biomass	C	H	N
Miscanthus	45.55	6.13	0.66
Peanut	46.69	6.42	1.38
Straw	44.03	5.93	0.67
Torrefied wood	49.32	6.04	0.51
Wood	46.68	6.44	0.24

**Note:** only results from Miscanthus are presented.


# Fuel properties and test conditions

- The pellets of tested biomass burnt under the following conditions for pre-set temperatures of 800°C and 900°C which replicate the working temperatures of a typical biomass-fired fluidised bed boiler (fixed bed).

Condition	O <sub>2</sub> (l/min)	CO <sub>2</sub> (l/m)
Air (l/min)	10	
O <sub>2</sub> @21%	2.1	7.9
O <sub>2</sub> @25%	2.5	7.5
O <sub>2</sub> @30%	3.0	7.0

- The size and mass of all the pellets were measured before the tests. Their volume and density were then computed and used to normalise the results for fair comparisons.

# Measurement

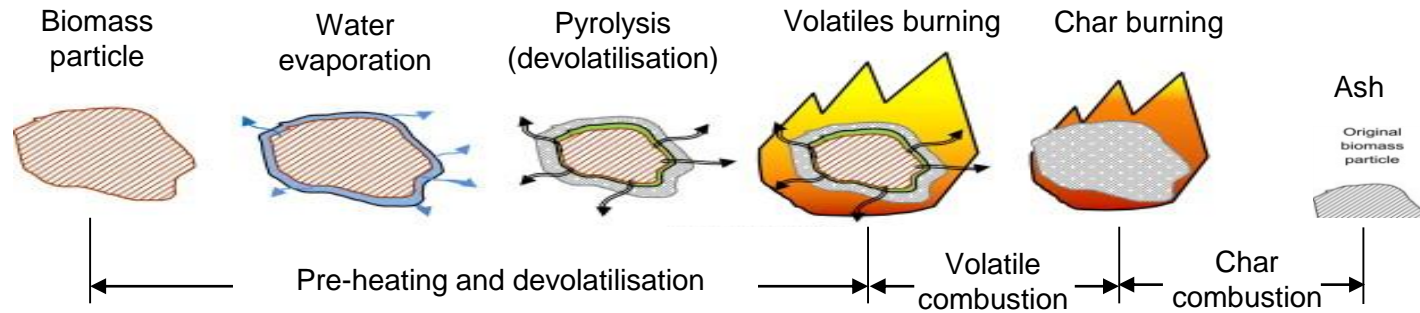

## Phases of biomass combustion

- **Volatile combustion**

- Size and Shape of flame
- Ignition time
- Burning velocity/rate
- Temperature and its distribution
- Spectral intensity of radicals  
(Alkali metals such as Na and K)

- **Char combustion**

- Burning velocity/rate
- Temperature and its distribution



# Measurement

- For each test condition
  - Three samples of each biomass fuel were burnt.
  - Videos of the complete combustion process of each sample were recorded.
  - Videos of alkali metals (Na and K) emissions were also recorded by placing band-pass filters at the front of the EMCCD camera.
  - Temperatures (flame, surface and inner) of the burning pellet were also measured concurrently using the thermocouples.
- Videos are processed and the characteristic parameters of the burning pellet were defined and computed for different combustion phases.
- The combustion behaviours of the burning pellet in relation to the test condition are then quantified.


# Results and discussions

**Miscanthus,**

**O<sub>2</sub>@21%,**


**CO<sub>2</sub>@79%**

**800°C**

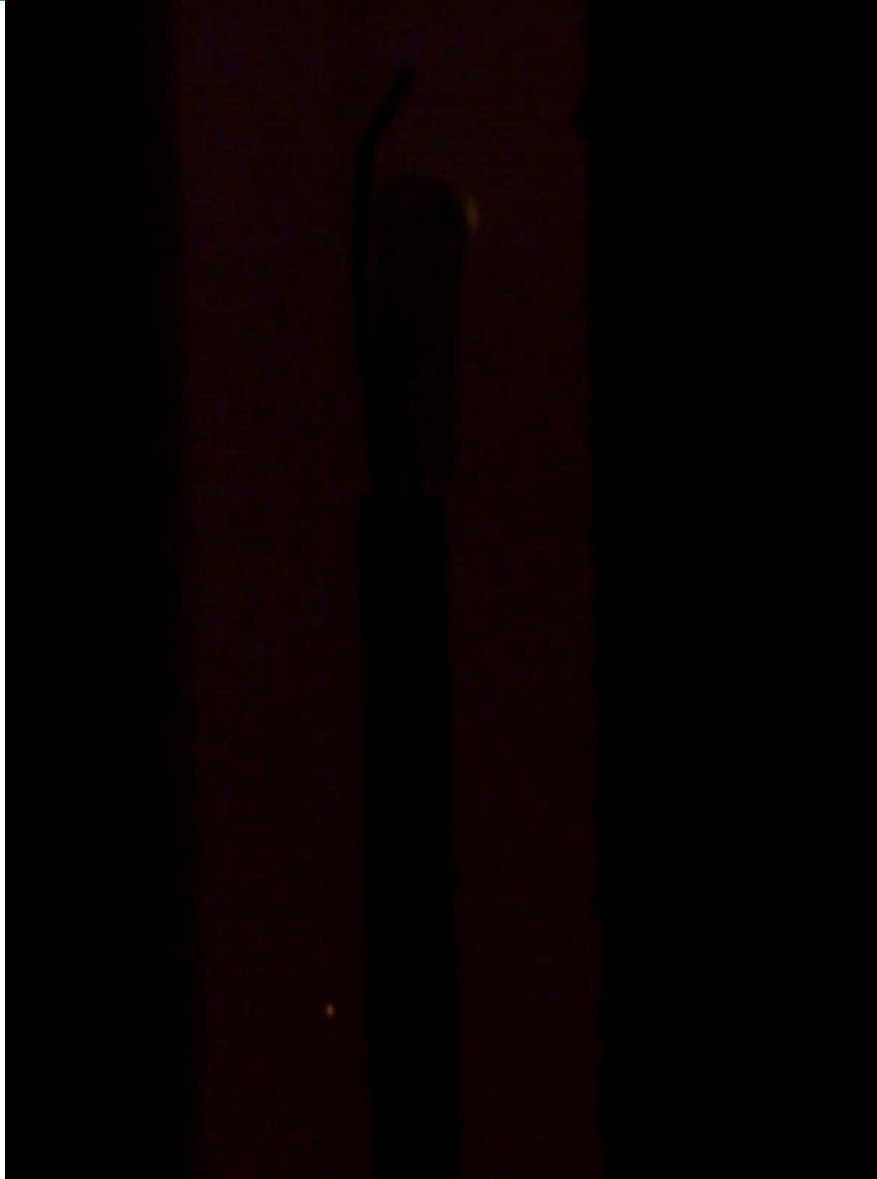






# Results and discussions

- Example flame/char images of Miscanthus pellets

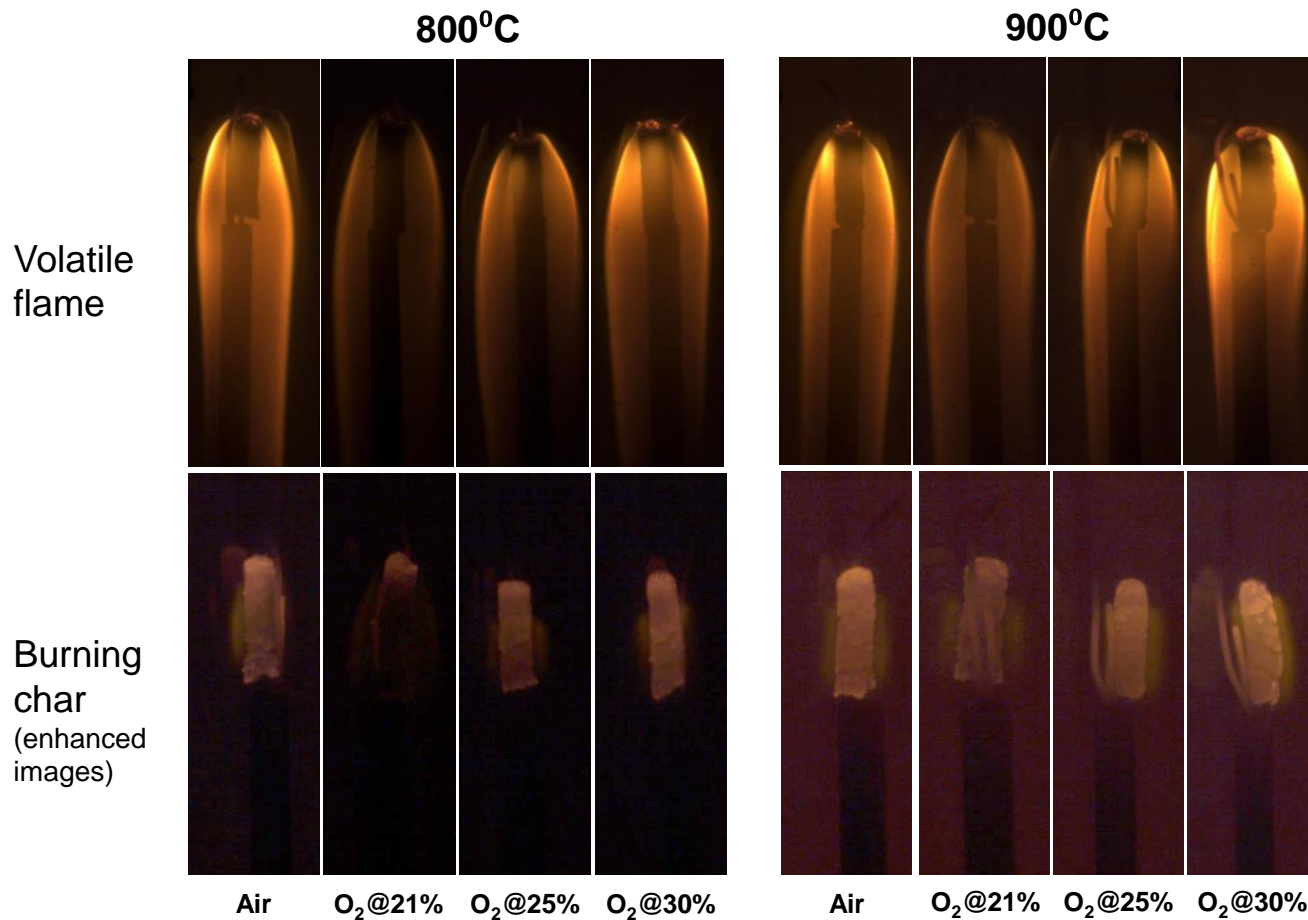

# Results and discussions






- Temperature of a burning Miscanthus pellet under air and oxy combustion for the pre-set furnace temperature of 800 °C

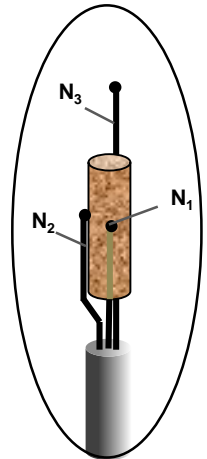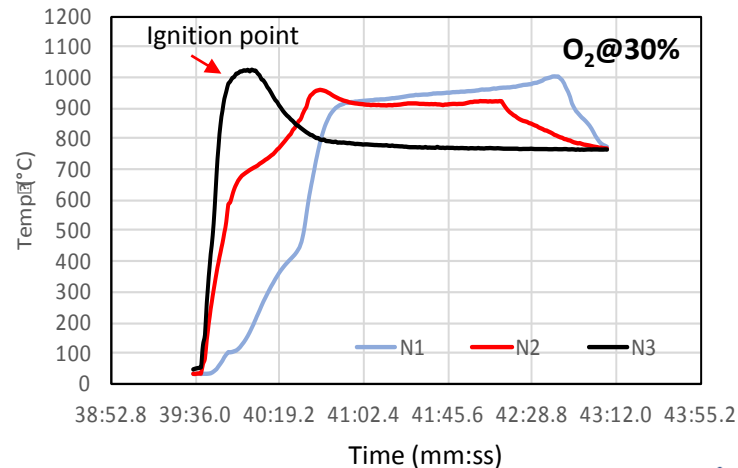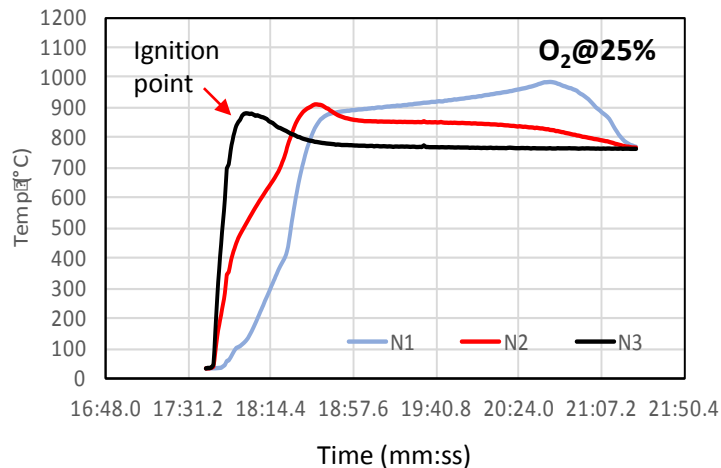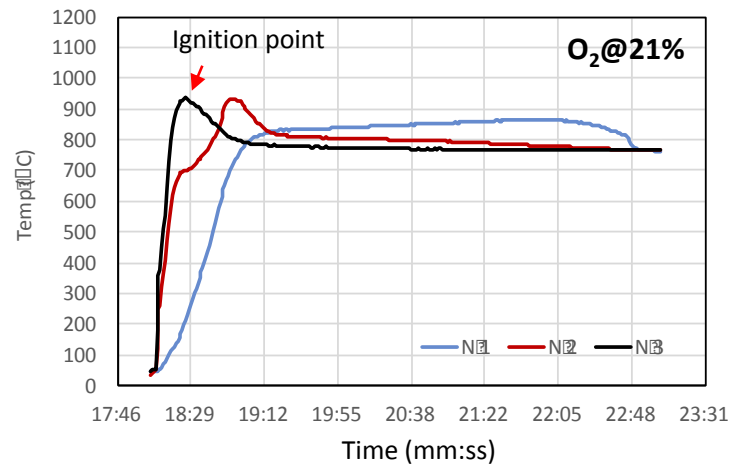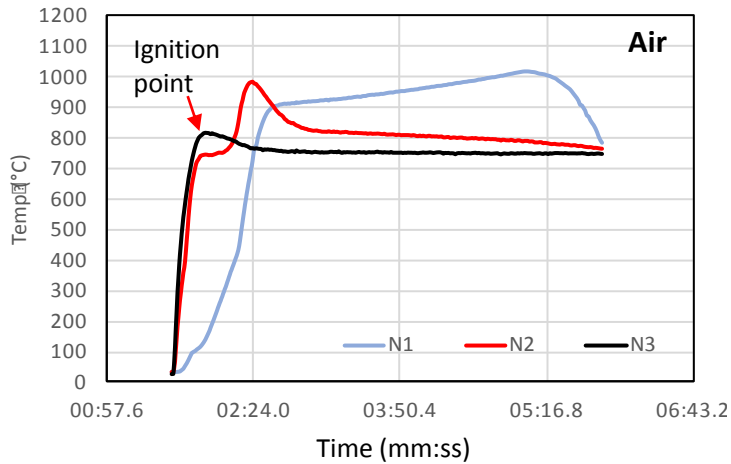

Thermocouples (N<sub>1</sub>, N<sub>2</sub>, N<sub>3</sub>)

# Results and discussions

- Temperature of a burning Miscanthus pellet under air and oxy combustion for the pre-set furnace temperature of 900 °C

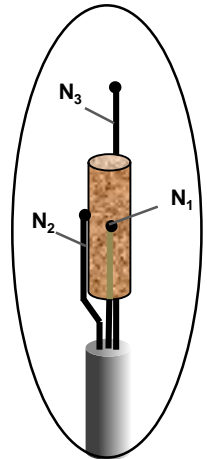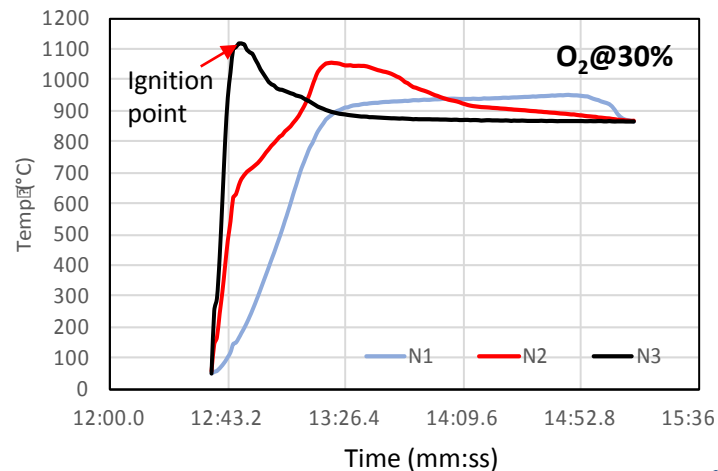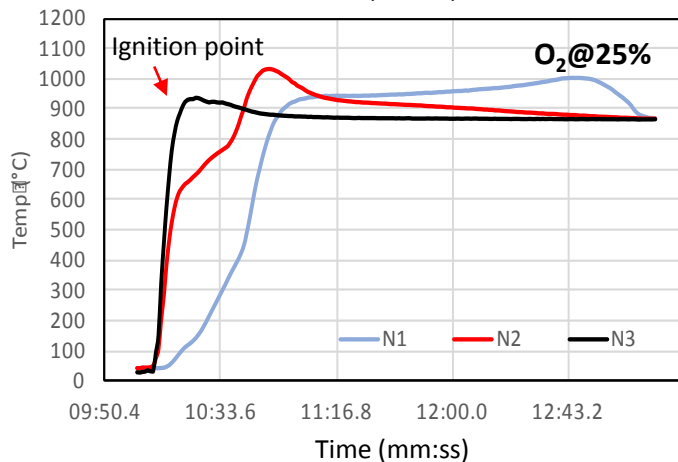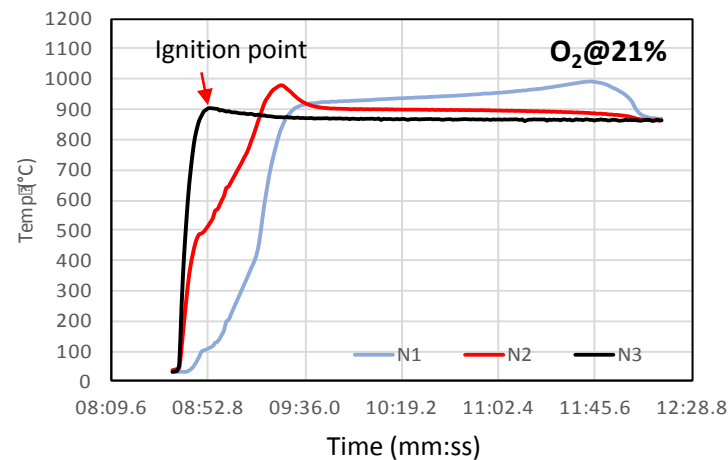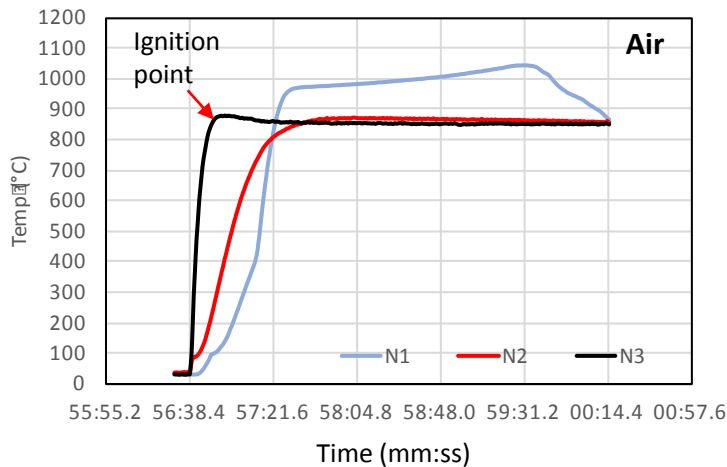

Thermocouples (N<sub>1</sub>, N<sub>2</sub>, N<sub>3</sub>)



# Results and discussions

- **Samples and burning times**  
(Note: only Miscanthus is included)

Condition	Sample	800 leg						900 leg						
		Volume <sup>Ⓜ</sup> (cm <sup>3</sup> )	Density <sup>Ⓜ</sup> (g/cm <sup>3</sup> )	Total <sup>Ⓜ</sup> burning time <sup>Ⓜ</sup> taken in test <sup>Ⓜ</sup> (sec)	Time <sup>Ⓜ</sup> (sec)			Volume <sup>Ⓜ</sup> (cm <sup>3</sup> )	Density <sup>Ⓜ</sup> (g/cm <sup>3</sup> )	Total <sup>Ⓜ</sup> burning time <sup>Ⓜ</sup> taken in test <sup>Ⓜ</sup> (sec)	Time <sup>Ⓜ</sup> (sec)			
					Total <sup>Ⓜ</sup> Combustion <sup>Ⓜ</sup>	Volentile <sup>Ⓜ</sup> Combustion <sup>Ⓜ</sup>	Char <sup>Ⓜ</sup> Combustion <sup>Ⓜ</sup>				Total <sup>Ⓜ</sup> Combustion <sup>Ⓜ</sup>	Volentile <sup>Ⓜ</sup> Combustion <sup>Ⓜ</sup>	Char <sup>Ⓜ</sup> Combustion <sup>Ⓜ</sup>	
Air	M1	1.27	0.52	242.0	240.0	38.0	202.0	M4	1.37	0.50	207.0	210.0	39.0	171.0
	M2	1.37	0.48	226.0	224.0	41.0	183.0	M5	1.45	0.55	222.0	218.0	41.0	177.0
	M3	1.45	0.52	219.0	220.0	38.0	182.0	M6	1.62	0.43	205.0	207.0	40.0	167.0
	ave	1.36	0.51	229.0	228.0	39.0	189.0	ave	1.48	0.49	211.3	211.7	40.0	171.7
O <sub>2</sub> @21%	M20	1.61	0.52	289.0	265.0	38.0	227.0	M7	1.43	0.49	204.0	199.0	42.0	157.0
	M21	1.55	0.48	338.0	275.0	37.0	238.0	M8	1.50	0.52	215.0	214.0	42.0	172.0
	M22	1.46	0.53	308.0	285.0	40.0	245.0	M9	1.48	0.57	228.0	225.0	42.0	183.0
	ave	1.54	0.51	311.7	275.0	38.3	236.7	ave	1.47	0.53	215.7	212.7	42.0	170.7
O <sub>2</sub> @25%	M23	1.25	0.52	199.0	200.0	38.0	162.0	M10	1.21	0.56	177.0	173.0	38.0	135.0
	M24	1.35	0.54	214.0	209.0	37.0	172.0	M11	1.47	0.51	177.0	173.0	37.0	136.0
	M25	1.28	0.52	211.0	199.0	36.0	163.0	M13	1.54	0.53	189.0	184.0	41.0	143.0
	ave	1.29	0.53	208.0	202.7	37.0	165.7	ave	1.41	0.53	181.0	176.7	38.7	138.0
O <sub>2</sub> @30%	M26	1.44	0.49	173.0	173.0	37.0	136.0	M14	1.46	0.50	147.0	145.0	36.0	109.0
	M27	1.18	0.51	168.0	160.0	37.0	123.0	M17	1.27	0.45	124.0	127.0	35.0	92.0
	M28	1.15	0.53	168.0	161.0	36.0	125.0	M19	1.26	0.52	150.0	149.0	39.0	110.0
	ave	1.26	0.51	169.7	164.7	36.7	128.0	ave	1.33	0.49	140.3	140.3	36.7	103.7

# Results and discussions

- **Burning rates of Miscanthus pellets**

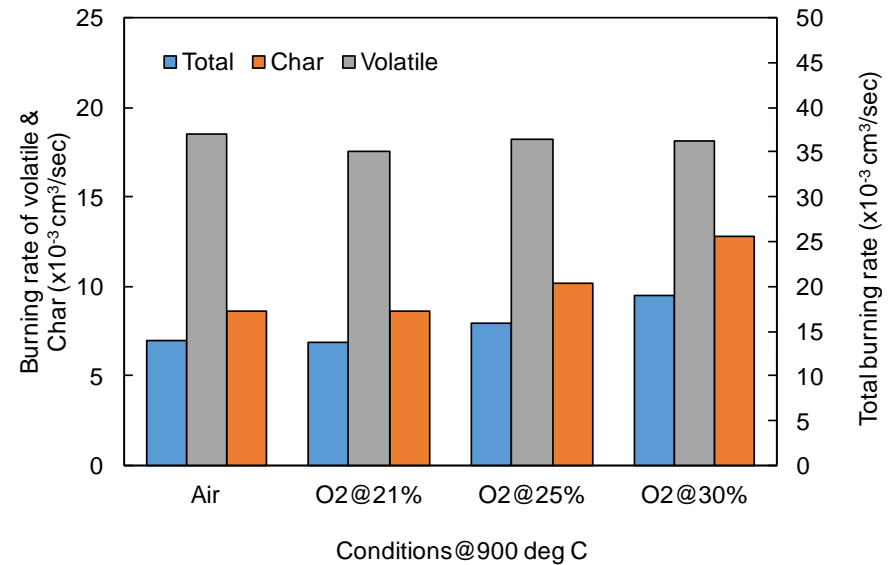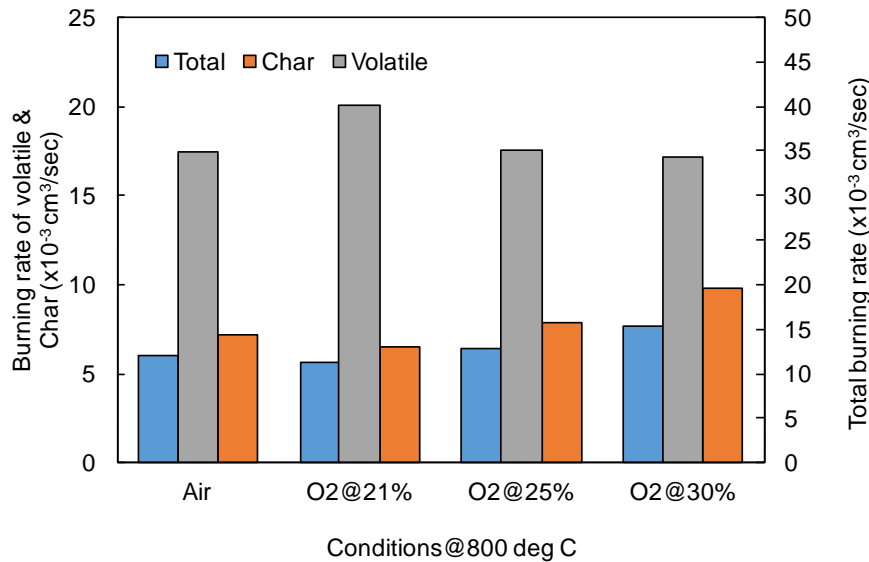

## Remarks:

- An increased O<sub>2</sub> flow would increase the burning rate of char and thus the total combustion rate of the biomass pellet.
- The pre-set furnace temperature has a little impact on the burning rate of volatile matters.
- Combustion behaviours of the biomass pellet under the O<sub>2</sub>@25% oxy-condition show to be similar to that under the air combustion.

# Concluding remarks

- Experiments have been carried out on a V-DTF to study the combustion behaviours of individual biomass pellets through digital imaging and image processing techniques.
- The complete combustion process of five different biomass pellets were recorded for both air and oxy conditions under the pre-set furnace temperatures of 800 °C and 900 °C.
- The phases of combustion (total, volatile and char) of each biomass pellet have been separated and the associated periods of time are determined.
- The temperatures of the burning pellet (e.g., ignition and surface) have been measured and their relationship with the combustion phases are quantified.
- Results have shown a strong correlation between the burning rate of biomass pellets and oxy flows. In particular, the burning rate of char and thus the total combustion rate increases with the O<sub>2</sub> flow.
- The data processing is continuing to quantify and compare the combustion behaviours of different biomass materials (e.g., colour, and spectral intensities of free radicals) for both air and oxy conditions .



# Acknowledgement

UKCCSRC is acknowledged for providing a grant in aid of this research.

