




Wire Rope, 6x19 IWRC


5000 ft spool



2500 ft spool

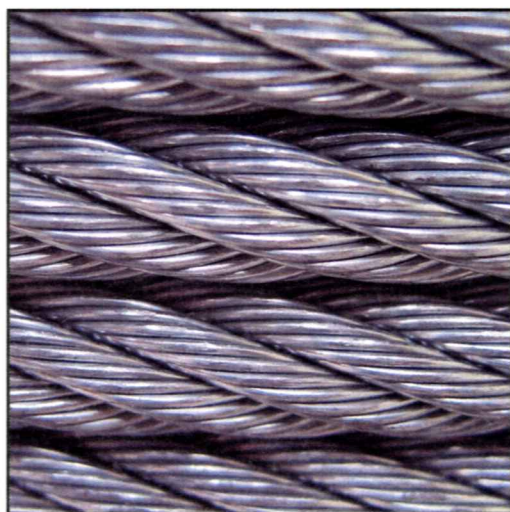

cross section

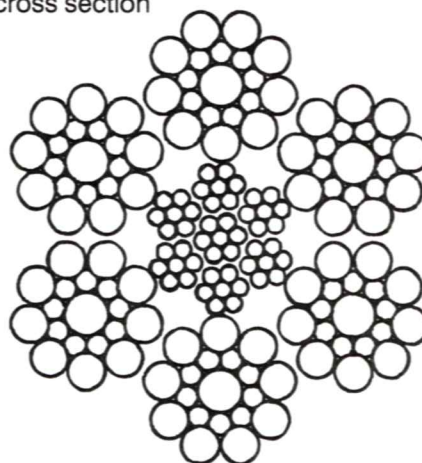

Description

Quality Design and Manufacturing! Swiss precision in a wire rope specifically designed for temporary and permanent suspended scaffolding. A state-of-the-art manufacturing facility with over 100 years of experience producing premium grade wire ropes.

Versatile! Can be used in any brand hoist that specifies this construction.

In Stock! Readily available in warehouses in the North East, South East and California.

Specifications

Part No.: SW61950 - 5000 ft spool
SW61925 - 2500 ft spool
SW619 - per foot

Nominal Diameter: 8.2mm (5/16in.)

Construction: 6x19 Seale

Core Material: IWRC

Wire Finish: Galvanized

Type of Lay: Right Regular

Breaking Strength: 50.5 kN (11,500 lbs.)

Mass per unit length: 0.27 kg/m
0.181 lbs/ft