
ORDERING SYNTHETIC WEBBING SLINGS


TO ORDER SYNTHETIC WEBBING SLINGS YOU MUST SPECIFY:

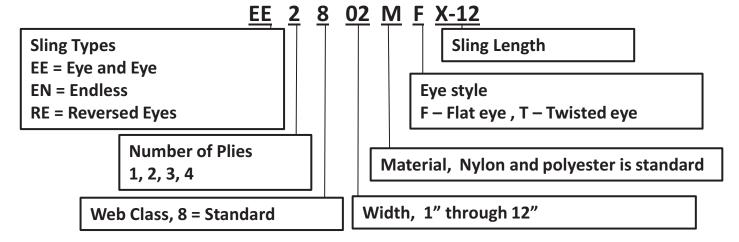

WEBBING SLING CONFIGURATIONS

Standard eye lengths

Plies of	Sling Width (in.)									
Web	1	2	3	4	6	8	10	12		
1	8 ½	10	11	12	16	20	24	24		
2	8 1/2	10	11	12	16	20	24	24		
3	10	12	14	16	18	24	24	24		
4	10	12	14	16	18	24	24	24		

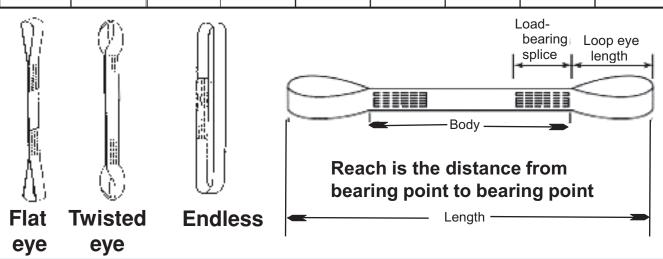

The information contained in this document was obtained from resources believed to be reliable at the time of publication. You assume the entire risk as to the use of this information and Industrial Splicing and Sling assumes no liability in connection with the information presented or the use of suggestions in this publication. Refer to the full OSHA and ASME Standards addressing the topics discussed.

WEBBING SLING CAPACITIES

		Web Width	Rated Capacity (lbs.)				
		(in.)	Vertical	Choker	V. Basket		
One Ply	EE1801 EE1802 EE1803 EE1804	1 2 3 4	1,600 3,200 4,800 6,400	1,280 2,500 3,800 5,000	3,200 6,400 9,600 12,800		
	EE1806 EE1808 EE1810 EE1812	6 8 10 12	9,600 12,800 16,000 19,200	7,700 10,200 12,800 15,400	19,200 25,600 32,000 38,400		
Two Ply	EE2801 EE2802 EE2803 EE2804	1 2 3 4	3,200 6,400 8,800 11,500	2,500 5,000 7,040 9,200	6,400 12,800 17,600 23,000		
	EE2806 EE2808 EE2810 EE2812	6 8 10 12	16,500 19,200 22,400 26,900	13,200 15,400 17,900 21,500	33,000 38,400 44,800 53,800		
Three Ply	EE3801 EE3802 EE3803 EE3804	1 2 3 4	4,100 8,300 12,500 16,000	3,300 6,600 10,000 12,800	8,200 16,600 25,000 32,000		
	EE3806 EE3808 EE3810 EE3812	6 8 10 12	23,000 30,700 36,800 44,000	18,400 24,500 29,400 35,200	46,000 61,400 73,600 88,000		
Four Ply	EE4801 EE4802 EE4803 EE4804	1 2 3 4	5,000 10,000 14,900 19,800	4,000 8,000 11,900 15,800	10,000 20,000 29,800 39,600		
	EE4806 EE4808 EE4810 EE4812	6 8 10 12	29,800 39,700 49,600 59,500	23,800 31,700 39,600 47,600	59,600 79,400 99,200 119,000		

SAMPLE WEBBING SLING SPECIFICATIONS

EE1801MF x 8

Is a single ply eye and eye sling, 1" wide with flat eyes and vertical W.L.L. = 1, 600 lbs, 8' long and eye length of 8.5"

EE1806MF x 20

Is a single ply eye and eye sling, 6" wide with flat eyes and vertical W.L.L. = 9,600 lbs, 20' and eye length of 16"

The information contained in this document was obtained from resources believed to be reliable at the time of publication. You assume the entire risk as to the use of this information and Industrial Splicing and Sling assumes no liability in connection with the information presented or the use of suggestions in this publication. Refer to the full OSHA and ASME Standards addressing the topics discussed.