



14

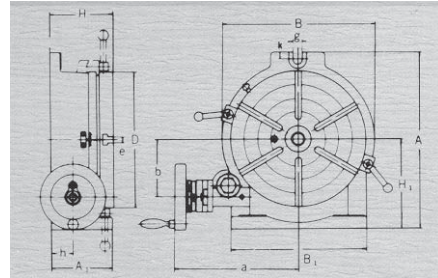

ROTARY TABLE, VICES

ROTARY TABLE


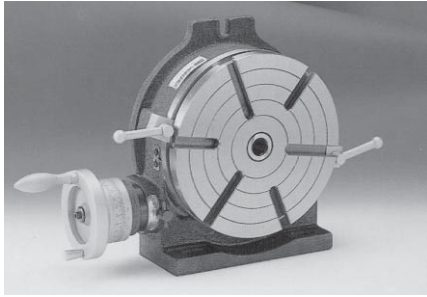


Order No. & Dimensions:

Unit: mm/inches

Order No.	Table			Base dimension			Width of T-slot		Bolt slots	Center sleeve	Gross Weight kg/lb woodencase(W) Carton(C)	Meas. CFT
	Outer diameter		Height									
	A ₁	D	H	H ₁	A	B	e	Type	g			
HV-6	78 3.07	150 5.91	80 3.11	100 3.94	200 7.87	160 6.30	11 0.43	⊕	15 0.59	MT-2	(C) 12 26.4	0.4
HV-8	100 3.94	200 7.87	105 4.13	135 5.31	265 10.43	220 8.66	14 0.55	⊕	17 0.67	MT-3	(C) 30 66.1	0.8
HV-10	110 4.33	250 9.84	115 4.53	165 6.50	325 12.80	280 11.02	14 0.55	⊗	17 0.67	MT-3	(W) 45 99	2

MILLING VICE

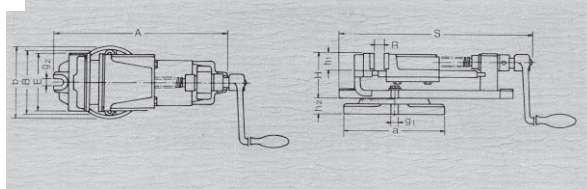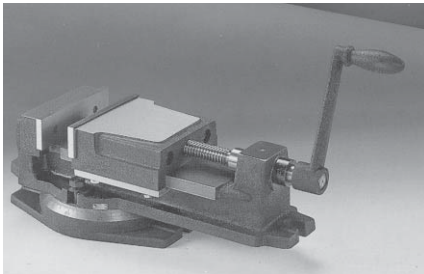


Order No. & Dimensions:


Unit:mm

Order No.	E	A	B	H	R	S	a	b	h ₁	h ₂	g ₁	g ₂	G.W. Kg	Meas. CFT
VK-4	100	267	106	75	62	295	160	114	30	25	13	13	(C) 11	0.2
VK-6	150	421	160	105	114	462	245	175	40	40	16	16	(C) 28	1.1
VK-8	200	576	215	144	150	620	340	230	58	45	18	18	(W) 58	1.5

TOOLMAKERS VICE

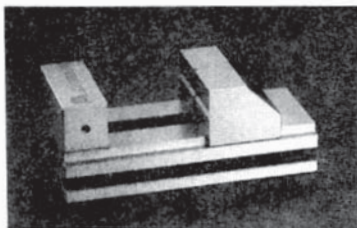

Squareness and Parallelism:
Within 0.005mm Per 100mm


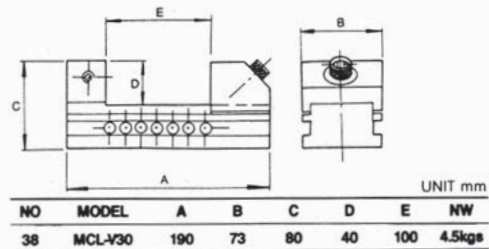


NO	MODEL	A	B	C	D	E	NW
38	MCL-V30	190	73	80	40	100	4.5kgs

56



PRECISION VICES, DEPTH GAUGE

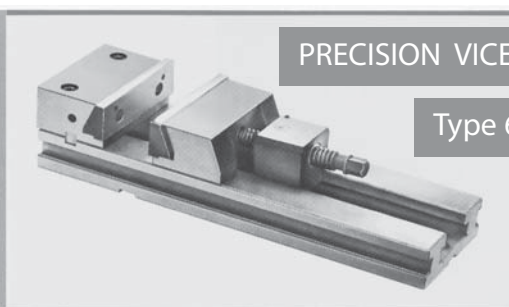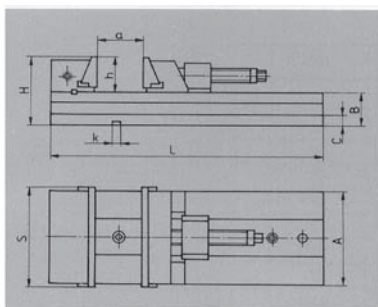

PRECISION VICES

Type 6566

Used for precision grinding and milling.

Widely used with CNC and standard machine tools for work in assemblies, on pallet and individually


- high positioning repeatability
- fixed jaw reversible
- movable jaw quick readjustable, self-adjusting
- possibility of using removable jaw inserts
- possibility of setting up the vice on swivel base
- made of high-grade alloy steel, stabilized and hardened

Standard accessories: wrench, slot nuts, lug hold down.

Size	S	A	B	C	H	L	a max	h	k (H7)	Max clamping force daN	Weight kg
100/320	100	85	35	13	70	320	160	35	12	2000	9,0
125/335	125	105	42	15	85	335	160	43	12	3000	13,0
150/425	150	140	52	18	109	425	210	57	20	4100	28,0
150/475	150	140	52	18	109	475	260	57	20	4100	30,0
200/535	200	165	61	20	126	535	260	65	20	4500	48,0
200/585	200	165	61	20	126	585	310	65	20	4500	50,0
200/635	200	165	61	20	126	635	360	65	20	4500	52,0

PLASTIC Mitutoyo DEPTH GAUGE

Part No. 700-105

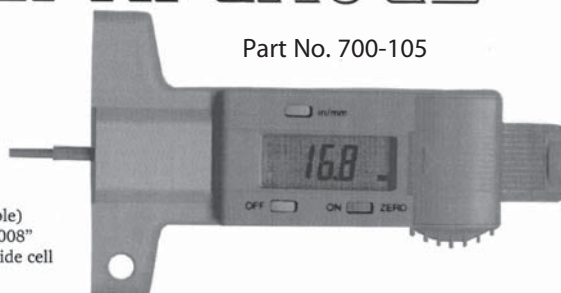

Remarks

1. Measuring Range: 0 – 25mm/1"
2. Resolution: 0.1mm/.001" (switchable)
3. Instrumental Error: $\pm 0.2\text{mm}/\pm 0.008"$
4. Power source: Button-type silver oxide cell
5. Battery life: Approx. 1 years
6. Response speed: 1,600 mm/s
7. Display: LCD digits.(-) model, Height of LCD characters 7.5mm
8. Alarm: Low voltage, Overspeed
9. Operation temperature: 0 – 40°C
Storage temperature: 10 – 60°C (Temperature range at which Instrument error is guaranteed: $20 \pm 10^\circ\text{C}$)