

## CONTROL PANELS FOR BOW AND STERN THRUSTERS

### Electric remote control

#### *Always comes in handy*

Type RECON can be used for the operation of DC and DC Extended Run time bow and stern thrusters, anchor windlasses, remote controlled gangways, electric cranes, hydraulic steering systems etc. This electric remote control has a stainless steel (AISI 316) hanger loop which is fitted on the back.

#### Specifications

- Suitable for 12 or 24 Volt D.C.
- Max switching capacity of 6A
- Supplied with three-core spiralled wire of 3,5 mtr
- Complete with watertight plug and socket



**RECON**

Type	Specifications
RECON	Hand held remote control for operation of bow and stern thrusters, windlasses, etc.

### Wireless remote control

#### *In control of your electrically driven equipment on board*

The WRC remote control system is designed to work with electrically controlled "on-off" devices and not proportionally controlled devices, so is ideal for use with solenoid actuated thrusters and windlasses, including the BOW range of DC thrusters, Extended Runtime thrusters, Ignition Protected thrusters, DC electric windlasses and non-proportional hydraulic thrusters. As with all VETUS Maxwell products, engineering development of this remote control system is ongoing, so please check with your VETUS Maxwell dealer or query our website if you need remote control for a proportionally controlled device such as a BOWPRO or RimDrive.

#### Specifications WRCBS Receiver

- Receiver accepts 12 or 24 volt power supply
- Connections for (1 or 2 D.C. electric or hydraulic thrusters), or for (1 DC electric or hydraulic thruster and 1 DC electric or hydraulic windlass)
- Maximum 5 hand-held remote transmitters
- Detachable antenna
- Protection class IP40 (for use in dry locations only)


#### Specifications WRCKF hand-held remote control transmitter

- Power supply - 3 Volt battery type CR2032
- Maximum distance to WRCBS receiver - 10 - 25 meters
- Protection class IP66 (resistant to high pressure water from any direction)



**WRCBS**

**WRCKF**

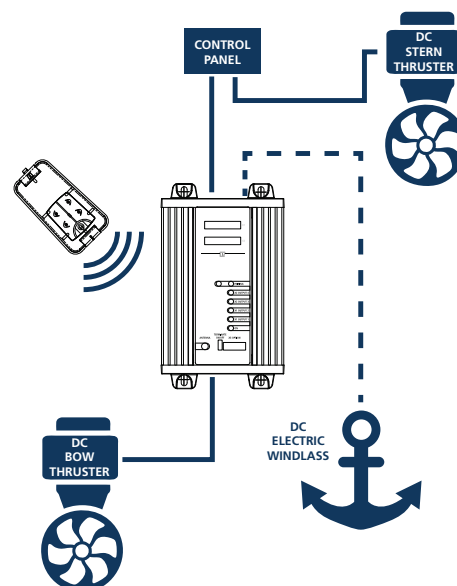

Type	Product description	Dimensions
WRC	Package consists of the WRCBS and the WRCKF	208 mm x 124 mm x 50 mm
WRCBS	Base unit for wireless remote control	208 mm x 124 mm x 50 mm
WRCKF	Hand held remote control	42 mm x 78 mm x 16 mm
WRCCAB	Additional connector cable to VETUS bow/stern thruster	28 mm x 230 mm