




OUTBOARD

Cable steering

The cable length refers to total length of the inner cable. The outer jacket of the cable is about 75 cm (30") shorter. When selecting the right cable, always round up to the next size.

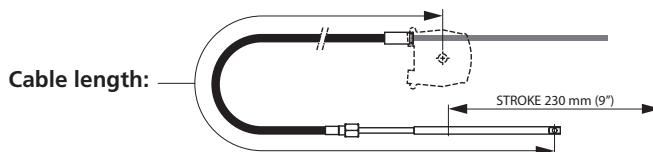

LCSKIT..

Light series cable steering kit

Cable steering kit including: Helm, straight bezel, cable and spent core tube. The helm is equipped as standard with a friction brake. Fitted with a $\varnothing \frac{3}{4}$ " (19 mm) shaft, tapered 1:12.

Available with cable length:
7 to 16 ft (213 to 488 cm), in steps of 1 ft.

- Wheel turns: 2,6
- Max. wheel \varnothing : 406 mm
- Min. bend radius 302 mm

For craft up to 5 m.

Type	Max. engine output	Cable length
LCSKIT7	55 HP (40 kw)	7 ft (213.5 cm)
LCSKIT8	55 HP (40 kw)	8 ft (244 cm)
LCSKIT9	55 HP (40 kw)	9 ft (274.5 cm)
LCSKIT10	55 HP (40 kw)	10 ft (305 cm)
LCSKIT11	55 HP (40 kw)	11 ft (335.5 cm)

Type	Max. engine output	Cable length
LCSKIT12	55 HP (40 kw)	12 ft (366 cm)
LCSKIT13	55 HP (40 kw)	13 ft (396.5 cm)
LCSKIT14	55 HP (40 kw)	14 ft (427 cm)
LCSKIT15	55 HP (40 kw)	15 ft (457.5 cm)
LCSKIT16	55 HP (40 kw)	16 ft (488 cm)



HZFKIT..

Zero feedback cable steering kit

Zero torque high performance cable steering kit including: Zero feedback helm, straight bezel, high performance cable and spent core tube. Smooth and durable operation due to planetary gear design. Unique design eliminates any torque coming from the steering cable, creating an effortless ride. A 20° Bezel kit can be ordered separately if required. Fitted with a $\varnothing \frac{3}{4}$ " (19 mm) shaft, tapered 1:12.

A.B.Y.C., N.M.M.A., I.M.C.I. and CE approved.

Available with cable length:
8 to 20 ft (244 to 610 cm), in steps of 1 ft.

- Wheel turns: 3,8
- Max. wheel \varnothing : 406 mm
- Min. bend radius 200 mm

For craft up to 7 m.

Type	Max. engine output	Cable length
HZFKIT8	125 HP (90 kw)	8 ft (244 cm)
HZFKIT9	125 HP (90 kw)	9 ft (274.5 cm)
HZFKIT10	125 HP (90 kw)	10 ft (305 cm)
HZFKIT11	125 HP (90 kw)	11 ft (335.5 cm)
HZFKIT12	125 HP (90 kw)	12 ft (366 cm)
HZFKIT13	125 HP (90 kw)	13 ft (396.5 cm)
HZFKIT14	125 HP (90 kw)	14 ft (427 cm)

Type	Max. engine output	Cable length
HZFKIT15	125 HP (90 kw)	15 ft (457.5 cm)
HZFKIT16	125 HP (90 kw)	16 ft (488 cm)
HZFKIT17	125 HP (90 kw)	17 ft (518.5 cm)
HZFKIT18	125 HP (90 kw)	18 ft (549 cm)
HZFKIT19	125 HP (90 kw)	19 ft (579.5 cm)
HZFKIT20	125 HP (90 kw)	20 ft (610 cm)



OUTBOARD

Cable steering options



HB20

Bezel kit

To tilt the helm at a 20° angle for optimum steering position. 20° Bezel kit for zero feedback cable steering helm. Weight 0,3 kg.

Type	Description
HB20	High performance series 20o bezel kit



SQBALL

Quick release balljoint

Quick release balljoint for steering cables. For L and H series. Weight 0,3 kg.


Type	Description
SQBALL	H and L series, steering cable quick release balljoint

Cable steering mounting sets

To complete the steering system to your requirements, please select one of the mounting sets below.




SLINK




Universal link arm

When outboard motor acts as cable mount. For L and H series.

Type	Description
SLINK	Steering cable universal link arm

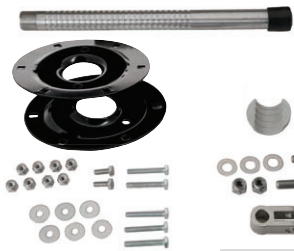

SSPLASH




Splashwell mount

Splashwell cable support mount for L and H series.

Type	Flange Ø	Weight (kg)
SSPLASH	125	0,75



STRANS



Transom mount

Transom support mount (short) for L and H series.

Type	Length* (mm)	Angle	Weight (kg)
STRANS	51	90°	0,7

*Cable core to transom





OUTBOARD



STRANL

Transom mount

Transom support mount (long) for L and H series.

Type	Length* (mm)	Angle	Weight (kg)
STRANL	102	67°	0,8

*Cable core to transom

Steering cable only

Available for light series and high performance series.
Length between 5 and 20 feet (153 to 610 cm), in steps of 1 ft.
Max. bend radius: 200 mm.

For light series: LCAB (max. 55 HP / 40 kw)
For zero feedback series: HCAB (max. 125 HP / 90 kw)



LCAB..

Type	Cable length
LCAB5	5 ft (152.5 cm)
LCAB6	6 ft (183 cm)
LCAB7	7 ft (213.5 cm)
LCAB8	8 ft (244 cm)
LCAB9	9 ft (274.5 cm)
LCAB10	10 ft (305 cm)
LCAB11	11 ft (335.5 cm)
LCAB12	12 ft (366 cm)

Type	Cable length
LCAB13	13 ft (396.5 cm)
LCAB14	14 ft (427 cm)
LCAB15	15 ft (457.5 cm)
LCAB16	16 ft (488 cm)
LCAB17	17 ft (518.5 cm)
LCAB18	18 ft (549 cm)
LCAB19	19 ft (579.5 cm)
LCAB20	20 ft (610 cm)



HCAB..

Type	Cable length
HCAB5	5 ft (152.5 cm)
HCAB6	6 ft (183 cm)
HCAB7	7 ft (213.5 cm)
HCAB8	8 ft (244 cm)
HCAB9	9 ft (274.5 cm)
HCAB10	10 ft (305 cm)
HCAB11	11 ft (335.5 cm)
HCAB12	12 ft (366 cm)

Type	Cable length
HCAB13	13 ft (396.5 cm)
HCAB14	14 ft (427 cm)
HCAB15	15 ft (457.5 cm)
HCAB16	16 ft (488 cm)
HCAB17	17 ft (518.5 cm)
HCAB18	18 ft (549 cm)
HCAB19	19 ft (579.5 cm)
HCAB20	20 ft (610 cm)