



HEAVY DUTY TRUCK PARTS

FAIRVIEW TRUCK & TRAILER CATALOG

NO. FTTC-R



HOSE & ASSEMBLIES

A



TUBE

B



HOSE ENDS

C



FITTINGS

D



QUICK DISCONNECTS

E



VALVES & COCKS

F



PRESSURE GAUGES

G



CLAMPS, TUBE STRAPS & SPACERS

H



CABINETS, TOOLS & ACCESSORIES

I



**Fairview Canada
Head Office
Oakville, Ontario**



**Fairview USA
Head Office
Wheatfield, New York**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HERE IN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Fairview, its subsidiaries and authorized distributors provide product and / or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system, in the current catalogue. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuming that all performance, safety and warning requirements are met.

AGGRESSIVE WATER WARNING:

Water quality can significantly influence the life of Fairview products. Test for corrosive elements, acidity and other relevant contaminants, including chlorine and treat water appropriately. Failure to do so will void warranty and may lead to premature failure of tubes, valves and fittings.

The product described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Fairview and its subsidiaries at any time without notice.

LA DÉFAILLANCE, LA MAUVAISE SÉLECTION OU LE MAUVAIS USAGE DES PRODUITS OU SYSTÈMES DÉCRITS CI-DESSOUS OU ARTICLES CONNEXES PEUT CAUSER LA MORT, DES BLESSURES CORPORELLES OU DES DOMMAGES MATÉRIELS.

Ce document et les autres renseignements fournis par Fairview, ses filiales et distributeurs autorisés offrent des options de produits ou systèmes pour les utilisateurs ayant de l'expertise technique. Il est important d'analyser tous les aspects de votre application et de revoir l'information concernant le produit ou système dans le catalogue actuel. À cause des conditions de fonctionnement et des applications variées de ces produits ou systèmes, l'utilisateur, par sa propre analyse et ses essais, est le seul responsable de la sélection finale des produits et systèmes, en présumant que toutes les exigences de rendement, de sécurité et d'avertissement sont respectées.

AVERTISSEMENT RELATIF À L'EAU AGRESSIVE

La qualité de l'eau peut avoir une incidence sur la durée de vie des produits Fairview. Analyser l'eau pour vérifier le niveau d'acidité, la présence d'éléments corrosifs ou d'autres polluants connexes, y compris le chlore, et traiter l'eau en conséquence. L'inobservation de cet avertissement annulera la garantie et pourrait causer la défaillance prématurée des tubes, des robinets et des raccords.

Le produit décrit aux présentes, y compris mais sans s'y limiter, les caractéristiques du produit, spécifications, conceptions, disponibilité et prix sont sujets à changement par Fairview et ses filiales en tout temps et sans préavis.

LA FALTA DE SELECCIÓN, UNA SELECCIÓN INADECUADA O EL USO INDEBIDO DE LOS PRODUCTOS, SISTEMAS O ARTÍCULOS AFINES QUE SE DESCRIBEN AQUÍ PUEDEN CAUSAR LA MUERTE, LESIONES A LAS PERSONAS Y DAÑOS A LA PROPIEDAD.

Este documento, junto con otra información de parte de Fairview, sus subsidiarias y distribuidores autorizados ofrecen opciones de productos o sistemas para que los usuarios que tengan pericia técnica realicen una investigación posterior. Es importante que analice todos los aspectos de su aplicación y revise la información del presente catálogo con respecto al producto o sistema. Debido a la diversidad de condiciones operativas y aplicaciones de estos productos o sistemas, el usuario - a través de su propio análisis y prueba - es el único responsable de hacer la selección final de los productos y sistemas, y de que se cumplan todos los requisitos de rendimiento, seguridad y advertencia.

ADVERTENCIA DE AGUA AGRESIVA: La calidad del agua puede influir en forma significativa en la vida de los productos Fairview. Haga los análisis necesarios para determinar si existen elementos corrosivos, acidez y otros contaminantes pertinentes, incluso cloro, y trate al agua de manera adecuada.

El incumplimiento de este requisito anulará la garantía y podría causar la falla prematura de los tubos, las válvulas y los accesorios. Los productos que se describen en el presente, que incluyen sin ningún límite, las características, las especificaciones, los diseños, la disponibilidad y los precios de los productos, están sujetos a cambios sin aviso en cualquier momento por parte de Fairview y sus subsidiarias.

TABLE OF CONTENTS



SECTION A HOSE & ASSEMBLIES

| | |
|--|------------|
| AIR BRAKE HOSE | 2 |
| AIR BRAKE HOSE ASSEMBLIES | 2 - 7 |
| AIR BRAKE HOSE ASSEMBLY KITS | 2 |
| AIR HOSE & ASSEMBLIES | 7, 23 - 26 |
| AIR SEAT GUN SPLICER KIT | 26 |
| AIR SHIFT TRANSMISSION | 26 |
| BULKHEAD AND SLIDER HOSE ASSEMBLIES | 5 |
| COOLANT HOSE (SILICONE) | 21 |
| FIFTH WHEEL SLIDER ASSEMBLY | 26 |
| FUEL LINE HOSE (ALSO SEE TUBE SECTION B) | 22 |
| GRIP-TITE - GENERAL PURPOSE HOSE | 22 |
| GREASE WHIP | 26 |
| HEATER HOSE | 20, 21 |
| HYDRAULIC HOSE | 8 - 19 |
| PRESSURE WASH HOSE & ASSEMBLIES | 28 - 30 |
| RETRACTABLE AIR BRAKE COILS | 7 |
| SELFSTORING AIR HOSE | 25 - 26 |
| STAINLESS STEEL BRAIDED HOSE - SAE 100R14 (PTFE) | 17 |
| SUCTION HOSE - SAE 100R4 | 11 |
| MEDIUM PRESSURE HYDRAULIC 100R7 HOSE | 13 - 14 |
| MEDIUM PRESSURE HYDRAULIC 100R8 HOSE | 15 - 16 |
| TRUCK HOSE - S.A.E.100R5 | 12 |
| TURBO-CHARGER CONNECTOR | 21 |
| WATER HOSE ASSEMBLIES - INDUSTRIAL | 27 |
| WET LINE KITS | 11 |

SECTION B TUBE

| | |
|-------------------------------------|----|
| AIR BRAKE TUBE - DOT (NYLON) | 34 |
| AIR SHIFT TRANSMISSION TUBE (NYLON) | 36 |
| BRAKE LINE ASSEMBLY - STEEL | 33 |
| CLEAR VINYL TUBE | 35 |
| COPPER TUBE | 32 |
| POLYETHYLENE TUBE | 36 |
| POLYURETHANE (FUEL LINE) CLEAR TUBE | 35 |
| STEEL TUBE - SAE 527 | 32 |

SECTION C HOSE ENDS

| | |
|---|----------------------|
| AIR BRAKE HOSE COUPLINGS | 38 |
| AIR BRAKE HOSE MENDER KITS | 39 |
| COMBINATION NIPPLES AND HOSE MENDERS (STEEL) | 43 |
| FERRULES (BRASS) | 43 |
| HOSE BARBS (BRASS) | 41, 42 |
| HOSE BARBS - GRIP-TITE (BRASS) | 40 |
| HOSE BARBS - FUEL LINE (BRASS) | 43 |
| HOSE BARBS (NYLON) | 42 |
| HOSE INSERTS (STEEL) | 49 |
| HYDRAULIC CRIMP INSTRUCTIONS | 56 |
| PERMANENT HOSE ENDS SAE 100R7, 100R8, 100R18, | 54 |
| REUSABLE HOSE FITTINGS (BRASS) | 44 |
| REUSABLE - SAE 100R14 | 51 |
| RING-BARB FITTINGS (BRASS) | 44 |
| STEEL CRIMP ENDS - SAE 100R7 | 49, 54 |
| STEEL ONE PIECE CRIMP ENDS SAE | 45 - 49, 52, 54 - 55 |
| STEEL ONE PIECE CRIMP ENDS SAE 100R1-AT, 100R2-AT | 45 - 48 |
| STEEL ONE PIECE CRIMP ENDS SAE 100R5 | 52 |
| STEEL ONE PIECE CRIMP ENDS SAE 100R12 | 55 |
| STEEL ONE PIECE CRIMP ENDS SAE 100R14 | 50 |
| STEEL ONE PIECE CRIMP ENDS SAE 100R16, 100R17 | 45 - 48 |
| STEEL REUSABLE ENDS | 49, 50, 53 |
| STEEL REUSABLE HOSE ENDS - SAE 100R1-AT, 100R2-AT | 50 |
| STEEL REUSABLE HOSE ENDS - SAE 100R5 | 53 |
| STEEL REUSABLE HOSE ENDS - SAE 100R7 | 49 |
| TERMINAL BOLTS | 38 |

SECTION D FITTINGS

| | |
|--|---------|
| AIR BRAKE D.O.T. (FOR NYLON TUBE) | 59, 60 |
| AIR BRAKE D.O.T. (PUSH-TO-CONNECT) | 61, 62 |
| AIR BRAKE D.O.T. (FOR COPPER TUBE) | 60 |
| AIR BRAKE SERVICE KITS | 58 |
| AIR SHIFT TRANSMISSION (D.O.T.) | 72 |
| FLANGE ADAPTERS AND KITS (STEEL) | 78 |
| FLARE S.A.E. 45° (BRASS) | 69 - 71 |
| FLARE J.I.C. 37° (STEEL) | 74 - 77 |
| FLARELESS (STEEL) | 82 |
| GREASE FITTINGS (SEE TOOLS SECTION FOR GUNS) | 73 |
| NPSM SWIVEL ADAPTERS (STEEL) | 85, 86 |
| O-RING BOSS ADAPTERS (STEEL) | 79, 80 |
| O-RING FACE SEAL ADAPTERS (STEEL) | 81, 82 |
| PIPE FITTINGS (BRASS) | 63 - 66 |
| PIPE FITTINGS (BLACK IRON) | 67 - 69 |
| PIPE ADAPTERS (STEEL) | 83 - 85 |

SECTION E QUICK DISCONNECTS

| | |
|--|-----|
| AGRICULTURAL INTERCHANGE (PIONEER 4000) | 90 |
| ARO210 / ARO310 INTERCHANGES | 97 |
| AUTOMOTIVE INTERCHANGE (TRU-FLATE) | 97 |
| HIGH PRESSURE FLUSH FACE (71-3) | 93 |
| HYDRAULIC CROSSOVER | 88 |
| HYDRAULIC FLUSH FACE (ISO 16028 HTMA) | 93 |
| HYDRAULIC (ISO A) INTERCHANGE | 92 |
| HYDRAULIC (ISO B) INTERCHANGE | 91 |
| INDUSTRIAL INTERCHANGE - AUTOMATIC | 96 |
| INDUSTRIAL INTERCHANGE - MANUAL | 95 |
| LINCOLN INTERCHANGE | 98 |
| MINIATURE HIGH CAPACITY SERIES - AUTOMATIC | 98 |
| PNEUMATIC CROSSOVER | 94 |
| PNEUMATIC INTERCHANGE (ARO210 / ARO310) | 97 |
| PRESSURE WASH COUPLINGS & ADAPTERS | 100 |
| SNOW PLOW Q.D. | 90 |
| SWING COUPLINGS | 99 |
| THREAD-TO-CONNECT HIGH PRESSURE (TCC) | 92 |
| THREAD-TO-CONNECT UNDER PRESSURE (75) | 92 |
| UNIVERSAL INTERCHANGE COUPLING - AUTOMATIC | 98 |
| WATER COUPLINGS | 100 |
| WING COUPLERS - HEAVY DUTY | 89 |

SECTION F VALVES & COCKS

| | |
|------------------------------------|----------|
| AIR CONTROL ACCESSORIES | 114 |
| AIR CONTROL PRESSURE REGULATOR | 114 |
| AIR CHUCKS | 113 |
| AIR CONTROL SOLENOIDS | 114 |
| AIR TANK DRAIN VALVE | 113 |
| AIR VENTS AND MUFFLERS | 112 |
| ANGLE VALVES | 106 |
| BALL (CARBON STEEL) | 104, 105 |
| BALL (CAST BRASS) | 102 |
| BALL (FORGED BRASS - FULL PORT) | 102 |
| BALL (LEAD FREE BRASS - FULL PORT) | 102 |
| BALL (STAINLESS STEEL) | 104, 105 |
| BALL (THREE WAY) | 103 |
| CHECK VALVES | 109 |
| COMPRESSION VALVES | 103 |
| DRAIN COCKS & VALVES | 108 |
| GATE VALVES | 106 |
| GLADHANDS - SAE J318 | 110, 111 |
| FIFTH WHEEL SLIDER CYLINDER | 114 |
| MINIATURE VALVES | 103 |
| NEEDLE SEAT VALVES | 108 |
| PRESSURE PROTECTION VALVES | 113 |
| SAFETY EXHAUST (BRASS) | 102 |
| SELECTOR VALVES (WITH CLICK) | 106 |
| SHUT-OFF COCKS | 107 |
| SWING CHECK | 109 |
| TANK VALVE | 113 |
| TIRE PRESSURE GAUGE | 114 |
| UTILITY VALVES | 106 |
| WATER THREAD VALVES | 106 |



TABLE OF CONTENTS

SECTION G PRESSURE GAUGES

CENTER BACK MOUNT (DRY)119, 120, 122
 CENTER BACK MOUNT (LIQUID FILLED)116, 117
 EQUALIZER (DRY)120 - 122
 MOUNTING BRACKETS118
 PROTECTIVE COVER118
 SNUBBER118
 STEM MOUNT (DRY)119 - 122
 STEM MOUNT (LIQUID FILLED)116 - 118
 VACUUM SERVICE118

SECTION H CLAMPS & TUBE STRAPS

AIR BRAKE HOSE ACCESSORIES130
 CLAMP DISPLAY RACKS124
 EAR CLAMPS (ONE & TWO)127, 128
 EXTENDED TONGUE CLAMPS124
 FLEX SEAL CLAMPS126
 FUEL INJECTION HOSE CLAMP127
 GEAR CLAMPS (STANDARD)124
 O-CLAMPS (SEE EAR CLAMPS)
 QUICK RELEASE CLAMPS127
 STEPLESS EAR CLAMPS128
 T-BOLT CLAMPS125
 TIE STRAPS130
 TUBE STRAPS AND HANGERS129 - 130

SECTION I CABINETS & ACCESSORIES

AIR GUNS AND WANDS143
 BEND PROTECTORS147
CABINETS & RACKS
 BIN CABINETS (WALL / FLOOR)135
 BIN - LARGE SLIDER CABINET (FLOOR)132
 BIN & DRAWER COMBO CABINET (FLOOR)133
 CABINET PRODUCT ASSORTMENTS (KIT)136, 137
 CLAMP RACK KITS140
 DRAWER CABINETS (WALL / FLOOR)133 - 134
 HOSE ASSEMBLY RACKS141, 142
 PLASTIC DRAWERS / BINS132 - 134
 PRESSURE GAUGE DISPLAY138
 PRODUCT STAND ALONE - GANG HOOK138 - 139
 CRIMPERS150 - 151
 CUTTERS146, 147, 148
 GREASE GUNS, COUPLER145
 HOSE TOOLS AND ACCESSORIES146, 147
 LEAK DETECTION FLUID149
 MEASURING DEVICES146
 PINCERS (EAR CLAMP)146
 ROTO-REAL146
 SPIRAL HOSE GUARD WRAP147
 SPLIT LOOM WRAP147
 SPRING GUARD, SLEEVE147
 STOCK BOXES140
 THREAD SEALANTS149
 TUBE WORKING TOOLS148
 UNIVERSAL SWIVEL143
 WATER NOZZLES144



WHAT'S NEW IN THIS SECTION

- Truck To Trailer 3 in 1 Assemblies7
- Truck To Trailer 4 in 1 Assemblies7


| | |
|--|------------|
| AIR BRAKE HOSE | 2 |
| AIR BRAKE HOSE ASSEMBLIES | 2 - 7 |
| AIR BRAKE HOSE ASSEMBLY KITS | 2 |
| AIR HOSE & ASSEMBLIES | 7, 23 - 26 |
| AIR SEAT GUN SPLICER KIT | 26 |
| AIR SHIFT TRANSMISSION | 26 |
| BULKHEAD AND SLIDER HOSE ASSEMBLIES | 5 |
| COOLANT HOSE (SILICONE) | 21 |
| FIFTH WHEEL SLIDER ASSEMBLY | 26 |
| FUEL LINE HOSE (ALSO SEE TUBE SECTION B) | 22 |
| GRIP-TITE - GENERAL PURPOSE HOSE | 22 |
| GREASE WHIP | 26 |
| HEATER HOSE | 20, 21 |
| HYDRAULIC HOSE | 8 - 19 |
| PRESSURE WASH HOSE & ASSEMBLIES | 28 - 30 |
| RETRACTABLE AIR BRAKE COILS | 7 |
| SELFSTORING AIR HOSE | 25 - 26 |
| STAINLESS STEEL BRAIDED HOSE - SAE 100R14 (PTFE) | 17 |
| SUCTION HOSE - SAE 100R4 | 11 |
| MEDIUM PRESSURE HYDRAULIC 100R7 HOSE | 13 - 14 |
| MEDIUM PRESSURE HYDRAULIC 100R8 HOSE | 15 - 16 |
| TRUCK HOSE - S.A.E.100R5 | 12 |
| TURBO-CHARGER CONNECTOR | 21 |
| WATER HOSE ASSEMBLIES - INDUSTRIAL | 27 |
| WET LINE KITS | 11 |



AIR BRAKE HOSE

RUBBER AIR BRAKE HOSE

A

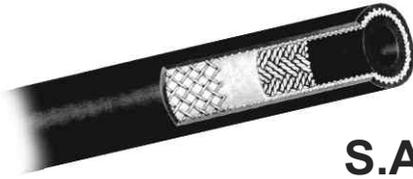

50 Ft. Dispenser Carton



Rubber air brake hose is for use in truck and trailer air brake systems. It is certified to meet S.A.E. J1402 and D.O.T. F.M.V.S.S. 106 requirements. This air brake hose features a synthetic rubber oil-resistant tube and cover which is reinforced with synthetic cord for high performance strength.

S.A.E. J1402


MEETS – D.O.T. F.M.V.S.S. 106

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Length (FT.) |
|------------|-------------------|-----------------|---------------------------|--------------|
| HAB-6-REEL | 3/8 | .750 | 225 | 250 |
| HAB-6-50P | 3/8 | .750 | 225 | 50 |
| HAB-8-REEL | 1/2 | .875 | 225 | 250 |
| HAB-8-50P | 1/2 | .875 | 225 | 50 |

HAB-6: MEETS TABLE AI AND TABLE AII
HAB-8: MEETS TABLE A

- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **PACKAGING:** Reels, 50 Ft. Dispenser Carton (-50P)
- **COLOR:** Standard HAB color is Black, Red and Blue available
Note: Red and Blue hose is only available in -6
- **FITTINGS:** 1490 Series Page 38
- **FACTORY ASSEMBLIES:** Page 3 - 7

ARCTIC AIR BRAKE HOSE

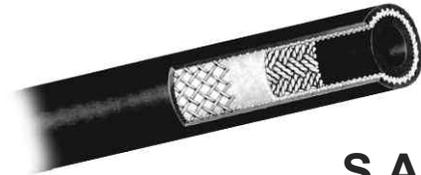

Rubber air brake hose is for use in truck and trailer air brake systems. It is certified to meet S.A.E. J1402 and D.O.T. F.M.V.S.S. 106 requirements. This air brake hose features a synthetic rubber tube and cover designed for low temperatures. It is oil-resistant and reinforced with spiral polyester cord for high performance strength.

S.A.E. J1402

MEETS – D.O.T. F.M.V.S.S. 106

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Reel Length (FT.) |
|-------------|-------------------|-----------------|---------------------------|-------------------|
| HABA-6-REEL | 3/8 | .750 | 200 | 250 |
| HABA-8-REEL | 1/2 | .875 | 200 | 250 |

HABA-6: MEETS TABLE AI AND TABLE AII
HABA-8: MEETS TABLE A

- **TEMPERATURE:** -65°F to +200°F, -54°C to +93°C
- **PACKAGING:** Reels
- **FITTINGS:** 1490 Series Page 38
- **FACTORY ASSEMBLIES:** Page 3 - 7

AIR BRAKE HOSE ASSEMBLY KITS



Not exactly as shown.

Ideal for start-up, each Fairview air brake hose assembly kit contains three of each of our most popular assemblies (45 hoses total)



HAR-15 (Rack Only)

PART No. HAB-6-KIT 3/8" I.D. Hose Assemblies

3/8 Swivel X 3/8 Rigid Male Pipe (For Swivel b/e use suffix -SW)

| PART No. | Length (IN.) | PART No. | Length (IN.) |
|-----------|--------------|---------------|--------------|
| HAB-6-18C | 18 | HAB-6-36C-SW | 36 |
| HAB-6-20C | 20 | HAB-6-40C | 40 |
| HAB-6-24C | 24 | HAB-6-42C | 42 |
| HAB-6-26C | 26 | HAB-6-48C | 48 |
| HAB-6-28C | 28 | HAB-6-60C | 60 |
| HAB-6-30C | 30 | HAB-6-72C | 72 |
| HAB-6-32C | 32 | HAB-6-108C | 108 |
| HAB-6-36C | 36 | HAR-15 (Rack) | |

PART No. HAB-8-KIT 1/2" I.D. Hose Assemblies

3/8 Swivel X 3/8 Rigid Male Pipe (For Swivel b/e use suffix -SW)

| PART No. | Length (IN.) | PART No. | Length (IN.) |
|-----------|--------------|---------------|--------------|
| HAB-8-20C | 20 | HAB-8-36C-SW | 36 |
| HAB-8-24C | 24 | HAB-8-42C | 42 |
| HAB-8-26C | 26 | HAB-8-48C | 48 |
| HAB-8-28C | 28 | HAB-8-54C | 54 |
| HAB-8-30C | 30 | HAB-8-60C | 60 |
| HAB-8-32C | 32 | HAB-8-72C | 72 |
| HAB-8-34C | 32 | HAB-8-96C | 96 |
| HAB-8-36C | 36 | HAR-15 (Rack) | |



CRIMPED RUBBER AIR BRAKE HOSE ASSEMBLIES D.O.T. -40°F to +200°F, -40°C to +93°C TEMPERATURE RANGE

- D.O.T. Listed • 225 P.S.I. Working Pressure • -40°F to +200°F, -40°C to +93°C
- Many Other Common Lengths Available From Stock. Custom Lengths On Request.
- For Assemblies Requiring -65°F, -54°C Cold Weather Arctic Hose Simply Replace "HAB" Prefix With "HABA" (HABA-6-24B) • Bulk Hose Page 2 • Display Rack Page 2, 141

Length From 0 up to and including 36"
For Lengths above 36"
Tolerance ±1/4"
±1% of length measured to the nearest 1/8 of an inch.



3/8 I.D. HOSE

SWIVEL
MALE PIPE

RIGID
MALE PIPE

| PART No. | Pipe Size | Hose I.D. (IN.) | Hose |
|------------|-----------|-----------------|-------------|
| HAB-6-__B | 1/4 | 3/8 | Rubber |
| HAB-6-__C | 3/8 | 3/8 | Rubber |
| HABA-6-__B | 1/4 | 3/8 | Arctic Hose |
| HABA-6-__C | 3/8 | 3/8 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.



1/2 I.D. HOSE

SWIVEL
MALE PIPE

RIGID
MALE PIPE

| PART No. | Pipe Size | Hose I.D. (IN.) | Hose |
|-------------|------------|-----------------|-------------|
| HAB-8-__C | 3/8 | 1/2 | Rubber |
| HAB-8-__CD | 1/2 TO 3/8 | 1/2 | Rubber |
| HABA-8-__C | 3/8 | 1/2 | Arctic Hose |
| HABA-8-__CD | 1/2 TO 3/8 | 1/2 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.



3/8 I.D. HOSE

LIVE SWIVEL
MALE PIPE

RIGID
MALE PIPE

| PART No. | Pipe Size | Hose I.D. (IN.) | Hose |
|---------------|-----------|-----------------|-------------|
| HAB-6-__BLSB | 1/4 | 3/8 | Rubber |
| HAB-6-__CLSC | 3/8 | 3/8 | Rubber |
| HABA-6-__BLSB | 1/4 | 3/8 | Arctic Hose |
| HABA-6-__CLSC | 3/8 | 3/8 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.



NEW STYLE LIVE SWIVEL
(Still swivels once connected)

1/2 I.D. HOSE

LIVE SWIVEL
MALE PIPE

RIGID
MALE PIPE

| PART No. | Pipe Size | Hose I.D. (IN.) | Hose |
|---------------|------------|-----------------|-------------|
| HAB-8-__CLSC | 3/8 | 1/2 | Rubber |
| HAB-8-__DLSC | 1/2 TO 3/8 | 1/2 | Rubber |
| HABA-8-__CLSC | 3/8 | 1/2 | Arctic Hose |
| HABA-8-__DLSC | 1/2 TO 3/8 | 1/2 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.



3/8 I.D. HOSE

3/8
FEMALE SWIVEL
FLARE

3/8
FEMALE SWIVEL
FLARE

| PART No. | Flare Size | Hose I.D. (IN.) | Hose |
|-------------|------------|-----------------|-------------|
| HAB-6-__FS | 3/8 | 3/8 | Rubber |
| HABA-6-__FS | 3/8 | 3/8 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.



1/2 I.D. HOSE

1/2
FEMALE SWIVEL
FLARE

1/2
FEMALE SWIVEL
FLARE

| PART No. | Flare Size | Hose I.D. (IN.) | Hose |
|-------------|------------|-----------------|-------------|
| HAB-8-__FS | 1/2 | 1/2 | Rubber |
| HABA-8-__FS | 1/2 | 1/2 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

- STANDARD ASSEMBLIES RANGE IN LENGTH FROM 16 TO 96 INCHES X 2 INCH INCREMENTS
- ALSO AVAILABLE WITH SPRING GUARD SUFFIX WITH -SG

CAUTION: Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.

A



CRIMPED AIR BRAKE ASSEMBLIES D.O.T.

CRIMPED RUBBER AIR BRAKE HOSE ASSEMBLIES D.O.T. -40°F to +200°F, -40°C to +93°C TEMPERATURE RANGE

- D.O.T. Listed • 225 P.S.I. Working Pressure • -40°F to +200°F, -40°C to +93°C
- Many Other Common Lengths Available From Stock. Custom Lengths On Request.
- For Assemblies Requiring -65°F, -54°C Cold Weather Arctic Hose Simply Replace "HAB" Prefix With "HABA" (HABA-6-24B) • Bulk Hose Page 2 • Display Rack Page 2, 141

Length From 0 up to and including 36"
For Lengths above 36"
Tolerance ±1/4"
±1% of length measured to the nearest 1/8 of an inch.

A



3/8 I.D. HOSE

3/8 SWIVEL MALE PIPE 3/8 SWIVEL MALE PIPE

| PART No. | SW Pipe Size | Hose I.D. (IN.) | Hose |
|---------------|--------------|-----------------|-------------|
| HAB-6-__C-SW | 3/8 | 3/8 | Rubber |
| HABA-6-__C-SW | 3/8 | 3/8 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.



1/2 I.D. HOSE

SWIVEL MALE PIPE SWIVEL MALE PIPE

| PART No. | SW Pipe Size | Hose I.D. (IN.) | Hose |
|---------------|--------------|-----------------|-------------|
| HAB-8-__C-SW | 3/8 | 1/2 | Rubber |
| HAB-8-__D-SW | 1/2 | 1/2 | Rubber |
| HABA-8-__C-SW | 3/8 | 1/2 | Arctic Hose |
| HABA-8-__D-SW | 1/2 | 1/2 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.



3/8 I.D. HOSE

3/8 LIVE SWIVEL MALE PIPE 3/8 LIVE SWIVEL MALE PIPE

| PART No. | LSW Pipe Size | Hose I.D. (IN.) | Hose |
|----------------|---------------|-----------------|-------------|
| HAB-6-__C-LSW | 3/8 | 3/8 | Rubber |
| HABA-6-__C-LSW | 3/8 | 3/8 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

NEW STYLE LIVE SWIVEL
(Still swivels once connected)



1/2 I.D. HOSE

LIVE SWIVEL MALE PIPE LIVE SWIVEL MALE PIPE

| PART No. | LSW Pipe Size | Hose I.D. (IN.) | Hose |
|----------------|---------------|-----------------|-------------|
| HAB-8-__C-LSW | 3/8 | 1/2 | Rubber |
| HAB-8-__D-LSW | 1/2 | 1/2 | Rubber |
| HABA-8-__C-LSW | 3/8 | 1/2 | Arctic Hose |
| HABA-8-__D-LSW | 1/2 | 1/2 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

AIR BRAKE ASSEMBLIES D.O.T. (WITH SPRING GUARD)



3/8" SWIVEL MALE PIPE **1/2" RIGID MALE PIPE**

| PART No. | Length (IN.) | Hose I.D. (IN.) |
|------------------|--------------|-----------------|
| HAB-6-13.62CD-SG | 13.62 | 3/8 |
| HAB-8-13.62CD-SG | 13.62 | 1/2 |

NOTE: ADDITIONAL LENGTHS AVAILABLE ON REQUEST. ENDS ARE COMPLETE WITH THREAD SEALANT.

AIR BRAKE ASSEMBLIES D.O.T. (GLADHAND ADAPTER)



- Greater Flexibility • Easy Attachment of Gladhand
- Cost Effective Alternative to the Swing Away Gladhand

| PART No. | Description: | PART No. | Description: |
|----------------|-------------------------|----------------|-------------------------|
| HAB-NOSE BOX-1 | • 3/8" I.D. Hose | HAB-NOSE BOX-2 | • 3/8" I.D. Hose |
| | • 1/2" NPT Reusable End | | • 1/2" NPT Reusable End |
| | • 1/2" NPT Crimp End | | • 1/2" FPT Crimp End |
| | • 6" Overall Length | | • 6" Overall Length |

ALTERNATIVE TO A SOLID SWIVEL GLADHAND.
GLADHAND SOLD SEPARATELY PAGE 110

CAUTION: Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.



BULKHEAD AND SLIDER HOSE ASSEMBLIES -40°F to +200°F, -40°C to +93°C TEMPERATURE RANGE

- D.O.T. Listed • 225 P.S.I. Working Pressure • -40°F to +200°F, -40°C to +93°C
- Many Other Common Lengths Available From Stock. Custom Lengths On Request.
- For Assemblies Requiring -65°F, -54°C Cold Weather Arctic Hose Simply Replace "HAB" Prefix With "HABA" (HABA-6-24B) • Bulk Hose Page 2 • Display Rack Page 2, 141

Length
From 0 up to and including 36" ±1/4"
For Lengths above 36" ±1% of length measured to the nearest 1/8 of an inch.

BULKHEAD HOSE ASSEMBLY



3/8 I.D. HOSE

1/2 MALE BULKHEAD X
1/4 FEMALE PIPE
WITH SPRING GUARDS (-SG)
NEW STYLE LIVE SWIVEL (Still swivels once connected)
3/8 LIVE SWIVEL MALE PIPE

| PART No. | F Pipe Size | SW Pipe Size | Hose I.D. (IN.) | Hose |
|--------------------|-------------|--------------|-----------------|-------------|
| HAB-6-__BHBLSC-SG | 1/4 | 3/8 | 3/8 | Rubber |
| HABA-6-__BHBLSC-SG | 1/4 | 3/8 | 3/8 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

SERVICEABLE SLIDER HOSE ASSEMBLY



3/8 I.D. HOSE

7/8-20 MOUNTING THREAD
D.O.T. AIR BRAKE TUBE
WITH SPRING GUARDS (-SG)
NEW STYLE LIVE SWIVEL (Still swivels once connected)
3/8 LIVE SWIVEL MALE PIPE

| PART No. | LSW Pipe Size | Tube Size | Hose I.D. (IN.) | Hose |
|-------------------|---------------|-----------|-----------------|-------------|
| HAB-6-__SABH6-SG | 3/8 | 3/8 | 3/8 | Rubber |
| HAB-6-__SABH8-SG | 3/8 | 1/2 | 3/8 | Rubber |
| HABA-6-__SABH6-SG | 3/8 | 3/8 | 3/8 | Arctic Hose |
| HABA-6-__SABH8-SG | 3/8 | 1/2 | 3/8 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

CONTROL LINE SLIDER HOSE ASSEMBLY



1/4 I.D. HOSE

7/8-20 MOUNTING THREAD
D.O.T. AIR BRAKE TUBE
WITH SPRING GUARDS ADD (-SG)
D.O.T. AIR BRAKE TUBE

| PART No. | Tube Size | Hose I.D. (IN.) | Hose |
|---------------|-----------|-----------------|-------------|
| HAB-4-__ABH6 | 3/8 | 1/4 | Rubber |
| HABA-4-__ABH6 | 3/8 | 1/4 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.
• SEE PAGE 26 FOR AIR SHIFT TRANSMISSION ASSEMBLIES.

SLIDER AXLE HOSE ASSEMBLY



3/8 I.D. HOSE

7/8-20 MOUNTING THREAD
D.O.T. AIR BRAKE TUBE
WITH SPRING GUARDS (-SG)
D.O.T. AIR BRAKE TUBE

| PART No. | Tube Size | Hose I.D. (IN.) | Hose |
|------------------|-----------|-----------------|-------------|
| HAB-6-__ABH6-SG | 3/8 | 3/8 | Rubber |
| HAB-6-__ABH8-SG | 1/2 | 3/8 | Rubber |
| HAB-8-__ABH8-SG | 1/2 | 1/2 | Rubber |
| HABA-6-__ABH6-SG | 3/8 | 3/8 | Arctic Hose |
| HABA-6-__ABH8-SG | 1/2 | 3/8 | Arctic Hose |
| HABA-8-__ABH8-SG | 1/2 | 1/2 | Arctic Hose |

• NOTE: __ ENTER OVERALL LENGTH IN INCHES WHERE APPLICABLE.

CAUTION: Some agents used in the curing of rubber hose may leach out over time. Trace amounts may be enough to cause problems for sensitive hands. Gloves should be worn and care taken in handling of rubber hose products.

A

New From Fairview

ARLECTRIC™

3-IN-1 AIR BRAKE & ELECTRICAL LINES

Fairview is pleased to introduce **ARLECTRIC™**. The 3-in-1 Air Brake & Electric assembly set developed to simplify and protect air brake and electrical lines between the tractor and the trailer. The unique live swivel hose ends and superior flexibility of the **ARLECTRIC™** set promotes longer hose life, helps prevent tangling and means less time is required to make connections.

Technical Specifications:

- MEETS OR EXCEEDS: S.A.E J2394, J560, J1402 D.O.T F.M.V.S.S 106 TYPE F
- TEMPERATURE: -85°F to +200°F, -65°C to +93°C
- FITTINGS: 1/2" live swivel male pipe each end

| PART No. | Length |
|-------------|--------|
| HAB3-ABS-12 | 12 Ft. |
| HAB3-ABS-15 | 15 Ft. |

Color coded spring ends



Rack with assemblies and signage available.

Live Swivels All Ends

Caution: To reduce risk of hose failure due to snagging, Fairview recommends that airbrake line sets are to be secured using appropriate spring or pogo style hose supports.

see page 130



www.fairviewfittings.com

Contact Fairview For Details...

ARLECTRIC™ is a trademark of Fairview Fittings & Mfg. Oakville On L6H6G1/ Wheatfield NY 14120



A



TRUCK AIRBRAKE & ELECTRICAL LINES



Color coded spring ends.



- **MEETS OR EXCEEDS:** S.A.E J2394, J560, J1402 D.O.T F.M.V.S.S 106 TYPE F
- **TEMPERATURE:** -85°F to +200°F, -65°C to +93°C
- **FITTINGS:** 1/2" live swivel male pipe each end • Superior flexibility, promotes longer hose life

| PART No. | 3-in-1 ELECTRICAL & AIR BRAKE LINES | Length (FT.) |
|----------------|--|--------------|
| HAB3-ABS-12 | 3/8 7-Way Green ABS cable & AB lines; color coded rubber grip | 12 |
| HAB3-ABS-15 | 3/8 7-Way Green ABS cable & AB lines; color coded rubber grip | 15 |
| HAB3-ABS-20 | 3/8 7-Way Green ABS cable & AB lines; color coded rubber grip | 20 |
| HAB3-NABS-12 | 3/8 7-Way Black Non-ABS cable & AB lines; color coded rubber grip | 12 |
| HAB3-NABS-15 | 3/8 7-Way Black Non-ABS cable & AB lines; color coded rubber grip | 15 |
| PART No. | 4-in-1 ELECTRICAL & AIR BRAKE LINES | Length (FT.) |
| HAB4-ABSAUX-12 | 7-way ABS, ISO/Aux. cable & HAB lines; color coded rubber grip | 12 |
| HAB4-ABSAUX-15 | 7-way ABS, ISO/Aux. cable & HAB lines; color coded rubber grip | 15 |
| HAB4-ABSAUX-20 | 7-way ABS, ISO/Aux. cable & HAB lines; color coded rubber grip | 20 |
| HAB4-ABSSP-12 | 7-way ABS, Single pole liftgate cable & HAB lines; color coded rubber grip | 12 |
| HAB4-ABSSP-15 | 7-way ABS, Single pole liftgate cable & HAB lines; color coded rubber grip | 15 |
| HAB4-ABSSP-20 | 7-way ABS, Single pole liftgate cable & HAB lines; color coded rubber grip | 20 |
| HAB4-ABSDP-12 | 7-way ABS, Dual pole liftgate cable & HAB lines; color coded rubber grip | 12 |
| HAB4-ABSDP-15 | 7-way ABS, Dual pole liftgate cable & HAB lines; color coded rubber grip | 15 |
| HAB4-ABSDP-20 | 7-way ABS, Dual pole liftgate cable & HAB lines; color coded rubber grip | 20 |

TRUCK TO TRAILER RUBBER AIR BRAKE LINES



To Order Complete with Gladhand Suffix PART No. with -GH

Featuring Fairview Live Swivels on Both Ends.

- SAE J1402 rubber air brake hose with factory crimped ends.
- Red or Blue GLAD GRIPS for easy glad hand connection, identification and hose bend protection
- Swivel fitting with spring guard for easy end installation.
- Internal live swivel at gladhand grip for added strain relief.
- Assemblies meet D.O.T F.M.V.S.S 106

| PART No. | Length (FT.) | Swivel Male Pipe | Low Temp. |
|----------------|--------------|------------------|--------------|
| HABRED-15GGSG | 15 | 1/2 | -40°F, -40°C |
| HABBLU-15GGSG | 15 | 1/2 | -40°F, -40°C |
| HABARED-15GGSG | 15 | 1/2 | -65°F, -54°C |
| HABABLU-15GGSG | 15 | 1/2 | -65°F, -54°C |
| HABRED-20GGSG | 20 | 1/2 | -40°F, -40°C |
| HABBLU-20GGSG | 20 | 1/2 | -40°F, -40°C |
| HABARED-20GGSG | 20 | 1/2 | -65°F, -54°C |
| HABABLU-20GGSG | 20 | 1/2 | -65°F, -54°C |

Part numbers above are for ONE Assembly combined with Glad Grip & Spring Guard.


| PART No. | Length (FT.) | Low Temp. |
|---------------|--------------|--------------|
| HABSPW-15GGSG | 15 | -40°F, -40°C |
| HABSPW-20GGSG | 20 | -40°F, -40°C |



Spiral Hose Guard Wrap Available

Part numbers above are for TWO Assemblies combined with Spiral Hose Guard Wrap.

S.A.E. J844 RETRACTABLE AIR BRAKE COILS

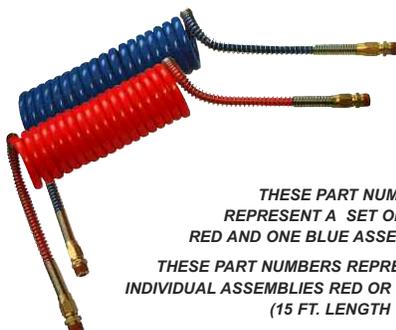

THESE PART NUMBERS REPRESENT A SET OF ONE RED AND ONE BLUE ASSEMBLY.
THESE PART NUMBERS REPRESENT INDIVIDUAL ASSEMBLIES RED OR BLUE. (15 FT. LENGTH ONLY)

- **MEETS:** S.A.E. J884D Type 3B D.O.T. F.M.V.S.S. 106
- **COLORS:** Red, Blue
- **TEMPERATURE:** -85°F to +200°F, -65°C to +93°C
- **PACKAGING:** As a Set of One Red and One Blue.
- **FITTINGS:** 1/2" Male Pipe Each End.

LOW TEMPERATURE RATED

-85°F
(-65°C)



| PART No. | Working Length (FT.) | Tube O.D. (IN.) | Pigtail Length (IN.) | Male Pipe Ends | Low Temp |
|---------------|----------------------|-----------------|----------------------|----------------|--------------|
| 1486L-8-15 | 15 | 1/2 | 12" | 1/2 | -85°F, -65°C |
| 1486L-8-20 | 20 | 1/2 | 12" | 1/2 | -85°F, -65°C |
| 1486L-8RED-15 | 15 | 1/2 | 12" | 1/2 | -85°F, -65°C |
| 1486L-8BLU-15 | 15 | 1/2 | 12" | 1/2 | -85°F, -65°C |

A



ORDERING HYDRAULIC HOSE ASSEMBLIES

A

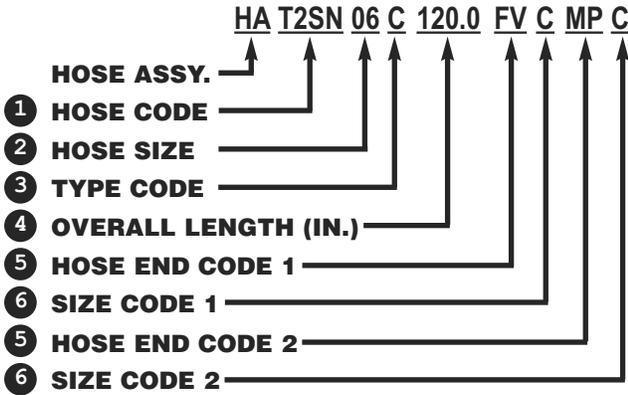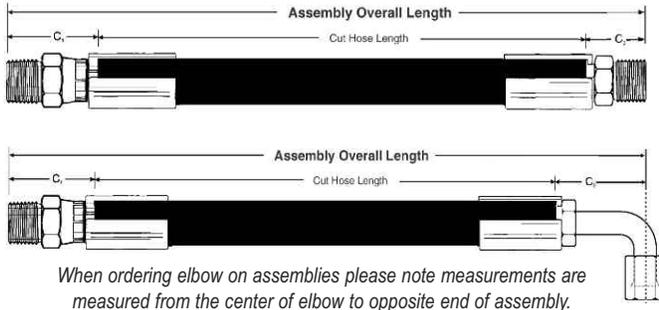

① HOSE CODES

| CODE | HOSE | CODE | HOSE |
|------|---------------------------|------|-----------------------------|
| T1SN | S.A.E. 100R1 | HR7R | S.A.E. 100R7 Kink Resistant |
| T1XX | S.A.E. 100R1 | R7LT | 100R7 Low-Temperature |
| T2SN | S.A.E. 100R2 | R7NC | 100R7 Non-Conductive |
| T2XX | S.A.E. 100R2 | R7PN | 100R7 Plus Non-Conductive |
| H4SH | DIN 20023 4SH | HR8X | S.A.E. 100R8 |
| HR3X | S.A.E. 100R3 | R8NC | 100R8 Non-Conductive |
| HR4X | S.A.E. 100R4 | HR12 | S.A.E. 100R12 |
| HR5X | S.A.E. 100R5 | HR13 | S.A.E. 100R13 |
| HR5H | S.A.E. 100R5HT High Temp. | HR16 | S.A.E. 100R16 |
| HR7X | S.A.E. 100R7 | HR17 | S.A.E. 100R17 |
| HR7A | S.A.E. 100R7 ANSI | R17L | 100R17 Low Temp. |
| HR7P | S.A.E. 100R7 PLUS | HR18 | S.A.E. 100R18 |

② SIZE CODES

| HOSE SIZE | TUBE | SIZE CODE |
|-----------|--------|-----------|
| 02 | 1/8" | A |
| 03 | 3/16" | F |
| 04 | 1/4" | B |
| 05 | 5/16" | G |
| 06 | 3/8" | C |
| 08 | 1/2" | D |
| 10 | 5/8" | I |
| 12 | 3/4" | E |
| 16 | 1" | H |
| 20 | 1-1/4" | J |
| 24 | 1-1/2" | K |
| 32 | 2" | M |

③ ASSEMBLY TYPE CODES

| CODE | TYPE | CODE | TYPE |
|------|---------------|------|----------------|
| C | Crimp Ends | S | Swage Hose |
| R | Reusable Ends | T | Twin-Line Hose |

④ ASSEMBLY OVERALL LENGTH

The overall length of the Assembly is measured in Inches Including Hose Ends.

Example: 2' = 24.00
10' = 120.0
100' = 1200.

Must fill all 5 spaces in the Overall Length Code

Length Tolerances for Hydraulic Hose Assemblies and Specified Hose Lengths.

| Length | Tolerance |
|---|---|
| For Lengths from 0 to and including 36" | ±1/4" |
| For Lengths above 36" | ±1% of length measured to the nearest 1/8 of an inch. |

⑤ HOSE END CODES

| CODE | DESCRIPTION |
|------|---|
| B9 | Female British Parallel 90° Elbow |
| BF | Female BSPP Swivel Female Cone |
| BM | Female BSPP Swivel Male Cone |
| FH | Female Heavy Metric |
| H9 | Female Heavy Metric 90° Metric |
| JS | Female JIS 30° Flare |
| KM | Female Komatsu 30° Flare |
| FL | Female Light Metric |
| L9 | Female Light Metric 90° Elbow |
| FV | Female NPSM Swivel |
| RS | Female O-Ring Face Seal |
| R5 | Female O-Ring Face Seal 45° Elbow |
| R9 | Female O-Ring Face Seal 90° Elbow |
| FP | Female Pipe |
| FJ | Female Swivel 37° S.A.E. |
| J5 | Female Swivel 37° S.A.E. 45° Elbow |
| J9 | Female Swivel 37° S.A.E. 90° Elbow |
| JL | Female Swivel 37° S.A.E. 90° Elbow (Long) |
| FS | Female Swivel 45° S.A.E. |
| S5 | Female Swivel 45° S.A.E. 45° Elbow |
| S9 | Female Swivel 45° S.A.E. 90° Elbow |

| | |
|----|--------------------------|
| C5 | Flange code 61 45° Elbow |
| C9 | Flange code 61 90° Elbow |
| C1 | Flange code 61 Straight |
| D5 | Flange code 62 45° Elbow |
| D9 | Flange code 62 90° Elbow |
| D2 | Flange code 62 Straight |

TR Flareless Tube Repair

GT Grease Tap

| | |
|----|-------------------------------|
| MJ | Male 37° S.A.E. |
| MS | Male 45° S.A.E. |
| BP | Male British Parallel |
| BT | Male British Tapered |
| MH | Male Heavy Metric |
| MI | Male Inverted Flare |
| I5 | Male Inverted Flare 45° Elbow |
| I9 | Male Inverted Flare 90° Elbow |
| ML | Male Light Metric |
| MO | Male O-Ring |
| O5 | Male O-Ring Boss 45° Elbow |
| O9 | Male O-Ring Boss 90° Elbow |
| RM | Male O-Ring Face Seal |
| SO | Male O-Ring Boss Swivel |
| MP | Male Pipe |
| SP | Male Pipe Swivel |
| P9 | Male Pipe Swivel 90° Elbow |
| ST | Stand Pipe |

MEDIUM PRESSURE HOSE



Meets or Exceeds
**S.A.E. 100R1 TYPE AT
 EN853 1SN**
 ONE WIRE BRAID (NON SKIVE)
 COVER IS NOT REMOVED

For medium to high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Not suitable for use with phosphate esters.

- **CONSTRUCTION:**
One Ply of Steel Wire Braid.
- **TUBE:** Oil and Heat-Resistant Synthetic Rubber Inner Tube.
- **COVER:** Oil, Weather and Flame-Resistant M.S.H.A. Approved Synthetic Rubber Cover.
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +250°F, -40°C to +121°C
- **PACKAGING:** For Reel Lengths and Carton Quantities see below.
- **FITTINGS:** SC600 Compression Page 45 - 46
SC900 Bite-To-The-Wire Page 47 - 48
SRT100 Reusable Page 50
- **LOW TEMPERATURE:** -67°F to +200°F, -55°C to +93°C Available change prefix to T1SNLT-. Minimum runs may apply.

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Approx. Wgt. / Ft. (LBS.) | Reel Lengths (FT.) |
|--------------|-------------------|-----------------|---------------------------|------------------------------|------------------------|---------------------------|--------------------|
| T1SN-4-REEL | 1/4 | .531 | 3,260 | 13,000 | 4.00 | .17 | 328 |
| T1SN-6-REEL | 3/8 | .687 | 2,610 | 10,400 | 5.00 | .26 | 328 |
| T1SN-8-REEL | 1/2 | .812 | 2,320 | 9,300 | 7.00 | .31 | 328 |
| T1SN-12-REEL | 3/4 | 1.093 | 1,520 | 6,100 | 9.50 | .47 | 164 |

HIGH PRESSURE HOSE



Meets or Exceeds
**S.A.E. 100R2 TYPE AT
 EN853 2SN**
 TWO WIRE BRAID (NON SKIVE)
 COVER IS NOT REMOVED

For high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Not suitable for use with phosphate esters.

- **CONSTRUCTION:**
Two Plies of Steel Wire Braid.
- **TUBE:** Oil and Heat-Resistant Synthetic Rubber Inner Tube.
- **COVER:** Oil, Weather and Flame-Resistant Black Synthetic Rubber Cover
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +250°F, -40°C to +121°C
- **PACKAGING:** For Reel Lengths and Carton Quantities see below.
- **FITTINGS:** SC600 Compression Page 45 - 46
SC900 Bite-To-The-Wire Page 47 - 48
SRT200 Reusable Page 50
- **LOW TEMPERATURE:** -67°F to +200°F, -55°C to +93°C Available change prefix to T2SNLT-. Minimum runs may apply.

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Approx. Wgt. / Ft. (LBS.) | Reel Lengths (FT.) |
|--------------|-------------------|-----------------|---------------------------|------------------------------|------------------------|---------------------------|--------------------|
| T2SN-4-REEL | 1/4 | .593 | 5,800 | 23,200 | 4.00 | .26 | 328 |
| T2SN-6-REEL | 3/8 | .750 | 4,785 | 19,100 | 5.00 | .38 | 328 |
| T2SN-8-REEL | 1/2 | .875 | 3,990 | 16,000 | 7.00 | .48 | 328 |
| T2SN-12-REEL | 3/4 | 1.187 | 3,120 | 12,500 | 9.50 | .61 | 164 |
| T2SN-16-REEL | 1 | 1.500 | 2,390 | 9,500 | 12.00 | .95 | 164 |

A

MEDIUM PRESSURE HOSE

A



S.A.E. 100R1 TYPE AT EN853 1SN

ONE WIRE BRAID (NON SKIVE)
COVER IS NOT REMOVED

For medium to high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Not suitable for use with phosphate esters.

- **CONSTRUCTION:**
One Ply of Steel Wire Braid.
- **TUBE:** Oil and Heat-Resistant Synthetic Rubber Inner Tube.
- **COVER:** Oil, Weather and Flame-Resistant M.S.H.A. Approved Synthetic Rubber Cover.
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +212°F, -40°C to +100°C
- **PACKAGING:** For Reel Lengths and Carton Quantities see below.
- **FITTINGS:** SC600 Compression Page 45 - 46
SC900 Bite-To-The-Wire Page 47 - 48
SRT100 Reusable Page 50

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Approx. Wgt. / Ft. (LBS.) | Reel Lengths (FT.) |
|------------|-------------------|-----------------|---------------------------|------------------------------|------------------------|---------------------------|--------------------|
| T1-4-REEL | 1/4 | .531 | 3,263 | 13,000 | 4.00 | .17 | 300 |
| T1-6-REEL | 3/8 | .687 | 2,610 | 10,400 | 5.00 | .26 | 300 |
| T1-8-REEL | 1/2 | .812 | 2,320 | 9,300 | 7.00 | .31 | 300 |
| T1-12-REEL | 3/4 | 1.093 | 1,523 | 6,100 | 9.50 | .47 | 250 |

HIGH PRESSURE HOSE



S.A.E. 100R2 TYPE AT EN853 2SN

TWO WIRE BRAID (NON SKIVE)
COVER IS NOT REMOVED

For high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Not suitable for use with phosphate esters.

- **CONSTRUCTION:**
Two Plies of Steel Wire Braid.
- **TUBE:** Oil and Heat-Resistant Synthetic Rubber Inner Tube.
- **COVER:** Oil, Weather and Flame-Resistant Black Synthetic Rubber Cover
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +212°F, -40°C to +100°C
- **PACKAGING:** For Reel Lengths and Carton Quantities see below.
- **FITTINGS:** SC600 Compression Page 45 - 46
SC900 Bite-To-The-Wire Page 47 - 48
SRT200 Reusable Page 50

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Approx. Wgt. / Ft. (LBS.) | Reel Lengths (FT.) |
|------------|-------------------|-----------------|---------------------------|------------------------------|------------------------|---------------------------|--------------------|
| T2-4-REEL | 1/4 | .593 | 5,800 | 23,200 | 4.00 | .26 | 300 |
| T2-6-REEL | 3/8 | .750 | 4,785 | 19,100 | 5.00 | .38 | 300 |
| T2-8-REEL | 1/2 | .875 | 3,988 | 15,900 | 7.00 | .48 | 300 |
| T2-10-REEL | 5/8 | 1.000 | 3,625 | 14,500 | 8.00 | .50 | 250 |
| T2-12-REEL | 3/4 | 1.187 | 3,118 | 12,500 | 9.50 | .61 | 250 |
| T2-16-REEL | 1 | 1.500 | 2,393 | 9,500 | 12.00 | .95 | 150 |
| T2-20-CTN | 1-1/4 | 1.902 | 1,813 | 6,200 | 16.50 | 1.38 | 130 |

SUCTION HOSE



Meets or Exceeds
Performance Characteristics

S.A.E. 100R4

TWO TEXTILE SPIRAL PLIES
WITH WIRE HELIX
(NON SKIVE)
COVER IS NOT REMOVED

For hydraulic suction (29 Inch/hg) and low pressure hydraulic return lines. Will handle petroleum based hydraulic fluids, diesel fuels, water and lubricating oils. Wire helix prevents collapsing under vacuum service. Not suitable for use with phosphate esters.

- **CONSTRUCTION:**
Two Textile Spiral Plies With Wire Helix.
- **TUBE:** Oil and Heat-Resistant Synthetic Rubber Inner Tube.
- **MSHA Approved**
- **COVER:** Oil, Weather and Abrasion-Resistant Synthetic Rubber Cover.
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +250°F, -40°C to +121°C
- **PACKAGING:** 50 FT. and 100 FT. Coils
- **FITTINGS:** SC600 Compression Page 45 - 46
(Up to 1-1/4 Size)
S1100 and SO1100 Steel Hose Inserts Page 49
Steel Combination Nipples Page 43

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Vacuum Service (IN./HG) | Approx. Wgt. / Ft. (LBS.) | Coil Length (FT.) |
|------------|-------------------|-----------------|---------------------------|------------------------------|------------------------|-------------------------|---------------------------|-------------------|
| HR4-12-100 | 3/4 | 1.160 | 300 | 1,200 | 4.90 | 29 | .60 | 100 |
| HR4-16-100 | 1 | 1.480 | 250 | 1,000 | 5.90 | 29 | .70 | 100 |
| HR4-20-100 | 1-1/4 | 1.770 | 200 | 800 | 7.87 | 29 | .90 | 100 |
| HR4-24-100 | 1-1/2 | 2.050 | 150 | 600 | 10.00 | 29 | 1.20 | 100 |
| HR4-32-100 | 2 | 2.500 | 100 | 400 | 11.80 | 29 | 1.50 | 100 |

WETLINE KITS

Wet Kits (or wetline kits) installed on the PTO (Power Take Off) of trucks or semi-trucks.

Many different accessories are installed on these trucks, like booms and cranes.

The hydraulic pump is activated by the truck's Power Take Off.

These accessories need the hydraulic pump to operate.

CUSTOM KITS AVAILABLE



HYDRAULIC ADAPTERS



T-BOLT CLAMPS



HOSE CONNECTORS



HYDRAULIC WING Q.D. COUPLERS





S.A.E. HYDRAULIC / TRUCK HOSE

A



S.A.E. 100R5 S.A.E. J1402

MEETS D.O.T. F.M.V.S.S. - 106
ONE WIRE BRAID
TWO COTTON BRAIDS
(NON SKIVE)
COVER IS NOT REMOVED

For medium pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils, air and water. Recommended for power steering and power steering return lines, fuel filters, turbo chargers, tilt lines, lube oil lines and machine tools. Not suitable for use with phosphate esters.

- **CONSTRUCTION:** Textile inner braid with single wire braid reinforcement.
 - **TUBE:** Oil and heat-resistant synthetic rubber inner tube.
 - **COVER:** Textile outer braid and a cotton braided black cover.
 - **COLOR:** Black
 - **TEMPERATURE:** -40°F to +212°F, -40°C to +100°C
 - **PACKAGING:** For Reel Lengths and Carton Quantities see below.
Sizes -4 to -16 available in 100 Ft. Coils.
 - **FITTINGS:** SCW500 Crimp Page 52
SR500 Reusable Page 53
- * Max. temperature recommended for air +140F, +60C

| PART No. | Nominal I.D. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Approx. Wgt. / Ft. (LBS.) | Reel Length (FT.) |
|-------------|--------------|-------------------|-----------------|---------------------------|------------------------------|------------------------|---------------------------|-------------------|
| HR5-4-REEL | 1/4 | 3/16 | 0.52 | 3,000 | 12,000 | 3.00 | .16 | 250 |
| HR5-5-REEL | 5/16 | 1/4 | 0.58 | 2,500 | 10,000 | 3.38 | .18 | 250 |
| HR5-6-REEL | 3/8 | 5/16 | 0.68 | 2,250 | 9,000 | 4.00 | .22 | 250 |
| HR5-8-REEL | 1/2 | 13/32 | 0.77 | 2,000 | 8,000 | 4.62 | .27 | 250 |
| HR5-10-REEL | 5/8 | 1/2 | 0.92 | 1,750 | 7,000 | 5.50 | .34 | 250 |
| HR5-12-REEL | 3/4 | 5/8 | 1.08 | 1,500 | 6,000 | 6.50 | .42 | 250 |
| HR5-16-REEL | 1 | 7/8 | 1.24 | 800 | 3,200 | 7.38 | .44 | 165 |
| HR5-20-CTN | 1-1/4 | 1-1/8 | 1.50 | 625 | 2,500 | 9.00 | .52 | 100 |
| HR5-24-CTN | 1-1/2 | 1-3/8 | 1.75 | 500 | 2,000 | 10.50 | .62 | 100 |
| HR5-32-CTN | 2 | 1-13/16 | 2.22 | 350 | 1,400 | 13.25 | .93 | 100 |

BLUE HIGH TEMP. S.A.E. 100R5 HOSE



S.A.E. 100R5 S.A.E. J1402

HIGH TEMPERATURE


MEETS D.O.T. F.M.V.S.S. - 106
ONE WIRE BRAID
TWO COTTON BRAIDS
(NON SKIVE)
COVER IS NOT REMOVED

For high temperature, medium to high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels, lubricating oils and water. Recommended for power steering and power steering return lines, fuel filters, turbo chargers, tilt lines, lube oil lines, compressors and machine tools. Not suitable with phosphate esters.

- **CONSTRUCTION:** Textile inner braid with single wire braid reinforcement.
- **TUBE:** Oil and heat-resistant synthetic rubber inner tube.
- **COVER:** Textile outer braid and a cotton braided cover.
- **COLOR:** Blue
- **TEMPERATURE:** -49°F to +300°F, -55°C to +150°C
- **PACKAGING:** For Reel Lengths and Carton Quantities see below.
- **FITTINGS:** SCW500 Crimp Page 52
SR500 Reusable Page 53

| PART No. | Nominal I.D. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Approx. Wgt. / Ft. (LBS.) | Reel Length (FT.) |
|---------------|--------------|-------------------|-----------------|---------------------------|------------------------------|------------------------|---------------------------|-------------------|
| HR5HT-8-REEL | 1/2 | 13/32 | 0.76 | 2,000 | 8,000 | 4.62 | .26 | 500 |
| HR5HT-10-REEL | 5/8 | 1/2 | 0.93 | 1,750 | 7,000 | 5.50 | .37 | 300 |
| HR5HT-12-REEL | 3/4 | 5/8 | 1.08 | 1,500 | 6,000 | 6.50 | .46 | 250 |
| HR5HT-16-REEL | 1 | 7/8 | 1.27 | 800 | 3,200 | 7.38 | .44 | 190 |

MEDIUM PRESSURE HOSE

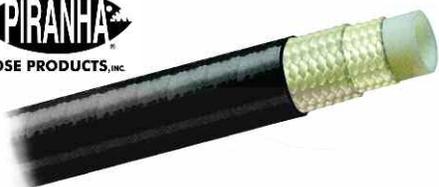

S.A.E. 100R7

Meet or Exceeds S.A.E. J517
Exceeds 100R7 Impulse Requirements
Lightweight and Flexible

For medium pressure hydraulic service in the handling of most hydraulic fluids, diesel fuels, water and lubricating oils. Not suitable for use with phosphate esters. This hose combines the best features of conventional rubber hose with the unique advantages of synthetic materials.

Recommended use: Hand held grease guns.

- **CONSTRUCTION:** High tensile strength fiber reinforcement Braided Synthetic fiber.
- **TUBE:** Oil and Heat-Resistant Nylon Inner Tube.
- **COVER:** Resistant Polyurethane, pin pricked cover.
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **PACKAGING:** Reels
- **COLOR:** Black
- **FITTINGS:** SC700 (for 1/8 & 1/4 sizes) Page 49 , SCTP Page 54
- * **S.A.E. WORKING PRESSURES SHOWN**

| PART No. | Nominal Hose I.D. (IN.) | Hose O.D. (IN.) | * Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Weight / 100 Ft. (LBS.) | Reel Lengths (FT.) |
|-------------|-------------------------|-----------------|-----------------------------|------------------------------|------------------------|-------------------------|--------------------|
| HR7-2-REEL | 1/8 | 0.322 | 3,000 | 12,000 | 0.75 | 3 | 250 |
| HR7-3-REEL | 3/16 | 0.415 | 3,000 | 12,000 | 0.75 | 5 | 250 |
| HR7-4-REEL | 1/4 | 0.496 | 2,750 | 11,000 | 1.50 | 6 | 250 |
| HR7-5-REEL | 5/16 | 0.580 | 2,500 | 10,000 | 1.75 | 8 | 250 |
| HR7-6-REEL | 3/8 | 0.650 | 2,250 | 9,000 | 2.00 | 11 | 250 |
| HR7-8-REEL | 1/2 | 0.834 | 2,000 | 8,000 | 3.00 | 16 | 250 |
| HR7-12-REEL | 3/4 | 1.050 | 1,250 | 5,000 | 6.00 | 22 | 250 |

• **LOW TEMPERATURE AVAILABLE ON REQUEST:** -65°F to +200°F, -54°C to +93°C

| PART No. | Nominal Hose I.D. (IN.) | Hose O.D. (IN.) | * Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Weight / 100 Ft. (LBS.) | Reel Lengths (FT.) |
|--------------|-------------------------|-----------------|-----------------------------|------------------------------|------------------------|-------------------------|--------------------|
| HR7LT-4-REEL | 1/4 | 0.496 | 2,750 | 11,000 | 1.50 | 6 | 250 |
| HR7LT-6-REEL | 3/8 | 0.650 | 2,250 | 9,000 | 2.00 | 11 | 250 |
| HR7LT-8-REEL | 1/2 | 0.834 | 2,000 | 8,000 | 3.00 | 16 | 250 |

TWIN-LINE MEDIUM PRESSURE HOSE



S.A.E. 100R7

Meets or Exceeds S.A.E. J517
Specifications

FEATURES: Low Elongation • Best Value 100R7 Hose

TYPICAL APPLICATIONS: For use with General Hydraulics • Material Handling • Forklift • Chemical Transfer


- **CONSTRUCTION:** Braided Synthetic Fiber Reinforcement
- **TUBE:** Nylon-Lined Core Tube
- **COVER:** Resistant Polyurethane, pin pricked cover.
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C for petroleum based hydraulic fluids.
- **PACKAGING:** Reels
- **COLOR:** Black
- **FITTINGS:** SC700 (for 1/4 size) Page 49 , SCTP Page 54

| PART No. | Nominal Hose I.D. (IN.) | Hose O.D. (IN.) | Min. Bend Radius (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Approx. Wgt./Ft. (LBS.) | Reel Length (FT.) |
|--------------|-------------------------|-----------------|------------------------|---------------------------|------------------------------|-------------------------|-------------------|
| HR7TW-4-REEL | 1/4 | .496 | 1-1/2 | 2,750 | 11,000 | .06 | 250 |
| HR7TW-6-REEL | 3/8 | .650 | 2 | 2,250 | 9,000 | .11 | 250 |
| HR7TW-8-REEL | 1/2 | .834 | 3 | 2,000 | 8,000 | .16 | 200 |

A

MEDIUM PRESSURE (Non-Conductive) HOSE

A

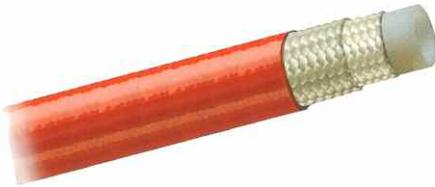

For medium pressure hydraulic service in the handling of most hydraulic fluids, diesel fuels, water and lubricating oils. Not suitable for use with phosphate esters. This hose combines the best features of conventional rubber hose with the unique advantages of synthetic materials.

S.A.E. 100R7

Meet or Exceeds SAE J517
Exceeds 100R7 Impulse Requirements
Lightweight and Flexible

- **CONSTRUCTION:** High tensile strength fiber reinforcement Braided Synthetic fiber.
- **TUBE:** Oil and Heat-Resistant Nylon Inner Tube.
- **COVER:** Resistant Polyurethane, non-pin pricked cover
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **PACKAGING:** Reels
- **COLOR:** Orange, NON-CONDUCTIVE Marking
- **FITTINGS:** SC700 (for 1/4 size) Page 49 , SCTP Page 54
- * **S.A.E. WORKING PRESSURES SHOWN**

| PART No. | Nominal Hose I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Weight / 100 Ft. (LBS.) | Reel Lengths (FT.) |
|---------------|-------------------------|-----------------|---------------------------|------------------------------|------------------------|-------------------------|--------------------|
| HR7-4ORA-REEL | 1/4 | 0.496 | 2750 | 11,000 | 1.50 | 6 | 250 |
| HR7-5ORA-REEL | 5/16 | 0.580 | 2500 | 10,000 | 1.75 | 8 | 250 |
| HR7-6ORA-REEL | 3/8 | 0.650 | 2250 | 9,000 | 2.00 | 11 | 250 |
| HR7-8ORA-REEL | 1/2 | 0.834 | 2000 | 8,000 | 3.00 | 16 | 250 |

MEDIUM PRESSURE TWIN-LINE (Non-Conductive) HOSE



FEATURES: • Low Elongation • Best Value 100R7 Hose
TYPICAL APPLICATIONS: For use with General Hydraulics • Material Handling • Forklift • High Pressure Gas Transfer • Chemical Transfer


S.A.E. 100R7

Meets or Exceeds S.A.E. J517 Specifications

- **CONSTRUCTION:** Braided Synthetic Fiber Reinforcement
- **TUBE:** Nylon-Lined Core Tube
- **COVER:** Resistant Polyurethane, non-pin pricked cover
- **COLOR:** Orange, NON-CONDUCTIVE Marking
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **FITTINGS:** SCTP Page 54

| PART No. | Nominal Hose I.D. (IN.) | Hose O.D. (IN.) | Min. Bend Radius (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Approx. Wgt./Ft. (LBS.) | Reel Length (FT.) |
|-----------------|-------------------------|-----------------|------------------------|---------------------------|------------------------------|-------------------------|-------------------|
| HR7TW-6ORA-REEL | 3/8 | .650 | 2 | 2,250 | 9,000 | .130 | 250 |

HR8 HIGH PRESSURE HOSE

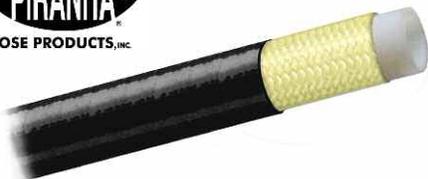

Meets or exceeds **S.A.E. 100R8** Specifications

Extremely Durable
Highly Abrasion Resistant


FEATURES: Meets or exceeds SAE 100R8 impulse requirements, good kink resistance, lightweight; less than about half of comparable rubber wire hose. Highly abrasion resistant outer cover, the inner tube will not chip or peel in service.

TYPICAL APPLICATIONS: Ideal for use in applications where a non-conductive high pressure hydraulic hose is required; industrial hydraulic construction, material handling, agricultural equipment, hydraulic tools, lubrication lines and hydraulic lifts.

- **CONSTRUCTION:** Aramid Fiber Reinforcement
- **TUBE:** Seamless Polyester Inner Tube
- **COVER:** Highly Abrasion Resistant Polyurethane, pin pricked Cover
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **FITTINGS:** SCTP Page 54

| PART No. | Nominal I.D. (IN.) | Hose O.D. (IN.) | Min. Bend Radius (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Approx. Wgt./Ft. (LBS.) | Reel Length (FT.) |
|-------------|--------------------|-----------------|------------------------|---------------------------|------------------------------|-------------------------|-------------------|
| HR8-4-REEL | 1/4 | .485 | 2 | 5,000 | 20,000 | .070 | 250 |
| HR8-6-REEL | 3/8 | .630 | 2-1/2 | 4,000 | 16,000 | .100 | 250 |
| HR8-8-REEL | 1/2 | .820 | 3-1/2 | 3,500 | 14,000 | .170 | 250 |
| HR8-12-REEL | 3/4 | 1.050 | 4-1/2 | 2,250 | 9,000 | .200 | 250 |

HR8 NON-CONDUCTIVE HIGH PRESSURE HOSE

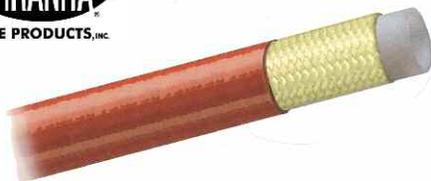

Meets or exceeds **S.A.E. 100R8** Specifications

FEATURES: Meets or exceeds SAE 100R8 impulse requirements, good kink resistance, lightweight; less than about half of comparable rubber wire hose. Highly abrasion resistant outer cover, the inner tube will not chip or peel in service.


TYPICAL APPLICATIONS: Ideal for use in applications where a non-conductive high pressure hydraulic hose is required; industrial hydraulic construction, material handling, agricultural equipment, hydraulic tools, lubrication lines and hydraulic lifts.

- **CONSTRUCTION:** Aramid Fiber Reinforcement
- **TUBE:** Extruded Seamless Polyester Inner Tube
- **COVER:** Highly Abrasion Resistant Polyurethane, Non-Pinpricked Cover
- **COLOR:** Orange, NON-CONDUCTIVE Marking
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **FITTINGS:** SCTP Page 54

| PART No. | Nominal I.D. (IN.) | Hose O.D. (IN.) | Min. Bend Radius (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Approx. Wgt./Ft. (LBS.) | Reel Length (FT.) |
|---------------|--------------------|-----------------|------------------------|---------------------------|------------------------------|-------------------------|-------------------|
| HR8-4ORA-REEL | 1/4 | .485 | 2 | 5,000 | 20,000 | .070 | 250 |
| HR8-6ORA-REEL | 3/8 | .630 | 2-1/2 | 4,000 | 16,000 | .100 | 250 |
| HR8-8ORA-REEL | 1/2 | .820 | 3-1/2 | 3,500 | 14,000 | .170 | 250 |

A

HR8TW TWIN-LINE NON-CONDUCTIVE HIGH PRESSURE HOSE

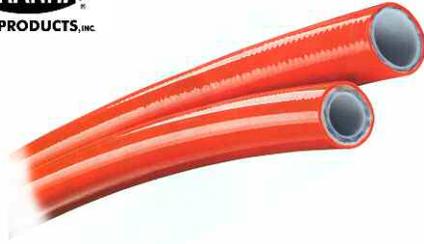

Meets **S.A.E. 100R8**
Specifications
Lightweight and
Extremely durable.

FEATURES: Meets or exceeds SAE 100R8 impulse requirements, good kink resistance, lightweight; less than about half of comparable rubber wire hose. Highly abrasion resistant outer cover, the inner tube will not chip or peel in service.

- Long Life for Impulse Cycling and Flexing • UV Resistant Cover

TYPICAL APPLICATIONS: Ideal for use in applications where a non-conductive high pressure hydraulic twin-line hose is required; industrial hydraulic construction, material handling, agricultural equipment, hydraulic tools, lubrication lines and hydraulic lifts.

- **CONSTRUCTION:** Aramid Fiber Reinforcement
- **TUBE:** Extruded Seamless Polyester Inner Tube
- **COVER:** Highly Abrasion Resistant Polyurethane, Non-Pin pricked Cover
- **COLOR:** Orange, NON-CONDUCTIVE Marking
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **FITTINGS:** SCTP Page 54

Other Sizes Available on Request

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Min. Bend Radius (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Approx. Wgt./Ft. (LBS.) | Reel Length (FT.) |
|-----------------|----------------------|--------------------|------------------------------|---------------------------------|------------------------------------|-------------------------------|-------------------------|
| HR8TW-6ORA-REEL | 3/8 | .630 | 2-1/2 | 4,000 | 16,000 | .100 | 250 |

HIGH PRESSURE HOSE



S.A.E. 100R12
EN856 4SN
FOUR SPIRAL WIRE
(NON SKIVE / SKIVE)

For very high pressure hydraulic service in the handling of most hydraulic fluids, diesel fuels, water and lubricating oils. Not suitable for use with phosphate esters.

- **CONSTRUCTION:**
Four Spirals of High Tensile Steel Wire.
- **TUBE:** Oil and Heat-Resistant Synthetic Rubber Inner Tube.
- **COVER:** Oil, Weather and Flame-Resistant M.S.H.A. Approved Synthetic Rubber Cover.
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **PACKAGING:** Coils
- **FITTINGS:** SCT900MS (Non-Skive) Bite-To-The-Wire Page 55
- * **S.A.E. WORKING PRESSURES SHOWN**

- **LOW TEMPERATURE:** -67°F to +200°F, -55°C to +93°C Available change prefix to HRA12LT-. Minimum runs apply.

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | * Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Approx. Wgt. / Ft. (LBS.) | Coil Lengths (FT.) |
|----------|----------------------|--------------------|-----------------------------------|------------------------------------|------------------------------|---------------------------------|--------------------------|
| HRA12-6 | 3/8 | .787 | 4,000 | 16,000 | 5.00 | .44 | 131 |
| HRA12-8 | 1/2 | .934 | 4,000 | 16,000 | 7.00 | .56 | 131 |
| HRA12-12 | 3/4 | 1.210 | 4,000 | 16,000 | 9.50 | .89 | 131 |
| HRA12-16 | 1 | 1.495 | 4,000 | 16,000 | 12.00 | 1.30 | 131 |
| HRA12-20 | 1-1/4 | 1.850 | 3,000 | 12,000 | 16.50 | 1.79 | 131 |

(MEDIUM PRESSURE SMOOTH BORE)



S.A.E. 100R14

• TYPICAL USES INCLUDE

Pneumatic, hot oil lines, steam lines, food processing, paint spray, compressor discharge, gases, chemical lines, steering lines, brake lines, high pressure hydraulic lines.

PTFE hose can solve almost all "problem" applications. It is suitable for use with steam, solvents, fuels, hydraulic fluids, most chemicals and acids. Vibration absorption, extra long shelf life, high temperature and pressure ranges, make PTFE hose the most versatile hose in the industry today.

- **CONSTRUCTION:** Braided Outer Cover
- **TUBE:** PTFE Inner Tube
- **COVER:** Stainless Steel (TYPE 304)
- **TEMPERATURE:** -65°F to + 450°F, -54°C to +232°C
- **PACKAGING:** Bulk Coils - Random Lengths
- **FITTINGS:** SCT400 One Piece Crimp Page 50
SR400 Reusable End Page 51

| PART No. | Nominal I.D. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) |
|----------|--------------|-------------------|-----------------|---------------------------|------------------------------|------------------------|
| HT-4 | 1/4 | 3/16 | .30 | 3000 | 12000 | 1.50 |
| HT-5 | 5/16 | 1/4 | .38 | 3000 | 12000 | 2.00 |
| HT-6 | 3/8 | 5/16 | .44 | 2500 | 10000 | 3.50 |
| HT-8 | 1/2 | 13/32 | .54 | 2000 | 8000 | 4.50 |
| HT-10 | 5/8 | 1/2 | .63 | 1750 | 7000 | 5.00 |
| HT-12 | 3/4 | 5/8 | .76 | 1500 | 6000 | 6.00 |
| HT-16 | 1 | 7/8 | 1.03 | 1000 | 4000 | 9.00 |
| HT-20 | 1-1/4 | 1-1/8 | 1.29 | 750 | 3000 | 16.00 |

NOTE: WORKING PRESSURE RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

HOW TO ORDER CUSTOM FACTORY MADE PTFE HOSE ASSEMBLIES (STAINLESS STEEL BRAIDED COVER - BRASS ENDS)

AIR BRAKE
COMPRESSION




STRAIGHT
TUBE

Note: When ordering elbow on assemblies please note measurements are measured from the center of elbow to opposite end of assembly.

SAMPLE HOSE ASSEMBLY PART NUMBER

HOSE END FITTING CODE

END SIZE CODE

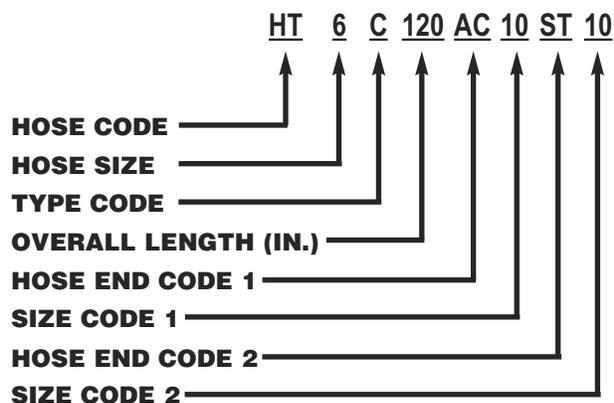

| | | | |
|----|-------------------------------------|--------------|-----------|
| AC | AIRBRAKE COMPRESSION | SIZE 1/4" | CODE 4 |
| FJ | FEMALE SWIVEL 37° (J.I.C.) FLARE | 5/16" | 5 |
| FS | FEMALE SWIVEL 45° (S.A.E.) FLARE | 3/8" | 6 |
| MI | MALE INVERTED FLARE SWIVEL | 1/2" | 8 |
| MP | MALE PIPE | 5/8" | 10 |
| ST | STRAIGHT TUBE | 3/4" | 12 |
| J5 | 45° ELBOW SWIVEL 37° (J.I.C.) FLARE | 1" | 16 |
| J9 | 90° ELBOW SWIVEL 37° (J.I.C.) FLARE | | |

A

HIGH PRESSURE HOSE

A



For hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels lubricating oils and water. Not suitable with phosphate esters.

- **CONSTRUCTION:**
Two Plies of Steel Wire Braid.
- **TUBE:** Oil and Heat-Resistant Synthetic Rubber Inner Tube
- **COVER:** Oil, Weather and Flame-resistant Synthetic Rubber Cover. MSHA Approved.
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +212°F, -40°C to +100°C
- **PACKAGING:** For Reel Lengths see below.
- **FITTINGS:** SC600 Compression Page 45 - 46
SC900 Bite-To-The-Wire Page 47 - 48

EXTREMELY FLEXIBLE S.A.E. 100R16 / DIN 2SC

TWO WIRE BRAID
(NON SKIVE)
COVER IS NOT REMOVED

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Approx. Wgt. / Ft. (LBS.) | Reel Lengths (FT.) |
|-------------|----------------------|--------------------|------------------------------|---------------------------------|---------------------------|------------------------------|-----------------------|
| HR16-4-REEL | 1/4 | 0.530 | 5,800 | 23,200 | 2 | 0.18 | 500 |
| HR16-6-REEL | 3/8 | 0.687 | 5,000 | 20,000 | 2.5 | 0.27 | 400 |
| HR16-8-REEL | 1/2 | 0.812 | 4,250 | 17,000 | 3.5 | 0.35 | 300 |

MEDIUM PRESSURE HOSE



For medium to high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels lubricating oils and water. Not suitable with phosphate esters.

- **CONSTRUCTION:** One Braid of High Tensile Steel Wire Reinforcement for 1/4" ID Through to 1/2" ID hose. • Two Braids of High Tensile Steel Wire Reinforcement for 3/4" ID Through to 1" ID Hose.
- **TUBE:** Oil and Heat Resistant Synthetic Rubber Inner Tube
- **COVER:** Oil, Weather and Flame-Resistant Synthetic Rubber Cover.
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +212°F, -40°C to +100°C
- **PACKAGING:** For Reel Lengths see below.
- **FITTINGS:** SC600 Compression Page 45 - 46
SC900 Bite-To-The-Wire Page 47 - 48

S.A.E. 100R17

(NON-SKIVE)
COVER IS NOT REMOVED

| PART No. | Actual I.D. (IN.) | Nominal Hose O.D. (IN.) | Maximum Hose O.D. (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Approx. Wgt. / Ft. (LBS.) | Reel Lengths (FT.) |
|--------------|----------------------|----------------------------|----------------------------|------------------------------|---------------------------------|---------------------------|------------------------------|-----------------------|
| HR17-4-REEL | 1/4 | 0.480 | 0.520 | 3,000 | 12,000 | 2.00 | 0.16 | 300 |
| HR17-6-REEL | 3/8 | 0.610 | 0.670 | 3,000 | 12,000 | 2.50 | 0.24 | 300 |
| HR17-8-REEL | 1/2 | 0.750 | 0.830 | 3,000 | 12,000 | 3.50 | 0.29 | 300 |
| HR17-12-REEL | 3/4 | 1.090 | 1.190 | 3,000 | 12,000 | 4.75 | 0.55 | 250 |

LOW TEMPERATURE MEDIUM PRESSURE HOSE



S.A.E. 100R17

(NON-SKIVE)


COVER IS NOT REMOVED

For Low Temperature medium to high pressure hydraulic service in the handling of most hydraulic fluids, gasoline, diesel fuels lubricating oils and water. Not suitable with phosphate esters.

- **CONSTRUCTION:** One Braid of High Tensile Steel Wire Reinforcement for 1/4" ID Through to 1/2" ID hose. • Two Braids of High Tensile Steel Wire Reinforcement for 3/4" ID Through to 1" ID Hose.
- **TUBE:** Oil and Heat Resistant Synthetic Rubber Inner Tube
- **COVER:** Oil, Weather and Flame-Resistant Synthetic Rubber Cover.
- **COLOR:** Black
- **LOW TEMPERATURE:** -67°F to +212°F, -55°C to +100°C
- **PACKAGING:** For Reel Lengths see below.
- **FITTINGS:** SC900 Bite-To-The-Wire Page 47 - 48
Fairview Fittings recommends the use of Bite-To-The-Wire fittings only for our low temperature 100R17 hose.

| PART No. | Actual I.D. (IN.) | Nominal Hose O.D. (IN.) | Maximum Hose O.D. (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Min. Bend Radius (IN.) | Approx. Wgt. / Ft. (LBS.) | Reel Lengths (FT.) |
|----------------|-------------------|-------------------------|-------------------------|---------------------------|------------------------------|------------------------|---------------------------|--------------------|
| HR17LT-4-REEL | 1/4 | 0.48 | 0.50 | 3,000 | 12,000 | 2.00 | 0.16 | 328 |
| HR17LT-6-REEL | 3/8 | 0.61 | 0.63 | 3,000 | 12,000 | 2.50 | 0.24 | 328 |
| HR17LT-8-REEL | 1/2 | 0.75 | 0.77 | 3,000 | 12,000 | 3.50 | 0.29 | 328 |
| HR17LT-10-REEL | 5/8 | 0.94 | 0.96 | 3,000 | 12,000 | 3.94 | 0.32 | 250 |
| HR17LT-12-REEL | 3/4 | 1.09 | 1.11 | 3,000 | 12,000 | 4.72 | 0.55 | 164 |
| HR17LT-16-REEL | 1 | 1.42 | 1.44 | 3,000 | 12,000 | 5.90 | 0.95 | 164 |

HR18 CONSTANT PRESSURE HOSE

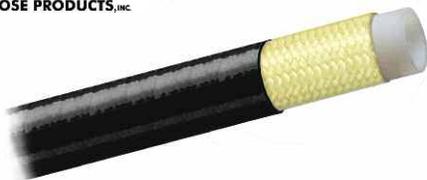

S.A.E. 100R18

Meets or Exceeds S.A.E. J517 Specifications

FEATURES: Exceeds 100R18 Impulse requirements • Lightweight and Flexible • Ideal for general hydraulic service.

TYPICAL APPLICATIONS: General purpose high pressure hydraulic applications • industrial Hydraulic • Construction • Material Handling • Agricultural Equipment • Hydraulic Tools • Lubrication Lines and Man Lifts

- **CONSTRUCTION:** Braided Synthetic Fiber Reinforcement
- **TUBE:** Seamless Polyester Inner Tube
- **COVER:** Abrasion Resistant Polyurethane Cover
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C, Petroleum-Based Hydraulic Fluids
- **TEMPERATURE:** -40°F to +140°F, -40°C to +60°C, with Water-Based or Fire Resistant Fluids
- **FITTINGS:** SCTP Page 54

| PART No. | Nominal Hose I.D. (IN.) | Hose O.D. (IN.) | Min. Bend Radius (IN.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) | Approx. Wgt./Ft. (LBS.) | Reel Length (FT.) |
|-------------|-------------------------|-----------------|------------------------|---------------------------|------------------------------|-------------------------|-------------------|
| HR18-4-REEL | 1/4 | .496 | 1-1/2 | 3,000 | 12,000 | .064 | 250 |
| HR18-6-REEL | 3/8 | .650 | 2 | 3,000 | 12,000 | .110 | 250 |
| HR18-8-REEL | 1/2 | .834 | 3 | 3,000 | 12,000 | .160 | 250 |

A



RUBBER HEATER HOSE

PREMIUM RED RUBBER HEATER HOSE

A




A replacement for OE on most cars and trucks. This high quality hose is for higher temperatures. Withstands the abuse of corrosive solutions and additives. Resists weathering to provide long and trouble-free service.

- **MEETS:** Similar to S.A.E. 20R3 Class D2, S.A.E. J2387
- **COLOR:** Red
- **TEMPERATURE:** -40°F to +257°F, -40C to +125°C
- **PACKAGING:** 50 FT. Coils, Reel
- **FITTINGS:** Hose Barbs Page 41 - 42
- **CLAMPS:** Page 124

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Min. Burst Pressure (P.S.I.) |
|-----------|----------------------|--------------------|------------------------------------|
| HHR-8-50 | 1/2 | .806 | 250 |
| HHR-10-50 | 5/8 | .932 | 250 |
| HHR-12-50 | 3/4 | 1.057 | 200 |

PREMIUM RED HEAVY DUTY THERMAL HEATER HOSE

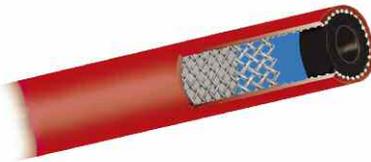

This heavy duty rubber hose with a blue insulating layer that helps to minimize heat loss. A replacement for OE on cars and trucks. Withstands the abuse of corrosive solutions and additives. Resists weathering to provide long and trouble-free service.

- **MEETS:** Similar to S.A.E. 20R3 Class D2, S.A.E. J2387
- **COLOR:** Red
- **TEMPERATURE:** -40°F to +257°F, -40C to +125°C
- **PACKAGING:** 50 FT. Coils
- **FITTINGS:** Hose Barbs Page 41 - 42
- **CLAMPS:** Page 124

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Min. Burst Pressure (P.S.I.) |
|-----------|----------------------|--------------------|------------------------------------|
| HHP-8-50 | 1/2 | .812 | 250 |
| HHP-10-50 | 5/8 | .937 | 250 |
| HHP-12-50 | 3/4 | 1.062 | 200 |
| HHP-16-50 | 1 | 1.375 | 175 |

RUBBER HEATER HOSE



This standard hose is for normal duty service. Withstands the abuse of corrosive solutions and additives. Resists weathering to provide long and trouble-free service.

- **MEETS:** Similar to S.A.E. 20R3 Class D2
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +212°F, -40C to +100°C
- **PACKAGING:** 250 FT Reels, 50 FT. Coils
- **FITTINGS:** Hose Barbs Page 41 - 42
- **CLAMPS:** Page 124

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Min. Burst Pressure (P.S.I.) |
|------------|----------------------|--------------------|------------------------------------|
| HH-8-50 | 1/2 | .806 | 200 |
| HH-10-REEL | 5/8 | .932 | 140 |
| HH-10-50 | 5/8 | .932 | 140 |
| HH-12-REEL | 3/4 | 1.057 | 125 |
| HH-12-50 | 3/4 | 1.057 | 125 |
| HH-16-50 | 1 | 1.406 | 100 |

SILICONE HEATER HOSE



S.A.E. 20R3 CLASS A


| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Min. Burst Pressure (P.S.I.) |
|-----------|-------------------|-----------------|------------------------------|
| HHS-6-50 | 3/8 | .707 | 310 |
| HHS-8-50 | 1/2 | .875 | 310 |
| HHS-10-50 | 5/8 | 1.00 | 300 |
| HHS-12-50 | 3/4 | 1.125 | 300 |
| HHS-14-50 | 7/8 | 1.25 | 200 |
| HHS-16-50 | 1 | 1.375 | 250 |

Recommended for extra high-temp heater connections, air-pump discharge and any similar uses.

- **MEETS:** S.A.E. 20R3 Class A (Tested To J20E PART VI)
- **COLOR:** Blue
- **TEMPERATURE:** -65°F to +350°F, -54°C to +177°C
- **PACKAGING:** 50 Foot Coils
- **FITTINGS:** Hose Barbs Page 41 - 42
- **CLAMPS:** Page 124

A

TRUCK SILICONE COOLANT HOSE

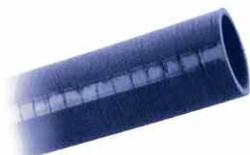

S.A.E. J20 R1 CLASS A

4 Ply silicone coolant hose reinforced with polyester fabric and coated with specially compounded silicone elastomer. Ideal for extreme temperatures and various pressure ranges.

- **MEETS OR EXCEEDS:** S.A.E. J20 R1 Class A
- **COLOR:** Blue
- **TEMPERATURES:** -65°F to +350°F, -54°C to +177°C
- **PACKAGING:** 4 Foot Lengths (Eg. FOR 8 FT. ORDER 2 PCS.)
- **CLAMPS:** Page 124

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) |
|----------|-------------------|-----------------|---------------------------|
| CHS-12-4 | 3/4 | 1.14 | 80 |
| CHS-14-4 | 7/8 | 1.27 | 80 |
| CHS-16-4 | 1 | 1.37 | 75 |
| CHS-18-4 | 1-1/8 | 1.52 | 75 |
| CHS-20-4 | 1-1/4 | 1.64 | 65 |
| CHS-22-4 | 1-3/8 | 1.77 | 65 |
| CHS-24-4 | 1-1/2 | 1.89 | 60 |
| CHS-26-4 | 1-5/8 | 2.02 | 60 |
| CHS-28-4 | 1-3/4 | 2.14 | 55 |
| CHS-32-4 | 2 | 2.37 | 50 |

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) |
|----------|-------------------|-----------------|---------------------------|
| CHS-36-4 | 2-1/4 | 2.64 | 40 |
| CHS-38-4 | 2-3/8 | 2.77 | 40 |
| CHS-40-4 | 2-1/2 | 2.89 | 35 |
| CHS-42-4 | 2-5/8 | 3.00 | 35 |
| CHS-44-4 | 2-3/4 | 3.14 | 30 |
| CHS-46-4 | 2-7/8 | 3.25 | 30 |
| CHS-48-4 | 3 | 3.39 | 25 |
| CHS-52-4 | 3-1/4 | 3.64 | 25 |
| CHS-56-4 | 3-1/2 | 3.89 | 15 |
| CHS-64-4 | 4 | 4.37 | 10 |

NOTE: WORKING PRESSURE RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

TRUCK SILICONE TURBO CHARGER CONNECTOR



TCS2
2 Ring



TCS3
3 Ring


Recommended for extra high-temp turbo charger connections. 4-PLY Silicone coated fabric with stainless steel retention rings.

- **COLOR:** ORANGE
- **TEMPERATURE:** -65°F TO +500° F, -54° C to +260°C
- **PACKAGING:** Per Piece
- **CLAMPS:** HC19 & HC20 Page 126

| PART No. | Actual I.D. (IN.) | Length (IN.) |
|-----------|-------------------|--------------|
| TCS2-48-6 | 3 | 6 |
| TCS2-56-6 | 3-1/2 | 6 |
| TCS2-64-6 | 4 | 6 |
| TCS2-72-6 | 4-1/2 | 6 |

| PART No. | Actual I.D. (IN.) | Length (IN.) |
|-----------|-------------------|--------------|
| TCS3-48-6 | 3 | 6 |
| TCS3-56-6 | 3-1/2 | 6 |
| TCS3-64-6 | 4 | 6 |
| TCS3-64-8 | 4 | 8 |
| TCS3-72-6 | 4-1/2 | 6 |

FUEL LINE HOSE

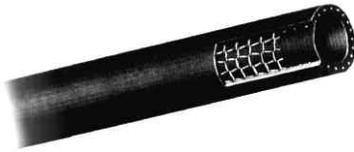

S.A.E. 30R7

Designed to convey most fuels in cars, trucks, buses etc. Durable cover resists deterioration from oil, grease, heat and ozone and gives long service life.

NOTE: FLH IS NOT DESIGNED FOR MARINE USE WITH ALCOHOL BLENDED FUELS.

- **MEETS:** S.A.E. 30R7
- **COLOR:** Black
- **TEMPERATURE:** -40°F to +257°F, -40°C to +125°C
- **PACKAGING:** 250 FT Reels, 50 and 100 FT Coils
- **FITTINGS:** Hose Barbs Page 43
- **CLAMPS:** HC5 & HC6 Page 124

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Length (FT.) | Working Pressure (P.S.I.) | Min. Burst Pressure (P.S.I.) |
|-----------|-------------------|-----------------|--------------|---------------------------|------------------------------|
| FLH-3-25 | 3/16 | .406 | 25 | 50 | 250 |
| FLH-3-50 | 3/16 | .406 | 50 | 50 | 250 |
| FLH-3-100 | 3/16 | .406 | 100 | 50 | 250 |
| FLH-3-250 | 3/16 | .406 | 250 | 50 | 250 |
| FLH-4-25 | 1/4 | .500 | 25 | 50 | 250 |
| FLH-4-50 | 1/4 | .500 | 50 | 50 | 250 |
| FLH-4-100 | 1/4 | .500 | 100 | 50 | 250 |
| FLH-4-250 | 1/4 | .500 | 250 | 50 | 250 |
| FLH-5-25 | 5/16 | .563 | 25 | 50 | 250 |
| FLH-5-50 | 5/16 | .563 | 50 | 50 | 250 |
| FLH-5-100 | 5/16 | .563 | 100 | 50 | 250 |
| FLH-5-250 | 5/16 | .563 | 250 | 50 | 250 |
| FLH-6-25 | 3/8 | .625 | 25 | 50 | 250 |
| FLH-6-50 | 3/8 | .625 | 50 | 50 | 250 |
| FLH-6-100 | 3/8 | .625 | 100 | 50 | 250 |
| FLH-6-250 | 3/8 | .625 | 250 | 50 | 250 |

RUBBER COVER GRIP-TITE HOSE (PUSH-ON)



THE SPECIAL BRAIDING PROCESS USED IN THE MANUFACTURE OF THIS HOSE PERMITS THE USE OF GRIP-TITE FITTINGS, WHICH ELIMINATES THE NEED FOR CLAMPS.

A lightweight, flexible, low pressure, general purpose hose with one fiber braid reinforcement. Used for conveying hydraulic oils, mineral oils, antifreeze solutions, most agricultural sprays and other diluted chemical solutions.

- **MSHA Approved (Black Only)**
- **COVER:** Rubber Covered.
- **COLORS:** Black (Standard), Blue, Green, Grey, Red
- **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
- **PACKAGING:** Bulk Reels
- **FITTINGS:** 700 Series Page 40

RANDOM REEL LENGTHS FOR COLOR HOSE:

Reel lengths Maximum 725 FT., Minimum 400 FT. (5 pieces maximum per reel with minimum 50 FT. length piece)

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Reel Length (FT.) |
|---------------|-------------------|-----------------|---------------------------|-------------------|
| 761-4-REEL | 1/4 | 1/2 | 300 | 500 |
| 761-4GRY-REEL | 1/4 | 1/2 | 300 | Random |
| 761-5-REEL | 5/16 | 5/8 | 300 | 500 |
| 761-6-REEL | 3/8 | 5/8 | 300 | 500 |
| 761-6BLU-REEL | 3/8 | 5/8 | 300 | Random |
| 761-6GRY-REEL | 3/8 | 5/8 | 300 | Random |

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Reel Length (FT.) |
|---------------|-------------------|-----------------|---------------------------|-------------------|
| 761-8-REEL | 1/2 | 3/4 | 300 | 500 |
| 761-8BLU-REEL | 1/2 | 3/4 | 300 | Random |
| 761-8GRY-REEL | 1/2 | 3/4 | 300 | Random |
| 761-10-REEL | 5/8 | 29/32 | 300 | 500 |
| 761-12-REEL | 3/4 | 1 | 300 | 250 |

NOTE: WORKING PRESSURE RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

QUALITY RUBBER HOSE



This quality rubber hose features EPDM cover and tube with high tensile spiral synthetic yarn reinforcement. It is best suited for applications requiring maximum flexibility or a lighter weight rubber hose.

- **CONSTRUCTION:**
- **TUBE:** EPDM (RMA CLASS C).
- **COVER:** EPDM (RMA CLASS C).
- **REINFORCEMENT:** Spiral Synthetic Yarn
- **COLORS:** Black, Green, Red, Yellow
- **TEMPERATURE:** -22°F to +167°F, -30°C to +75°C
- **PACKAGING:** Reels
- **FITTINGS:** Page 41 - 42
- **BEND PROTECTORS:** Page 147

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Reel Length (FT.) |
|-----------------|-------------------|-----------------|---------------------------|-------------------|
| RGP-4RED-REEL | 1/4 | .500 | 200 | 300 |
| RGP-4/2RED-REEL | 1/4 | .527 | 250 | 300 |
| RGP-6RED-REEL | 3/8 | .669 | 200 | 300 |
| RGP-6/2RED-REEL | 3/8 | .700 | 250 | 300 |
| RGP-8BLK-REEL | 1/2 | .810 | 200 | 300 |
| RGP-8RED-REEL | 1/2 | .810 | 200 | 300 |
| RGP-8/2RED-REEL | 1/2 | .838 | 250 | 300 |

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure (P.S.I.) | Reel Length (FT.) |
|------------------|-------------------|-----------------|---------------------------|-------------------|
| RGP-10BLK-REEL | 5/8 | .930 | 200 | 500-700 |
| RGP-10RED-REEL | 5/8 | .968 | 200 | 500-700 |
| RGP-10/2RED-REEL | 5/8 | .976 | 250 | 500-700 |
| RGP-12BLK-REEL | 3/4 | 1.080 | 200 | 200 |
| RGP-12RED-REEL | 3/4 | 1.118 | 200 | 200 |
| RGP-12/2RED-REEL | 3/4 | 1.141 | 250 | 500-700 |
| RGP-16RED-REEL | 1 | 1.440 | 200 | 200 |
| RGP-20RED-REEL | 1-1/4 | 1.750 | 200 | 300 |
| RGP-24RED-REEL | 1-1/2 | 2.000 | 200 | 300 |

NOTE: WORKING PRESSURE RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

QUALITY RUBBER HOSE ASSEMBLIES

The **RG** Series of assemblies is constructed with **RGP** hose. All assemblies have factory crimped ends with either B - 1/4", C - 3/8" or D - 1/2" brass male pipe ends. Standard lengths are -25, 50, 75 or 100ft.

- **COLORS:** Black, Red, Yellow
- **TEMPERATURE:** -22°F to +167°F, -30°C to +75°C
- **PACKAGING:** Individually shrink wrapped with bar coded label.
- **FITTINGS:** Machined Brass

NOTE

WORKING PRESSURE RATED AT +70°F +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

Custom Lengths Available Upon Request.



| 1/4 I.D. 1/4 NPT ENDS | | | 3/8 I.D. 1/4 NPT ENDS | | | 3/8 I.D. 3/8 NPT ENDS | | | 1/2 I.D. 3/8 NPT ENDS | | | 1/2 I.D. 1/2 NPT ENDS | | |
|-----------------------|--------------|---------------------------|-----------------------|--------------|---------------------------|-----------------------|--------------|---------------------------|-----------------------|--------------|---------------------------|-----------------------|--------------|---------------------------|
| PART No. | Length (FT.) | Working Pressure (P.S.I.) | PART No. | Length (FT.) | Working Pressure (P.S.I.) | PART No. | Length (FT.) | Working Pressure (P.S.I.) | PART No. | Length (FT.) | Working Pressure (P.S.I.) | PART No. | Length (FT.) | Working Pressure (P.S.I.) |
| RG4RED-25B | 25 | 200 | RG6RED-25B | 25 | 200 | RG6RED-25C | 25 | 200 | RG8RED-25C | 25 | 200 | RG8BLK-25D | 25 | 200 |
| RG4RED-50B | 50 | 200 | RG6RED-30B | 30 | 200 | RG6RED-50C | 50 | 200 | RG8RED-50C | 50 | 200 | RG8BLK-50D | 50 | 200 |
| RG4RED-100B | 100 | 200 | RG6RED-35B | 35 | 200 | RG6RED-100C | 100 | 200 | RG8RED-100C | 100 | 200 | RG8BLK-100D | 100 | 200 |
| | | | RG6RED-50B | 50 | 200 | | | | | | | | | |
| RG4/2RED-25B | 25 | 250 | RG6RED-100B | 100 | 200 | RG6/2RED-25C | 25 | 250 | RG8/2RED-50C | 50 | 200 | RG8RED-25D | 25 | 200 |
| RG4/2RED-50B | 50 | 250 | | | | RG6/2RED-50C | 50 | 250 | | | | RG8RED-50D | 50 | 200 |
| RG4/2RED-100B | 100 | 250 | RG6/2RED-25B | 25 | 250 | RG6/2RED-100C | 100 | 250 | | | | RG8RED-100D | 100 | 200 |
| | | | RG6/2RED-50B | 50 | 250 | | | | | | | RG8/2RED-25D | 25 | 250 |
| | | | RG6/2RED-100B | 100 | 250 | | | | | | | RG8/2RED-50D | 50 | 250 |
| | | | | | | | | | | | | RG8/2RED-100D | 100 | 250 |

A



This quality hose features the same uniquely blended P.V.C. compounds as our HPA air hose. Its' reduced wall thickness provides an economical alternative without sacrificing working pressure or temperature range.

- **REINFORCEMENT:** Spiral High Tensile Yarn
- **COLORS:** Blue, Red, Yellow
- **TEMPERATURE:** +25°F to +150°F, -4°C to +66°C
- **WORKING PRESSURE:** 1/4 AND 3/8 I.D. 300 P.S.I. 1/2 150 P.S.I.
- **PACKAGING:** Reels
- **FITTINGS:** Page 41 - 42
- **BEND PROTECTORS:** Page 147

| PART No. | Actual I.D. (IN.) | Hose O.D. (IN.) | Working Pressure P.S.I. | Reel / Coil Length (FT.) |
|---------------|-------------------|-----------------|-------------------------|--------------------------|
| RVH-4RED-COIL | 1/4 | .438 | 300 | 500 |
| RVH-6BLU-COIL | 3/8 | .594 | 300 | 500 |
| RVH-6RED-COIL | 3/8 | .594 | 300 | 500 |

NOTE: WORKING PRESSURE RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

QUALITY P.V.C. HOSE ASSEMBLIES

The **RV** Series of assemblies is constructed with **RVH** hose. All assemblies have factory crimped ends with either B - 1/4" or C - 3/8" brass male pipe ends. Standard lengths are -25, 50, 75 or 100ft.

- **COLORS:** Blue, Red, Yellow
- **TEMPERATURE:** +25°F to +150°F, -4°C to +66°C
- **PACKAGING:** Individually shrink wrapped with bar coded label.
- **FITTINGS:** Machined Brass



NOTE

WORKING PRESSURE RATED AT +70°F +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

Custom Lengths Available Upon Request.

| 1/4 I.D. HOSE 1/4 NPT ENDS | | | 3/8 I.D. HOSE 1/4 NPT ENDS | | | 3/8 I.D. HOSE 3/8 NPT ENDS | | |
|----------------------------|--------------|---------------------------|----------------------------|--------------|---------------------------|----------------------------|--------------|---------------------------|
| PART No. | Length (FT.) | Working Pressure (P.S.I.) | PART No. | Length (FT.) | Working Pressure (P.S.I.) | PART No. | Length (FT.) | Working Pressure (P.S.I.) |
| RV4RED-25B | 25 | 300 | RV6BLU-25B | 25 | 300 | RV6RED-25C | 25 | 300 |
| RV4RED-50B | 50 | 300 | RV6BLU-50B | 50 | 300 | RV6RED-50C | 50 | 300 |
| RV4RED-100B | 100 | 300 | RV6BLU-100B | 100 | 300 | | | |
| | | | RV6RED-25B | 25 | 300 | | | |
| | | | RV6RED-50B | 50 | 300 | | | |
| | | | RV6RED-100B | 100 | 300 | | | |

AIR HOSE ASSEMBLIES

AIR ASSEMBLY WITH GLADHAND

Connects directly to the Gladhand port on a truck cab. This assembly is complete with air chuck end which allows for the easy filling of tires.

* Other Lengths Available.

| PART No. | Desc. | Actual I.D. (IN.) | Length (FT.) | Working Pressure (P.S.I.) |
|-----------------|------------|-------------------|--------------|---------------------------|
| GL6RED-50GHU-DF | Super-Flex | 3/8 | 50 | 300 |
| GL6YEL-50GHU-DF | Super-Flex | 3/8 | 50 | 300 |



**GHU
Universal
Gladhand**

CONTRACTORS INDUSTRIAL P.V.C. AIR HOSE ASSEMBLIES

Heavy duty brass reusable ends and spring guard bend protectors make these light weight uniquely blended P.V.C hose assemblies ideal for pneumatic nail guns and air powered industrial tools at the job site.

- **COLOR:** Red, Blue and Yellow
- **TEMPERATURE:** -15°F to +150°F, -26°C to +66°C
- **PACKAGING:** Individually Shrink Wrapped With Bar Coded Label.
- **QUICK DISCONNECT:** QD-TFM Series (Optional) Page 97

NOTE

WORKING PRESSURE RATED AT +70°F
+21°C. ANY AMBIENT OR INTERNAL
INCREASE IN TEMPERATURE WILL
LOWER THE WORKING PRESSURE.



3/8 I.D. HOSE 1/4 NPT ENDS

| PART No. | Length (FT.) | Working Pressure (P.S.I.) |
|-----------------|--------------|---------------------------|
| PAR6RED-25B-SG | 25 | 300 |
| PAR6RED-50B-SG | 50 | 300 |
| PAR6RED-100B-SG | 100 | 300 |
| PAR6BLU-100B-SG | 100 | 300 |
| PAR6YEL-100B-SG | 100 | 300 |

3/8 I.D. HOSE 3/8 NPT ENDS

| PART No. | Length (FT.) | Working Pressure (P.S.I.) |
|-----------------|--------------|---------------------------|
| PAR6RED-50C-SG | 50 | 300 |
| PAR6RED-100C-SG | 100 | 300 |
| PAR6BLU-100C-SG | 100 | 300 |

POLYURETHANE SELF-STORING AIR HOSE ASSEMBLIES

These polyurethane assemblies are produced using an ether based resin for better strength, flexibility and superior memory. This hose has excellent resistance to water, chemicals, oxidation, hydrolysis and ozone. It is kink resistant, light weight and mobile.

- **COLOR:** Blue
- **TEMPERATURE:** -40°F to +175°F, -40°C to +79°C
- **PACKAGING:** Individually Bagged With Header / Display Ready
- **FITTINGS:** 360° Brass Working Male Pipe Swivels Each End.

NOTE

WORKING PRESSURE RATED AT +70°F
+21°C. ANY AMBIENT OR INTERNAL
INCREASE IN TEMPERATURE WILL
LOWER THE WORKING PRESSURE.

| PART No. | Actual I.D. (IN.) | Swivel Pipe | Length (FT.) | Working Pressure (P.S.I.) |
|-----------|-------------------|-------------|--------------|---------------------------|
| 1936-4-12 | 1/4 | 1/4 | 12 | 125 |
| 1936-4-15 | 1/4 | 1/4 | 15 | 125 |
| 1936-4-25 | 1/4 | 1/4 | 25 | 125 |
| 1936-4-50 | 1/4 | 1/4 | 50 | 125 |
| 1936-6-12 | 3/8 | 3/8 | 12 | 125 |
| 1936-6-15 | 3/8 | 3/8 | 15 | 125 |
| 1936-6-20 | 3/8 | 3/8 | 20 | 125 |
| 1936-6-25 | 3/8 | 3/8 | 25 | 125 |
| 1936-6-50 | 3/8 | 3/8 | 50 | 125 |

NOTE: 1936 SERIES SUPPLIED IN ASSEMBLIES ONLY.



A



SPECIALTY HOSE ASSEMBLIES

A

NYLON GREASE WHIPS



3/16" I.D. Thermoplastic, fiber reinforced hose with 1/8 steel male pipe couplings. This hose combines the best features of conventional rubber hose with the unique advantages of synthetic materials.

Recommended use: Hand held grease guns.

| PART No. | Length (IN.) | Working Pressure (P.S.I.) | Burst Pressure (PSI) |
|----------|--------------|---------------------------|----------------------|
| GWN-3-12 | 12 | 3000 | 12,000 |
| GWN-3-18 | 18 | 3000 | 12,000 |
| GWN-3-24 | 24 | 3000 | 12,000 |

Available packaged, Suffix PART No. with the letter "P"

RUBBER GREASE WHIPS



These assemblies are manufactured from 3/16" I.D. S.A.E. 100R1 rubber hose. The one braid hose is permanently crimped with 1/8 brass male pipe couplings on both ends. **Recommended use:** Hand held grease guns.

| PART No. | Length (IN.) | Working Pressure (P.S.I.) | Burst Pressure (PSI) |
|-----------|--------------|---------------------------|----------------------|
| GWR-3-12 | 12 | 3000 | 12,000 |
| GWR-3-18 | 18 | 3000 | 12,000 |
| GWR-3-24 | 24 | 3000 | 12,000 |
| GWR-3-28 | 28 | 3000 | 12,000 |
| GWR-3-36 | 36 | 3000 | 12,000 |
| GWR-3-48 | 48 | 3000 | 12,000 |
| GWR-3-54 | 54 | 3000 | 12,000 |
| GWR-3-60 | 60 | 3000 | 12,000 |
| GWR-3-72 | 72 | 3000 | 12,000 |
| GWR-3-84 | 72 | 3000 | 12,000 |
| GWR-3-96 | 96 | 3000 | 12,000 |
| GWR-3-132 | 132 | 3000 | 12,000 |
| GWR-3-144 | 144 | 3000 | 12,000 |



Available packaged, Suffix PART No. with the letter "P"

D.O.T. AIR SHIFT TRANSMISSION ASSEMBLIES



Male Pipe Swivel

Male Pipe Thread

| PART No. | Swivel Pipe | Male Pipe | Hose I.D. (IN.) | Length (IN.) |
|----------|-------------|-----------|-----------------|--------------|
| 2815-4-2 | 1/8 | 1/8 | 1/4 | 15 |
| 2817-4-2 | 1/8 | 1/8 | 1/4 | 17 |
| 2831-4-2 | 1/8 | 1/8 | 1/4 | 31 |
| 2832-4-2 | 1/8 | 1/8 | 1/4 | 32 |
| 2834-4-2 | 1/8 | 1/8 | 1/4 | 34 |
| 2836-4-2 | 1/8 | 1/8 | 1/4 | 36 |

OTHER LENGTHS AVAILABLE ON REQUEST

FIFTH WHEEL SLIDER ASSEMBLY



- **MEETS:** S.A.E. J884D TYPE 3A D.O.T. F.M.V.S.S. 106
 - **COLOR:** Black
 - **TEMPERATURE:** -40°F to +200°F, -40°C to +93°C
 - **FITTINGS:** 360° Brass Working Male Pipe Swivel Each End.
- For Complete Kit below
For Fifth Wheel Cylinder Page 114

| PART No. | Working Length (IN.) | Tube O.D. (IN.) | Pigtail Length (IN.) | Male Pipe Ends |
|------------|----------------------|-----------------|----------------------|----------------|
| 1486S-4-10 | 70 | 1/4 | 4 | 1/4 |

FIFTH WHEEL SLIDER KIT



PART No. FWSK-1

Designed for use on sliding fifth wheels, this kit includes most everything you need to complete the connections.

Kit Includes:

- 70" Working Length of 1/4" O.D. S.A.E. - J844-A coiled air tube.
- 360° Brass working male pipe swivels each end.
- Spring guard hose end protectors.
- 90° Brass adapter elbow.
- Frame mounting terminal bolt.

PART No. FWSK-2

Same as above with Push-To-Connect style connections.



AIR SEAT GUN SPLICER KIT



PART No. ASGK-1

Simply splice the air seat line with the push-to-connect tee end of the assembly. This handy kit features an industrial air gun for cleaning out the cab on site.

Kit Includes:

- 70" Working Length of 1/4" O.D. S.A.E. J844-A coiled air tube.
- One 360° Brass working male pipe swivel.
- Two spring guard hose end protectors.
- Push-to-connect splicer tee. (No Tools required)
- Chrome plated, lever handle air gun.





A

- HEAVY BRASS MACHINED ENDS, FOR ALL ASSEMBLIES.
 - OTHER LENGTHS AND END COMBINATIONS AVAILABLE UPON REQUEST.
- NOTE: WORKING PRESSURE RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.**

Top-of-The-Line 'Blue Star' Brand

Heavy Hex Female End
By Male Water Thread
Working Pressures: 1/2" I.D. 300 P.S.I.,
5/8" and 3/4" I.D. 250 P.S.I.
Temp: -15°F to +150°F, -26°C to +66°C

| PART No. | Length (FT.) | Actual I.D. (IN.) | Working Pressure (P.S.I.) |
|--------------|--------------|-------------------|---------------------------|
| WH8BLU-25H | 25 | 1/2 | 300 |
| WH8BLU-50H | 50 | 1/2 | 300 |
| WH8BLU-75H | 75 | 1/2 | 300 |
| WH8BLU-100H | 100 | 1/2 | 300 |
| WH10BLU-25H | 25 | 5/8 | 250 |
| WH10BLU-50H | 50 | 5/8 | 250 |
| WH10BLU-75H | 75 | 5/8 | 250 |
| WH10BLU-100H | 100 | 5/8 | 250 |
| WH12BLU-25H | 25 | 3/4 | 250 |
| WH12BLU-50H | 50 | 3/4 | 250 |
| WH12BLU-75H | 75 | 3/4 | 250 |
| WH12BLU-100H | 100 | 3/4 | 250 |



Quality PVC Assemblies

Heavy Hex Female End
By Male Water Thread
Working Pressures: 150 P.S.I.,
Temp: +25°F to +150°F, -4°C to +66°C

| PART No. | Length (FT.) | Actual I.D. (IN.) | Working Pressure (P.S.I.) |
|---------------|--------------|-------------------|---------------------------|
| WHRV8BLU-25H | 25 | 1/2 | 150 |
| WHRV8BLU-50H | 50 | 1/2 | 150 |
| WHRV8BLU-100H | 100 | 1/2 | 150 |



High Quality 'Black Star' Rubber

Double or Heavy Hex Female End
By Male Water Thread
Working Pressure: 1/2", 5/8" 200 P.S.I.
and 3/4" I.D. 150 P.S.I.
Temp: -22°F to +167°F, -30°C to +75°C

| PART No. | Length (FT.) | Actual I.D. (IN.) | Working Pressure (P.S.I.) |
|--------------|--------------|-------------------|---------------------------|
| WH8BLK-25H | 25 | 1/2 | 200 |
| WH8BLK-50H | 50 | 1/2 | 200 |
| WH8BLK-75H | 75 | 1/2 | 200 |
| WH8BLK-100H | 100 | 1/2 | 200 |
| WH10BLK-25H | 25 | 5/8 | 200 |
| WH10BLK-50H | 50 | 5/8 | 200 |
| WH10BLK-75H | 75 | 5/8 | 200 |
| WH10BLK-100H | 100 | 5/8 | 200 |
| WH12BLK-25H | 25 | 3/4 | 150 |
| WH12BLK-50H | 50 | 3/4 | 150 |
| WH12BLK-75H | 75 | 3/4 | 150 |
| WH12BLK-100H | 100 | 3/4 | 150 |



High Quality 'Green Star' Rubber

Heavy Hex Female End
By Male Water Thread
Working Pressure: 1/2" I.D. 200 P.S.I.
Temp: -20°F to +200°F, -29°C to +93°C

| PART No. | Length (FT.) | Actual I.D. (IN.) | Working Pressure (P.S.I.) |
|-------------|--------------|-------------------|---------------------------|
| WH8GRN-25H | 25 | 1/2 | 200 |
| WH8GRN-50H | 50 | 1/2 | 200 |
| WH8GRN-100H | 100 | 1/2 | 200 |



Commercial 'Yellow Star' Brand

Heavy Hex Female End
By Male Water Thread
Working Pressure: 1/2" I.D. 125 P.S.I.
Temp: +25°F to +150°F, -4°C to +65°C

| PART No. | Length (FT.) | Actual I.D. (IN.) | Working Pressure (P.S.I.) |
|-------------|--------------|-------------------|---------------------------|
| WH8YEL-25H | 25 | 1/2 | 125 |
| WH8YEL-50H | 50 | 1/2 | 125 |
| WH8YEL-100H | 100 | 1/2 | 125 |
| WH12YEL-50H | 50 | 3/4 | 125 |



Green Super Flex - Low Temp

Heavy Hex Female End
By Male Water Thread
Working Pressure: 1/2" I.D. 300 P.S.I.
Temp.: -65°F to +150°F, -54°C to +65°C

| PART No. | Length (FT.) | Actual I.D. (IN.) | Working Pressure (P.S.I.) |
|----------------|--------------|-------------------|---------------------------|
| WHGL8GRN-25H | 25 | 1/2 | 300 |
| WHGL8GRN-50H | 50 | 1/2 | 300 |
| WHGL8GRN-75H | 75 | 1/2 | 300 |
| WHGL8GRN-100H | 100 | 1/2 | 300 |
| WHGL10GRN-25H | 25 | 1/2 | 300 |
| WHGL10GRN-50H | 50 | 1/2 | 300 |
| WHGL10GRN-75H | 75 | 1/2 | 300 |
| WHGL10GRN-100H | 100 | 1/2 | 300 |



Industrial Water Hose Assembly Kits & Racks Can be Found on Page 141 - 142



WATER HOSE ASSEMBLIES

BULK PRESSURE WASH HOSE

A



BLACK COVER (4000 P.S.I.)

(PW2) is a one wire construction, wrapped black, smooth blue or wrapped grey covered hose. Its' tube is specially formulated to handle high pressure water. Suitable for pressures up to 4000 P.S.I., at +70°F,(+21°C), or temperatures up to +250°F,(+121°C) at lower pressures.

GREY COVER (6000 P.S.I.)

(PW4) is a two wire construction, grey wrapped cover hose. Suitable for pressures up to 6000 P.S.I., at +70°F,(+21°C) or temperatures up to +250°F,(+121°C), at lower pressures.

BLUE NON-MARKING COVER (4000 P.S.I.)

(PW3) is a one wire construction hose with a special Blue Non-Marking smooth Cover. Suitable for pressures up to 4000 P.S.I., at +70°F,(+21°C), or temperatures up to +275°F,(+135°C)

RED NON-MARKING HIGH-TEMP. (3000 P.S.I.)

Heat-Star-Combo (PW5) is a one wire construction, Red Non-Marking heat resistant smooth cover, dual purpose hose. This hose will handle steam up to +325°F,(+163°C) at 350 P.S.I. and hot water to +250°F,(+121°C) at 3000 P.S.I.

*** Any increase in temperature up to a maximum of 275°F will lower the working pressure considerably. For more than Intermittent applications in this environment (275°F Max) we recommend our PW5 High Temp Non Marking Hose.**

NOTE: The outer cover of PW5 hose must be skived (removed) before attaching over the wire crimp ends.

PREVAILER™ YELLOW COVER (4000 P.S.I.)

(PW6) Yellow oil and fat resistant (RMA CLASS A) special synthetic rubber covered hose providing superior strength, flexibility, abrasion resistance and long service life. One high tensile steel wire braid. Suitable for pressures up to 4000 P.S.I., at +70°F, (+21°C), or temperatures up to +250°F,(+121°C) at lower pressures.

| PART No. | Color | Actual Inside Diameter (IN.) | Maximum Working Pressure (P.S.I) | Approximate Weight Per Foot (LBS.) | Reel Length (FT.) |
|---------------|--------|------------------------------|----------------------------------|------------------------------------|-------------------|
| PW2-6-REEL | Black | 3/8 | 4000 | .23 | 300 |
| PW2-6BLU-REEL | Blue | 3/8 | 4000 | .23 | 300 |
| PW2-6GRY-REEL | Grey | 3/8 | 4000 | .23 | 300 |
| PW3-4-REEL | Blue | 1/4 | 3000 | .15 | 300 |
| PW3-6-REEL | Blue | 3/8 | 4000 | .25 | 300 |
| PW4-6-REEL | Grey | 3/8 | 6000 | .35 | 300 |
| PW5-6-REEL | Red | 3/8 | 3000 | .21 | 300 |
| PW6-6-REEL | Yellow | 3/8 | 4000 | .22 | 500 |

NOTE: Any ambient or internal increase in temperature will lower the above listed working pressures.

PRESSURE WASH HOSE ASSEMBLIES

BLACK COVER (4000 P.S.I.)

(PW2) is a one wire construction, black, blue or grey covered hose. Its' tube is specially formulated to handle high pressure water. Suitable for pressures up to 4000 P.S.I., at +70°F,(+21°C), or temperatures up to +250°F,(+121°C) at lower pressures.

| PART No. | Length (FT.) | Actual I.D (IN.) |
|------------|--------------|------------------|
| PW2A-6-25 | 25 | 3/8 |
| PW2A-6-30 | 30 | 3/8 |
| PW2A-6-50 | 50 | 3/8 |
| PW2A-6-75 | 75 | 3/8 |
| PW2A-6-100 | 100 | 3/8 |



A

For BLUE hose insert color code "BLU"
Example : PW2A-6BLU-50

For GREY hose insert color code "GRY"
Example : PW2A-6GRY-50

Style of bend protectors may vary with I.D.

NON-MARKING COVER

(PW3) is a one wire construction hose with a special blue Non-Marking Cover. Suitable for pressures up to 4000 P.S.I., at +70°F,(+21°C), or temperatures up to +275°F,(+135°C)

| PART No. | Length (FT.) | Actual I.D (IN.) |
|-------------|--------------|------------------|
| PW3A-4-30 | 30 | 1/4 |
| PW3A-4-50 | 50 | 1/4 |
| PW3A-4-75 | 75 | 1/4 |
| PW3A-4-100 | 100 | 1/4 |
| PW3A-6-25 | 25 | 3/8 |
| PW3A-6-30 | 30 | 3/8 |
| PW3A-6-35 | 35 | 3/8 |
| PW3A-6-50 | 50 | 3/8 |
| PW3A-6-75 | 75 | 3/8 |
| PW3A-6-100 | 100 | 3/8 |
| PW3A-6-50SW | 50 | 3/8 |



Swivels on both ends available upon request.
Suffix PART No. with "SW" Example: PW3A-6-50SW

GREY COVER (6000 P.S.I.)

(PW4) is a two wire construction, grey covered hose. Suitable for pressures up to 6000 P.S.I., at +70°F,(+21°C) or temperatures up to +250°F,(+121°C), at lower pressures.

| PART No. | Length (FT.) | Actual I.D (IN.) |
|------------|--------------|------------------|
| PW4A-6-30 | 30 | 3/8 |
| PW4A-6-50 | 50 | 3/8 |
| PW4A-6-75 | 75 | 3/8 |
| PW4A-6-100 | 100 | 3/8 |



• CAN BE MADE TO ORDER • ALL ASSEMBLIES COME WITH THERMOPLASTIC BEND PROTECTORS • SYNTHETIC RUBBER BEND PROTECTORS ALSO AVAILABLE • STANDARD HOSE ASSEMBLIES CONSIST OF SWIVEL MALE PIPE X SOLID MALE PIPE ENDS

NOTE: Any ambient or internal increase in temperature will lower the above listed working pressures.



WATER HOSE ASSEMBLIES

PRESSURE WASH HOSE ASSEMBLIES

A

NON-MARKING COVER

Heat-Combo (PW5) is a one wire construction, red Non-Marking heat resistant covered, dual purpose hose. This hose will handle steam up to +325°F,(+163°C) at 350 P.S.I. and hot water to +250°F,(+121°C) at 3000 P.S.I.

| PART No. | Length (FT.) | Actual I.D (IN.) |
|------------|--------------|------------------|
| PW5A-6-30 | 30 | 3/8 |
| PW5A-6-50 | 50 | 3/8 |
| PW5A-6-75 | 75 | 3/8 |
| PW5A-6-100 | 100 | 3/8 |

| Length (FT.) | Actual I.D (IN.) |
|--------------|------------------|
| 30 | 3/8 |
| 50 | 3/8 |
| 75 | 3/8 |
| 100 | 3/8 |



OIL AND FAT RESISTANT COVER

(PW6 PREVAILER™) is a yellow cover, oil and fat resistant hose providing superior strength, flexibility, abrasion resistance and long service life. Excellent resistance to oils and animal fats. Suitable for pressures up to 4000 P.S.I., at +70°F,(+21°C), or temperatures up to +250°F,(+121°C) at lower pressures.

| PART No. | Length (FT.) | Actual I.D (IN.) |
|------------|--------------|------------------|
| PW6A-6-30 | 30 | 3/8 |
| PW6A-6-50 | 50 | 3/8 |
| PW6A-6-100 | 100 | 3/8 |

| Length (FT.) | Actual I.D (IN.) |
|--------------|------------------|
| 30 | 3/8 |
| 50 | 3/8 |
| 100 | 3/8 |



• CAN BE MADE TO ORDER • ALL ASSEMBLIES COME WITH THERMOPLASTIC BEND PROTECTORS • SYNTHETIC RUBBER BEND PROTECTORS ALSO AVAILABLE • STANDARD HOSE ASSEMBLIES CONSIST OF SWIVEL MALE PIPE X SOLID MALE PIPE ENDS

NOTE: Any ambient or internal increase in temperature will lower the above listed working pressures.

KARCHER STYLE PRESSURE WASH HOSE ASSEMBLIES

(4000 P.S.I.)

(PW2) is a one wire construction, black, blue covered hose. (also available in blue) Its' tube is specially formulated to handle high pressure water. Suitable for pressures up to 4000 P.S.I., at +70°F,(+21°C), or temperatures up to +250°F,(+121°C) at lower pressures.

| PART No. | Length (FT.) | Actual I.D (IN.) |
|-----------|--------------|------------------|
| PW2K-6-20 | 20 | 3/8 |
| PW2K-6-30 | 30 | 3/8 |
| PW2K-6-50 | 50 | 3/8 |

| Length (FT.) | Actual I.D (IN.) |
|--------------|------------------|
| 20 | 3/8 |
| 30 | 3/8 |
| 50 | 3/8 |



Complete with KARCHER style M22 X 1.5 female swivel power washer machine attachments on both ends.

NON-MARKING COVER (3000 P.S.I.)

(PW3) is a one wire construction hose with a special blue Non-Marking Cover. Suitable for pressures up to 4000 P.S.I., at +70°F,(+21°C), or temperatures up to +275°F,(+135°C)

| PART No. | Length (FT.) | Actual I.D (IN.) |
|-----------|--------------|------------------|
| PW3K-6-30 | 30 | 3/8 |
| PW3K-6-50 | 50 | 3/8 |

| Length (FT.) | Actual I.D (IN.) |
|--------------|------------------|
| 30 | 3/8 |
| 50 | 3/8 |



Complete with KARCHER style M22 X 1.5 female swivel power washer machine attachments on both ends.

CAUTION

A pressure washer's powerful spray is hazardous when misdirected, strong enough to damage skin in an instant. With pressures up to 6000 psi they can cause serious injury. Appropriate protection should be worn during use.

• CAN BE MADE TO ORDER • ALL ASSEMBLIES COME WITH THERMOPLASTIC BEND PROTECTORS • SYNTHETIC RUBBER BEND PROTECTORS ALSO AVAILABLE

NOTE: Any ambient or internal increase in temperature will lower the above listed working pressures.

TUBE

ALUMINUM - COPPER - NYLON - STEEL - VINYL



| | |
|---|----|
| AIR BRAKE TUBE - DOT (NYLON) | 34 |
| AIR SHIFT TRANSMISSION TUBE (NYLON) | 36 |
| BRAKE LINE ASSEMBLY - STEEL | 33 |
| CLEAR VINYL TUBE | 35 |
| COPPER TUBE | 32 |
| POLYETHYLENE TUBE | 36 |
| PolyURETHANE (FUEL LINE) CLEAR TUBE | 35 |
| STEEL TUBE - SAE 527 | 32 |

Note:

Use of Fairview Hose and Tube with other than Fairview original recommended fittings, may void warranty. Verify with a Fairview representative prior to installation.

GENERAL USE (ASTM B75) COPPER TUBE

A



CERTIFIED UNDER STANDARD 61

FAIRVIEW COPPER TUBE IS SOFT, SEAMLESS AND ANNEALED FOR FLEXIBILITY. CHECK LOCAL CODES TO ENSURE PROPER COPPER TUBE SELECTION TO MEET APPLICATION REQUIREMENTS.

| PART No. | Tube O.D. (IN.) | Wall Thickness (IN.) | Working Pressure (P.S.I.)* | Coil Length (FT.) |
|-----------|-----------------|----------------------|----------------------------|-------------------|
| CTG-4-25 | 1/4 | .030 | 1406 | 25 |
| CTG-5-25 | 5/16 | .032 | 1197 | 25 |
| CTG-6-25 | 3/8 | .032 | 984 | 25 |
| CTG-8-25 | 1/2 | .032 | 727 | 25 |
| CTG-10-25 | 5/8 | .035 | 618 | 25 |
| CTG-12-25 | 3/4 | .035 | 511 | 25 |

* Working Pressure Rated at +100°F, (+38°C)

REFRIGERATION (ASTM B280) COPPER TUBE



| PART No. | Tube O.D. (IN.) | Wall Thickness (IN.) | Working Pressure (P.S.I.)* | Coil Length (FT.) |
|------------|-----------------|----------------------|----------------------------|-------------------|
| CTR-2-50 | 1/8 | .030 | 3074 | 50 |
| CTR-3-50 | 3/16 | .030 | 1935 | 50 |
| CTR-4-50 | 1/4 | .030 | 1406 | 50 |
| CTR-4-100 | 1/4 | .030 | 1406 | 100 |
| CTR-5-50 | 5/16 | .032 | 1197 | 50 |
| CTR-6-50 | 3/8 | .032 | 984 | 50 |
| CTR-6-100 | 3/8 | .032 | 984 | 100 |
| CTR-8-50 | 1/2 | .032 | 727 | 50 |
| CTR-8-100 | 1/2 | .032 | 727 | 100 |
| CTR-10-50 | 5/8 | .035 | 618 | 50 |
| CTR-10-100 | 5/8 | .035 | 618 | 100 |
| CTR-12-50 | 3/4 | .035 | 511 | 50 |
| CTR-14-50 | 7/8 | .045 | 582 | 50 |

* Working Pressure Rated at +100°F, (+38°C)

S.A.E. - 527 STEEL TUBE



The green (GRN) anti-corrosion poly coating complies with GM123M-ASV and S.A.E. J527B.



| PART No. | Tube O.D. (IN.) | Wall Thickness (IN.) | Working Pressure (P.S.I.)* | Coil Length (FT.) |
|-------------|-----------------|----------------------|----------------------------|-------------------|
| BLT-3-25 | 3/16 | .028 | 5000 | 25 |
| BLT-4-25 | 1/4 | .028 | 5000 | 25 |
| BLT-5-25 | 5/16 | .028 | 5000 | 25 |
| BLT-6-25 | 3/8 | .028 | 5000 | 25 |
| BLT-3GRN-25 | 3/16 | .028 | 5000 | 25 |
| BLT-4GRN-25 | 1/4 | .028 | 5000 | 25 |
| BLT-5GRN-25 | 5/16 | .028 | 5000 | 25 |
| BLT-6GRN-25 | 3/8 | .028 | 5000 | 25 |

FITTINGS: Threaded sleeve

ASSEMBLIES: Ready-made brake lines available.

*** NOTE**

THE WORKING PRESSURES LISTED FOR THIS TUBE IS RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE ABOVE LISTED WORKING PRESSURES.

STEEL BRAKE LINE TUBE ASSEMBLIES



STANDARD

(Inverted Flare Thread)



| PART No. | Tube O.D. (IN.) | Thread | Length (IN.) |
|----------|--------------------|-----------|-----------------|
| BL-3-08 | 3/16 | 3/8 - 24 | 8 |
| BL-3-12 | 3/16 | 3/8 - 24 | 12 |
| BL-3-20 | 3/16 | 3/8 - 24 | 20 |
| BL-3-30 | 3/16 | 3/8 - 24 | 30 |
| BL-3-40 | 3/16 | 3/8 - 24 | 40 |
| BL-3-51 | 3/16 | 3/8 - 24 | 51 |
| BL-3-60 | 3/16 | 3/8 - 24 | 60 |
| BL-3-72 | 3/16 | 3/8 - 24 | 72 |
| | | | |
| BL-4-08 | 1/4 | 7/16 - 24 | 8 |
| BL-4-12 | 1/4 | 7/16 - 24 | 12 |
| BL-4-20 | 1/4 | 7/16 - 24 | 20 |
| BL-4-30 | 1/4 | 7/16 - 24 | 30 |
| BL-4-40 | 1/4 | 7/16 - 24 | 40 |
| BL-4-51 | 1/4 | 7/16 - 24 | 51 |
| BL-4-60 | 1/4 | 7/16 - 24 | 60 |
| BL-4-72 | 1/4 | 7/16 - 24 | 72 |
| | | | |
| BL-5-12 | 5/16 | 1/2 - 20 | 12 |
| BL-5-20 | 5/16 | 1/2 - 20 | 20 |
| BL-5-30 | 5/16 | 1/2 - 20 | 30 |
| BL-5-40 | 5/16 | 1/2 - 20 | 40 |
| BL-5-51 | 5/16 | 1/2 - 20 | 51 |
| BL-5-60 | 5/16 | 1/2 - 20 | 60 |
| | | | |
| BL-6-12 | 3/8 | 5/8 - 18 | 12 |
| BL-6-20 | 3/8 | 5/8 - 18 | 20 |
| BL-6-30 | 3/8 | 5/8 - 18 | 30 |
| BL-6-40 | 3/8 | 5/8 - 18 | 40 |
| BL-6-51 | 3/8 | 5/8 - 18 | 51 |
| BL-6-60 | 3/8 | 5/8 - 18 | 60 |

ARMORED STANDARD

(Inverted Flare Thread)



| PART No. | Tube O.D. (IN.) | Thread | Length (IN.) |
|----------|--------------------|-----------|-----------------|
| BLA-3-08 | 3/16 | 3/8 - 24 | 8 |
| BLA-3-12 | 3/16 | 3/8 - 24 | 12 |
| BLA-3-20 | 3/16 | 3/8 - 24 | 20 |
| BLA-3-30 | 3/16 | 3/8 - 24 | 30 |
| BLA-3-40 | 3/16 | 3/8 - 24 | 40 |
| BLA-3-51 | 3/16 | 3/8 - 24 | 51 |
| BLA-3-60 | 3/16 | 3/8 - 24 | 60 |
| BLA-3-72 | 3/16 | 3/8 - 24 | 72 |
| | | | |
| BLA-4-12 | 1/4 | 7/16 - 24 | 12 |
| BLA-4-20 | 1/4 | 7/16 - 24 | 20 |
| BLA-4-30 | 1/4 | 7/16 - 24 | 30 |
| BLA-4-40 | 1/4 | 7/16 - 24 | 40 |
| BLA-4-51 | 1/4 | 7/16 - 24 | 51 |
| BLA-4-60 | 1/4 | 7/16 - 24 | 60 |
| BLA-4-72 | 1/4 | 7/16 - 24 | 72 |

JAPANESE STANDARD

(10 x 1.0mm Thread)



| PART No. | Tube O.D. (IN.) | Length (IN.) |
|----------|--------------------|-----------------|
| BLJ-3-08 | 3/16 | 8 |
| BLJ-3-12 | 3/16 | 12 |
| BLJ-3-20 | 3/16 | 20 |
| BLJ-3-30 | 3/16 | 30 |
| BLJ-3-40 | 3/16 | 40 |
| BLJ-3-51 | 3/16 | 51 |
| BLJ-3-60 | 3/16 | 60 |
| BLJ-3-72 | 3/16 | 72 |

ANTI CORROSION POLY COATED STANDARD

(Inverted Flare Thread)

*The Poly Vinyl Fluorine coating provides 30 times more corrosion resistance than standard brake lines. These brake lines are designed with a copper-brazed, double-wall steel construction which allows for easy bending without kinking. The poly coating complies with GM123M-ASV and S.A.E. J527B.



| PART No. | Tube O.D. (IN.) | Thread | Length (IN.) |
|----------|--------------------|----------|-----------------|
| BLP-3-12 | 3/16 | 3/8 - 24 | 12 |
| BLP-3-20 | 3/16 | 3/8 - 24 | 20 |
| BLP-3-30 | 3/16 | 3/8 - 24 | 30 |
| BLP-3-40 | 3/16 | 3/8 - 24 | 40 |
| BLP-3-51 | 3/16 | 3/8 - 24 | 51 |
| BLP-3-60 | 3/16 | 3/8 - 24 | 60 |
| BLP-3-72 | 3/16 | 3/8 - 24 | 72 |

EUROPEAN STANDARD

(Bubble Flare Thread 10 x 1.0mm)



| PART No. | Tube O.D. (IN.) | Length (IN.) |
|----------|--------------------|-----------------|
| BLE-3-08 | 3/16 | 8 |
| BLE-3-12 | 3/16 | 12 |
| BLE-3-20 | 3/16 | 20 |
| BLE-3-30 | 3/16 | 30 |
| BLE-3-40 | 3/16 | 40 |
| BLE-3-51 | 3/16 | 51 |
| BLE-3-60 | 3/16 | 60 |
| BLE-3-72 | 3/16 | 72 |

ANTI CORROSION COATED EUROPEAN STD.

(Bubble Flare Thread 10 x 1.0mm)



| PART No. | Tube O.D. (IN.) | Length (IN.) |
|-----------|--------------------|-----------------|
| BLPE-3-08 | 3/16 | 8 |
| BLPE-3-20 | 3/16 | 20 |
| BLPE-3-40 | 3/16 | 40 |
| BLPE-3-51 | 3/16 | 51 |
| BLPE-3-60 | 3/16 | 60 |

B



D.O.T. AIR BRAKE TUBE



STANDARD
COLOR IS BLACK



100 FT
COIL

Air brake tube is designed for use with truck, trailer and other mobile air brake and auxiliary systems.

This lightweight, flexible and UV stabilized tube is highly resistant to abrasion, oil, grease and road salt.

- **COLORS:** Black, Blue, Green, Orange, Red, Yellow.
Other colors quoted on request. Minimum runs may apply.
- **TEMPERATURE:** -85°F to +200°F, -65°C to +93°C
- **PACKAGING:** Reels, Coils -50, -100
- **FITTINGS:** 1400 or PC1400 Series Page 59, 61 - 62
800 Series Page 72
- **MEETS OR EXCEEDS:** D.O.T. F.M.V.S.S. 106
S.A.E. J844 TEST REQUIREMENTS
- * **NOTE:** 1/8 does not comply with F.M.V.S.S. 106
- ****NOTE:** S.A.E. does not recognize 5/32 O.D. for airbrake systems.

TYPE 3A NON-REINFORCED

| PART No. | Tube O.D. (IN.) | Wall Thickness (IN.) | Working Pressure (P.S.I.) | Reel-Coil Length (FT.) |
|-------------------|-----------------|----------------------|---------------------------|------------------------|
| * 1485-2-100 | 1/8 | 0.023 | 250 | 100 |
| * 1485-2-REEL | 1/8 | 0.023 | 250 | 2000 |
| **1485-2-1/2-100 | 5/32 | 0.036 | 250 | 100 |
| **1485-2-1/2-REEL | 5/32 | 0.036 | 250 | 1000 |
| 1485-3-100 | 3/16 | 0.035 | 250 | 100 |
| 1485-3-REEL | 3/16 | 0.035 | 250 | 1000 |
| 1485-4-100 | 1/4 | 0.040 | 300 | 100 |
| 1485-4-REEL | 1/4 | 0.040 | 300 | 1000 |
| 1485-4BLU-100 | 1/4 | 0.040 | 300 | 100 |
| 1485-4BLU-REEL | 1/4 | 0.040 | 300 | 1000 |
| 1485-4GRN-100 | 1/4 | 0.040 | 300 | 100 |
| 1485-4GRN-REEL | 1/4 | 0.040 | 300 | 1000 |
| 1485-4ORA-100 | 1/4 | 0.040 | 300 | 100 |
| 1485-4ORA-REEL | 1/4 | 0.040 | 300 | 1000 |
| 1485-4RED-100 | 1/4 | 0.040 | 300 | 100 |
| 1485-4RED-REEL | 1/4 | 0.040 | 300 | 1000 |
| 1485-4YEL-100 | 1/4 | 0.040 | 300 | 100 |
| 1485-4YEL-REEL | 1/4 | 0.040 | 300 | 1000 |
| 1485-5-100 | 5/16 | 0.040 | 250 | 100 |
| 1485-5-REEL | 5/16 | 0.040 | 250 | 500 |

TYPE 3B REINFORCED

| PART No. | Tube O.D. (IN.) | Wall Thickness (IN.) | Working Pressure (P.S.I.) | Reel-Coil Length (FT.) |
|-----------------|-----------------|----------------------|---------------------------|------------------------|
| 1485-6-100 | 3/8 | 0.062 | 350 | 100 |
| 1485-6-REEL | 3/8 | 0.062 | 350 | 500 |
| 1485-6BLU-100 | 3/8 | 0.062 | 350 | 100 |
| 1485-6BLU-REEL | 3/8 | 0.062 | 350 | 500 |
| 1485-6GRN-100 | 3/8 | 0.062 | 350 | 100 |
| 1485-6GRN-REEL | 3/8 | 0.062 | 350 | 500 |
| 1485-6ORA-100 | 3/8 | 0.062 | 350 | 100 |
| 1485-6ORA-REEL | 3/8 | 0.062 | 350 | 500 |
| 1485-6RED-100 | 3/8 | 0.062 | 350 | 100 |
| 1485-6RED-REEL | 3/8 | 0.062 | 350 | 500 |
| 1485-6YEL-100 | 3/8 | 0.062 | 350 | 100 |
| 1485-6YEL-REEL | 3/8 | 0.062 | 350 | 500 |
| 1485-8-100 | 1/2 | 0.062 | 240 | 100 |
| 1485-8-REEL | 1/2 | 0.062 | 240 | 500 |
| 1485-8BLU-100 | 1/2 | 0.062 | 240 | 100 |
| 1485-8BLU-REEL | 1/2 | 0.062 | 240 | 500 |
| 1485-8GRN-100 | 1/2 | 0.062 | 240 | 100 |
| 1485-8GRN-REEL | 1/2 | 0.062 | 240 | 500 |
| 1485-8ORA-100 | 1/2 | 0.062 | 240 | 100 |
| 1485-8ORA-REEL | 1/2 | 0.062 | 240 | 500 |
| 1485-8RED-100 | 1/2 | 0.062 | 240 | 100 |
| 1485-8RED-REEL | 1/2 | 0.062 | 240 | 500 |
| 1485-8YEL-100 | 1/2 | 0.062 | 240 | 100 |
| 1485-8YEL-REEL | 1/2 | 0.062 | 240 | 500 |
| 1485-10-100 | 5/8 | 0.092 | 225 | 100 |
| 1485-10-REEL | 5/8 | 0.092 | 225 | 250 |
| 1485-10GRN-100 | 5/8 | 0.092 | 225 | 100 |
| 1485-10GRN-REEL | 5/8 | 0.092 | 225 | 250 |
| 1485-10ORA-100 | 5/8 | 0.092 | 225 | 100 |
| 1485-10ORA-REEL | 5/8 | 0.092 | 225 | 250 |
| 1485-10RED-100 | 5/8 | 0.092 | 225 | 100 |
| 1485-10RED-REEL | 5/8 | 0.092 | 225 | 250 |
| 1485-10YEL-100 | 5/8 | 0.092 | 225 | 100 |
| 1485-10YEL-REEL | 5/8 | 0.092 | 225 | 250 |
| 1485-12-100 | 3/4 | 0.092 | 200 | 100 |
| 1485-12-REEL | 3/4 | 0.092 | 200 | 250 |
| 1485-12BLU-100 | 3/4 | 0.092 | 200 | 100 |
| 1485-12BLU-REEL | 3/4 | 0.092 | 200 | 250 |
| 1485-12GRN-100 | 3/4 | 0.092 | 200 | 100 |
| 1485-12GRN-REEL | 3/4 | 0.092 | 200 | 250 |
| 1485-12ORA-100 | 3/4 | 0.092 | 200 | 100 |
| 1485-12ORA-REEL | 3/4 | 0.092 | 200 | 250 |
| 1485-12RED-REEL | 3/4 | 0.092 | 200 | 250 |

NOTE:

THE WORKING PRESSURES LISTED FOR THIS TUBE IS RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE ABOVE LISTED WORKING PRESSURES.



CLEAR VINYL TUBE

Certain Sizes Now Available
Packaged x 10 Ft. (Series JFTA)



| PART No. | O.D. | I.D. | FT. |
|-------------|------|------|-----|
| JFTA-42-10P | 1/4 | 1/8 | 10 |
| JFTA-53-10P | 5/16 | 3/16 | 10 |
| JFTA-64-10P | 3/8 | 1/4 | 10 |
| JFTA-75-10P | 7/16 | 5/16 | 10 |
| JFTA-86-10P | 1/2 | 3/8 | 10 |



CERTIFIED UNDER STANDARD 51 and 61

Clear polyvinyl-chloride tube is manufactured from F.D.A. approved resins.

It is clear, flexible, easy to clean, abrasion resistant and non-contaminating.

It is suitable for the conveyance of air, and water and is used extensively where food and beverages are conveyed.

NOTE

THE WORKING PRESSURES LISTED FOR THE VINYL TUBE IS RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE ABOVE LISTED WORKING PRESSURES. THIS TUBE IS NOT RECOMMENDED FOR MILK CONTACT, ALCOHOL (LIQUOR) OR MEDICAL APPLICATIONS.

- **PACKAGING:** 100 FT COILS 1/8" TO 1-1/4" I.D.
500 FT REELS 1/8" TO 1/2" I.D.
300 FT REELS 5/8" TO 1" I.D.
50 FT COIL 1-1/2" I.D.

NOTE: TO ORDER REEL LENGTHS CHANGE -100 TO -REEL

- **TEMPERATURE:** +25°F TO +149°F, -4°C TO +65°C
- **FITTINGS:** HOSE BARBS PAGE 41 - 42
- * **THESE ITEMS ARE ALSO AVAILABLE IN REELS. (CHANGE -100 TO -REEL)**

| PART No. | Tube O.D. (IN.) | Actual I.D. (IN.) | Working Pressure (P.S.I.) |
|----------------|-----------------|-------------------|---------------------------|
| JFT-42-100 | 1/4 | 1/8 | 65 |
| JFT-53-100 | 5/16 | 3/16 | 55 |
| JFT-63-100 * | 3/8 | 3/16 | 65 |
| JFT-64-100 | 3/8 | 1/4 | 55 |
| JFT-74-100 * | 7/16 | 1/4 | 60 |
| JFT-75-100 * | 7/16 | 5/16 | 50 |
| JFT-84-100 * | 1/2 | 1/4 | 70 |
| JFT-85-100 | 1/2 | 5/16 | 60 |
| JFT-86-100 | 1/2 | 3/8 | 45 |
| JFT-106-100 * | 5/8 | 3/8 | 55 |
| JFT-108-100 | 5/8 | 1/2 | 30 |
| JFT-128-100 | 3/4 | 1/2 | 45 |
| JFT-1210-100* | 3/4 | 5/8 | 30 |
| JFT-1310-100* | 13/16 | 5/8 | 30 |
| JFT-1410-100 | 7/8 | 5/8 | 40 |
| JFT-1612-100 | 1 | 3/4 | 35 |
| JFT-1812-100 | 1-1/8 | 3/4 | 50 |
| JFT-2014-100 * | 1-1/4 | 7/8 | 35 |
| JFT-2016-100 | 1-1/4 | 1 | 25 |
| JFT-2416-100 * | 1-1/2 | 1 | 35 |
| JFT-2420-100 * | 1-1/2 | 1-1/4 | 20 |
| JFT-3224-50 | 2 | 1-1/2 | 35 |

POLYURETHANE (FUEL LINE) CLEAR TUBE

This Ether based polyurethane tube has been specially formulated for use with gasoline and is also suitable for such applications as air transfer lines, granular transfer lines, lubrication lines and robotics control lines. It is clear with a blue tint to allow see-through convenience. Polyurethane tube features abrasion and cut resistance, good flex fatigue and resiliency and excellent resistance to ozone, solvents and fuel. Items and colors not shown are subject to minimum runs.



- **PACKAGING:** 100 FT COILS
- **TEMPERATURE:** -40°F to +175°F, -40°C to +79°C
- **FITTINGS:** HOSE BARBS PAGE 41 - 42
- **FOR FUEL LINE HOSE SEE PAGE 22**


| PART No. | Tube O.D. (IN.) | Actual I.D. (IN.) | Wall Thickness | Working Pressure P.S.I. |
|-------------|-----------------|-------------------|----------------|-------------------------|
| FLT-42-100 | 1/4 | 1/8 | 1/16 | 100 |
| FLT-53-100 | 5/16 | 3/16 | 1/16 | 75 |
| FLT-64-100 | 3/8 | 1/4 | 1/16 | 60 |
| FLT-75-100 | 7/16 | 5/16 | 1/16 | 50 |
| FLT-86-100 | 1/2 | 3/8 | 1/16 | 45 |
| FLT-128-100 | 3/4 | 1/2 | 1/8 | 60 |

NOTE:

WORKING PRESSURE RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.



POLYETHYLENE TUBE

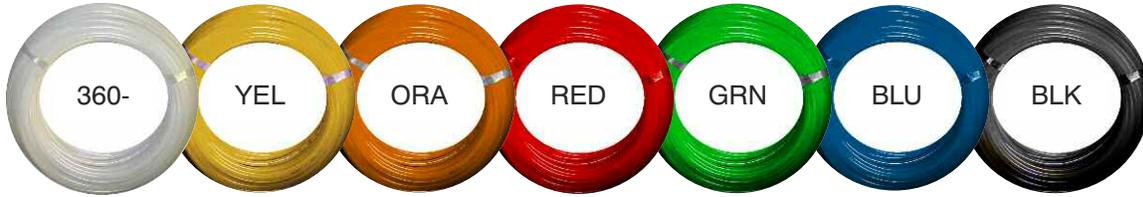

Polyethylene tube is manufactured from F.D.A. approved resins. It has very low moisture absorption. It is fungus resistant, non-corrosive, and highly resistant to stress cracking.

It is suitable for air and water applications and is used for beverage and soda transfer.

It is available in two types, low and high density. Low density provides flexibility and high density, while not as flexible, has a higher temperature and pressure rating.

NOTE

THE WORKING PRESSURES LISTED FOR THE POLY TUBES ARE RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE ABOVE LISTED WORKING PRESSURES. THESE TUBES ARE NOT RECOMMENDED FOR MILK CONTACT.

ORDERING INFORMATION

• **PACKAGING:** 100 FT. COILS
500 AND 1000 FT. REELS ON 360 TUBE
TO ORDER REELS CHANGE -100 TO -500 OR -1000

• **TEMPERATURE:** LOW DENSITY -40°F to +160°F, -40°C to +71°C
HIGH DENSITY -40°F to +250°F, -40°C to +121°C

• **FITTINGS:** 400 SERIES
500 SERIES
PC60 SERIES
900 SERIES PAGE 44

WARNING
USE OF THIS TUBE WITH
FITTINGS OTHER THAN FAIRVIEW
ORIGINAL WILL VOID WARRANTY.

• **COLOR CODES:** 360 series only: BLK (Black), BLU (Blue), GRN (Green), ORA (ORANGE), Red (Red), YEL (Yellow)
NOT ALL SIZES ARE AVAILABLE IN ALL COLORS. MINIMUM RUNS MAY APPLY.

NOTE: To order a color suffix the size code with a color code
Example: 360-6RED-100, 360-6RED-1000. For natural color (opaque) omit the color code. Dark colors have better U.V. resistance for outdoor applications.

| LOW DENSITY | | | | | HIGH DENSITY | | | | |
|-------------|-----------------|-------------------|----------------|---------------------------|--------------|-----------------|-------------------|----------------|---------------------------|
| PART No. | Tube O.D. (IN.) | Actual I.D. (IN.) | Wall Thickness | Working Pressure (P.S.I.) | PART No. | Tube O.D. (IN.) | Actual I.D. (IN.) | Wall Thickness | Working Pressure (P.S.I.) |
| 360-4-100 | 1/4 | .170 | .040 | 125 | 359-4-100 | 1/4 | .170 | .040 | 250 |
| 360-4H-100 | 1/4 | .125 | .062 | 170 | 359-4H-100 | 1/4 | .125 | .062 | 280 |
| 360-5-100 | 5/16 | .187 | .062 | 130 | 359-5-100 | 5/16 | .187 | .062 | 250 |
| 360-6-100 | 3/8 | .250 | .062 | 100 | 359-6-100 | 3/8 | .250 | .062 | 250 |
| 360-8-100 | 1/2 | .375 | .062 | 90 | 359-8-100 | 1/2 | .375 | .062 | 250 |
| 360-10-100 | 5/8 | .500 | .062 | 80 | 359-10-100 | 5/8 | .500 | .062 | 160 |
| 360-12-100 | 3/4 | .625 | .062 | 60 | 359-12-100 | 3/4 | .600 | .075 | 160 |

AIR SHIFT TRANSMISSION TUBE



This tube is lightweight and flexible, resists oil, grease and road salt.

TYPE 3A NON-REINFORCED

| PART No. | Tube O.D. (IN.) | Wall Thickness (I.N.) | Working Pressure (P.S.I.) | Reel Length (FT.) |
|-----------------|-----------------|-----------------------|---------------------------|-------------------|
| 1485-2-REEL | 1/8 | .023 | 250 | 2000 |
| 1485-2-1/2-REEL | 5/32 | .036 | 250 | 1000 |

- **COLOR:** BLACK
- **TEMPERATURE:** -40°F TO +200°F, -40°C TO +93°C
- **PACKAGING:** BULK REELS
- **FITTINGS:** 800 SERIES PAGE 72

Other colors than those listed are available on request. Minimum runs apply.

NOTE: WORKING PRESSURE RATED AT +70°F, +21°C. ANY AMBIENT OR INTERNAL INCREASE IN TEMPERATURE WILL LOWER THE WORKING PRESSURE.

HOSE ENDS

BRASS - STEEL - BLACK IRON - NYLON



WHAT'S NEW IN THIS SECTION

- Plated Combination Nipples 43
- Permanent Hose Ends (SCTP) 54

| | |
|---|----------------------|
| AIR BRAKE HOSE COUPLINGS | 38 |
| AIR BRAKE HOSE MENDER KITS | 39 |
| COMBINATION NIPPLES AND HOSE MENDERS (STEEL) | 43 |
| FERRULES (BRASS) | 43 |
| HOSE BARBS (BRASS) | 41, 42 |
| HOSE BARBS - GRIP-TITE (BRASS) | 40 |
| HOSE BARBS - FUEL LINE (BRASS) | 43 |
| HOSE BARBS (NYLON) | 42 |
| HOSE INSERTS (STEEL) | 49 |
| HYDRAULIC CRIMP INSTRUCTIONS | 56 |
| PERMANENT HOSE ENDS SAE 100R7, 100R8, 100R18, | 54 |
| REUSABLE HOSE FITTINGS (BRASS) | 44 |
| REUSABLE - SAE 100R14 | 51 |
| RING-BARB FITTINGS (BRASS) | 44 |
| STEEL CRIMP ENDS - SAE 100R7 | 49, 54 |
| STEEL ONE PIECE CRIMP ENDS SAE | 45 - 49, 52, 54 - 55 |
| STEEL ONE PIECE CRIMP ENDS SAE 100R1-AT, 100R2-AT | 45 - 48 |
| STEEL ONE PIECE CRIMP ENDS SAE 100R5 | 52 |
| STEEL ONE PIECE CRIMP ENDS SAE 100R12 | 55 |
| STEEL ONE PIECE CRIMP ENDS SAE 100R14 | 50 |
| STEEL ONE PIECE CRIMP ENDS SAE 100R16, 100R17 | 45 - 48 |
| STEEL REUSABLE ENDS | 49, 50, 53 |
| STEEL REUSABLE HOSE ENDS - SAE 100R1-AT, 100R2-AT | 50 |
| STEEL REUSABLE HOSE ENDS - SAE 100R5 | 53 |
| STEEL REUSABLE HOSE ENDS - SAE 100R7 | 49 |
| TERMINAL BOLTS | 38 |



BRASS D.O.T. AIR BRAKE HOSE COUPLINGS AND STEEL TERMINAL BOLTS



SLEEVE

| PART No. | For Hose I.D. |
|----------|---------------|
| 1490-6 | 3/8 |
| 1490-8 | 1/2 |



NUT

| PART No. | For Hose I.D. |
|----------|---------------|
| 1491-6 | 3/8 |
| 1491-8 | 1/2 |



COUPLER ASSEMBLY (NUT, SLEEVE AND COUPLER)

| PART No. | For Hose I.D. | Pipe |
|----------|---------------|------|
| 1492-6B | 3/8 | 1/4 |
| 1492-6C | 3/8 | 3/8 |
| 1492-6D | 3/8 | 1/2 |
| 1492-8C | 1/2 | 3/8 |
| 1492-8D | 1/2 | 1/2 |



SWIVEL COUPLER ASSEMBLY (NUT, SLEEVE AND COUPLER)

| PART No. | Hose I.D. | Pipe |
|-------------|-----------|------|
| 1492SW-6 | 3/8 | -- |
| 1492SW-8 | 1/2 | -- |
| 1492SW-6B * | 3/8 | 1/4 |
| 1492SW-6C * | 3/8 | 3/8 |
| 1492SW-6D * | 3/8 | 1/2 |
| 1492SW-8C * | 1/2 | 3/8 |

* Complete with 4134 series adapter.



HOSE CONNECTOR FOR HAB ASSEMBLIES

| PART No. | Straight | | Pipe |
|------------|----------|--|------|
| | Thread | | |
| 4134-6B | 3/4-20 | | 1/4 |
| 4134-6C | 3/4-20 | | 3/8 |
| 4134-6D | 3/4-20 | | 1/2 |
| 4134-8C | 3/4-20 | | 3/8 |
| 4134-8D | 3/4-20 | | 1/2 |
| 4134-8C-WH | 7/8-20 | | 3/8 |
| 4134-8D-WH | 7/8-20 | | 1/2 |

USED WITH HAB ASSEMBLIES.



HOSE SPLICER

| PART No. | For Hose I.D. |
|----------|---------------|
| 1492-6S | 3/8 |
| 1492-8S | 1/2 |



COUPLER

| PART No. | For Hose I.D. | Pipe |
|----------|---------------|------|
| B1492-6B | 3/8 | 1/4 |
| B1492-6C | 3/8 | 3/8 |
| B1492-6D | 3/8 | 1/2 |
| B1492-8C | 1/2 | 3/8 |
| B1492-8D | 1/2 | 1/2 |



COUPLER ASSEMBLY WITH SPRING GUARD (NUT, SLEEVE, COUPLER AND SPRING)

| PART No. | For Hose I.D. | Pipe |
|----------|---------------|------|
| 1493-6B | 3/8 | 1/4 |
| 1493-6C | 3/8 | 3/8 |
| 1493-6D | 3/8 | 1/2 |
| 1493-8C | 1/2 | 3/8 |
| 1493-8D | 1/2 | 1/2 |



SWIVEL COUPLER ASSEMBLY WITH SPRING GUARD (NUT, SLEEVE, COUPLER AND SPRING)

| PART No. | For Hose I.D. | Pipe |
|-------------|---------------|------|
| 1493SW-6 | 3/8 | |
| 1493SW-8 | 1/2 | |
| 1493SW-6B * | 3/8 | 1/4 |
| 1493SW-6C * | 3/8 | 3/8 |
| 1493SW-8C * | 1/2 | 3/8 |

* Complete with 4134 series adapter.



NUT WITH SPRING HOSE GUARD

| PART No. | For Hose I.D. |
|----------|---------------|
| 1494-6 | 3/8 |
| 1494-8 | 1/2 |



TERMINAL BOLT (STEEL)

| PART No. | Female Pipe | Length (IN.) |
|----------|-------------|--------------|
| 1495-C | 3/8 X 3/8 | 1-3/8 |
| 1495-L | 1/4 X 1/4 | 1-1/2 |
| 1495-S | 1/4 X 1/4 | 31/32 |



TERMINAL BOLT (BRASS)

| PART No. | Female Pipe | Length (IN.) |
|----------|-------------|--------------|
| 1495B-A | 1/8 X 1/8 | 1-1/2 |
| 1495B-C | 3/8 X 3/8 | 1-1/4 |
| 1495B-D | 1/2 X 1/2 | 1-1/2 |
| 1495B-L | 1/4 X 1/4 | 1-1/2 |
| 1495B-S | 1/4 X 1/4 | 31/32 |



TERMINAL BOLT (STEEL)

| PART No. | Pipe | Length (IN.) |
|----------|-------------|--------------|
| 1496-DC | 1/2M X 3/8F | 2 |



TERMINAL BOLT

| PART No. | Pipe | Material | Length (IN.) |
|----------|---------------------|----------|--------------|
| 1497-DB | 1/2M X 1/4F | Steel | 2-3/4 |
| 1497-DBS | 1/2M X 1/4F (Short) | Brass | 1-5/8 |



BULKHEAD ADAPTER Female Pipe To Nylon Tube

| PART No. | For Nylon Tube O.D. | Female Pipe |
|----------|---------------------|-------------|
| 1495N-4B | 1/4 | 1/4 |
| 1495N-4C | 1/4 | 3/8 |
| 1495N-6B | 3/8 | 1/4 |
| 1495N-6C | 3/8 | 3/8 |
| 1495N-6D | 3/8 | 1/2 |
| 1495N-8C | 1/2 | 3/8 |
| 1495N-8D | 1/2 | 1/2 |



For Nylon



For Copper

TERMINAL BOLT (STEEL)

| PART No. | For Nylon Tube O.D. | Pipe | Length (IN.) |
|----------|---------------------|-------------|--------------|
| 1498N-6D | 3/8 | 1/2M X 1/4F | 2-5/8 |

(Complete with 1461 series brass nut.)

| PART No. | For Copper Tube O.D. | Pipe | Length (IN.) |
|----------|----------------------|-------------|--------------|
| 1498-6D | 3/8 | 1/2M X 1/4F | 3-1/4 |

(Complete with 1161 series brass nut & sleeve.)



For Nylon



For Copper

TERMINAL BOLT (STEEL)

| PART No. | For Nylon Tube O.D. | For Hose I.D. |
|-----------|---------------------|---------------|
| 1499N-6 * | 3/8 | 3/8 |

* Complete with 1461 series nut.

| PART No. | For Copper Tube O.D. | For Hose I.D. |
|----------|----------------------|---------------|
| 1499-6 | 3/8 | 3/8 |

AIR BRAKE HOSE MENDERS & QUICK SERVICE KITS

Fairview's Patented design is for use with **Type A, AI & All SAE J1402 Air Brake Hose**. This kit includes two hose repair couplers and an Allen Wrench to make fast air brake hose repairs anywhere. **Hanger retail packaging, complete with assembly instructions.**



4120R-8C-RK

| PART No. | Description | Pipe | Hose | Min. Hose O.D. |
|-------------|-------------------|------|------|----------------|
| 4120R-6C-RK | Carded Repair Kit | 3/8 | 3/8 | .750 |
| 4120R-6D-RK | Carded Repair Kit | 1/2 | 3/8 | .750 |
| 4120R-8C-RK | Carded Repair Kit | 3/8 | 1/2 | .875 |

(MALE TO FEMALE COUPLER)

| PART No. | Description | Pipe | Hose | O.D. |
|------------|--------------------|------|------|------|
| 4129R-6-RK | Bagged Splicer Kit | 3/8 | 3/8 | .750 |
| 4129R-8-RK | Bagged Splicer Kit | 1/2 | 1/2 | .875 |

Patent D759,216 D760,876


D.O.T. LISTED - NO ADDITIONAL TOOLS REQUIRED



1
Thread Shell
On Hose



2
Push Stem and
Screw to Start



3
Hold Shell and
Tighten Stem
With Key



4129R-8-RK

Fairview's Quick Service Repair Kit

Allows you to repair or custom build hose assemble(s) to your customer's needs, in minutes.

| PART No. | Size |
|------------|---------------|
| HABR-KIT-6 | 3/8 I.D. |
| Qty. | Size |
| 20 | 3/8 X 3/8 NPT |
| 10 | 3/8 X 1/2 NPT |
| 50 Ft. | 3/8" I.D. |

| Kit Includes: | Description |
|---------------|--|
| | Hose Menders (10 Sets of 4120R-6C-RK) |
| | Hose Menders (5 Sets of 4120R-6D-RK) |
| | Air Brake Hose (In A Dispenser Carton) |

| PART No. | Size |
|------------|---------------|
| HABR-KIT-8 | 1/2 I.D. |
| Qty. | Size |
| 20 | 1/2 X 3/8 NPT |
| 50 Ft. | 1/2" I.D. |

| Kit Includes: | Description |
|---------------|--|
| | Hose Menders (10 Sets of 4120R-8C-RK) |
| | Air Brake Hose (In A Dispenser Carton) |



Allen wrench supplied with each kit.

C



BRASS GRIP-TITE HOSE FITTINGS

(USE WITH GRIP-TITE HOSE: PAGE 22)



Male Pipe

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 725-4A | 1/4 | 1/8 |
| 725-4B | 1/4 | 1/4 |
| 725-4C | 1/4 | 3/8 |
| 725-5A | 5/16 | 1/8 |
| 725-5B | 5/16 | 1/4 |
| 725-6A | 3/8 | 1/8 |
| 725-6B | 3/8 | 1/4 |
| 725-6C | 3/8 | 3/8 |
| 725-6D | 3/8 | 1/2 |
| 725-8B | 1/2 | 1/4 |
| 725-8C | 1/2 | 3/8 |
| 725-8D | 1/2 | 1/2 |
| 725-8E | 1/2 | 3/4 |
| 725-10C | 5/8 | 3/8 |
| 725-10D | 5/8 | 1/2 |
| 725-10E | 5/8 | 3/4 |
| 725-12D | 3/4 | 1/2 |
| 725-12E | 3/4 | 3/4 |



Working Male Pipe Swivel

| PART No. | Hose I.D. | Pipe |
|-----------|-----------|------|
| 725SW-4B | 1/4 | 1/4 |
| 725SW-6B | 3/8 | 1/4 |
| 725SW-6C | 3/8 | 3/8 |
| 725SW-8C | 1/2 | 3/8 |
| 725SW-8D | 1/2 | 1/2 |
| 725SW-12E | 3/4 | 3/4 |



RIGID Female Pipe

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| 726-4B | 1/4 | 1/4 |
| 726-6B | 3/8 | 1/4 |
| 726-6C | 3/8 | 3/8 |
| 726-8C | 1/2 | 3/8 |
| 726-8D | 1/2 | 1/2 |
| 726-8E | 1/2 | 3/4 |
| 726-12E | 3/4 | 3/4 |



45° S.A.E. Male Flare

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| 727-44 | 1/4 | 1/4 |
| 727-45 | 1/4 | 5/16 |
| 727-66 | 3/8 | 3/8 |
| 727-88 | 1/2 | 1/2 |



45° S.A.E. Female Flare Swivel

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| 728-44 | 1/4 | 1/4 |
| 728-45 | 1/4 | 5/16 |
| 728-66 | 3/8 | 3/8 |
| 728-68 | 3/8 | 1/2 |
| 728-86 | 1/2 | 3/8 |
| 728-88 | 1/2 | 1/2 |
| 728-810 | 1/2 | 5/8 |
| 728-108 | 5/8 | 1/2 |
| 728-1010 | 5/8 | 5/8 |
| 728-1212 | 3/4 | 3/4 |



HOSE SPLICER

| PART No. | Hose I.D. |
|----------|-----------|
| 729-4 | 1/4 |
| 729-5 | 5/16 |
| 729-6 | 3/8 |
| 729-8 | 1/2 |
| 729-10 | 5/8 |
| 729-12 | 3/4 |



Female Straight Pipe Swivel

GASKET TYPE

| PART No. | Hose I.D. | Straight Pipe |
|----------|-----------|---------------|
| 730-4B | 1/4 | 1/4 |



Female Straight Pipe Swivel

BALL TYPE

| PART No. | Hose I.D. | Straight Pipe |
|----------|-----------|---------------|
| 731-4A | 1/4 | 1/8 |
| 731-4B | 1/4 | 1/4 |
| 731-6B | 3/8 | 1/4 |
| 731-6C | 3/8 | 3/8 |
| 731-8D | 1/2 | 1/2 |
| 731-12E | 3/4 | 3/4 |



RIGID Tube Shank

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| 732-44 | 1/4 | 1/4 |
| 732-66 | 3/8 | 3/8 |



45° S.A.E. Male Inverted Flare Swivel

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| 735-43 | 1/4 | 3/16 |
| 735-44 | 1/4 | 1/4 |
| 735-45 | 1/4 | 5/16 |
| 735-65 | 3/8 | 5/16 |
| 735-66 | 3/8 | 3/8 |
| 735-88 | 1/2 | 1/2 |
| 735-1010 | 5/8 | 5/8 |



45° S.A.E. Female Inverted Flare

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| 736-45 | 1/4 | 5/16 |
| 736-65 | 3/8 | 5/16 |
| 736-66 | 3/8 | 3/8 |



37° J.I.C. Male Flare

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| 737-44 | 1/4 | 1/4 |
| 737-66 | 3/8 | 3/8 |
| 737-88 | 1/2 | 1/2 |



37° J.I.C. Female Flare Swivel


| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| 738-44 | 1/4 | 1/4 |
| 738-45 | 1/4 | 5/16 |
| 738-66 | 3/8 | 3/8 |
| 738-88 | 1/2 | 1/2 |
| 738-1010 | 5/8 | 5/8 |
| 738-1212 | 3/4 | 3/4 |



90° ELBOW Hose To Male Pipe

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 739-4A | 1/4 | 1/8 |
| 739-4B | 1/4 | 1/4 |
| 739-6B | 3/8 | 1/4 |
| 739-6C | 3/8 | 3/8 |
| 739-8C | 1/2 | 3/8 |
| 739-8D | 1/2 | 1/2 |
| 739-12E | 3/4 | 3/4 |

ASSEMBLY INSTRUCTIONS

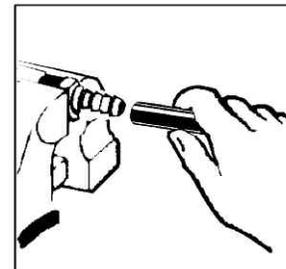

- LUBRICATE HOSE AND BARB.
- PUSH HOSE ON FITTING UNTIL SEATED UNDER PROTECTIVE CAP.
- NO CLAMPS REQUIRED WHEN USED WITH GRIP-TITE HOSE.

BRASS HOSE BARB FITTINGS



COUPLER
Hose Barb To
Male Pipe

| PART No. | Hose I.D. | Pipe |
|-------------|-----------|------------------|
| 125-2-10/32 | 1/8 | 10/32 UNF |
| 125-2A | 1/8 | 1/8 |
| 125-2B | 1/8 | 1/4 |
| 125-3A | 3/16 | 1/8 |
| 125-3B | 3/16 | 1/4 |
| 125-4A | 1/4 | 1/8 |
| 125-4B | 1/4 | 1/4 |
| 125-4C | 1/4 | 3/8 |
| 125-4D | 1/4 | 1/2 |
| 125-5A | 5/16 | 1/8 |
| 125-5B | 5/16 | 1/4 |
| 125-5C | 5/16 | 3/8 |
| 125-6A | 3/8 | 1/8 |
| 125-6B | 3/8 | 1/4 |
| 125-6C | 3/8 | 3/8 |
| 125-6D | 3/8 | 1/2 |
| 125-6E | 3/8 | 3/4 |
| 125-8B | 1/2 | 1/4 |
| 125-8C | 1/2 | 3/8 |
| 125-8D | 1/2 | 1/2 |
| 125-8E | 1/2 | 3/4 |
| 125-10C | 5/8 | 3/8 |
| 125-10D | 5/8 | 1/2 |
| 125-10E | 5/8 | 3/4 |
| 125-12D | 3/4 | 1/2 |
| 125-12E | 3/4 | 3/4 |
| 125-16E | 1 | 3/4 |
| 125-16H | 1 | 1 |
| 125CA-8D | 1/2 | Cast Brass 1/2 |
| 125CA-12E | 3/4 | Cast Brass 3/4 |
| 125CA-16H | 1 | Cast Brass 1 |
| 125CA-20J | 1-1/4 | Cast Brass 1-1/4 |
| 125CA-24K | 1-1/2 | Cast Brass 1-1/2 |
| 125CA-32M | 2 | Cast Brass 2 |

**WORKING SWIVEL
COUPLER**



Hose Barb To
Male Pipe

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 1925-4B | 1/4 | 1/4 |
| 1925-6B | 3/8 | 1/4 |
| 1925-6C | 3/8 | 3/8 |
| 1925-8C | 1/2 | 3/8 |
| 1925-8D | 1/2 | 1/2 |



COUPLER
Hose Barb To
Female Pipe

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 126-2A | 1/8 | 1/8 |
| 126-2B | 1/8 | 1/4 |
| 126-3A | 3/16 | 1/8 |
| 126-3B | 3/16 | 1/4 |
| 126-4A | 1/4 | 1/8 |
| 126-4B | 1/4 | 1/4 |
| 126-4C | 1/4 | 3/8 |
| 126-5A | 5/16 | 1/8 |
| 126-5B | 5/16 | 1/4 |
| 126-5C | 5/16 | 3/8 |



COUPLER
Hose Barb To
Female Pipe

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 126-6A | 3/8 | 1/8 |
| 126-6B | 3/8 | 1/4 |
| 126-6C | 3/8 | 3/8 |
| 126-6D | 3/8 | 1/2 |
| 126-8B | 1/2 | 1/4 |
| 126-8C | 1/2 | 3/8 |
| 126-8D | 1/2 | 1/2 |
| 126-12D | 3/4 | 1/2 |
| 126-16H | 1 | 1 |

**SWIVEL
COUPLER**
Hose Barb Flat
Seat With Gasket
To Female
Straight Pipe



| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 130-4A | 1/4 | 1/8 |
| 130-4B | 1/4 | 1/4 |
| 130-6B | 3/8 | 1/4 |
| 130-6C | 3/8 | 3/8 |
| 130-6D | 3/8 | 1/2 |
| 130-8D | 1/2 | 1/2 |

**SWIVEL
COUPLER**
Hose Barb Flat
Seat To Female
Straight Pipe



Use With PART No. 134

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 131-3A | 3/16 | 1/8 |
| 131-4A | 1/4 | 1/8 |
| 131-4B | 1/4 | 1/4 |
| 131-4C | 1/4 | 3/8 |
| 131-5B | 5/16 | 1/4 |
| 131-6B | 3/8 | 1/4 |
| 131-6C | 3/8 | 3/8 |
| 131-8C | 1/2 | 3/8 |
| 131-8D | 1/2 | 1/2 |
| 131-12E | 3/4 | 3/4 |

COUPLER
Hose Barb To
Male 45°
S.A.E. Flare



| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| 127-44 | 1/4 | 1/4 |
| 127-46 | 1/4 | 3/8 |
| 127-55 | 5/16 | 5/16 |
| 127-66 | 3/8 | 3/8 |
| 127-68 | 3/8 | 1/2 |



CONNECTOR
Male Straight
Pipe Thread With
Ball Seat To Male
Taper Pipe Thread

Use With PART No. 130, 131

| PART No. | Straight Pipe | Pipe |
|----------|------------------|------|
| 134-BB | 1/4 | 1/4 |
| 134-CD | 3/8 | 1/2 |
| 134-DD | 1/2 | 1/2 |

**SWIVEL
COUPLER**
Hose Barb To
Female 45°
S.A.E. Flare



| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| 128-34 | 3/16 | 1/4 |
| 128-44 | 1/4 | 1/4 |
| 128-46 | 1/4 | 3/8 |
| 128-55 | 5/16 | 5/16 |
| 128-56 | 5/16 | 3/8 |
| 128-66 | 3/8 | 3/8 |
| 128-68 | 3/8 | 1/2 |
| 128-88 | 1/2 | 1/2 |
| 128-810 | 1/2 | 5/8 |
| 128-1010 | 5/8 | 5/8 |
| 128-1212 | 3/4 | 3/4 |

90° ELBOW
Hose Barb
To
Male Pipe



| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 139-3A | 3/16 | 1/8 |
| 139-4A | 1/4 | 1/8 |
| 139-4B | 1/4 | 1/4 |
| 139-4C | 1/4 | 3/8 |
| 139-5A | 5/16 | 1/8 |
| 139-5B | 5/16 | 1/4 |
| 139-5C | 5/16 | 3/8 |
| 139-6A | 3/8 | 1/8 |
| 139-6B | 3/8 | 1/4 |
| 139-6C | 3/8 | 3/8 |
| 139-6D | 3/8 | 1/2 |
| 139-8B | 1/2 | 1/4 |
| 139-8C | 1/2 | 3/8 |
| 139-8D | 1/2 | 1/2 |
| 139-10C | 5/8 | 3/8 |
| 139-10D | 5/8 | 1/2 |
| 139-12D | 3/4 | 1/2 |
| 139-12E | 3/4 | 3/4 |
| 139-16E | 1 | 3/4 |
| 139-16H | 1 | 1 |

45° ELBOW
Hose Barb To
Male Pipe



| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 140-4A | 1/4 | 1/8 |
| 140-4B | 1/4 | 1/4 |
| 140-5A | 5/16 | 1/8 |
| 140-6A | 3/8 | 1/8 |
| 140-6B | 3/8 | 1/4 |
| 140-6C | 3/8 | 3/8 |
| 140-8C | 1/2 | 3/8 |
| 140-10C | 5/8 | 3/8 |

C



HOSE BARB FITTINGS



SPLICER
Hose Barb

| PART No. | Hose I.D. |
|----------|-----------|
| 129-3 | 3/16 |
| 129-4 | 1/4 |
| 129-5 | 5/16 |
| 129-6 | 3/8 |
| 129-8 | 1/2 |
| 129-10 | 5/8 |
| 129-12 | 3/4 |



Y CONNECTOR
Hose Barb
All Ends

| PART No. | Hose I.D. |
|----------|-----------|
| 123Y-4 | 1/4 |
| 123Y-6 | 3/8 |
| 123Y-8 | 1/2 |
| 123Y-10 | 5/8 |
| 123Y-12 | 3/4 |



TEE
Hose Barb
All Ends

| PART No. | Hose I.D. |
|----------|-----------|
| 123-4 | 1/4 |
| 123-5 | 5/16 |
| 123-6 | 3/8 |



ELBOW
Hose Barb
To
Hose Barb

| PART No. | Hose I.D. |
|----------|-----------|
| 99HB-4 | 1/4 |
| 99HB-5 | 5/16 |
| 99HB-6 | 3/8 |
| 99HB-8 | 1/2 |

NOTE:
Lead Free brass hose bars are available on request.
(Special Order)
Minimum quantities apply.

NYLON HOSE BARB FITTINGS (MADE WITH NSF APPROVED RESINS)



COUPLER
Hose Barb
To
Male Pipe

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 525-4A | 1/4 | 1/8 |
| 525-4B | 1/4 | 1/4 |
| 525-4D | 1/4 | 1/2 |
| 525-5A | 5/16 | 1/8 |
| 525-6B | 3/8 | 1/4 |
| 525-6C | 3/8 | 3/8 |
| 525-6D | 3/8 | 1/2 |
| 525-8C | 1/2 | 3/8 |
| 525-8D | 1/2 | 1/2 |
| 525-8E | 1/2 | 1/2 |
| 525-10D | 5/8 | 1/2 |
| 525-10E | 5/8 | 3/4 |
| 525-12D | 3/4 | 1/2 |
| 525-12E | 3/4 | 3/4 |



SPLICER
Hose Barb

| PART No. | Hose I.D. |
|-----------------|------------|
| 529-4 | 1/4 |
| 529-6 | 3/8 |
| 529-8 | 1/2 |
| Reducing | |
| 529-42 | 1/4 to 1/8 |
| 529-64 | 3/8 to 1/4 |
| 529-86 | 1/2 to 3/8 |



90° ELBOW
Hose Barb
To
Hose Barb

| PART No. | Hose I.D. |
|----------|-----------|
| 555-4 | 1/4 |
| 555-6 | 3/8 |
| 555-8 | 1/2 |
| 555-10 | 5/8 |
| 555-12 | 3/4 |



90° ELBOW
Hose Barb
To
Male Pipe

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 539-4A | 1/4 | 1/8 |
| 539-4B | 1/4 | 1/4 |
| 539-6B | 3/8 | 1/4 |
| 539-6C | 3/8 | 3/8 |
| 539-6D | 3/8 | 1/2 |
| 539-8C | 1/2 | 3/8 |
| 539-8D | 1/2 | 1/2 |
| 539-10D | 5/8 | 1/2 |
| 539-10E | 5/8 | 3/4 |



TEE
Hose Barb
All Ends

| PART No. | Hose I.D. |
|----------|-----------|
| 544-3 | 3/16 |
| 544-4 | 1/4 |
| 544-6 | 3/8 |
| 544-8 | 1/2 |
| 544-10 | 5/8 |



COUPLER
Hose Barb
To
Female Pipe

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 526-4B | 1/4 | 1/4 |
| 526-4D | 1/4 | 1/2 |
| 526-6B | 3/8 | 1/4 |
| 526-6C | 3/8 | 3/8 |
| 526-8D | 1/2 | 1/2 |



90° ELBOW
Hose Barb
To
Female Pipe

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 539F-8D | 1/2 | 1/2 |

C

BRASS FUEL LINE HOSE BARBS



COUPLER
Hose Barb
To Male Pipe

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 325-3A | 3/16 | 1/8 |
| 325-4A | 1/4 | 1/8 |
| 325-4B | 1/4 | 1/4 |
| 325-5A | 5/16 | 1/8 |
| 325-5B | 5/16 | 1/4 |
| 325-6A | 3/8 | 1/8 |
| 325-6B | 3/8 | 1/4 |
| 325-6C | 3/8 | 3/8 |
| 325-10C | 5/8 | 3/8 |
| 325-10D | 5/8 | 1/2 |
| 325-12D | 3/4 | 1/2 |



CONNECTOR
Hose Barb To
Male Inverted
Flare

| PART No. | Hose I.D. | Tube Size |
|----------|-----------|-----------|
| 335-54 | 5/16 | 1/4 |
| 335-55 | 5/16 | 5/16 |
| 335-65 | 3/8 | 5/16 |
| 335-66 | 3/8 | 3/8 |



90° ELBOW
Hose Barb
To
Male Pipe

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 339-4A | 1/4 | 1/8 |
| 339-5A | 5/16 | 1/8 |
| 339-5B | 5/16 | 1/4 |
| 339-6A | 3/8 | 1/8 |
| 339-6B | 3/8 | 1/4 |
| 339-10C | 5/8 | 3/8 |

FOR FUEL LINE HOSE PAGE 22

STEEL COMBINATION NIPPLES AND HOSE MENDERS (NOT RECOMMENDED FOR USE WITH AIR)



COMBINATION NIPPLE
Hose Barb To
Male Pipe

| PART No. | Hose I.D. | Pipe |
|------------|-----------|-------|
| BI-125-8D | 1/2 | 1/2 |
| BI-125-12E | 3/4 | 3/4 |
| BI-125-16H | 1 | 1 |
| BI-125-20J | 1-1/4 | 1-1/4 |
| BI-125-24K | 1-1/2 | 1-1/2 |
| BI-125-32M | 2 | 2 |



PLATED COMBINATION NIPPLE
Hose Barb To
Male Pipe

| PART No. | Hose I.D. | Pipe |
|------------|-----------|-------|
| GI-125-8D | 1/2 | 1/2 |
| GI-125-12E | 3/4 | 3/4 |
| GI-125-16H | 1 | 1 |
| GI-125-20J | 1-1/4 | 1-1/4 |
| GI-125-24K | 1-1/2 | 1-1/2 |
| GI-125-32M | 2 | 2 |
| GI-125-40N | 2-1/2 | 2-1/2 |



HOSE MENDER
Hose Barb

| PART No. | Hose I.D. |
|-----------|-----------|
| BI-129-8 | 1/2 |
| BI-129-12 | 3/4 |
| BI-129-16 | 1 |
| BI-129-20 | 1-1/4 |
| BI-129-24 | 1-1/2 |



PLATED HOSE MENDER
Hose Barb

| PART No. | Hose I.D. |
|-----------|-----------|
| GI-129-12 | 3/4 |
| GI-129-16 | 1 |
| GI-129-20 | 1-1/4 |
| GI-129-24 | 1-1/2 |

BRASS STANDARD FERRULES

FBL – Ferrules Brass Long FBS – Ferrules Brass Short



FBL



FBS

- SIZE RANGE FROM 3/8 TO 1 INCH OUTSIDE DIAMETER
- THE PART NUMBER DESIGNATES THE OUTSIDE DIAMETER OF THE HOSE OR TUBE
- WALL THICKNESS OF THE FERRULE IS .025
- FOR CRIMPERS PAGE 150

| PART No. | Inside Dia. (IN.) | Ferrule Length (IN.) | Hole Size (IN.) | PART No. | Inside Dia. (IN.) | Ferrule Length (IN.) | Hole Size (IN.) |
|----------|-------------------|----------------------|-----------------|----------|-------------------|----------------------|-----------------|
| FBL-450 | .450 | 23/32 | .328 | FBL-825 | .825 | 31/32 | .625 |
| FBL-475 | .475 | 23/32 | .328 | FBL-850 | .850 | 31/32 | .586 |
| FBL-500 | .500 | 23/32 | .328 | FBL-875 | .875 | 31/32 | .750 |
| FBL-525 | .525 | 23/32 | .453 | FBL-900 | .900 | 31/32 | .750 |
| FBL-550 | .550 | 23/32 | .438 | FBL-925 | .925 | 31/32 | .750 |
| FBL-575 | .575 | 31/32 | .438 | FBL-975 | .975 | 31/32 | .875 |
| FBL-600 | .600 | 31/32 | .453 | FBL-1000 | 1.000 | 31/32 | .875 |
| FBL-625 | .625 | 31/32 | .453 | FBL-1025 | 1.025 | 31/32 | .875 |
| FBL-650 | .650 | 31/32 | .453 | FBL-1100 | 1.100 | 31/32 | .875 |
| FBL-675 | .675 | 31/32 | .500 | FBL-1125 | 1.125 | 31/32 | .875 |
| FBL-700 | .700 | 31/32 | .500 | FBL-1150 | 1.150 | 31/32 | .875 |
| FBL-725 | .725 | 31/32 | .500 | FBL-1175 | 1.175 | 55/64 | .875 |
| FBL-750 | .750 | 31/32 | .500 | FBL-1275 | 1.275 | 31/32 | .875 |
| FBL-775 | .775 | 31/32 | .500 | FBL-1500 | 1.500 | 31/32 | .875 |
| FBL-800 | .800 | 31/32 | .625 | | | | |



| PART No. | Inside Dia. (IN.) | Ferrule Length (IN.) | Hole Size (IN.) |
|----------|-------------------|----------------------|-----------------|
| FBS-500 | .500 | 1/2 | .328 |



BRASS RING-BARB FITTINGS FOR POLY TUBE

(USE WITH POLYETHYLENE TUBE: Page 35)



COUPLING

Tube To
Tube

| PART No. | Tube O.D. | Tube I.D. |
|----------|-----------|-----------------|
| 962-4 | 1/4 | .170 |
| 962-6 | 3/8 | .250 |
| 962-8 | 1/2 | .375 |
| 962-64 | 3/8 | Reducing To 1/4 |



CONNECTOR

Tube To
Female Pipe

| PART No. | Tube O.D. | Tube I.D. | Pipe |
|----------|-----------|-----------|------|
| 966-4A | 1/4 | .170 | 1/8 |
| 966-4B | 1/4 | .170 | 1/4 |



CONNECTOR

Tube To
Male Pipe

| PART No. | Tube O.D. | Tube I.D. | Pipe |
|----------|-----------|-----------|------|
| 968-4A | 1/4 | .170 | 1/8 |
| 968-4B | 1/4 | .170 | 1/4 |
| 968-6A | 3/8 | .250 | 1/8 |
| 968-6B | 3/8 | .250 | 1/4 |



BULKHEAD UNION

| PART No. | Tube O.D. | Tube I.D. |
|----------|-----------|-----------|
| 977-4 | 1/4 | .170 |



90° ELBOW

Tube
To
Tube

| PART No. | Tube O.D. | Tube I.D. |
|----------|-----------|-----------|
| 965-4 | 1/4 | .170 |
| 965-6 | 3/8 | .250 |
| 965-8 | 1/2 | .375 |



90° ELBOW

Tube
To
Male Pipe

| PART No. | Tube O.D. | Tube I.D. | Pipe |
|----------|-----------|-----------|------|
| 969-4A | 1/4 | .170 | 1/8 |
| 969-4B | 1/4 | .170 | 1/4 |
| 969-6A | 3/8 | .250 | 1/8 |
| 969-6B | 3/8 | .250 | 1/4 |



TEE

Tube
Three Ends

| PART No. | Tube O.D. | Tube I.D. |
|----------|-----------|-----------|
| 964-4 | 1/4 | .170 |
| 964-6 | 3/8 | .250 |
| 964-8 | 1/2 | .375 |

Reducing

| PART No. | Tube O.D. | Tube I.D. |
|----------|-----------|------------------|
| 964-84 | 1/2 | Reducing 1/2 1/4 |

RING-BARB FITTINGS ARE DESIGNED FOR USE WITH FAIRVIEW POLYETHYLENE TUBE. THE BARB HAS A RAISED RING THAT IMBEDS INTO THE TUBE. THIS ASSURES A LEAKPROOF CONNECTION WHEN USED WITHIN THE NORMAL TEMPERATURE AND PRESSURE RANGE OF THE TUBE. SIMPLY PUSH FITTING INTO TUBE TO ASSEMBLE. NO TOOLS OR CLAMPS REQUIRED.

Note:

Use of Fairview Hose and Tube with other than Fairview original recommended fittings, may void warranty. Verify with a Fairview representative prior to installation.

BRASS SCREW-ON REUSABLE HOSE FITTINGS



HOSE FERRULES

| PART No. | Hose O.D. | Hose I. D. |
|----------|-----------|------------|
| 750-84 | 1/2 | 1/4 |
| 750-106 | 5/8 | 3/8 |
| 750-116 | 11/16 | 3/8 |
| 750-126 | 3/4 | 3/8 |
| 750-148 | 7/8 | 1/2 |



HOSE STEM

With
Male Pipe
Thread

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 751-4B | 1/4 | 1/4 |
| 751-6B | 3/8 | 1/4 |
| 751-6C | 3/8 | 3/8 |
| 751-8B | 1/2 | 1/4 |
| 751-8C | 1/2 | 3/8 |
| 751-8D | 1/2 | 1/2 |



HOSE STEM

With Female
Pipe Thread
(Two Piece
Swivel)

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| 752-4B | 1/4 | 1/4 |
| 752-6B | 3/8 | 1/4 |
| 752-6C | 3/8 | 3/8 |

STEEL ONE PIECE CRIMP HOSE ENDS (COMPRESSION STYLE)



USE WITH S.A.E. 100R1-AT, 100R2-AT, T1SN, T2SN, 100R4, 100R16 AND
100R17 HOSE (Pages 9 - 11, 18)

**ITEMS SHOWN ARE INTERCHANGEABLE WITH WEATHERHEAD "U" SERIES COUPLINGS.
(They are Fairview Equivalents and are NOT WeatherHead Original Product.)**



**Male
Pipe**

| PART No. | Hose I.D. | Pipe |
|-----------|-----------|-------|
| SC625-4A | 1/4 | 1/8 |
| SC625-4B | 1/4 | 1/4 |
| SC625-4C | 1/4 | 3/8 |
| SC625-4D | 1/4 | 1/2 |
| SC625-6B | 3/8 | 1/4 |
| SC625-6C | 3/8 | 3/8 |
| SC625-6D | 3/8 | 1/2 |
| SC625-8C | 1/2 | 3/8 |
| SC625-8D | 1/2 | 1/2 |
| SC625-8E | 1/2 | 3/4 |
| SC625-10D | 5/8 | 1/2 |
| SC625-10E | 5/8 | 3/4 |
| SC625-12D | 3/4 | 1/2 |
| SC625-12E | 3/4 | 3/4 |
| SC625-12H | 3/4 | 1 |
| SC625-16E | 1 | 3/4 |
| SC625-16H | 1 | 1 |
| SC625-20J | 1-1/4 | 1-1/4 |



**Male Pipe
(Working
Swivel)**

| PART No. | Hose I.D. | Pipe |
|-------------|-----------|------|
| SC625SW-4B | 1/4 | 1/4 |
| SC625SW-6B | 3/8 | 1/4 |
| SC625SW-6C | 3/8 | 3/8 |
| SC625SW-6D | 3/8 | 1/2 |
| SC625SW-8D | 1/2 | 1/2 |
| SC625SW-12E | 3/4 | 3/4 |
| SC625SW-16H | 1 | 1 |



**Female
Pipe**

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| SC626-4A | 1/4 | 1/8 |
| SC626-4B | 1/4 | 1/4 |
| SC626-6B | 3/8 | 1/4 |
| SC626-6C | 3/8 | 3/8 |
| SC626-8D | 1/2 | 1/2 |



**S.A.E. 37°
Male Flare**

| PART No. | Hose I.D. | Tube |
|------------|-----------|------|
| SC637-44 | 1/4 | 1/4 |
| SC637-45 | 1/4 | 5/16 |
| SC637-46 | 1/4 | 3/8 |
| SC637-66 | 3/8 | 3/8 |
| SC637-68 | 3/8 | 1/2 |
| SC637-610 | 3/8 | 5/8 |
| SC637-88 | 1/2 | 1/2 |
| SC637-810 | 1/2 | 5/8 |
| SC637-812 | 1/2 | 3/4 |
| SC637-108 | 5/8 | 1/2 |
| SC637-1010 | 5/8 | 5/8 |
| SC637-1012 | 5/8 | 3/4 |
| SC637-1212 | 3/4 | 3/4 |
| SC637-1216 | 3/4 | 1 |
| SC637-1616 | 1 | 1 |



**Female
N.P.S.M. Pipe
(Swivel)**

| PART No. | Hose I.D. | Pipe |
|-------------|-----------|------|
| SC626SW-4B | 1/4 | 1/4 |
| SC626SW-6C | 3/8 | 3/8 |
| SC626SW-6D | 3/8 | 1/2 |
| SC626SW-8D | 1/2 | 1/2 |
| SC626SW-12E | 3/4 | 3/4 |
| SC626SW-16H | 1 | 1 |



**Female
(Grease Tap)**

| PART No. | Hose I.D. | Thread |
|------------|-----------|----------|
| SC626GT-4A | 1/4 | 1/2 - 27 |



**S.A.E. 37°
Female Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|------------|-----------|-------|
| SC638-44 | 1/4 | 1/4 |
| SC638-45 | 1/4 | 5/16 |
| SC638-46 | 1/4 | 3/8 |
| SC638-64 | 3/8 | 1/4 |
| SC638-66 | 3/8 | 3/8 |
| SC638-68 | 3/8 | 1/2 |
| SC638-610 | 3/8 | 5/8 |
| SC638-86 | 1/2 | 3/8 |
| SC638-88 | 1/2 | 1/2 |
| SC638-810 | 1/2 | 5/8 |
| SC638-812 | 1/2 | 3/4 |
| SC638-1010 | 5/8 | 5/8 |
| SC638-1012 | 5/8 | 3/4 |
| SC638-1210 | 3/4 | 5/8 |
| SC638-1212 | 3/4 | 3/4 |
| SC638-1214 | 3/4 | 7/8 |
| SC638-1216 | 3/4 | 1 |
| SC638-1616 | 1 | 1 |
| SC638-2020 | 1-1/4 | 1-1/4 |



**S.A.E. 45°
Female Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|------------|-----------|------|
| SC628-66 | 3/8 | 3/8 |
| SC628-1212 | 3/4 | 3/4 |



**S.A.E. 45°
Inverted Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| SC635-44 | 1/4 | 1/4 |
| SC635-65 | 3/8 | 5/16 |
| SC635-66 | 3/8 | 3/8 |
| SC635-88 | 1/2 | 1/2 |



**Male
O-Ring Boss**

| PART No. | Hose I.D. | O-Ring |
|------------|-----------|-------------|
| SC643-66 | 3/8 | 9/16 - 18 |
| SC643-68 | 3/8 | 3/4 - 16 |
| SC643-610 | 3/8 | 7/8 - 14 |
| SC643-88 | 1/2 | 3/4 - 16 |
| SC643-810 | 1/2 | 7/8 - 14 |
| SC643-1212 | 3/4 | 1-1/16 - 12 |



**Male
O-Ring Boss
(Swivel)**

| PART No. | Hose I.D. | O-Ring |
|-------------|-----------|----------|
| SC643SW-88 | 1/2 | 3/4 - 16 |
| SC643SW-810 | 1/2 | 7/8 - 14 |



**Male O-Ring
Face Seal**

| PART No. | Hose I.D. | ORFS |
|-----------|-----------|------------|
| SC653-66 | 3/8 | 11/16 - 16 |
| SC653-68 | 3/8 | 13/16 - 16 |
| SC653-88 | 1/2 | 13/16 - 16 |
| SC653-810 | 1/2 | 1 - 14 |



**Female O-Ring
Face Seal
(Swivel)**

| PART No. | Hose I.D. | ORFS |
|------------|-----------|-------------|
| SC658-44 | 1/4 | 9/16 - 18 |
| SC658-46 | 1/4 | 11/16 - 16 |
| SC658-66 | 3/8 | 11/16 - 16 |
| SC658-68 | 3/8 | 13/16 - 16 |
| SC658-88 | 1/2 | 13/16 - 16 |
| SC658-810 | 1/2 | 1 - 14 |
| SC658-1010 | 5/8 | 1 - 14 |
| SC658-1012 | 5/8 | 1-3/16 - 12 |
| SC658-1212 | 3/4 | 1-3/16 - 12 |
| SC658-1616 | 1 | 1-7/16 - 12 |



STEEL ONE PIECE CRIMP HOSE ENDS (COMPRESSION STYLE)

USE WITH S.A.E. 100R1-AT, 100R2-AT, T1SN, T2SN, 100R4, 100R16 AND
100R17 HOSE (Pages 9 - 11, 18)

**ITEMS SHOWN ARE INTERCHANGEABLE WITH WEATHERHEAD "U" SERIES COUPLINGS.
(They are Fairview Equivalents and are NOT WeatherHead Original Product.)**



**Tube Repair
(Flareless)**

| PART No. | Hose I.D. | Tube |
|------------|-----------|------|
| SC667-44 | 1/4 | 1/4 |
| SC667-65 | 3/8 | 5/16 |
| SC667-66 | 3/8 | 3/8 |
| SC667-88 | 1/2 | 1/2 |
| SC667-810 | 1/2 | 5/8 |
| SC667-1212 | 3/4 | 3/4 |



Hose Splicer

| PART No. | Hose I.D. |
|------------|-----------|
| SC629-44 | 1/4 |
| SC629-66 | 3/8 |
| SC629-88 | 1/2 |
| SC629-1212 | 3/4 |
| SC629-1616 | 1 |



**British Standard
Pipe Parallel
Female (Swivel)
(BSPP)**

| PART No. | Hose I.D. | Pipe |
|----------------|-----------|----------|
| SCK631BSP-66 | 3/8 | 3/8 - 19 |
| SCK631BSP-88 | 1/2 | 1/2 - 14 |
| SCK631BSP-1212 | 3/4 | 3/4 - 14 |



**90° ELBOW
Male Pipe
(Working
Swivel)**

| PART No. | Hose I.D. | Pipe |
|------------|-----------|------|
| SC616SW-4B | 1/4 | 1/4 |
| SC616SW-6C | 3/8 | 3/8 |
| SC616SW-8D | 1/2 | 1/2 |



**90° ELBOW
Male O-Ring
Boss
(Working
Swivel)**

| PART No. | Hose I.D. | O-Ring |
|-----------|-----------|-----------|
| SC636-66 | 3/8 | 9/16 - 18 |
| SC636-68 | 3/8 | 3/4 - 16 |
| SC636-610 | 3/8 | 7/8 - 14 |
| SC636-88 | 1/2 | 3/4 - 16 |
| SC636-810 | 1/2 | 7/8 - 14 |



**90° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|------------|-----------|------|
| SC639-44 | 1/4 | 1/4 |
| SC639-45 | 1/4 | 5/16 |
| SC639-46 | 1/4 | 5/16 |
| SC639-66 | 3/8 | 3/8 |
| SC639-68 | 3/8 | 1/2 |
| SC639-88 | 1/2 | 1/2 |
| SC639-810 | 1/2 | 5/8 |
| SC639-1010 | 5/8 | 5/8 |
| SC639-1212 | 3/4 | 3/4 |
| SC639-1616 | 1 | 1 |



**90° ELBOW
(LONG STYLE)
S.A.E. 37°
Female Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|-------------|-----------|------|
| SC639L-44 | 1/4 | 1/4 |
| SC639L-66 | 3/8 | 3/8 |
| SC639L-68 | 3/8 | 1/2 |
| SC639L-88 | 1/2 | 1/2 |
| SC639L-1212 | 3/4 | 3/4 |



**90° ELBOW
S.A.E. 45°
Female Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| SC641-66 | 3/8 | 3/8 |



**90° ELBOW
S.A.E. 45°
Inverted
Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| SC631-44 | 1/4 | 1/4 |
| SC631-66 | 3/8 | 3/8 |
| SC631-88 | 1/2 | 1/2 |



**90° ELBOW
British Standard
Parallel Pipe
Female (Swivel)
(BSPP)**

| PART No. | Hose I.D. | BSPP |
|--------------|-----------|----------|
| SCK639BSP-66 | 3/8 | 3/8 - 19 |
| SCK639BSP-88 | 1/2 | 1/2 - 14 |



**90° ELBOW
Female O-Ring
Face Seal
(Swivel)**

| PART No. | HOSE | ORFS |
|------------|------|-------------|
| SC659-44 | 1/4 | 9/16 - 18 |
| SC659-46 | 1/4 | 11/16 - 16 |
| SC659-66 | 3/8 | 11/16 - 16 |
| SC659-68 | 3/8 | 13/16 - 16 |
| SC659-88 | 1/2 | 13/16 - 16 |
| SC659-810 | 1/2 | 1 - 14 |
| SC659-1010 | 5/8 | 1 - 14 |
| SC659-1012 | 5/8 | 1-3/16 - 12 |
| SC659-1212 | 3/4 | 1-3/16 - 12 |
| SC659-1616 | 1 | 1-7/16 - 12 |



**45° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|------------|-----------|------|
| SC640-44 | 1/4 | 1/4 |
| SC640-66 | 3/8 | 3/8 |
| SC640-68 | 3/8 | 1/2 |
| SC640-88 | 1/2 | 1/2 |
| SC640-810 | 1/2 | 5/8 |
| SC640-1212 | 3/4 | 3/4 |
| SC640-1616 | 1 | 1 |



**45° ELBOW
S.A.E. 45°
Inverted Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| SC632-44 | 1/4 | 1/4 |
| SC632-66 | 3/8 | 3/8 |



**45° ELBOW
Female O-Ring
Face Seal
(Swivel)**

| PART No. | Hose I.D. | ORFS |
|-----------|-----------|------------|
| SC650-44 | 1/4 | 9/16 - 18 |
| SC650-66 | 3/8 | 11/16 - 16 |
| SC650-88 | 1/2 | 13/16 - 16 |
| SC650-810 | 1/2 | 1 - 14 |

STEEL ONE PIECE CRIMP HOSE ENDS

(BITE-TO-THE-WIRE)



USE WITH S.A.E. 100R1-AT, 100R2-AT, T1SN, T2SN, 100R16 AND
100R17 HOSE (Pages 9 - 10, 18)

ITEMS SHOWN ARE INTERCHANGEABLE WITH PARKER "43" SERIES COUPLINGS.
(They are Fairview Equivalents and are NOT PARKER Original Product.)



Male Pipe

| PART No. | Hose I.D. | Pipe |
|-----------|-----------|-------|
| SC925-4A | 1/4 | 1/8 |
| SC925-4B | 1/4 | 1/4 |
| SC925-4C | 1/4 | 3/8 |
| SC925-4D | 1/4 | 1/2 |
| SC925-6B | 3/8 | 1/4 |
| SC925-6C | 3/8 | 3/8 |
| SC925-6D | 3/8 | 1/2 |
| SC925-8C | 1/2 | 3/8 |
| SC925-8D | 1/2 | 1/2 |
| SC925-8E | 1/2 | 3/4 |
| SC925-12D | 3/4 | 1/2 |
| SC925-12E | 3/4 | 3/4 |
| SC925-12H | 3/4 | 1 |
| SC925-16E | 1 | 3/4 |
| SC925-16H | 1 | 1 |
| SC925-20J | 1-1/4 | 1-1/4 |



**Male Pipe
(Working Swivel)**

| PART No. | Hose I.D. | Pipe |
|-------------|-----------|------|
| SC925SW-4B | 1/4 | 1/4 |
| SC925SW-6B | 3/8 | 1/4 |
| SC925SW-6C | 3/8 | 3/8 |
| SC925SW-6D | 3/8 | 1/2 |
| SC925SW-8D | 1/2 | 1/2 |
| SC925SW-12E | 3/4 | 3/4 |
| SC925SW-16H | 1 | 1 |



Female Pipe

| PART No. | Hose I.D. | Pipe |
|----------|-----------|------|
| SC926-4B | 1/4 | 1/4 |
| SC926-6B | 3/8 | 1/4 |
| SC926-6C | 3/8 | 3/8 |
| SC926-8D | 1/2 | 1/2 |



**S.A.E. 37°
Male Flare**

| PART No. | Hose I.D. | Tube |
|------------|-----------|------|
| SC937-44 | 1/4 | 1/4 |
| SC937-45 | 1/4 | 5/16 |
| SC937-46 | 1/4 | 3/8 |
| SC937-66 | 3/8 | 3/8 |
| SC937-68 | 3/8 | 1/2 |
| SC937-88 | 1/2 | 1/2 |
| SC937-810 | 1/2 | 5/8 |
| SC937-812 | 1/2 | 3/4 |
| SC937-1010 | 5/8 | 5/8 |
| SC937-1012 | 5/8 | 3/4 |
| SC937-1212 | 3/4 | 3/4 |
| SC937-1216 | 3/4 | 1 |
| SC937-1616 | 1 | 1 |



**S.A.E. 37°
Female Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|------------|-----------|-------|
| SC938-44 | 1/4 | 1/4 |
| SC938-45 | 1/4 | 5/16 |
| SC938-46 | 1/4 | 3/8 |
| SC938-64 | 3/8 | 1/4 |
| SC938-66 | 3/8 | 3/8 |
| SC938-68 | 3/8 | 1/2 |
| SC938-610 | 3/8 | 5/8 |
| SC938-86 | 1/2 | 3/8 |
| SC938-88 | 1/2 | 1/2 |
| SC938-810 | 1/2 | 5/8 |
| SC938-812 | 1/2 | 3/4 |
| SC938-1010 | 5/8 | 5/8 |
| SC938-1012 | 5/8 | 3/4 |
| SC938-1210 | 3/4 | 5/8 |
| SC938-1212 | 3/4 | 3/4 |
| SC938-1214 | 3/4 | 7/8 |
| SC938-1216 | 3/4 | 1 |
| SC938-1612 | 1 | 3/4 |
| SC938-1616 | 1 | 1 |
| SC938-2020 | 1-1/4 | 1-1/4 |
| SC938-2424 | 1-1/2 | 1-1/2 |



**Female
NPSM Pipe
(Swivel)**

| PART No. | Hose I.D. | Pipe |
|-------------|-----------|------|
| SC926SW-4B | 1/4 | 1/4 |
| SC926SW-6C | 3/8 | 3/8 |
| SC926SW-6D | 3/8 | 1/2 |
| SC926SW-8D | 1/2 | 1/2 |
| SC926SW-12E | 3/4 | 3/4 |
| SC926SW-16H | 1 | 1 |



**Female
(Grease Tap)**

| PART No. | Hose I.D. | Thread |
|------------|-----------|----------|
| SC926GT-4A | 1/4 | 1/2 - 27 |



**S.A.E. 45°
Female Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|------------|-----------|------|
| SC928-66 | 3/8 | 3/8 |
| SC928-1212 | 3/4 | 3/4 |



**S.A.E. 45°
Inverted Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| SC935-44 | 1/4 | 1/4 |
| SC935-66 | 3/8 | 3/8 |



**Male
O-Ring Boss**

| PART No. | Hose I.D. | O-Ring |
|------------|-----------|-------------|
| SC943-44 | 1/4 | 7/16 - 18 |
| SC943-46 | 1/4 | 9/16 - 18 |
| SC943-66 | 3/8 | 9/16 - 18 |
| SC943-68 | 3/8 | 3/4 - 16 |
| SC943-88 | 1/2 | 3/4 - 16 |
| SC943-810 | 1/2 | 7/8 - 14 |
| SC943-1212 | 3/4 | 1-1/16 - 12 |



**Male
O-Ring Boss
(Working Swivel)**

| PART No. | Hose I.D. | O-Ring |
|------------|-----------|----------|
| SC943SW-68 | 3/8 | 3/4 - 16 |
| SC943SW-88 | 1/2 | 3/4 - 16 |



**Male
O-Ring Face
Seal**

| PART No. | Hose I.D. | ORFS |
|------------|-----------|-------------|
| SC953-44 | 1/4 | 9/16 - 18 |
| SC953-66 | 3/8 | 11/16 - 16 |
| SC953-68 | 3/8 | 13/16 - 16 |
| SC953-88 | 1/2 | 13/16 - 16 |
| SC953-810 | 1/2 | 1 - 14 |
| SC953-1010 | 5/8 | 1 - 14 |
| SC953-1212 | 3/4 | 1-3/16 - 12 |



**Female
O-Ring Face
Seal
(Swivel)**

| PART No. | Hose I.D. | ORFS |
|------------|-----------|-------------|
| SC958-44 | 1/4 | 9/16 - 18 |
| SC958-46 | 1/4 | 11/16 - 16 |
| SC958-66 | 3/8 | 11/16 - 16 |
| SC958-68 | 3/8 | 13/16 - 16 |
| SC958-88 | 1/2 | 13/16 - 16 |
| SC958-810 | 1/2 | 1 - 14 |
| SC958-1010 | 5/8 | 1 - 14 |
| SC958-1012 | 5/8 | 1-3/16 - 12 |
| SC958-1212 | 3/4 | 1-3/16 - 12 |
| SC958-1616 | 1 | 1-7/16 - 12 |



**Tube
Repair
(Flareless)**

| PART No. | Hose I.D. | Tube |
|------------|-----------|------|
| SC967-65 | 3/8 | 5/16 |
| SC967-66 | 3/8 | 3/8 |
| SC967-88 | 1/2 | 1/2 |
| SC967-810 | 1/2 | 5/8 |
| SC967-1212 | 3/4 | 3/4 |

C

STEEL ONE PIECE CRIMP HOSE ENDS (BITE-TO-THE-WIRE)

USE WITH S.A.E. 100R1-AT, 100R2-AT, T1SN, T2SN, 100R16 AND
100R17 HOSE (Pages 9 - 10, 18)

**ITEMS SHOWN ARE INTERCHANGEABLE WITH PARKER "43" SERIES COUPLINGS.
(They are Fairview Equivalents and are NOT PARKER Original Product.)**



Hose Splicer

| PART No. | Hose I.D. |
|------------|-----------|
| SC929-44 | 1/4 |
| SC929-66 | 3/8 |
| SC929-88 | 1/2 |
| SC929-1212 | 3/4 |



British Standard Pipe Parallel Female (Swivel) (BSPP)

| PART No. | Hose I.D. | Pipe |
|-------------|-----------|----------|
| SC931BSP-44 | 1/4 | 1/4 - 19 |
| SC931BSP-66 | 3/8 | 3/8 - 19 |
| SC931BSP-88 | 1/2 | 1/2 - 14 |



Female 30° JIS Flare Parallel Pipe Female (Swivel)

| PART No. | Hose I.D. | Pipe |
|-------------|-----------|------|
| SC931JIS-66 | 3/8 | 3/8 |



Universal Seat (Light) Female (Swivel) (DIN)

| PART No. | Hose I.D. | Tube | Metric |
|--------------|-----------|-------|---------|
| SC931LM-6-16 | 3/8 | 10 MM | M16X1.5 |
| SC931LM-6-18 | 3/8 | 12 MM | M18X1.5 |
| SC931LM-8-22 | 1/2 | 15 MM | M22X1.5 |



90° ELBOW Male Pipe (Working Swivel)

| PART No. | Hose I.D. | Pipe |
|------------|-----------|------|
| SC916SW-4B | 1/4 | 1/4 |
| SC916SW-6C | 3/8 | 3/8 |
| SC916SW-8D | 1/2 | 1/2 |



90° ELBOW Male O-Ring Boss (Working Swivel)

| PART No. | Hose I.D. | O-Ring |
|-----------|-----------|-----------|
| SC936-66 | 3/8 | 9/16 - 18 |
| SC936-68 | 3/8 | 3/4 - 16 |
| SC936-88 | 1/2 | 3/4 - 16 |
| SC936-810 | 1/2 | 7/8 - 14 |



90° ELBOW S.A.E. 37° Female Flare (Swivel)

| PART No. | Hose I.D. | Tube |
|------------|-----------|-------|
| SC939-44 | 1/4 | 1/4 |
| SC939-46 | 1/4 | 3/8 |
| SC939-66 | 3/8 | 3/8 |
| SC939-68 | 3/8 | 1/2 |
| SC939-88 | 1/2 | 1/2 |
| SC939-810 | 1/2 | 5/8 |
| SC939-1010 | 5/8 | 5/8 |
| SC939-1212 | 3/4 | 3/4 |
| SC939-1616 | 1 | 1 |
| SC939-2020 | 1-1/4 | 1-1/4 |



90° ELBOW (LONG STYLE) S.A.E. 37° Female Flare (Swivel)

| PART No. | Hose I.D. | Tube |
|-------------|-----------|------|
| SC939L-44 | 1/4 | 1/4 |
| SC939L-46 | 1/4 | 3/8 |
| SC939L-66 | 3/8 | 3/8 |
| SC939L-88 | 1/2 | 1/2 |
| SC939L-810 | 1/2 | 5/8 |
| SC939L-1212 | 3/4 | 3/4 |
| SC939L-1616 | 1 | 1 |



90° ELBOW S.A.E. 45° Female Flare (Swivel)

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| SC941-66 | 3/8 | 3/8 |



90° ELBOW S.A.E. 45° Inverted Flare (Swivel)

| PART No. | Hose I.D. | Tube |
|----------|-----------|------|
| SC931-44 | 1/4 | 1/4 |
| SC931-66 | 3/8 | 3/8 |



90° ELBOW Female O-Ring Face Seal (Swivel)

| PART No. | HOSE | ORFS |
|------------|------|-------------|
| SC959-44 | 1/4 | 9/16 - 18 |
| SC959-46 | 1/4 | 11/16 - 16 |
| SC959-66 | 3/8 | 11/16 - 16 |
| SC959-68 | 3/8 | 13/16 - 16 |
| SC959-88 | 1/2 | 13/16 - 16 |
| SC959-810 | 1/2 | 1 - 14 |
| SC959-1010 | 5/8 | 1 - 14 |
| SC959-1212 | 3/4 | 1-3/16 - 12 |
| SC959-1616 | 1 | 1-7/16 - 12 |



90° ELBOW British Standard Pipe Parallel Female (Swivel) (BSPP)

| PART No. | Hose I.D. | Pipe |
|-------------|-----------|----------|
| SC939BSP-44 | 1/4 | 1/4 - 19 |
| SC939BSP-66 | 3/8 | 3/8 - 19 |
| SC939BSP-88 | 1/2 | 1/2 - 14 |



45° ELBOW S.A.E. 37° Female Flare (Swivel)

| PART No. | Hose I.D. | Tube |
|------------|-----------|------|
| SC940-44 | 1/4 | 1/4 |
| SC940-66 | 3/8 | 3/8 |
| SC940-68 | 3/8 | 1/2 |
| SC940-88 | 1/2 | 1/2 |
| SC940-810 | 1/2 | 5/8 |
| SC940-1010 | 5/8 | 5/8 |
| SC940-1212 | 3/4 | 3/4 |
| SC940-1616 | 1 | 1 |



45° ELBOW Female O-Ring Face Seal (Swivel)

| PART No. | Hose I.D. | ORFS |
|------------|-----------|-------------|
| SC950-44 | 1/4 | 9/16 - 18 |
| SC950-46 | 1/4 | 11/16 - 16 |
| SC950-66 | 3/8 | 11/16 - 16 |
| SC950-68 | 3/8 | 13/16 - 16 |
| SC950-88 | 1/2 | 13/16 - 16 |
| SC950-810 | 1/2 | 1 - 14 |
| SC950-1010 | 5/8 | 1 - 14 |
| SC950-1212 | 3/4 | 1-3/16 - 12 |
| SC950-1616 | 1 | 1-7/16 - 12 |



45° ELBOW British Standard Pipe Parallel Female (Swivel) (BSPP)

| PART No. | Hose I.D. | Pipe |
|-------------|-----------|----------|
| SC940BSP-44 | 1/4 | 1/4 - 19 |
| SC940BSP-66 | 3/8 | 3/8 - 19 |

STEEL HOSE ENDS



LUBE HOSE ENDS FOR USE WITH S.A.E. 100R7 HOSE (Page 13 - 14)

| Male Pipe | | | S.A.E. Female Flare (Swivel) | | | STEEL REUSABLE HOSE ENDS | | |
|---|------------------|-------------|---|------------------|-------------|---|------------------|-------------|
|  | | |  | | |  | | |
| PART No. | Hose I.D. | Pipe | PART No. | Hose I.D. | Tube | PART No. | Hose I.D. | Tube |
| SC725-2A | 1/8 | 1/8 | SC738-24 | 1/8 | 1/4 | SR738-24 | 1/8 | 1/4 |
| SC725-3A | 3/16 | 1/8 | SC738-34 | 3/16 | 1/4 | | | |
| SC725-4B | 1/4 | 1/4 | SC738-44 | 1/4 | 1/4 | | | |
| | | | SC738-46 | 1/4 | 3/8 | | | |
| <hr/> | | | <hr/> | | | <hr/> | | |
|  | | | | | |  | | |
| PART No. | Hose I.D. | Pipe | | | | PART No. | Hose I.D. | Pipe |
| SC725SW-2A | 1/8 | 1/8 | | | | SR725SW-2A | 1/8 | 1/8 |



CRIMP SPECIFICATIONS FOR PERMANENTLY ATTACHED HOSE ENDS

All Hydraulic Assemblies should be pressure tested prior to use.

NOTE: Fairview's Accutek™ 100R7 hose ends are not to be swaged.

| HOSE | DESCRIPTION | DASH SIZE | HOSE I.D. | Crimp DIA. SC700 Series |
|------|--------------|-----------|-----------|-------------------------|
| HR7 | S.A.E. 100R7 | -2 | 1/8 | 0.3650 |
| | | -3 | 3/16 | 0.5100 |
| | | -4 | 1/4 | 0.5550 |

IMPORTANT: This reference chart is provided by Fairview Fittings & Manufacturing for convenience only. The information contained herein cannot be guaranteed because conditions of use are beyond our control, such as variances in hose outside diameters. This document should not be substituted for the judgement of a qualified professional. Assemblies should be tested prior to installation. The user of this information assumes all risk associated with its use.

STEEL HOSE INSERTS FOR USE WITH 100R4 HOSE (Page 11)

| CONNECTOR Hose Insert To Male Pipe | | | 90° ELBOW Hose Insert To Male Pipe | | | 45° ELBOW Hose Insert To Male Pipe | | |
|---|------------------|---------------|---|------------------|---------------|---|------------------|---------------|
|  | | |  | | |  | | |
| PART No. | Hose I.D. | Pipe | PART No. | Hose I.D. | Pipe | PART No. | Hose I.D. | Pipe |
| S1125-10C | 5/8 | 3/8 | S1139-10D | 5/8 | 1/2 | S1140-10D | 5/8 | 1/2 |
| S1125-10D | 5/8 | 1/2 | S1139-12E | 3/4 | 3/4 | S1140-12E | 3/4 | 3/4 |
| S1125-12E | 3/4 | 3/4 | S1139-16H | 1 | 1 | | | |
| S1125-16E | 1 | 3/4 | | | | | | |
| <hr/> | | | <hr/> | | | <hr/> | | |
|  | | |  | | |  | | |
| PART No. | Hose I.D. | O-Ring | PART No. | Hose I.D. | O-Ring | PART No. | Hose I.D. | O-Ring |
| SO1125-6 | 3/8 | 9/16 - 18 | SO1140-16 | 1 | 1-5/16 - 12 | SO1139-4 | 1/4 | 7/16 - 20 |
| SO1125-16 | 1 | 1-5/16 - 12 | | | | SO1139-6 | 3/8 | 9/16 - 18 |
| SO1125-20 | 1-1/4 | 1-5/8 - 12 | | | | SO1139-8 | 1/2 | 3/4 - 16 |
| | | | | | | SO1139-16 | 1 | 1-5/16 - 12 |
| | | | | | | SO1139-1612 | 1 | 1-1/16 - 12 |



STEEL REUSABLE HOSE ENDS

FOR USE WITH: S.A.E. 100R1-AT (NON SKIVE) HOSE

FOR USE WITH: S.A.E. 100R2-AT (NON SKIVE) HOSE



Male Pipe

| PART No. | Hose I.D. | Pipe |
|-----------|-----------|------|
| SRT125-4B | 1/4 | 1/4 |
| SRT125-6C | 3/8 | 3/8 |
| SRT125-8D | 1/2 | 1/2 |



S.A.E. 37° Female Flare (Swivel)

| PART No. | Hose I.D. | Tube |
|-------------|-----------|------|
| SRT138-44 * | 1/4 | 1/4 |
| SRT138-66 * | 3/8 | 3/8 |
| SRT138-88 * | 1/2 | 1/2 |



Male Pipe

| PART No. | Hose I.D. | Pipe |
|-----------|-----------|------|
| SRT225-4B | 1/4 | 1/4 |
| SRT225-6C | 3/8 | 3/8 |
| SRT225-8D | 1/2 | 1/2 |




S.A.E. 37° Female Flare (Swivel)

| PART No. | Hose I.D. | Tube |
|---------------|-----------|------|
| SRT238-44 * | 1/4 | 1/4 |
| SRT238-66 * | 3/8 | 3/8 |
| SRT238-88 * | 1/2 | 1/2 |
| SRT238-1212 * | 3/4 | 3/4 |

* Item is available in stainless steel. Change prefix to "SS" (eg. SSRT238-44) *

ASSEMBLY INSTRUCTIONS FOR NON-SKIVE S.A.E. 100R1, 100R2 & 100R5 STEEL REUSABLE HOSE ENDS

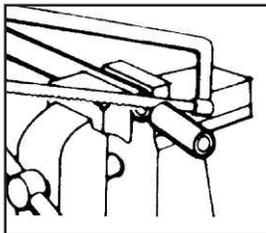


STEP 1

Using a fine-toothed saw or cut-off wheel, cut the hose square to the desired length. Clean hose with air pressure to remove dust particles.



STEP 2


Dip the end of the hose into a lubricant. Use a light viscosity oil (S.A.E. 10 or 20)

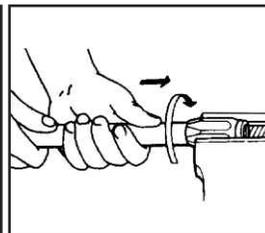

STEP 3


Turn the hose counterclockwise into the socket until the hose bottoms.

IMPORTANT: Back the hose off at least 1/2 turn, check to be sure that there is a gap of 1/32" to 1/16" between the hose end and the shoulder on the inside of the socket. Failure to provide this gap may cause cracking of the socket.

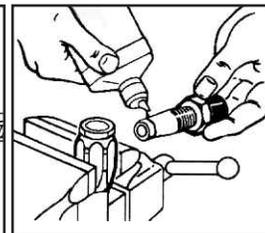

STEP 4

Dip the nipple end into a lubricant. Refer to step 2. (Light weight oil S.A.E. 10 or 20).

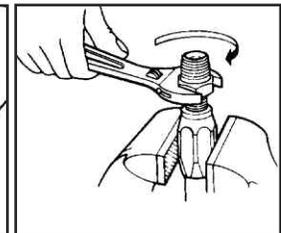

STEP 5

Turn the stem clockwise into the hose and socket until the stem hex shoulders against the ferrule.

CAUTION: Larger diameter hose is subject to "Neck Down" during cut-off operations. This condition does not allow the nipple to be pushed into the hose. When this happens, that portion of the hose I.D. must be chamfered with a sharp knife, just enough to allow the nipple to be pushed into the hose. Be sure to remove the cut-off rubber from the assembly.

ONE PIECE CRIMP ENDS FOR PTFE HOSE

FOR USE WITH S.A.E. 100R14 SMOOTH BORE PTFE HOSE (Page 17)

ALL WETTED PARTS ARE BRASS.



Male Pipe

| PART No. | Nominal Hose I.D. | Pipe |
|------------|-------------------|------|
| SCT425-4A | 1/4 | 1/8 |
| SCT425-4B | 1/4 | 1/4 |
| SCT425-6C | 3/8 | 3/8 |
| SCT425-8D | 1/2 | 1/2 |
| SCT425-10D | 5/8 | 1/2 |
| SCT425-12E | 3/4 | 3/4 |



S.A.E. 37° Female Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|-------------|-------------------|------|
| SCT438-44 | 1/4 | 1/4 |
| SCT438-66 | 3/8 | 3/8 |
| SCT438-88 | 1/2 | 1/2 |
| SCT438-1010 | 5/8 | 5/8 |
| SCT438-1212 | 3/4 | 3/4 |



**FOR USE WITH S.A.E. 100R14 SMOOTH BORE PTFE HOSE (Page 17)
ALL WETTED PARTS ARE BRASS**



Male Pipe

| PART No. | Nominal Hose I.D. | Pipe |
|-----------|-------------------|------|
| SR425-4A | 1/4 | 1/8 |
| SR425-4B | 1/4 | 1/4 |
| SR425-6B | 3/8 | 1/4 |
| SR425-6C | 3/8 | 3/8 |
| SR425-8D | 1/2 | 1/2 |
| SR425-10D | 5/8 | 1/2 |
| SR425-12E | 3/4 | 3/4 |
| SR425-16H | 1 | 1 |



**Female Swivel
37° J.I.C.
Flare**

| PART No. | Nominal Hose I.D. | Tube |
|------------|-------------------|------|
| SR438-44 | 1/4 | 1/4 |
| SR438-55 | 5/16 | 5/16 |
| SR438-66 | 3/8 | 3/8 |
| SR438-88 | 1/2 | 1/2 |
| SR438-1010 | 5/8 | 5/8 |
| SR438-1212 | 3/4 | 3/4 |
| SR438-1616 | 1 | 1 |



**45° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

| PART No. | Nominal Hose I.D. | Tube |
|----------|-------------------|------|
| SR440-55 | 5/16 | 5/16 |
| SR440-88 | 1/2 | 1/2 |



**Female Swivel
45° S.A.E.
Flare**

| PART No. | Nominal Hose I.D. | Tube |
|------------|-------------------|------|
| SR428-44 | 1/4 | 1/4 |
| SR428-55 | 5/16 | 5/16 |
| SR428-66 | 3/8 | 3/8 |
| SR428-88 | 1/2 | 1/2 |
| SR428-1010 | 5/8 | 5/8 |
| SR428-1212 | 3/4 | 3/4 |



Straight Tube

Used in conjunction with an 1161 nut & 1160 sleeve.

| PART No. | Nominal Hose I.D. | Tube |
|------------|-------------------|------|
| SR462-1010 | 5/8 | 5/8 |
| SR462-1212 | 3/4 | 3/4 |



Replacement Sleeve

| PART No. | Nominal Hose I.D. |
|----------|-------------------|
| SR4S-4 | 1/4 |
| SR4S-6 | 3/8 |
| SR4S-8 | 1/2 |
| SR4S-10 | 5/8 |
| SR4S-12 | 3/4 |
| SR4S-16 | 1 |



**D.O.T.
Air Brake
Compression**

| PART No. | Nominal Hose I.D. | Tube |
|------------|-------------------|------|
| SR468-1010 | 5/8 | 5/8 |



**D.O.T.
Air Brake
Sleeve**

| PART No. | Tube |
|----------|------|
| 1160-10 | 5/8 |
| 1160-12 | 3/4 |

For use with metal "Straight Tube".

STAINLESS STEEL AVAILABLE UPON REQUEST (SSR4 Series •)



**90° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

| PART No. | Nominal Hose I.D. | Tube |
|----------|-------------------|------|
| SR439-44 | 1/4 | 1/4 |
| SR439-66 | 3/8 | 3/8 |
| SR439-88 | 1/2 | 1/2 |




**D.O.T.
Air Brake
Nut**


| PART No. | Tube |
|----------|------|
| 1161-10 | 5/8 |
| 1161-12 | 3/4 |

For use with metal "Straight Tube".


PTFE REUSABLE FITTINGS ASSEMBLY INSTRUCTIONS

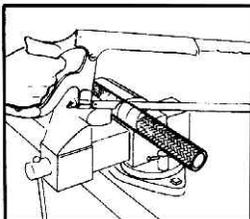


Step 1
Wrap masking tape around hose at desired length and cut square with fine-tooth hack saw. Trim any loose wires and slip two shells on back to back, placing them about 3" from each end of hose.

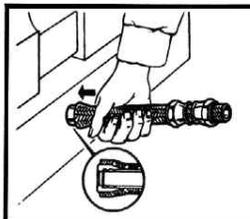


Step 2
Use a flat surface to push the sleeve over the tube underneath the wire until the tube stock butts against the inside shoulder of the sleeve.

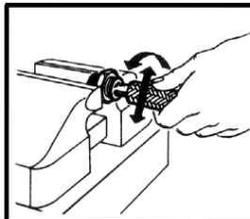

Step 3
Mount stem hex in vise. Work the hose bore over the stem to size tube.

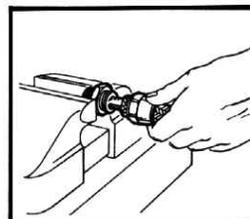

Step 4
Lubricate stem and shell threads. Push hose onto stem with twisting motion until hose seats against stem chamfer. Push shell forward and hand start threading.

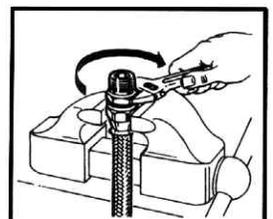

Step 5
Wrench tighten stem until clearance with shell is 1/32" or less. Clean, inspect and test.

FOR USE WITH S.A.E. 100R5 HOSE (Page 12)

ITEMS SHOWN ARE INTERCHANGEABLE WITH WEATHERHEAD "069E" SERIES COUPLINGS. (THEY ARE FAIRVIEW EQUIVALENTS AND ARE NOT WEATHERHEAD ORIGINAL PRODUCT.)



Male Pipe

| PART No. | Nominal Hose I.D. | Pipe |
|------------|-------------------|-------|
| SCW525-4B | 1/4 | 1/4 |
| SCW525-6B | 3/8 | 1/4 |
| SCW525-6C | 3/8 | 3/8 |
| SCW525-8C | 1/2 | 3/8 |
| SCW525-8D | 1/2 | 1/2 |
| SCW525-10D | 5/8 | 1/2 |
| SCW525-12E | 3/4 | 3/4 |
| SCW525-16H | 1 | 1 |
| SCW525-20J | 1-1/4 | 1-1/4 |
| SCW525-32M | 2 | 2 |



S.A.E. 37° Female Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|-------------|-------------------|-------|
| SCW538-44 | 1/4 | 1/4 |
| SCW538-66 | 3/8 | 3/8 |
| SCW538-88 | 1/2 | 1/2 |
| SCW538-108 | 5/8 | 1/2 |
| SCW538-1010 | 5/8 | 5/8 |
| SCW538-1212 | 3/4 | 3/4 |
| SCW538-1616 | 1 | 1 |
| SCW538-2020 | 1-1/4 | 1-1/4 |
| SCW538-3232 | 2 | 2 |



90° ELBOW S.A.E. 37° Female Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|-------------|-------------------|------|
| SCW539-44 | 1/4 | 1/4 |
| SCW539-66 | 3/8 | 3/8 |
| SCW539-88 | 1/2 | 1/2 |
| SCW539-1212 | 3/4 | 3/4 |
| SCW539-1616 | 1 | 1 |



S.A.E. 45° Female Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|-------------|-------------------|------|
| SCW528-66 | 3/8 | 3/8 |
| SCW528-1212 | 3/4 | 3/4 |



45° ELBOW S.A.E. 37° Female Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|-------------|-------------------|------|
| SCW540-1212 | 3/4 | 3/4 |
| SCW540-1616 | 1 | 1 |



90° ELBOW S.A.E. 45° Female Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|-------------|-------------------|------|
| SCW541-66 | 3/8 | 3/8 |
| SCW541-1212 | 3/4 | 3/4 |



FOR USE WITH S.A.E. 100R5 HOSE (Page 12)



Male Pipe

| PART No. | Nominal Hose I.D. | Pipe |
|-----------|-------------------|-------|
| SR525-4A | 1/4 | 1/8 |
| SR525-4B | 1/4 | 1/4 |
| SR525-5B | 5/16 | 1/4 |
| SR525-6B | 3/8 | 1/4 |
| SR525-6C | 3/8 | 3/8 |
| SR525-8C | 1/2 | 3/8 |
| SR525-8D | 1/2 | 1/2 |
| SR525-10D | 5/8 | 1/2 |
| SR525-12E | 3/4 | 3/4 |
| SR525-16H | 1 | 1 |
| SR525-20J | 1-1/4 | 1-1/4 |
| SR525-24K | 1-1/2 | 1-1/2 |
| SR525-32M | 2 | 2 |



S.A.E. 45° Male Flare

| PART No. | Nominal Hose I.D. | Tube |
|------------|-------------------|------|
| SR527-44 | 1/4 | 1/4 |
| SR527-66 | 3/8 | 3/8 |
| SR527-1010 | 5/8 | 5/8 |
| SR527-1212 | 3/4 | 3/4 |



S.A.E. 37° MALE FLARE

| PART No. | Nominal Hose I.D. | Tube |
|------------|-------------------|------|
| SR537-44 | 1/4 | 1/4 |
| SR537-66 | 3/8 | 3/8 |
| SR537-88 | 1/2 | 1/2 |
| SR537-1010 | 5/8 | 5/8 |
| SR537-1212 | 3/4 | 3/4 |
| SR537-1616 | 1 | 1 |



S.A.E. 45° Female Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|------------|-------------------|------|
| SR528-44 | 1/4 | 1/4 |
| SR528-55 | 5/16 | 5/16 |
| SR528-66 | 3/8 | 3/8 |
| SR528-88 | 1/2 | 1/2 |
| SR528-1010 | 5/8 | 5/8 |
| SR528-1212 | 3/4 | 3/4 |



S.A.E. 37° Female Flare (Swivel) Two Piece Design

| PART No. | Nominal Hose I.D. | Tube |
|------------|-------------------|-------|
| SR538-44 | 1/4 | 1/4 |
| SR538-55 | 5/16 | 5/16 |
| SR538-66 | 3/8 | 3/8 |
| SR538-88 | 1/2 | 1/2 |
| SR538-1010 | 5/8 | 5/8 |
| SR538-1212 | 3/4 | 3/4 |
| SR538-1616 | 1 | 1 |
| SR538-2020 | 1-1/4 | 1-1/4 |
| SR538-2424 | 1-1/2 | 1-1/2 |
| SR538-3232 | 2 | 2 |



S.A.E. 45° Inverted Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|----------|-------------------|------|
| SR535-66 | 3/8 | 3/8 |



90° ELBOW S.A.E. 37° Female Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|------------|-------------------|-------|
| SR539-44 | 1/4 | 1/4 |
| SR539-55 | 5/16 | 5/16 |
| SR539-66 | 3/8 | 3/8 |
| SR539-88 | 1/2 | 1/2 |
| SR539-1010 | 5/8 | 5/8 |
| SR539-1212 | 3/4 | 3/4 |
| SR539-1616 | 1 | 1 |
| SR539-2020 | 1-1/4 | 1-1/4 |



90° ELBOW (LONG STYLE) S.A.E. 37° Female Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|-----------|-------------------|------|
| SR539L-66 | 3/8 | 3/8 |



90° ELBOW S.A.E. 45° Female Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|------------|-------------------|------|
| SR541-44 | 1/4 | 1/4 |
| SR541-66 | 3/8 | 3/8 |
| SR541-1212 | 3/4 | 3/4 |



90° ELBOW S.A.E. 45° Inverted Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|----------|-------------------|------|
| SR595-66 | 3/8 | 3/8 |



45° ELBOW S.A.E. 37° Female Flare (Swivel)

| PART No. | Nominal Hose I.D. | Tube |
|------------|-------------------|------|
| SR540-44 | 1/4 | 1/4 |
| SR540-66 | 3/8 | 3/8 |
| SR540-88 | 1/2 | 1/2 |
| SR540-1010 | 5/8 | 5/8 |
| SR540-1212 | 3/4 | 3/4 |
| SR540-1616 | 1 | 1 |

C

PERMANENTLY ATTACHED HOSE ENDS

FOR SAE 100R7, 100R8 AND 100R18 THERMOPLASTIC HOSE (Pages 13 - 16, 19)
NOT FOR USE ON REDUCED OD S.A.E. 100R7



Male Pipe

| PART No. | Hose I.D. | Pipe |
|------------|-----------|------|
| SCTP25-2A | 1/8 | 1/8 |
| SCTP25-3A | 3/16 | 1/8 |
| SCTP25-3B | 3/16 | 1/4 |
| SCTP25-4A | 1/4 | 1/8 |
| SCTP25-4B | 1/4 | 1/4 |
| SCTP25-4C | 1/4 | 3/8 |
| SCTP25-5B | 5/16 | 1/4 |
| SCTP25-6C | 3/8 | 3/8 |
| SCTP25-8D | 1/2 | 1/2 |
| SCTP25-12E | 3/4 | 3/4 |
| SCTP25-16H | 1 | 1 |



Female NPSM Pipe (Swivel)

| PART No. | Hose I.D. | Pipe |
|-------------|-----------|------|
| SCTP26SW-3B | 3/16 | 1/4 |
| SCTP26SW-4B | 1/4 | 1/4 |
| SCTP26SW-6C | 3/8 | 3/8 |



90° ELBOW S.A.E. 37° Female Flare (Swivel)

| PART No. | Hose I.D. | Tube |
|-----------|-----------|------|
| SCTP39-34 | 3/16 | 1/4 |
| SCTP39-45 | 1/4 | 5/16 |
| SCTP39-66 | 3/8 | 3/8 |
| SCTP39-88 | 1/2 | 1/2 |



Male Pipe (Working Swivel)

| PART No. | Hose I.D. | Pipe |
|-------------|-----------|------|
| SCTP25SW-4B | 1/4 | 1/4 |
| SCTP25SW-6C | 3/8 | 3/8 |
| SCTP25SW-8D | 1/2 | 1/2 |



J.I.C. 37° Male Flare

| PART No. | Hose I.D. | Tube |
|-----------|-----------|------|
| SCTP37-66 | 3/8 | 3/8 |



45° ELBOW J.I.C. 37° Female Flare (Swivel)

| PART No. | Hose I.D. | Tube |
|-----------|-----------|------|
| SCTP40-66 | 3/8 | 3/8 |



S.A.E. 37° Female Flare (Swivel)

| PART No. | Hose I.D. | Tube |
|-------------|-----------|------|
| SCTP38-24 | 1/8 | 1/4 |
| SCTP38-34 | 3/16 | 1/4 |
| SCTP38-44 | 1/4 | 1/4 |
| SCTP38-45 | 1/4 | 5/16 |
| SCTP38-46 | 1/4 | 3/8 |
| SCTP38-66 | 3/8 | 3/8 |
| SCTP38-68 | 3/8 | 1/2 |
| SCTP38-88 | 1/2 | 1/2 |
| SCTP38-1212 | 3/4 | 3/4 |



Female O-Ring Face Seal (Swivel)

| PART No. | Hose I.D. | ORFS |
|-----------|-----------|------------|
| SCTP58-66 | 3/8 | 11/16 - 16 |

All Hydraulic Assemblies should be pressure tested prior to use.

CRIMP SPECIFICATIONS FOR PERMANENTLY ATTACHED HOSE ENDS (FOR USE WITH ALL HR7, HR8 & HR18 HOSE TYPES)

| Dash Size | Inside Diameter (IN.) | Crimp Outside Diameter (IN.) |
|-----------|-----------------------|------------------------------|
| -2 | 1/8 | 0.365 |
| -3 | 3/16 | 0.500 |
| -4 | 1/4 | 0.555 |
| -5 | 5/16 | 0.630 |
| -6 | 3/8 | 0.675 |
| -8 | 1/2 | 0.830 |
| -12 | 3/4 | 1.080 |
| -16 | 1 | 1.340 |

All Hydraulic Assemblies should be pressure tested prior to use.

NOTE: Also see Fairview's Accutek™ 100R7 lube hose ends SC700 & SR700 series.

All Hydraulic Assemblies should be pressure tested prior to use.

NOTE: Also see Fairview's Accutek™ 100R7 lube hose ends SC700 & SR700 series.

IMPORTANT: This reference chart is provided by Fairview Fittings & Manufacturing for convenience only. The information contained herein cannot be guaranteed because conditions of use are beyond our control, such as variances in hose outside diameters. This document should not be substituted for the judgement of a qualified professional. Assemblies should be tested prior to installation. The user of this information assumes all risk associated with its use.

STEEL ONE PIECE CRIMP MULTI-SPIRAL HOSE ENDS

(NON-SKIVE / BITE-TO-THE-WIRE)



FOR USE WITH S.A.E. 100R12 HOSE

ITEMS SHOWN ARE INTERCHANGEABLE WITH PARKER "71" SERIES COUPLINGS.
(They are Fairview Equivalents and are NOT PARKER Original Product.)



Male Pipe

| PART No. | Hose I.D. | Pipe |
|--------------|-----------|-------|
| SCT925MS-8D | 1/2 | 1/2 |
| SCT925MS-12E | 3/4 | 3/4 |
| SCT925MS-16H | 1 | 1 |
| SCT925MS-20J | 1-1/4 | 1-1/4 |
| SCT925MS-24K | 1-1/2 | 1-1/2 |



**Split Flange
Code 61**

| PART No. | Hose I.D. | Flange |
|---------------|-----------|--------|
| SCT900MS-1212 | 3/4 | 3/4 |
| SCT900MS-1616 | 1 | 1 |
| SCT900MS-2020 | 1-1/4 | 1-1/4 |

Code 62 Available SCT900MS62 in series.



**90° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|---------------|-----------|-------|
| SCT939MS-88 | 1/2 | 1/2 |
| SCT939MS-810 | 1/2 | 5/8 |
| SCT939MS-1212 | 3/4 | 3/4 |
| SCT939MS-1216 | 3/4 | 1 |
| SCT939MS-1616 | 1 | 1 |
| SCT939MS-2020 | 1-1/4 | 1-1/4 |



**S.A.E. 37°
Male Flare**

| PART No. | Hose I.D. | Tube |
|---------------|-----------|-------|
| SCT937MS-88 | 1/2 | 1/2 |
| SCT937MS-810 | 1/2 | 5/8 |
| SCT937MS-1212 | 3/4 | 3/4 |
| SCT937MS-1616 | 1 | 1 |
| SCT937MS-2020 | 1-1/4 | 1-1/4 |



**45° ELBOW
S.A.E. 37°
Female Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|---------------|-----------|-------|
| SCT940MS-88 | 1/2 | 1/2 |
| SCT940MS-810 | 1/2 | 5/8 |
| SCT940MS-1212 | 3/4 | 3/4 |
| SCT940MS-1216 | 3/4 | 1 |
| SCT940MS-1616 | 1 | 1 |
| SCT940MS-2020 | 1-1/4 | 1-1/4 |



**90° ELBOW
BSP Parallel
Female
60° Cone
(Swivel)**

| PART No. | Hose I.D. | Thread |
|------------------|-----------|----------|
| SCT939BSPMS-1212 | 3/4 | 3/4 - 14 |
| SCT939BSPMS-1616 | 1 | 1 - 11 |



**S.A.E. 37°
Female Flare
(Swivel)**

| PART No. | Hose I.D. | Tube |
|---------------|-----------|-------|
| SCT938MS-88 | 1/2 | 1/2 |
| SCT938MS-810 | 1/2 | 5/8 |
| SCT938MS-1212 | 3/4 | 3/4 |
| SCT938MS-1212 | 3/4 | 3/4 |
| SCT938MS-1216 | 3/4 | 1 |
| SCT938MS-2020 | 1-1/4 | 1-1/4 |
| SCT938MS-2424 | 1-1/2 | 1-1/2 |



**45° ELBOW
Split Flange
Code 61**

| PART No. | Hose I.D. | Flange |
|---------------|-----------|--------|
| SCT945MS-1212 | 3/4 | 3/4 |
| SCT945MS-1616 | 1 | 1 |
| SCT945MS-2020 | 1-1/4 | 1-1/4 |

Code 62 Available SCT945MS62 series.



**90° ELBOW
Female O-Ring
Face Seal
(Swivel)**

| PART No. | Hose I.D. | ORFS |
|---------------|-----------|--------------|
| SCT959MS-88 | 1/2 | 13/16 - 16 |
| SCT959MS-810 | 1/2 | 1 - 14 |
| SCT959MS-1212 | 3/4 | 1-3/16 - 12 |
| SCT959MS-1616 | 1 | 1-7/16 - 12 |
| SCT959MS-2020 | 1-1/4 | 1-11/16 - 12 |



**Female O-Ring
Face Seal
(Swivel)**

| PART No. | Hose I.D. | ORFS |
|---------------|-----------|--------------|
| SCT958MS-88 | 1/2 | 13/16 - 16 |
| SCT958MS-810 | 1/2 | 1 - 14 |
| SCT958MS-1212 | 3/4 | 1-3/16 - 12 |
| SCT958MS-1616 | 1 | 1-7/16 - 12 |
| SCT958MS-2020 | 1-1/4 | 1-11/16 - 12 |



**45° ELBOW
Female O-Ring
Face Seal
(Swivel)**

| PART No. | Hose I.D. | ORFS |
|---------------|-----------|-------------|
| SCT950MS-88 | 3/4 | 13/16 - 16 |
| SCT950MS-1212 | 3/4 | 1-3/16 - 12 |
| SCT950MS-1616 | 1 | 1-7/16 - 12 |



**90° ELBOW
Split Flange
Code 61**

| PART No. | Hose I.D. | Flange |
|---------------|-----------|--------|
| SCT990MS-1212 | 3/4 | 3/4 |
| SCT990MS-1216 | 3/4 | 1 |
| SCT990MS-1616 | 1 | 1 |
| SCT990MS-1620 | 1 | 1-1/4 |
| SCT990MS-2020 | 1-1/4 | 1-1/4 |

Code 62 Available SCT990MS62 series.



**British Standard
Pipe Parallel
Female
60° Cone
(Swivel)**

| PART No. | Hose I.D. | Thread |
|------------------|-----------|----------|
| SCT931BSPMS-1212 | 3/4 | 3/4 - 14 |
| SCT931BSPMS-1616 | 1 | 1 - 11 |



HYDRAULIC CRIMP INSTRUCTIONS

1.



1. Cut hose to length.

Using a cut-off saw or cut-off wheel, cut the hose square to the desired length.

Clean hose with air pressure to remove dust particles.

2.



2. Mark insertion Depth.

Find the insertion depth by measuring the distance from the end of the ferrule to the shoulder of the ferrule.

Using a ruler or by holding the hose next to the ferrule, mark a line on the hose indicating the insertion depth.

3.



3. Lubricate hose with hose assembly lubricant.

Place a small amount of lubricant on the outer and inner tube portion of the hose. Only use approved hose assembly lubricant.

Other non-approved lubricants or oil products may not be compatible with hose material.

4.



4. Insert fitting into hose.

Push the fitting into the hose until the insertion depth mark lines up with the end of the ferrule.

5.



figure 1



figure 2

5. Insert Hose into crimping machine.

When crimping Fairview's SC600 and SCK600 Series, align the dots on the ferrule with the top of the dies. (figure 1)

When crimping Fairview's SC500, SC900, SCAJ00, SCT900MS and SCTGW600 Series, align the top shoulder of the ferrule with the top of the dies and crimp the entire ferrule. (figure 2)

6.



6. Check Crimp Diameter.

After crimping verify crimp diameter is within specifications using calipers. Place caliper on the lower or smooth portion of the ferrule.

Do not place calipers on any raised ridges on the ferrule. Measure the top, middle and bottom of the ferrule to ensure crimp diameter is correct and uniform.

All Hydraulic Assemblies should be pressure tested prior to use.

FITTINGS

BRASS - STEEL - BLACK IRON



| | |
|--|---------|
| AIR BRAKE D.O.T. (FOR NYLON TUBE) | 59, 60 |
| AIR BRAKE D.O.T. (PUSH-TO-CONNECT) | 61, 62 |
| AIR BRAKE D.O.T. (FOR COPPER TUBE) | 60 |
| AIR BRAKE SERVICE KITS | 58 |
| AIR SHIFT TRANSMISSION (D.O.T.) | 72 |
| FLANGE ADAPTERS AND KITS (STEEL) | 78 |
| FLARE S.A.E. 45° (BRASS) | 69 - 71 |
| FLARE J.I.C. 37° (STEEL) | 74 - 77 |
| FLARELESS (STEEL) | 82 |
| GREASE FITTINGS (SEE TOOLS SECTION FOR GUNS) | 73 |
| NPSM SWIVEL ADAPTERS (STEEL) | 85, 86 |
| O-RING BOSS ADAPTERS (STEEL) | 79, 80 |
| O-RING FACE SEAL ADAPTERS (STEEL) | 81, 82 |
| PIPE FITTINGS (BRASS) | 63 - 66 |
| PIPE FITTINGS (BLACK IRON) | 67 - 69 |
| PIPE ADAPTERS (STEEL) | 83 - 85 |



AIR BRAKE SERVICE KITS

PART No. ABFR-KIT-1-PC (TUBE REPAIR KIT-PUSH-TO-CONNECT FITTINGS)

This kit includes a selection of Push-To-Connect fittings and tube to complete many temporary air brake tube repairs in the field or shop. Single sided carry case, with handle.

Push-To-Connect; Tube Repair Kit Selection:

| PART No. | Qty. | PART No. | Qty. |
|------------|--------|------------|--------|
| 1485-4-CUT | 24 In. | PC1468-6C | 2 PCS. |
| 1485-6-CUT | 24 In. | PC1468-8C | 1 PC. |
| 1485-8-CUT | 24 In. | PC1469-4A | 2 PCS. |
| PC1462-4 | 2 PCS. | PC1469-6B | 2 PCS. |
| PC1462-6 | 2 PCS. | PC1469-8C | 1 PC. |
| PC1462-8 | 2 PCS. | TK-1 | 1 PC. |
| PC1468-4A | 2 PCS. | ABFR-BOX-1 | 1 PC. |
| PC1468-6B | 2 PCS. | | |

No Tools Required

Overall:
 Height 12 inches
 Width 14-1/2 inches
 Depth 2-3/8 inches



PART No. ABFR-KIT-HAB (HAB HOSE REPAIR KIT)

Designed for use in the field, this kit includes a selection of items to complete many temporary air brake hose repairs. Single sided carry case, with handle.

D.O.T. Air Brake Hose Repair Kit Selection:

| PART No. | Qty. | PART No. | Qty. |
|-----------|--------|------------|--------|
| HAB-6-CUT | 16 In. | 1492SW-8 | 1 PC. |
| HAB-8-CUT | 16 In. | 4134-6B | 2 PCS. |
| 110-CB | 2 PCS. | 4134-6C | 2 PCS. |
| 110-DC | 2 PCS. | 4134-8C-WH | 2 PCS. |
| 121-M8 | 1 PCS. | 4134-8D-WH | 2 PCS. |
| 1492-6S | 1 PCS. | TK-1 | 1 PC. |
| 1492-8S | 1 PCS. | ABFR-BOX-1 | 1 PC. |
| 1492SW-6 | 1 PCS. | | |

Overall:
 Height 12 inches
 Width 14-1/2 inches
 Depth 2-3/8 inches



PART No. ABFR-KIT-1 (SERVICE KIT - SELECTION 1)

Designed for use in the field or shop, this kit includes a selection of items to complete many general repairs. Single sided carry case, with handle.

D.O.T. Air Brake Fittings; Service Kit Selection:

| PART No. | Description | Qty. | PART No. | Description | Qty. |
|----------|-------------|--------|----------|--------------------|--------|
| 121-M8 | SEALANT | 1 PC. | 1468-6B | CONNECTOR | 2 PCS. |
| 1460-4 | SLEEVE | 5 PCS. | 1468-8C | CONNECTOR | 1 PC. |
| 1460-6 | SLEEVE | 5 PCS. | 1469-4B | ELBOW | 2 PCS. |
| 1460-8 | SLEEVE | 5 PCS. | 1469-6B | ELBOW | 2 PCS. |
| 1461-4 | NUT | 2 PCS. | 1481-4 | INSERT | 5 PCS. |
| 1461-6 | NUT | 2 PCS. | 1481-6 | INSERT | 5 PCS. |
| 1461-8 | NUT | 2 PCS. | 1490-6 | SLEEVE | 6 PCS. |
| 1462-4 | UNION | 2 PCS. | 1491-6 | NUT | 4 PCS. |
| 1462-6 | UNION | 2 PCS. | 1494-6 | NUT, SPRING, GUARD | 2 PCS. |
| 1462-8 | UNION | 1 PC. | B1492-6C | HOSE END BODY | 4 PCS. |
| 1468-4A | CONNECTOR | 2 PCS. | 1495B-C | TERMINAL BOLT | 1 PC. |
| 1468-4B | CONNECTOR | 2 PCS. | B1492-6S | HOSE SPLICER BODY | 1 PC. |

Overall:
 Height 12 inches
 Width 14-1/2 inches
 Depth 2-3/8 inches



PART No. ABFR-KIT-2 (SERVICE KIT - SELECTION 2)

Designed for use in the field or shop, this kit includes a large selection of items to complete most general repairs in a Double sided carry case, with handle.

D.O.T. Air Brake & Pipe; Service Kit Selection:

| PART No. | Qty. | PART No. | Qty. | PART No. | Qty. | PART No. | Qty. |
|----------|--------|----------|--------|----------|--------|------------|--------|
| 103-A | 2 PCS. | 122-B | 3 PCS. | 1462-4 | 2 PCS. | 1469-6B | 2 PCS. |
| 103-B | 2 PCS. | 122-C | 2 PCS. | 1462-6 | 2 PCS. | 1469-6C | 2 PCS. |
| 103-C | 2 PCS. | 122-D | 2 PCS. | 1462-8 | 2 PCS. | 1469-8C | 2 PCS. |
| 103-D | 1 PC. | 1460-4 | 3 PCS. | 1462-10 | 1 PC. | 1481-4 | 3 PCS. |
| 110-BA | 3 PCS. | 1460-6 | 3 PCS. | 1468-4A | 2 PCS. | 1481-6 | 3 PCS. |
| 110-CB | 2 PCS. | 1460-8 | 3 PCS. | 1468-4B | 2 PCS. | 1481-8 | 3 PCS. |
| 110-DC | 2 PCS. | 1460-10 | 2 PCS. | 1468-6B | 2 PCS. | 1481-10 | 3 PCS. |
| 121-B | 3 PCS. | 1461-4 | 3 PCS. | 1468-6C | 2 PCS. | X115-B | 2 PCS. |
| 121-C | 2 PCS. | 1461-6 | 3 PCS. | 1468-8C | 2 PCS. | X115-C | 2 PCS. |
| 121-D | 2 PCS. | 1461-8 | 3 PCS. | 1469-4A | 2 PCS. | ABFR-BOX-2 | 1 PC. |
| 121-M8 | 2 PCS. | 1461-10 | 2 PCS. | 1469-4B | 2 PCS. | | |

Overall:
 Height 9-3/4 inches
 Width 14 inches
 Depth 4 inches



BRASS D.O.T. AIR BRAKE FITTINGS

(COMPLETE WITH FIXED INSERTS, FOR D.O.T. AIR BRAKE TUBE: PAGE 34)



INSERT

| PART No. | For Tube I.D. |
|----------|---------------|
| 1481-2 | .078 |
| 1481-4 | .170 |
| 1481-5 | .232 |
| 1481-6 | .250 |
| 1481-8 | .375 |
| 1481-10 | .440 |
| 1481-12 | .566 |



SLEEVE

| PART No. | Tube |
|----------|------|
| 1460-4 | 1/4 |
| 1460-6 | 3/8 |
| 1460-8 | 1/2 |
| 1460-10 | 5/8 |
| 1460-12 | 3/4 |



NUT

| PART No. | Tube |
|----------|------|
| 1461-4 | 1/4 |
| 1461-6 | 3/8 |
| 1461-8 | 1/2 |
| 1461-10 | 5/8 |
| 1461-12 | 3/4 |



UNION COUPLING

| PART No. | Tube |
|----------|------|
| 1462-4 | 1/4 |
| 1462-6 | 3/8 |
| 1462-8 | 1/2 |
| 1462-10 | 5/8 |
| 1462-12 | 3/4 |



CONNECTOR Tube To Female Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 1466-4A | 1/4 | 1/8 |
| 1466-4B | 1/4 | 1/4 |
| 1466-4C | 1/4 | 3/8 |
| 1466-6A | 3/8 | 1/8 |
| 1466-6B | 3/8 | 1/4 |
| 1466-6C | 3/8 | 3/8 |
| 1466-8C | 1/2 | 3/8 |
| 1466-8D | 1/2 | 1/2 |
| 1466-10C | 5/8 | 3/8 |
| 1466-10D | 5/8 | 1/2 |
| 1466-12D | 3/4 | 1/2 |
| 1466-12E | 3/4 | 3/4 |



CONNECTOR Tube To Male Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 1468-4A | 1/4 | 1/8 |
| 1468-4B | 1/4 | 1/4 |
| 1468-4C | 1/4 | 3/8 |
| 1468-4D | 1/4 | 1/2 |
| 1468-6A | 3/8 | 1/8 |
| 1468-6B | 3/8 | 1/4 |
| 1468-6C | 3/8 | 3/8 |
| 1468-6D | 3/8 | 1/2 |
| 1468-8B | 1/2 | 1/4 |
| 1468-8C | 1/2 | 3/8 |
| 1468-8D | 1/2 | 1/2 |
| 1468-8E | 1/2 | 3/4 |
| 1468-10C | 5/8 | 3/8 |
| 1468-10D | 5/8 | 1/2 |
| 1468-10E | 5/8 | 3/4 |
| 1468-12D | 3/4 | 1/2 |
| 1468-12E | 3/4 | 3/4 |



45° ELBOW Tube To Male Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 1474-4A | 1/4 | 1/8 |
| 1474-4B | 1/4 | 1/4 |
| 1474-6B | 3/8 | 1/4 |
| 1474-6C | 3/8 | 3/8 |
| 1474-6D | 3/8 | 1/2 |
| 1474-8B | 1/2 | 1/4 |
| 1474-8C | 1/2 | 3/8 |
| 1474-8D | 1/2 | 1/2 |
| 1474-10D | 5/8 | 1/2 |



90° ELBOW Tube To Tube

| PART No. | Tube |
|----------|------|
| 1465-4 | 1/4 |
| 1465-6 | 3/8 |
| 1465-8 | 1/2 |
| 1465-10 | 5/8 |
| 1465-12 | 3/4 |



90° ELBOW Tube To Male Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 1469-4A | 1/4 | 1/8 |
| 1469-4B | 1/4 | 1/4 |
| 1469-4C | 1/4 | 3/8 |
| 1469-4D | 1/4 | 1/2 |
| 1469-6A | 3/8 | 1/8 |
| 1469-6B | 3/8 | 1/4 |
| 1469-6C | 3/8 | 3/8 |
| 1469-6D | 3/8 | 1/2 |
| 1469-8B | 1/2 | 1/4 |
| 1469-8C | 1/2 | 3/8 |
| 1469-8D | 1/2 | 1/2 |
| 1469-10C | 5/8 | 3/8 |
| 1469-10D | 5/8 | 1/2 |
| 1469-10E | 5/8 | 3/4 |
| 1469-12D | 3/4 | 1/2 |
| 1469-12E | 3/4 | 3/4 |



90° ELBOW Tube To Female Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 1470-4A | 1/4 | 1/8 |
| 1470-4B | 1/4 | 1/4 |
| 1470-6A | 3/8 | 1/8 |
| 1470-6B | 3/8 | 1/4 |
| 1470-6C | 3/8 | 3/8 |
| 1470-8C | 1/2 | 3/8 |
| 1470-8D | 1/2 | 1/2 |
| 1470-10D | 5/8 | 1/2 |
| 1470-12D | 3/4 | 1/2 |



TEE Tube Three Ends

| PART No. | Tube |
|----------|------|
| 1464-4 | 1/4 |
| 1464-6 | 3/8 |
| 1464-8 | 1/2 |
| 1464-10 | 5/8 |
| 1464-12 | 3/4 |

Reducing

| | 1 | 2 | 3 |
|----------|-----|-----|-----|
| 1464R-64 | 3/8 | 3/8 | 1/4 |
| 1464R-86 | 1/2 | 1/2 | 3/8 |



TEE Ends Tube To Male Pipe Center Tube

| PART No. | Tube | Pipe |
|----------|------|------|
| 1471-4A | 1/4 | 1/8 |
| 1471-4B | 1/4 | 1/4 |
| 1471-6B | 3/8 | 1/4 |
| 1471-6C | 3/8 | 3/8 |
| 1471-8C | 1/2 | 3/8 |
| 1471-8D | 1/2 | 1/2 |
| 1471-10D | 5/8 | 1/2 |
| 1471-12D | 3/4 | 1/2 |



TEE Ends Tube Center Male Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 1472-4A | 1/4 | 1/8 |
| 1472-4B | 1/4 | 1/4 |
| 1472-6A | 3/8 | 1/8 |
| 1472-6B | 3/8 | 1/4 |
| 1472-6C | 3/8 | 3/8 |
| 1472-8B | 1/2 | 1/4 |
| 1472-8C | 1/2 | 3/8 |
| 1472-8D | 1/2 | 1/2 |
| 1472-10D | 5/8 | 1/2 |
| 1472-12D | 3/4 | 1/2 |
| 1472-12E | 3/4 | 3/4 |



TEE Female To Male Pipe Center Tube

| PART No. | Tube | Pipe |
|----------|------|------|
| 1476-4A | 1/4 | 1/8 |
| 1476-6B | 3/8 | 1/4 |



BULKHEAD UNION (With Lock Washer)

| PART No. | Tube |
|----------|------|
| 1477-4 | 1/4 |
| 1477-6 | 3/8 |
| 1477-8 | 1/2 |
| 1477-10 | 5/8 |



BRASS D.O.T. AIR BRAKE FITTINGS (FOR COPPER TUBE)



SLEEVE

| PART No. | Tube |
|----------|------|
| 1160-4 | 1/4 |
| 1160-6 | 3/8 |
| 1160-8 | 1/2 |
| 1160-10 | 5/8 |
| 1160-12 | 3/4 |



**CONNECTOR
Tube
To
Male Pipe**

| PART No. | Tube | Pipe |
|----------|------|------|
| 1168-4A | 1/4 | 1/8 |
| 1168-4B | 1/4 | 1/4 |
| 1168-6B | 3/8 | 1/4 |
| 1168-6C | 3/8 | 3/8 |
| 1168-8C | 1/2 | 3/8 |
| 1168-8D | 1/2 | 1/2 |



**90° ELBOW
Tube
To
Female Pipe**

| PART No. | Tube | Pipe |
|----------|------|------|
| 1170-4A | 1/4 | 1/8 |
| 1170-6B | 3/8 | 1/4 |



NUT

| PART No. | Tube |
|----------|------|
| 1161-4 | 1/4 |
| 1161-6 | 3/8 |
| 1161-8 | 1/2 |
| 1161-10 | 5/8 |
| 1161-12 | 3/4 |



**45° ELBOW
Tube
To
Male Pipe**

| PART No. | Tube | Pipe |
|----------|------|------|
| 1174-6B | 3/8 | 1/4 |
| 1174-6C | 3/8 | 3/8 |



**TEE
Tube
Three Ends**

| PART No. | Tube |
|----------|------|
| 1164-4 | 1/4 |
| 1164-6 | 3/8 |



**UNION
COUPLING**

| PART No. | Tube |
|----------|------|
| 1162-4 | 1/4 |
| 1162-6 | 3/8 |
| 1162-8 | 1/2 |



**90° ELBOW
Tube
To
Male Pipe**

| PART No. | Tube | Pipe |
|----------|------|------|
| 1169-4A | 1/4 | 1/8 |
| 1169-4B | 1/4 | 1/4 |
| 1169-6B | 3/8 | 1/4 |
| 1169-6C | 3/8 | 3/8 |
| 1169-8C | 1/2 | 3/8 |



**TEE
Ends Tube
To Male Pipe
Center Tube**

| PART No. | Tube | Pipe |
|----------|------|------|
| 1171-4B | 1/4 | 1/4 |

D

All New D.O.T. Air Brake Hose Menders

Ground Breaking All Metal Design


Designed for use with Type A, AI & All SAE J1402 Air Brake Hose, each kit includes two quick connect hose couplers to make fast air brake hose repairs in the shop or on the roadside.



**Thread Shell
On Hose**



**Push Stem and
Screw to Start**



**Hold Shell and
Tighten Stem
With Key**

Watch our instructional video on youtube:
<http://www.youtube.com/watch?v=rr2iRCOCS3k>

BRASS PUSH-TO-CONNECT D.O.T. AIR BRAKE FITTINGS



(FOR D.O.T. AIR BRAKE TUBE: PAGE 34)

D.O.T. RECOGNIZED FOR ALL AIR BRAKE APPLICATIONS EXCEPT THOSE FOR USE BETWEEN FRAME AND AXLE OR BETWEEN TOWED AND TOWING VEHICLES.



**UNION
COUPLING**

| PART No. | Tube |
|-------------|------|
| PC1462-5/32 | 5/32 |
| PC1462-4 | 1/4 |
| PC1462-6 | 3/8 |
| PC1462-8 | 1/2 |
| PC1462-10 | 5/8 |
| PC1462-12 | 3/4 |



**CONNECTOR
Tube
To
Female Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| PC1466-4A | 1/4 | 1/8 |
| PC1466-4B | 1/4 | 1/4 |
| PC1466-6B | 3/8 | 1/4 |
| PC1466-6C | 3/8 | 3/8 |
| PC1466-8C | 1/2 | 3/8 |
| PC1466-8D | 1/2 | 1/2 |



**CONNECTOR
Tube To
Male Pipe**

| PART No. | Tube | Pipe |
|---------------|------|----------|
| PC1468-3A | 3/16 | 1/8 |
| PC1468-3B | 3/16 | 1/4 |
| PC1468-5/32X1 | 5/32 | 1/16 |
| PC1468-5/32A | 5/32 | 1/8 |
| PC1468-4A | 1/4 | 1/8 |
| PC1468-4B | 1/4 | 1/4 |
| PC1468-4C | 1/4 | 3/8 |
| PC1468-6A | 3/8 | 1/8 |
| PC1468-6B | 3/8 | 1/4 |
| PC1468L-6B | 3/8 | Long 1/4 |
| PC1468-6C | 3/8 | 3/8 |
| PC1468-6D | 3/8 | 1/2 |
| PC1468-8B | 1/2 | 1/4 |
| PC1468-8C | 1/2 | 3/8 |
| PC1468-8D | 1/2 | 1/2 |
| PC1468-10C | 5/8 | 3/8 |
| PC1468-10D | 5/8 | 1/2 |
| PC1468-12D | 3/4 | 1/2 |
| PC1468-12E | 3/4 | 3/4 |



**BULKHEAD
UNION**

| PART No. | Tube |
|-----------|------|
| PC1477-4 | 1/4 |
| PC1477-6 | 3/8 |
| PC1477-8 | 1/2 |
| PC1477-10 | 5/8 |



**BULKHEAD
UNION
Tube To
Female Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| PC1486-4B | 1/4 | 1/4 |
| PC1486-6C | 3/8 | 3/8 |
| PC1486-8C | 1/2 | 3/8 |



**BULKHEAD
UNION
Tube To
Male Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| PC1483-6D | 3/8 | 1/2 |
| PC1483-8D | 1/2 | 1/2 |



**90° ELBOW
Tube To
Tube**

| PART No. | Tube |
|----------|------|
| PC1465-4 | 1/4 |
| PC1465-6 | 3/8 |
| PC1465-8 | 1/2 |



**90° ELBOW
Tube To
Female Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| PC1470-4A | 1/4 | 1/8 |
| PC1470-4B | 1/4 | 1/4 |
| PC1470-6B | 3/8 | 1/4 |
| PC1470-6C | 3/8 | 3/8 |
| PC1470-8D | 1/2 | 1/2 |



**90° ELBOW
Tube
To
Male Pipe**

| PART No. | Tube | Pipe |
|--------------|------|------|
| PC1469-3A | 3/16 | 1/8 |
| PC1469-5/32A | 5/32 | 1/8 |
| PC1469-4A | 1/4 | 1/8 |
| PC1469-4B | 1/4 | 1/4 |
| PC1469-4C | 1/4 | 3/8 |
| PC1469-6A | 3/8 | 1/8 |
| PC1469-6B | 3/8 | 1/4 |
| PC1469-6C | 3/8 | 3/8 |
| PC1469-6D | 3/8 | 1/2 |
| PC1469-8B | 1/2 | 1/4 |
| PC1469-8C | 1/2 | 3/8 |
| PC1469-8D | 1/2 | 1/2 |
| PC1469-10C | 5/8 | 3/8 |
| PC1469-10D | 5/8 | 1/2 |
| PC1469-12D | 3/4 | 1/2 |
| PC1469-12E | 3/4 | 3/4 |



**90° ELBOW
Tube To
Male Pipe
Swivel**

| PART No. | Tube | Pipe |
|--------------|------|------|
| PC1469SW-4A | 1/4 | 1/8 |
| PC1469SW-4B | 1/4 | 1/4 |
| PC1469SW-4C | 1/4 | 3/8 |
| PC1469SW-6A | 3/8 | 1/8 |
| PC1469SW-6B | 3/8 | 1/4 |
| PC1469SW-6C | 3/8 | 3/8 |
| PC1469SW-6D | 3/8 | 1/2 |
| PC1469SW-8B | 1/2 | 1/4 |
| PC1469SW-8C | 1/2 | 3/8 |
| PC1469SW-8D | 1/2 | 1/2 |
| PC1469SW-10C | 5/8 | 3/8 |
| PC1469SW-10D | 5/8 | 1/2 |
| PC1469SW-12D | 3/4 | 1/2 |
| PC1469SW-12E | 3/4 | 3/4 |



**45° ELBOW
Tube
To
Male Pipe**

| PART No. | Tube | Pipe |
|------------|------|------|
| PC1474-4A | 1/4 | 1/8 |
| PC1474-4B | 1/4 | 1/4 |
| PC1474-6A | 3/8 | 1/8 |
| PC1474-6B | 3/8 | 1/4 |
| PC1474-6C | 3/8 | 3/8 |
| PC1474-8B | 1/2 | 1/4 |
| PC1474-8C | 1/2 | 3/8 |
| PC1474-8D | 1/2 | 1/2 |
| PC1474-10D | 5/8 | 1/2 |
| PC1474-12D | 3/4 | 1/2 |
| PC1474-12E | 3/4 | 3/4 |



**45° ELBOW
Tube To
Male Pipe
Swivel**

| PART No. | Tube | Pipe |
|--------------|------|------|
| PC1474SW-4A | 1/4 | 1/8 |
| PC1474SW-4B | 1/4 | 1/4 |
| PC1474SW-6A | 3/8 | 1/8 |
| PC1474SW-6B | 3/8 | 1/4 |
| PC1474SW-6C | 3/8 | 3/8 |
| PC1474SW-6D | 3/8 | 1/2 |
| PC1474SW-8B | 1/2 | 1/4 |
| PC1474SW-8C | 1/2 | 3/8 |
| PC1474SW-8D | 1/2 | 1/2 |
| PC1474SW-10C | 5/8 | 3/8 |
| PC1474SW-10D | 5/8 | 1/2 |
| PC1474SW-12E | 3/4 | 3/4 |



**UNION TEE
Tube Each
End**

| PART No. | Tube |
|------------|------------|
| PC1464-4 | 1/4 |
| PC1464-6 | 3/8 |
| PC1464R-64 | 3/8 TO 1/4 |
| PC1464-8 | 1/2 |
| PC1464-10 | 5/8 |
| PC1464-12 | 3/4 |





BRASS PUSH-TO-CONNECT D.O.T. AIR BRAKE FITTINGS (FOR D.O.T. AIR BRAKE TUBE 1485)

D.O.T. RECOGNIZED FOR ALL AIR BRAKE APPLICATIONS EXCEPT THOSE FOR USE BETWEEN FRAME AND AXLE OR BETWEEN TOWED AND TOWING VEHICLES.



**TEE
Ends Tube
and
Male Pipe
Center Tube**

| PART No. | Tube | Pipe |
|-----------|------|------|
| PC1471-4A | 1/4 | 1/8 |
| PC1471-4B | 1/4 | 1/4 |
| PC1471-6B | 3/8 | 1/4 |
| PC1471-6C | 3/8 | 3/8 |
| PC1471-8C | 1/2 | 3/8 |



**TEE
Ends Tube
Center
Male Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| PC1472-4A | 1/4 | 1/8 |
| PC1472-4B | 1/4 | 1/4 |
| PC1472-6A | 3/8 | 1/8 |
| PC1472-6B | 3/8 | 1/4 |
| PC1472-6C | 3/8 | 3/8 |
| PC1472-8B | 1/2 | 1/4 |
| PC1472-8C | 1/2 | 3/8 |



**TEE
Ends Tube
Center
Female Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| PC1478-4A | 1/4 | 1/8 |
| PC1478-4B | 1/4 | 1/4 |
| PC1478-6B | 3/8 | 1/4 |



**TEE
Ends Tube
Center Female
Pipe Swivel**

| PART No. | Tube | Pipe |
|-------------|------|------|
| PC1478SW-4A | 1/4 | 1/8 |
| PC1478SW-6B | 3/8 | 1/4 |



**TEE
Ends Tube
and Male Pipe
Swivel
Center Tube**

| PART No. | Tube | Pipe |
|-------------|------|------|
| PC1471SW-4A | 1/4 | 1/8 |
| PC1471SW-4B | 1/4 | 1/4 |
| PC1471SW-6B | 3/8 | 1/4 |
| PC1471SW-6C | 3/8 | 3/8 |
| PC1471SW-8C | 1/2 | 3/8 |
| PC1471SW-8D | 1/2 | 1/2 |



**TEE
Ends Tube
Center Male
Pipe Swivel**

| PART No. | Tube | Pipe |
|-------------|------|------|
| PC1472SW-4A | 1/4 | 1/8 |
| PC1472SW-4B | 1/4 | 1/4 |
| PC1472SW-6B | 3/8 | 1/4 |
| PC1472SW-6C | 3/8 | 3/8 |
| PC1472SW-8B | 1/2 | 1/4 |
| PC1472SW-8C | 1/2 | 3/8 |
| PC1472SW-8D | 1/2 | 1/2 |



**TUBE
INSERT**

| PART No. | Tube |
|----------|------|
| PC1400-4 | 1/4 |
| PC1400-6 | 3/8 |
| PC1400-8 | 1/2 |

BRASS PUSH-TO-CONNECT FITTINGS ASSEMBLY INSTRUCTIONS

PUSH-TO-CONNECT FITTINGS FEATURE A LABOR SAVING FULL FLOW DESIGN THAT REQUIRES NO TOOLS.

Temperature Range -40°F to 225°F (-40°C to 107°C)



TO CONNECT TUBE:

Cut tube as squarely as possible. Insert tube end into fitting, slide the I.D. of the tube over the tube support until friction is felt as tube slides past the O-ring. Using a slight twisting motion while inserting the tube is often helpful. After this initial friction is felt, continue to push in the tube until it bottoms firmly against the internal tube support.




TO DISCONNECT TUBE:

With thumb and forefinger, hold down the top of the insert against the fitting body and then, with the other hand, pull out the tube. No tools are needed.

BRASS D.O.T. AIR BRAKE FITTINGS ASSEMBLY INSTRUCTIONS

USE WITH 1485 TUBE

1. Cut tube squarely.
2. Slide nut and then sleeve onto tube.
3. Insert tube fitting until it bottoms on seat.
4. Hand tighten and mark body.
5. Full clockwise wrench turns as per chart.

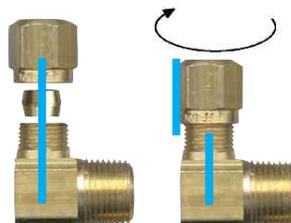

| Tube Size | Additional Full Turns from Hand Tight. |
|----------------------|--|
| 1/4" | 3 |
| 3/8", 1/2", and 5/8" | 4 |
| 3/4" | 3-1/2 |

BRASS PIPE FITTINGS



CLOSE NIPPLE

| PART No. | Pipe |
|-----------|-------|
| 112-A | 1/8 |
| 112-B | 1/4 |
| 112-C | 3/8 |
| 112-D | 1/2 |
| 112-E | 3/4 |
| 112-H | 1 |
| 112-J | 1-1/4 |
| 112-K | 1-1/2 |
| 112-M | 2 |
| 112-N | 2-1/2 |
| 112-P | 3 |
| Lead Free | |
| LF-112-A | 1/8 |
| LF-112-B | 1/4 |
| LF-112-C | 3/8 |
| LF-112-D | 1/2 |
| LF-112-E | 3/4 |



CLOSE NIPPLE (Red Brass)

| PART No. | Pipe |
|----------|------|
| 112RED-D | 1/2 |
| 112RED-E | 3/4 |



HEX NIPPLE

| PART No. | Length (IN.) | Pipe |
|----------------|--------------|------|
| 122-A | | 1/8 |
| 122-B | | 1/4 |
| 122L-B * | 1-3/8 | 1/4 |
| 122-C | | 3/8 |
| 122-D | | 1/2 |
| 122L-D * | 1-3/4 | 1/2 |
| 122-E | | 3/4 |
| 122-H | | 1 |
| * LONG PATTERN | | |
| Lead Free | | |
| LF-122-A | 1/8 | |
| LF-122-B | 1/4 | |
| LF-122-C | 3/8 | |
| LF-122-D | 1/2 | |
| LF-122-E | 3/4 | |
| LF-122-H | 1 | |

REDUCING

| PART No. | Pipe | to | Pipe |
|-----------|------|----|------|
| 122-BA | 1/4 | to | 1/8 |
| 122-CA | 3/8 | to | 1/8 |
| 122-CB | 3/8 | to | 1/4 |
| 122-DB | 1/2 | to | 1/4 |
| 122-DC | 1/2 | to | 3/8 |
| 122-ED | 3/4 | to | 1/2 |
| Lead Free | | | |
| LF-122-BA | 1/4 | to | 1/8 |
| LF-122-CB | 3/8 | to | 1/4 |
| LF-122-DB | 1/2 | to | 1/4 |
| LF-122-DC | 1/2 | to | 3/8 |
| LF-122-ED | 3/4 | to | 1/2 |



LONG NIPPLE

| PART No. | Pipe | Length (IN.) |
|---------------|------|--------------|
| 113-A1-1/2 | 1/8 | 1-1/2 |
| 113-A2 | 1/8 | 2 |
| 113-A2-1/2 | 1/8 | 2-1/2 |
| 113-A3 | 1/8 | 3 |
| 113-A3-1/2 | 1/8 | 3-1/2 |
| 113-A4 | 1/8 | 4 |
| 113-A4-1/2 | 1/8 | 4-1/2 |
| 113-A5 | 1/8 | 5 |
| 113-A6 | 1/8 | 6 |
| Lead Free | | |
| LF-113-A2 | 1/8 | 2 |
| LF-113-A3 | 1/8 | 3 |
| 1/4 NPT | | |
| 113-B1-1/2 | 1/4 | 1-1/2 |
| 113-B2 | 1/4 | 2 |
| 113-B2-1/2 | 1/4 | 2-1/2 |
| 113-B3 | 1/4 | 3 |
| 113-B3-1/2 | 1/4 | 3-1/2 |
| 113-B4 | 1/4 | 4 |
| 113-B4-1/2 | 1/4 | 4-1/2 |
| 113-B5 | 1/4 | 5 |
| 113-B5-1/2 | 1/4 | 5-1/2 |
| 113-B6 | 1/4 | 6 |
| Lead Free | | |
| LF-113-B1-1/2 | 1/4 | 1-1/2 |
| LF-113-B2 | 1/4 | 2 |
| LF-113-B3 | 1/4 | 3 |
| 3/8 NPT | | |
| 113-C1-1/2 | 3/8 | 1-1/2 |
| 113-C2 | 3/8 | 2 |
| 113-C2-1/2 | 3/8 | 2-1/2 |
| 113-C3 | 3/8 | 3 |
| 113-C3-1/2 | 3/8 | 3-1/2 |
| 113-C4 | 3/8 | 4 |
| 113-C4-1/2 | 3/8 | 4-1/2 |
| 113-C5 | 3/8 | 5 |
| 113-C5-1/2 | 3/8 | 5-1/2 |
| 113-C6 | 3/8 | 6 |
| Lead Free | | |
| LF-113-C1-1/2 | 3/8 | 1-1/2 |
| LF-113-C2 | 3/8 | 2 |
| LF-113-C3 | 3/8 | 3 |
| 1/2 NPT | | |
| 113-D1-1/2 | 1/2 | 1-1/2 |
| 113-D2 | 1/2 | 2 |
| 113-D2-1/2 | 1/2 | 2-1/2 |
| 113-D3 | 1/2 | 3 |
| 113-D3-1/2 | 1/2 | 3-1/2 |
| 113-D4 | 1/2 | 4 |
| 113-D4-1/2 | 1/2 | 4-1/2 |
| 113-D5 | 1/2 | 5 |
| 113-D5-1/2 | 1/2 | 5-1/2 |
| 113-D6 | 1/2 | 6 |
| Lead Free | | |
| LF-113-D1-1/2 | 1/2 | 1-1/2 |
| LF-113-D2 | 1/2 | 2 |
| LF-113-D3 | 1/2 | 3 |
| LF-113-D3-1/2 | 1/2 | 3-1/2 |
| 3/4 NPT | | |
| 113-E2 | 3/4 | 2 |
| 113-E2-1/2 | 3/4 | 2-1/2 |
| 113-E3 | 3/4 | 3 |
| 113-E3-1/2 | 3/4 | 3-1/2 |
| 113-E4 | 3/4 | 4 |
| 113-E4-1/2 | 3/4 | 4-1/2 |
| 113-E5 | 3/4 | 5 |
| 113-E5-1/2 | 3/4 | 5-1/2 |
| 113-E6 | 3/4 | 6 |
| Lead Free | | |
| LF-113-E2 | 3/4 | 2 |
| LF-113-E3 | 3/4 | 3 |



LONG NIPPLE

| PART No. | Pipe | Length (IN.) |
|------------|-------|--------------|
| 113-H2 | 1 | 2 |
| 113-H2-1/2 | 1 | 2-1/2 |
| 113-H3 | 1 | 3 |
| 113-H3-1/2 | 1 | 3-1/2 |
| 113-H4 | 1 | 4 |
| 113-H6 | 1 | 6 |
| 1-1/4 NPT | | |
| 113-J2 | 1-1/4 | 2 |
| 113-J2-1/2 | 1-1/4 | 2-1/2 |
| 113-J3 | 1-1/4 | 3 |
| 113-J3-1/2 | 1-1/4 | 3-1/2 |
| 113-J5 | 1-1/4 | 5 |
| 113-J6 | 1-1/4 | 6 |
| 1-1/2 NPT | | |
| 113-K2 | 1-1/2 | 2 |
| 113-K3 | 1-1/2 | 3 |
| 113-K3-1/2 | 1-1/2 | 3-1/2 |
| 113-K4 | 1-1/2 | 4 |
| 113-K6 | 1-1/2 | 6 |
| 2 NPT | | |
| 113-M2-1/2 | 2 | 2-1/2 |
| 113-M3 | 2 | 3 |
| 113-M3-1/2 | 2 | 3-1/2 |
| 113-M4 | 2 | 4 |
| 113-M5 | 2 | 5 |
| 113-M6 | 2 | 6 |

LONGER LENGTHS AVAILABLE ON REQUEST.



LONG NIPPLE (Red Brass)

| PART No. | Pipe | Length (IN.) |
|---------------|------|--------------|
| 113RED-D1-1/2 | 1/2 | 1-1/2 |
| 113RED-D2-1/2 | 1/2 | 2-1/2 |
| 113RED-D3 | 1/2 | 3 |
| 113RED-D4 | 1/2 | 4 |
| 3/4 NPT | | |
| 113RED-E1-1/2 | 3/4 | 1-1/2 |
| 113RED-E2 | 3/4 | 2 |
| 113RED-E2-1/2 | 3/4 | 2-1/2 |
| 113RED-E3 | 3/4 | 3 |
| 113RED-E4 | 3/4 | 4 |



COUPLING

| PART No. | Pipe |
|-----------|------|
| 103-A | 1/8 |
| 103-B | 1/4 |
| 103-C | 3/8 |
| 103-D | 1/2 |
| 103-E | 3/4 |
| Lead Free | |
| LF-103-A | 1/8 |
| LF-103-B | 1/4 |
| LF-103-C | 3/8 |
| LF-103-D | 1/2 |
| LF-103-E | 3/4 |

D



COUPLING (Cast Bronze)

| PART No. | Pipe |
|----------|-------|
| 103CA-D | 1/2 |
| 103CA-E | 3/4 |
| 103-H | 1 |
| 103-J | 1-1/4 |
| 103-K | 1-1/2 |
| 103-M | 2 |
| 103-N | 2-1/2 |



REDUCING COUPLING

| PART No. | Pipe | Pipe |
|-----------|------|--------|
| 119-BA | 1/4 | to 1/8 |
| 119-CA | 3/8 | to 1/8 |
| 119-CB | 3/8 | to 1/4 |
| 119-DA | 1/2 | to 1/8 |
| 119-DB | 1/2 | to 1/4 |
| 119-DC | 1/2 | to 3/8 |
| 119-ED | 3/4 | to 1/2 |
| Lead Free | | |
| LF-119-CB | 3/8 | to 1/4 |
| LF-119-ED | 3/4 | to 1/2 |



REDUCING (Cast Bronze)

| PART No. | Pipe | Pipe |
|----------|-------|----------|
| 119-EB | 3/4 | to 1/4 |
| 119-EC | 3/4 | to 3/8 |
| 119-HD | 1 | to 1/2 |
| 119-HE | 1 | to 3/4 |
| 119-JE | 1-1/4 | to 3/4 |
| 119-JH | 1-1/4 | to 1 |
| 119-KH | 1-1/2 | to 1 |
| 119-KJ | 1-1/2 | to 1-1/4 |
| 119-MK | 2 | to 1-1/2 |



UNION COUPLING

| PART No. | Pipe |
|----------|------|
| 104-A | 1/8 |
| 104-B | 1/4 |
| 104-C | 3/8 |
| 104-D | 1/2 |
| 104-E | 3/4 |



UNION COUPLING (Cast Bronze)

| PART No. | Pipe |
|----------|-------|
| 104-H | 1 |
| 104-J | 1-1/4 |
| 104-K | 1-1/2 |
| 104-M | 2 |



ADAPTER

| PART No. | Female Pipe | Male Pipe |
|-----------|----------------|--------------|
| 120-AA | 1/8 | to 1/8 |
| 120-BB | 1/4 | to 1/4 |
| 120-CC | 3/8 | to 3/8 |
| 120-DD | 1/2 | to 1/2 |
| Lead Free | | |
| LF-120-BB | 1/4 | to 1/4 |
| LF-120-DD | 1/2 | to 1/2 |



ADAPTER (Cont.)

| PART No. | Female Pipe | Male Pipe |
|-----------|----------------|--------------|
| 120-A-1 | 1/8 | to 1/16 |
| 120-BA | 1/4 | to 1/8 |
| 120-CA | 3/8 | to 1/8 |
| 120-CB | 3/8 | to 1/4 |
| 120-DB | 1/2 | to 1/4 |
| 120-DC | 1/2 | to 3/8 |
| 120-EC | 3/4 | to 3/8 |
| 120-ED | 3/4 | to 1/2 |
| Lead Free | | |
| LF-120-BA | 1/4 | to 1/8 |
| LF-120-CB | 3/8 | to 1/4 |
| LF-120-DB | 1/2 | to 1/4 |
| LF-120-ED | 3/4 | to 1/2 |



BUSHING

| PART No. | Male Pipe | Female Pipe |
|-----------|--------------|----------------|
| 110-BA | 1/4 | to 1/8 |
| 110-CA | 3/8 | to 1/8 |
| 110-CB | 3/8 | to 1/4 |
| 110-DA | 1/2 | to 1/8 |
| 110-DB | 1/2 | to 1/4 |
| 110-DC | 1/2 | to 3/8 |
| 110-EA | 3/4 | to 1/8 |
| 110-EB | 3/4 | to 1/4 |
| 110-EC | 3/4 | to 3/8 |
| 110-ED | 3/4 | to 1/2 |
| 110-HB | 1 | to 1/4 |
| 110-HC | 1 | to 3/8 |
| 110-HD | 1 | to 1/2 |
| 110-HE | 1 | to 3/4 |
| Lead Free | | |
| LF-110-BA | 1/4 | to 1/8 |
| LF-110-CA | 3/8 | to 1/8 |
| LF-110-CB | 3/8 | to 1/4 |
| LF-110-DA | 1/2 | to 1/8 |
| LF-110-DB | 1/2 | to 1/4 |
| LF-110-DC | 1/2 | to 3/8 |
| LF-110-EB | 3/4 | to 1/4 |
| LF-110-EC | 3/4 | to 3/8 |
| LF-110-ED | 3/4 | to 1/2 |
| LF-110-HB | 1 | to 1/4 |
| LF-110-HD | 1 | to 1/2 |
| LF-110-HE | 1 | to 3/4 |



BUSHING (Cast Bronze)

| PART No. | Male Pipe | Female Pipe |
|----------|--------------|----------------|
| 110CA-ED | 3/4 | to 1/2 |
| 110CA-HC | 1 | to 3/8 |
| 110CA-HD | 1 | to 1/2 |
| 110CA-HE | 1 | to 3/4 |
| 110-JD | 1-1/4 | to 1/2 |
| 110-JE | 1-1/4 | to 3/4 |
| 110-JH | 1-1/4 | to 1 |
| 110-KD | 1-1/2 | to 1/2 |
| 110-KE | 1-1/2 | to 3/4 |
| 110-KH | 1-1/2 | to 1 |
| 110-KJ | 1-1/2 | to 1-1/4 |
| 110-ME | 2 | to 3/4 |
| 110-MH | 2 | to 1 |
| 110-MJ | 2 | to 1-1/4 |
| 110-MK | 2 | to 1-1/2 |
| 110-NM | 2-1/2 | to 2 |
| 110-PM | 3 | to 2 |
| 110-PN | 3 | to 2-1/2 |



LOCK NUT

| PART No. | Pipe |
|----------|------|
| 111-A | 1/8 |
| 111-B | 1/4 |
| 111-C | 3/8 |
| 111-D | 1/2 |
| 111-E | 3/4 |



LOCK NUT (Cast Bronze)

| PART No. | Pipe |
|----------|------|
| 111-H | 1 |



PLUG Square Head

| PART No. | Pipe |
|-----------|------|
| 109-A | 1/8 |
| 109-B | 1/4 |
| 109-C | 3/8 |
| 109-D | 1/2 |
| 109-E | 3/4 |
| Lead Free | |
| LF-109-B | 1/4 |
| LF-109-C | 3/8 |
| LF-109-D | 1/2 |



(Cast Bronze)

| PART No. | Pipe |
|----------|-------|
| 109-H | 1 |
| 109-J | 1-1/4 |
| 109-K | 1-1/2 |
| 109-M | 2 |
| 109-N | 2-1/2 |



PLUG Slotted

| PART No. | Pipe |
|----------|------|
| 117-A | 1/8 |
| 117-B | 1/4 |
| 117-C | 3/8 |



PLUG Hex Countersunk

| PART No. | Pipe |
|----------|------|
| 118-A | 1/8 |
| 118-B | 1/4 |
| 118-C | 3/8 |
| 118-D | 1/2 |
| 118-E | 3/4 |

BRASS PIPE FITTINGS



PLUG Hex Head

| PART No. | | Pipe |
|-----------|-------|------|
| 121-1 | Cored | 1/16 |
| 121-A | Cored | 1/8 |
| 121-B | Cored | 1/4 |
| 121-C | Cored | 3/8 |
| 121-D | Cored | 1/2 |
| 121-E | Cored | 3/4 |
| 121-H | Cored | 1 |
| Lead Free | | |
| LF-121-C | Cored | 3/8 |

| PART No. | | Pipe |
|----------|-------|------|
| 121S-A | Solid | 1/8 |
| 121S-B | Solid | 1/4 |
| 121S-C | Solid | 3/8 |
| 121S-D | Solid | 1/2 |
| 121S-E | Solid | 3/4 |



CAP

| PART No. | Pipe |
|----------|------|
| 108-A | 1/8 |
| 108-B | 1/4 |
| 108-C | 3/8 |
| 108-D | 1/2 |
| 108-E | 3/4 |



(Cast Bronze)

| PART No. | Pipe |
|----------|-------|
| 108CA-D | 1/2 |
| 108CA-E | 3/4 |
| 108-H | 1 |
| 108-J | 1-1/4 |
| 108-K | 1-1/2 |
| 108-M | 2 |



FORGED 90° ELBOW

| PART No. | Pipe | |
|-----------|------|--------|
| 99-A | 1/8 | |
| 99-B | 1/4 | |
| 99-C | 3/8 | |
| 99-D | 1/2 | |
| Lead Free | | |
| PART No. | Pipe | Pipe |
| 99-BA | 1/4 | to 1/8 |
| 99-CA | 3/8 | to 1/8 |
| 99-CB | 3/8 | to 1/4 |
| 99-DC | 1/2 | to 3/8 |



EXTRUDED 90° STREET ELBOW

| PART No. | Pipe | |
|-----------|-------------|-----------|
| X115-A | 1/8 | |
| X115-B | 1/4 | |
| X115-C | 3/8 | |
| X115-D | 1/2 | |
| X115-E | 3/4 | |
| Lead Free | | |
| LF-X115-A | 1/8 | |
| LF-X115-B | 1/4 | |
| LF-X115-C | 3/8 | |
| LF-X115-D | 1/2 | |
| PART No. | Female Pipe | Male Pipe |
| X115-BA | 1/4 | to 1/8 |
| X115-DC | 1/2 | to 3/8 |



FORGED 90° STREET ELBOW

| PART No. | Pipe | |
|-----------|-------------|-----------|
| 116-A | 1/8 | |
| 116-B | 1/4 | |
| 116-C | 3/8 | |
| 116-D | 1/2 | |
| 116-E | 3/4 | |
| Lead Free | | |
| LF-116-B | 1/4 | |
| LF-116-C | 3/8 | |
| LF-116-D | 1/2 | |
| PART No. | Female Pipe | Male Pipe |
| 116-AB | 1/8 | to 1/4 |
| 116-BA | 1/4 | to 1/8 |
| 116-CB | 3/8 | to 1/4 |
| 116-CD | 3/8 | to 1/2 |
| 116-DC | 1/2 | to 3/8 |



90° STREET ELBOW (Cast Bronze)

| PART No. | Pipe |
|----------|-------|
| 116CA-D | 1/2 |
| 116CA-E | 3/4 |
| 116-H | 1 |
| 116-J | 1-1/4 |
| 116-K | 1-1/2 |
| 116-M | 2 |
| 116-N | 2-1/2 |
| 116-P | 3 |



FORGED 90° STREET ELBOW Heavy Pattern

| PART No. | Pipe |
|----------|------|
| 116H-B | 1/4 |
| 116H-C | 3/8 |



FORGED 90° ELBOW

| PART No. | Pipe |
|----------|------|
| 100-A | 1/8 |
| 100-B | 1/4 |
| 100-C | 3/8 |
| 100-D | 1/2 |
| 100-E | 3/4 |



FORGED 90° ELBOW

| PART No. | Pipe | Pipe |
|-----------|------|--------|
| Lead Free | | |
| LF-100-B | 1/4 | |
| LF-100-C | 3/8 | |
| LF-100-D | 1/2 | |
| PART No. | Pipe | Pipe |
| 100-BA | 1/4 | to 1/8 |
| 100-CB | 3/8 | to 1/4 |
| 100-DC | 1/2 | to 3/8 |



90° ELBOW (Cast Bronze)

| PART No. | Pipe | |
|----------|-------|--------|
| 100CA-D | 1/2 | |
| 100CA-E | 3/4 | |
| 100-H | 1 | |
| 100-J | 1-1/4 | |
| 100-K | 1-1/2 | |
| 100-M | 2 | |
| 100-N | 2-1/2 | |
| 100-P | 3 | |
| PART No. | Pipe | Pipe |
| 100-ED | 3/4 | to 1/2 |
| 100-HE | 1 | to 3/4 |



EXTRUDED 90° ELBOW

| PART No. | Pipe |
|----------|------|
| X100-A | 1/8 |
| X100-B | 1/4 |
| X100-C | 3/8 |
| X100-D | 1/2 |



FORGED 45° STREET ELBOW

| PART No. | Pipe |
|-----------|------|
| 124-A | 1/8 |
| 124-B | 1/4 |
| 124-C | 3/8 |
| Lead Free | |
| LF-124-B | 1/4 |
| LF-124-C | 3/8 |



45° STREET ELBOW (Cast Bronze)

| PART No. | Pipe |
|----------|------|
| 124-D | 1/2 |
| 124-E | 3/4 |
| 124-H | 1 |



EXTRUDED 45° STREET ELBOW

| PART No. | Pipe |
|----------|------|
| X124-A | 1/8 |
| X124-B | 1/4 |
| X124-C | 3/8 |
| X124-D | 1/2 |
| X124-E | 3/4 |

D



**45° ELBOW
(Cast Bronze)**

| PART No. | Pipe |
|----------|-------|
| 105-B | 1/4 |
| 105-C | 3/8 |
| 105-D | 1/2 |
| 105-E | 3/4 |
| 105-H | 1 |
| 105-J | 1-1/4 |
| 105-K | 1-1/2 |
| 105-M | 2 |



**EXTRUDED
45° ELBOW**

| PART No. | Pipe |
|----------|------|
| X105-A | 1/8 |
| X105-B | 1/4 |



**FORGED
CROSS**

| PART No. | Pipe |
|----------|------|
| 102-A | 1/8 |
| 102-B | 1/4 |
| 102-C | 3/8 |
| 102-D | 1/2 |



**CROSS
(Cast Bronze)**

| PART No. | Pipe |
|----------|------|
| 102-E | 3/4 |
| 102-H | 1 |



**EXTRUDED
CROSS**

| PART No. | Pipe |
|----------|------|
| X102-A | 1/8 |
| X102-B | 1/4 |
| X102-C | 3/8 |
| X102-D | 1/2 |



**FORGED
MALE BRANCH
TEE**

| PART No. | Pipe |
|----------|------|
| 106-A | 1/8 |
| 106-B | 1/4 |
| 106-C | 3/8 |
| 106-D | 1/2 |



**EXTRUDED
MALE BRANCH
TEE**

| PART No. | Pipe |
|----------|------|
| X106-A | 1/8 |
| X106-B | 1/4 |
| X106-C | 3/8 |



**FORGED
MALE
TEE**

| PART No. | Pipe |
|----------|------|
| 101M-A | 1/8 |
| 101M-B | 1/4 |
| 101M-C | 3/8 |
| 101M-D | 1/2 |
| 101M-E | 3/4 |



**FORGED
STREET
TEE**

| PART No | Pipe |
|-----------|------|
| 107-A | 1/8 |
| 107-B | 1/4 |
| 107-C | 3/8 |
| 107-D | 1/2 |
| 107-E | 3/4 |
| Lead Free | |
| LF-107-B | 1/4 |
| LF-107-C | 3/8 |



**EXTRUDED
STREET
TEE**

| PART No | Pipe |
|---------|------|
| X107-A | 1/8 |
| X107-B | 1/4 |
| X107-C | 3/8 |
| X107-D | 1/2 |
| X107-E | 3/4 |



**FORGED
TEE**

| PART No. | Pipe |
|-----------|------|
| 101-A | 1/8 |
| 101-B | 1/4 |
| 101-C | 3/8 |
| 101-D | 1/2 |
| 101-E | 3/4 |
| Lead Free | |
| LF-101-B | 1/4 |
| LF-101-C | 3/8 |
| LF-101-D | 1/2 |



**TEE
(Cast Bronze)**

| PART No. | Pipe |
|----------|-------|
| 101CA-C | 3/8 |
| 101CA-D | 1/2 |
| 101CA-E | 3/4 |
| 101-H | 1 |
| 101-J | 1-1/4 |
| 101-K | 1-1/2 |
| 101-M | 2 |



**EXTRUDED
TEE**

| PART No. | Pipe |
|----------|------|
| X101-A | 1/8 |
| X101-B | 1/4 |
| X101-C | 3/8 |
| X101-D | 1/2 |



**REDUCING
FORGED
TEE**

| PART No. | Reducing | | |
|----------|----------|-----|-----|
| | 1 | 2 | 3 |
| 101-BA | 1/4 | 1/4 | 1/8 |
| 101-CB | 3/8 | 3/8 | 1/4 |
| 101-DC | 1/2 | 1/2 | 3/8 |
| 101-ED | 3/4 | 3/4 | 1/2 |



**REDUCING
TEE
(Cast Bronze)**

| PART No. | Reducing | | |
|----------|----------|-------|-------|
| | 1 | 2 | 3 |
| 101-DB | 1/2 | 1/2 | 1/4 |
| 101-EDE | 3/4 | 1/2 | 3/4 |
| 101-HDH | 1 | 1/2 | 1 |
| 101-HE | 1 | 1 | 3/4 |
| 101-HEE | 1 | 3/4 | 3/4 |
| 101-JDJ | 1-1/4 | 1/2 | 1-1/4 |
| 101-JE | 1-1/4 | 1-1/4 | 3/4 |
| 101-KDK | 1-1/2 | 1/2 | 1-1/2 |



**FLOOR
FLANGE**

| PART No. | Pipe |
|----------|------|
| 114-D | 1/2 |



**"Y"
BLOCK**


| PART No. | Female | Male |
|----------|--------|------|
| | Pipe | Pipe |
| 678-YB | 1/4 | 1/4 |

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.

**FAIRVIEW RETAIL
CARDED STOCK AVAILABLE ON
SELECTED ITEMS**

BLACK IRON PIPE FITTINGS

SCHEDULE 40 (150 LB.)



CLOSE NIPPLE

| PART No. | Pipe |
|----------|-------|
| BI-112-A | 1/8 |
| BI-112-B | 1/4 |
| BI-112-C | 3/8 |
| BI-112-D | 1/2 |
| BI-112-E | 3/4 |
| BI-112-H | 1 |
| BI-112-J | 1-1/4 |
| BI-112-K | 1-1/2 |
| BI-112-M | 2 |
| BI-112-N | 2-1/2 |
| BI-112-P | 3 |
| BI-112-S | 4 |



LONG NIPPLE

| PART No. | Pipe | Length (IN.) |
|----------------|------|--------------|
| 1/8 NPT | | |
| BI-113-A1-1/2 | 1/8 | 1-1/2 |
| BI-113-A2 | 1/8 | 2 |
| BI-113-A2-1/2 | 1/8 | 2-1/2 |
| BI-113-A3 | 1/8 | 3 |
| BI-113-A3-1/2 | 1/8 | 3-1/2 |
| BI-113-A4 | 1/8 | 4 |
| BI-113-A4-1/2 | 1/8 | 4-1/2 |
| BI-113-A5 | 1/8 | 5 |
| BI-113-A5-1/2 | 1/8 | 5-1/2 |
| BI-113-A6 | 1/8 | 6 |
| 1/4 NPT | | |
| BI-113-B1-1/2 | 1/4 | 1-1/2 |
| BI-113-B2 | 1/4 | 2 |
| BI-113-B2-1/2 | 1/4 | 2-1/2 |
| BI-113-B3 | 1/4 | 3 |
| BI-113-B3-1/2 | 1/4 | 3-1/2 |
| BI-113-B4 | 1/4 | 4 |
| BI-113-B4-1/2 | 1/4 | 4-1/2 |
| BI-113-B5 | 1/4 | 5 |
| BI-113-B5-1/2 | 1/4 | 5-1/2 |
| BI-113-B6 | 1/4 | 6 |
| BI-113-B8 | 1/4 | 8 |
| 3/8 NPT | | |
| BI-113-C1-1/2 | 3/8 | 1-1/2 |
| BI-113-C2 | 3/8 | 2 |
| BI-113-C2-1/2 | 3/8 | 2-1/2 |
| BI-113-C3 | 3/8 | 3 |
| BI-113-C3-1/2 | 3/8 | 3-1/2 |
| BI-113-C4 | 3/8 | 4 |
| BI-113-C4-1/2 | 3/8 | 4-1/2 |
| BI-113-C5 | 3/8 | 5 |
| BI-113-C5-1/2 | 3/8 | 5-1/2 |
| BI-113-C6 | 3/8 | 6 |
| 1/2 NPT | | |
| BI-113-D1-1/2 | 1/2 | 1-1/2 |
| BI-113-D2 | 1/2 | 2 |
| BI-113-D2-1/2 | 1/2 | 2-1/2 |
| BI-113-D3 | 1/2 | 3 |
| BI-113-D3-1/2 | 1/2 | 3-1/2 |
| BI-113-D4 | 1/2 | 4 |
| BI-113-D4-1/2 | 1/2 | 4-1/2 |
| BI-113-D5 | 1/2 | 5 |
| BI-113-D5-1/2 | 1/2 | 5-1/2 |
| BI-113-D6 | 1/2 | 6 |
| BI-113-D7 | 1/2 | 7 |
| BI-113-D8 | 1/2 | 8 |



LONG NIPPLE

| PART No. | Pipe | Length (IN.) |
|------------------|-------|--------------|
| 3/4 NPT | | |
| BI-113-E1-1/2 | 3/4 | 1-1/2 |
| BI-113-E2 | 3/4 | 2 |
| BI-113-E2-1/2 | 3/4 | 2-1/2 |
| BI-113-E3 | 3/4 | 3 |
| BI-113-E3-1/2 | 3/4 | 3-1/2 |
| BI-113-E4 | 3/4 | 4 |
| BI-113-E4-1/2 | 3/4 | 4-1/2 |
| BI-113-E5 | 3/4 | 5 |
| BI-113-E5-1/2 | 3/4 | 5-1/2 |
| BI-113-E6 | 3/4 | 6 |
| BI-113-E8 | 3/4 | 8 |
| BI-113-E10 | 3/4 | 10 |
| BI-113-E12 | 3/4 | 12 |
| 1 NPT | | |
| BI-113-H2 | 1 | 2 |
| BI-113-H2-1/2 | 1 | 2-1/2 |
| BI-113-H3 | 1 | 3 |
| BI-113-H3-1/2 | 1 | 3-1/2 |
| BI-113-H4 | 1 | 4 |
| BI-113-H4-1/2 | 1 | 4-1/2 |
| BI-113-H5 | 1 | 5 |
| BI-113-H5-1/2 | 1 | 5-1/2 |
| BI-113-H6 | 1 | 6 |
| BI-113-H8 | 1 | 8 |
| BI-113-H12 | 1 | 12 |
| 1-1/4 NPT | | |
| BI-113-J2 | 1-1/4 | 2 |
| BI-113-J2-1/2 | 1-1/4 | 2-1/2 |
| BI-113-J3 | 1-1/4 | 3 |
| BI-113-J3-1/2 | 1-1/4 | 3-1/2 |
| BI-113-J4 | 1-1/4 | 4 |
| BI-113-J4-1/2 | 1-1/4 | 4-1/2 |
| BI-113-J5 | 1-1/4 | 5 |
| BI-113-J6 | 1-1/4 | 6 |
| 1-1/2 NPT | | |
| BI-113-K2 | 1-1/2 | 2 |
| BI-113-K2-1/2 | 1-1/2 | 2-1/2 |
| BI-113-K3 | 1-1/2 | 3 |
| BI-113-K3-1/2 | 1-1/2 | 3-1/2 |
| BI-113-K4 | 1-1/2 | 4 |
| BI-113-K4-1/2 | 1-1/2 | 4-1/2 |
| BI-113-K5 | 1-1/2 | 5 |
| BI-113-K5-1/2 | 1-1/2 | 5-1/2 |
| BI-113-K6 | 1-1/2 | 6 |
| 2 NPT | | |
| BI-113-M2-1/2 | 2 | 2-1/2 |
| BI-113-M3 | 2 | 3 |
| BI-113-M3-1/2 | 2 | 3-1/2 |
| BI-113-M4 | 2 | 4 |
| BI-113-M4-1/2 | 2 | 4-1/2 |
| BI-113-M5 | 2 | 5 |
| BI-113-M5-1/2 | 2 | 5-1/2 |
| BI-113-M6 | 2 | 6 |
| 2-1/2 NPT | | |
| BI-113-N3 | 2-1/2 | 3 |
| BI-113-N3-1/2 | 2-1/2 | 3-1/2 |
| BI-113-N4 | 2-1/2 | 4 |
| BI-113-N5 | 2-1/2 | 4 |
| BI-113-N6 | 2-1/2 | 6 |
| 3 NPT | | |
| BI-113-P3 | 3 | 3 |
| BI-113-P4 | 3 | 4 |
| BI-113-P6 | 3 | 6 |
| 4 NPT | | |
| BI-113-S4 | 4 | 4 |
| BI-113-S6 | 4 | 6 |

SCHEDULE 80:

Replace Prefix BI- With BI80-
For Schedule 80 (300LB.)



COUPLING

Reducing coupling see BI-119
Steel merchant see BI-103MC

| PART No. | Pipe |
|----------|-------|
| BI-103-A | 1/8 |
| BI-103-B | 1/4 |
| BI-103-C | 3/8 |
| BI-103-D | 1/2 |
| BI-103-E | 3/4 |
| BI-103-H | 1 |
| BI-103-J | 1-1/4 |
| BI-103-K | 1-1/2 |
| BI-103-M | 2 |
| BI-103-N | 2-1/2 |
| BI-103-P | 3 |
| BI-103-S | 4 |



REDUCING COUPLING

| PART No. | Pipe |
|-----------|----------------|
| BI-119-BA | 1/4 to 1/8 |
| BI-119-CA | 3/8 to 1/8 |
| BI-119-CB | 3/8 to 1/4 |
| BI-119-DB | 1/2 to 1/4 |
| BI-119-DC | 1/2 to 3/8 |
| BI-119-EB | 3/4 to 1/4 |
| BI-119-EC | 3/4 to 3/8 |
| BI-119-ED | 3/4 to 1/2 |
| BI-119-HB | 1 to 1/4 |
| BI-119-HC | 1 to 3/8 |
| BI-119-HD | 1 to 1/2 |
| BI-119-HE | 1 to 3/4 |
| BI-119-JD | 1-1/4 to 1/2 |
| BI-119-JE | 1-1/4 to 3/4 |
| BI-119-JH | 1-1/4 to 1 |
| BI-119-KD | 1-1/2 to 1/2 |
| BI-119-KE | 1-1/2 to 3/4 |
| BI-119-KH | 1-1/2 to 1 |
| BI-119-KJ | 1-1/2 to 1-1/4 |
| BI-119-ME | 2 to 3/4 |
| BI-119-MH | 2 to 1 |
| BI-119-MJ | 2 to 1-1/4 |
| BI-119-MK | 2 to 1-1/2 |
| BI-119-NK | 2-1/2 to 1-1/2 |
| BI-119-NM | 2-1/2 to 2 |
| BI-119-PM | 3 to 2 |
| BI-119-PN | 3 to 2-1/2 |
| BI-119-SP | 4 to 3 |



UNION

| PART No. | Pipe |
|----------|-------|
| BI-104-A | 1/8 |
| BI-104-B | 1/4 |
| BI-104-C | 3/8 |
| BI-104-D | 1/2 |
| BI-104-E | 3/4 |
| BI-104-H | 1 |
| BI-104-J | 1-1/4 |
| BI-104-K | 1-1/2 |
| BI-104-M | 2 |
| BI-104-N | 2-1/2 |
| BI-104-P | 3 |
| BI-104-S | 4 |

D



BLACK IRON PIPE FITTINGS

SCHEDULE 40 (150 LB.)



BUSHING

Steel merchant see BI-110MC

| PART No. | Pipe | Pipe |
|-----------|-------|----------|
| BI-110-BA | 1/4 | to 1/8 |
| BI-110-CA | 3/8 | to 1/8 |
| BI-110-CB | 3/8 | to 1/4 |
| BI-110-DA | 1/2 | to 1/8 |
| BI-110-DB | 1/2 | to 1/4 |
| BI-110-DC | 1/2 | to 3/8 |
| BI-110-EA | 3/4 | to 1/8 |
| BI-110-EB | 3/4 | to 1/4 |
| BI-110-EC | 3/4 | to 3/8 |
| BI-110-ED | 3/4 | to 1/2 |
| BI-110-HB | 1 | to 1/4 |
| BI-110-HC | 1 | to 3/8 |
| BI-110-HD | 1 | to 1/2 |
| BI-110-HE | 1 | to 3/4 |
| BI-110-JC | 1-1/4 | to 3/8 |
| BI-110-JD | 1-1/4 | to 1/2 |
| BI-110-JE | 1-1/4 | to 3/4 |
| BI-110-JH | 1-1/4 | to 1 |
| BI-110-KD | 1-1/2 | to 1/2 |
| BI-110-KE | 1-1/2 | to 3/4 |
| BI-110-KH | 1-1/2 | to 1 |
| BI-110-KJ | 1-1/2 | to 1-1/4 |
| BI-110-MD | 2 | to 1/2 |
| BI-110-ME | 2 | to 3/4 |
| BI-110-MH | 2 | to 1 |
| BI-110-MJ | 2 | to 1-1/4 |
| BI-110-MK | 2 | to 1-1/2 |
| BI-110-NH | 2-1/2 | to 1 |
| BI-110-NJ | 2-1/2 | to 1-1/4 |
| BI-110-NK | 2-1/2 | to 1-1/2 |
| BI-110-NM | 2-1/2 | to 2 |
| BI-110-PM | 3 | to 2 |
| BI-110-PN | 3 | to 2-1/2 |
| BI-110-SM | 4 | to 2 |
| BI-110-SN | 4 | to 2-1/2 |
| BI-110-SP | 4 | to 3 |



LOCK NUT

| PART No. | Pipe |
|----------|------|
| BI-111-B | 1/4 |
| BI-111-C | 3/8 |
| BI-111-D | 1/2 |
| BI-111-E | 3/4 |



PLUG

(Square Head)

Steel merchant see BI-109MC

| PART No. | Pipe |
|----------|-------|
| BI-109-A | 1/8 |
| BI-109-B | 1/4 |
| BI-109-C | 3/8 |
| BI-109-D | 1/2 |
| BI-109-E | 3/4 |
| BI-109-H | 1 |
| BI-109-J | 1-1/4 |
| BI-109-K | 1-1/2 |
| BI-109-M | 2 |
| BI-109-N | 2-1/2 |
| BI-109-P | 3 |
| BI-109-S | 4 |



90° ELBOW

| PART No. | Pipe |
|----------|-------|
| BI-100-A | 1/8 |
| BI-100-B | 1/4 |
| BI-100-C | 3/8 |
| BI-100-D | 1/2 |
| BI-100-E | 3/4 |
| BI-100-H | 1 |
| BI-100-J | 1-1/4 |
| BI-100-K | 1-1/2 |
| BI-100-M | 2 |
| BI-100-N | 2-1/2 |
| BI-100-P | 3 |
| BI-100-S | 4 |



REDUCING 90° ELBOW

| PART No. | Pipe | Pipe |
|-----------|-------|----------|
| BI-100-CB | 3/8 | to 1/4 |
| BI-100-DB | 1/2 | to 1/4 |
| BI-100-DC | 1/2 | to 3/8 |
| BI-100-EC | 3/4 | to 3/8 |
| BI-100-ED | 3/4 | to 1/2 |
| BI-100-HD | 1 | to 1/2 |
| BI-100-HE | 1 | to 3/4 |
| BI-100-JE | 1-1/4 | to 3/4 |
| BI-100-JH | 1-1/4 | to 1 |
| BI-100-KH | 1-1/2 | to 1 |
| BI-100-KJ | 1-1/2 | to 1-1/4 |
| BI-100-MH | 2 | to 1 |
| BI-100-MJ | 2 | to 1-1/4 |
| BI-100-MK | 2 | to 1-1/2 |



45° ELBOW

| PART No. | Pipe |
|----------|-------|
| BI-105-A | 1/8 |
| BI-105-B | 1/4 |
| BI-105-C | 3/8 |
| BI-105-D | 1/2 |
| BI-105-E | 3/4 |
| BI-105-H | 1 |
| BI-105-J | 1-1/4 |
| BI-105-K | 1-1/2 |
| BI-105-M | 2 |
| BI-105-P | 3 |
| BI-105-S | 4 |



90° STREET ELBOW

| PART No. | Pipe |
|----------|-------|
| BI-116-A | 1/8 |
| BI-116-B | 1/4 |
| BI-116-C | 3/8 |
| BI-116-D | 1/2 |
| BI-116-E | 3/4 |
| BI-116-H | 1 |
| BI-116-J | 1-1/4 |
| BI-116-K | 1-1/2 |
| BI-116-M | 2 |
| BI-116-N | 2-1/2 |
| BI-116-P | 3 |
| BI-116-S | 4 |



45° STREET ELBOW

| PART No. | Pipe |
|----------|-------|
| BI-124-A | 1/8 |
| BI-124-B | 1/4 |
| BI-124-C | 3/8 |
| BI-124-D | 1/2 |
| BI-124-E | 3/4 |
| BI-124-H | 1 |
| BI-124-J | 1-1/4 |
| BI-124-K | 1-1/2 |
| BI-124-M | 2 |



TEE

| PART No. | Pipe |
|----------|-------|
| BI-101-A | 1/8 |
| BI-101-B | 1/4 |
| BI-101-C | 3/8 |
| BI-101-D | 1/2 |
| BI-101-E | 3/4 |
| BI-101-H | 1 |
| BI-101-J | 1-1/4 |
| BI-101-K | 1-1/2 |
| BI-101-M | 2 |
| BI-101-N | 2-1/2 |
| BI-101-P | 3 |
| BI-101-S | 4 |



REDUCING TEE

| PART No. | Pipe Size | | |
|------------|-----------|-------|-------|
| | 1 | 2 | 3 |
| BI-101-DB | 1/2 | 1/2 | 1/4 |
| BI-101-DC | 1/2 | 1/2 | 3/8 |
| BI-101-DE | 1/2 | 1/2 | 3/4 |
| BI-101-EB | 3/4 | 3/4 | 1/4 |
| BI-101-EBE | 3/4 | 1/4 | 3/4 |
| BI-101-EC | 3/4 | 3/4 | 3/8 |
| BI-101-ED | 3/4 | 3/4 | 1/2 |
| BI-101-EDD | 3/4 | 1/2 | 1/2 |
| BI-101-EDE | 3/4 | 1/2 | 3/4 |
| BI-101-HB | 1 | 1 | 1/4 |
| BI-101-HBH | 1 | 1/4 | 1 |
| BI-101-HD | 1 | 1 | 1/2 |
| BI-101-HDE | 1 | 1/2 | 3/4 |
| BI-101-HDH | 1 | 1/2 | 1 |
| BI-101-HE | 1 | 1 | 3/4 |
| BI-101-HED | 1 | 3/4 | 1/2 |
| BI-101-HEE | 1 | 3/4 | 3/4 |
| BI-101-HEH | 1 | 3/4 | 1 |
| BI-101-HK | 1 | 1 | 1-1/2 |
| BI-101-JE | 1-1/4 | 1-1/4 | 3/4 |
| BI-101-JEE | 1-1/4 | 3/4 | 3/4 |
| BI-101-JH | 1-1/4 | 1-1/4 | 1 |
| BI-101-JHH | 1-1/4 | 1 | 1 |
| BI-101-KD | 1-1/2 | 1-1/2 | 1/2 |
| BI-101-KDK | 1-1/2 | 1/2 | 1-1/2 |

Continued on next page.

BLACK IRON PIPE FITTINGS

SCHEDULE 40 (150 LB.)



REDUCING TEE

| PART No. | Pipe Size | | |
|------------|-----------|-------|-------|
| | 1 | 2 | 3 |
| BI-101-KE | 1-1/2 | 1-1/2 | 3/4 |
| BI-101-KEK | 1-1/2 | 3/4 | 1-1/2 |
| BI-101-KH | 1-1/2 | 1-1/2 | 1 |
| BI-101-KHK | 1-1/2 | 1 | 1-1/2 |
| BI-101-KHH | 1-1/2 | 1 | 1 |
| BI-101-KJ | 1-1/2 | 1-1/2 | 1-1/4 |
| BI-101-MD | 2 | 2 | 1/2 |
| BI-101-MDM | 2 | 1/2 | 2 |
| BI-101-ME | 2 | 2 | 3/4 |
| BI-101-MH | 2 | 2 | 1 |
| BI-101-MHM | 2 | 1 | 2 |
| BI-101-MJ | 2 | 2 | 1-1/4 |
| BI-101-MK | 2 | 2 | 1-1/2 |
| BI-101-NK | 2-1/2 | 2-1/2 | 1-1/2 |

NOTE: For Galvanized Iron: Replace Prefix BI- With GI- (Minimums may apply)
SCHEDULE 80: Replace Prefix BI- With BI80- For Schedule 80 (300LB.)



CAP

| PART No. | Pipe |
|----------|-------|
| BI-108-A | 1/8 |
| BI-108-B | 1/4 |
| BI-108-C | 3/8 |
| BI-108-D | 1/2 |
| BI-108-E | 3/4 |
| BI-108-H | 1 |
| BI-108-J | 1-1/4 |
| BI-108-K | 1-1/2 |
| BI-108-M | 2 |
| BI-108-N | 2-1/2 |
| BI-108-P | 3 |
| BI-108-S | 4 |



FLOOR FLANGE

| PART No. | Pipe |
|----------|-------|
| BI-114-B | 1/4 |
| BI-114-C | 3/8 |
| BI-114-D | 1/2 |
| BI-114-E | 3/4 |
| BI-114-H | 1 |
| BI-114-J | 1-1/4 |
| BI-114-K | 1-1/2 |
| BI-114-M | 2 |
| BI-114-N | 2-1/2 |

NOTE: For Thread Sealants See Page 149



CROSS

| PART No. | Pipe |
|----------|-------|
| BI-102-C | 3/8 |
| BI-102-D | 1/2 |
| BI-102-E | 3/4 |
| BI-102-H | 1 |
| BI-102-J | 1-1/4 |
| BI-102-K | 1-1/2 |
| BI-102-M | 2 |

BRASS S.A.E. 45° FLARE



FORGED NUT Long Standard Type

| PART No. | Tube |
|----------|------|
| 39-4 | 1/4 |
| 39-5 | 5/16 |
| 39-6 | 3/8 |
| 39-8 | 1/2 |
| 39-10 | 5/8 |
| 39-12 | 3/4 |



FORGED NUT Short Standard Type

| PART No. | Hex Size | Tube |
|----------|----------|-----------------|
| 40-3 | 1/2 | 3/16 |
| 40-4 | 5/8 | 1/4 |
| 40-5 | 11/16 | 5/16 |
| 40-6 | 13/16 | 3/8 |
| 40-8 | 15/16 | 1/2 |
| 40-10 | 1-1/16 | 5/8 |
| 40-12 | 1-5/16 | 3/4 |
| 40-14 | 1-5/8 | 7/8 |
| | | Reducing |
| 40R-64 | 13/16 | 3/8 to 1/4 |
| 40R-86 | 15/16 | 1/2 to 3/8 |
| 40R-108 | 1-1/16 | 5/8 to 1/2 |



MILLED NUT Short Type

| PART No. | Length | Tube |
|----------|--------|------|
| 41S-3 | 5/8 | 3/16 |
| 41S-4 | 3/4 | 1/4 |
| 41S-5 | 7/8 | 5/16 |
| 41S-6 | 7/8 | 3/8 |
| 41S-8 | 1 | 1/2 |

FORGED NUTS

| | | |
|----------|-------|-----|
| FO41S-6 | 7/8 | 3/8 |
| FO41S-8 | 1 | 1/2 |
| FO41S-10 | 1-1/8 | 5/8 |
| FO41S-12 | 1-1/2 | 3/4 |
| FO41S-16 | 1-3/4 | 1 |

NOTE: For reducing size use 40R series.



MILLED NUT Long Type

| PART No. | Length | Tube |
|----------|--------|------|
| 41-3 | 13/16 | 3/16 |
| 41-4 | 15/16 | 1/4 |
| 41-5 | 1-1/8 | 5/16 |
| 41-6 | 1-5/16 | 3/8 |
| 41-8 | 1-5/8 | 1/2 |
| 41-10 | 1-7/8 | 5/8 |
| 41-12 | 2-3/16 | 3/4 |



BULKHEAD UNION Tube to Tube

| PART No. | Tube | Description |
|----------|------|---------------|
| 31-6 | 3/8 | INCLUDES L.N. |
| 31-8 | 1/2 | INCLUDES L.N. |

NOTE: Locknuts supplied in steel.

Note: Fairview 40 Series Flare Nuts are hot forged and marked C37700 in accordance with CAN/CSA-B149 gas installation code requirements.

Select items are available in Lead-Free Brass (Special Order)



TUBE COUPLING Female Flare to Female Flare

| PART No. | Tube |
|----------|------|
| 32-4 | 1/4 |
| 32-6 | 3/8 |



BRASS S.A.E. 45° FLARE



TUBE COUPLING Swivel Flare (FORGED NUTS)

| PART No. | Tube |
|----------|------|
| 34-4 | 1/4 |
| 34-5 | 5/16 |
| 34-6 | 3/8 |
| 34-8 | 1/2 |
| 34-10 | 5/8 |
| 34-12 | 3/4 |

| | Reducing Tube |
|--------|---------------|
| 34R-64 | 3/8 to 1/4 |
| 34R-86 | 1/2 to 3/8 |



TUBE COUPLING Female Flare to Male Flare

| PART No. | Tube Female | Tube Male |
|----------|-------------|-----------|
| 35-46 | 1/4 | 3/8 |
| 35-64 | 3/8 | 1/4 |
| 35-68 | 3/8 | 1/2 |
| 35-84 | 1/2 | 1/4 |
| 35-86 | 1/2 | 3/8 |
| 35-810 | 1/2 | 5/8 |
| 35-108 | 5/8 | 1/2 |

NOTE: Female size listed first in above part



UNION COUPLING Tube to Tube

| PART No. | Tube |
|----------|------|
| 42-2 | 1/8 |
| 42-3 | 3/16 |
| 42-4 | 1/4 |
| 42-5 | 5/16 |
| 42-6 | 3/8 |
| 42-8 | 1/2 |
| 42-10 | 5/8 |
| 42-12 | 3/4 |

| PART No. | Reducing Tube |
|----------|---------------|
| 42R-64 | 3/8 to 1/4 |
| 42R-65 | 3/8 to 5/16 |
| 42R-84 | 1/2 to 1/4 |
| 42R-86 | 1/2 to 3/8 |
| 42R-106 | 5/8 to 3/8 |
| 42R-108 | 5/8 to 1/2 |
| 42R-128 | 3/4 to 1/2 |



CONNECTOR Female Flare To Female Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 30-6B | 3/8 | 1/4 |



CONNECTOR Female Flare To Male Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 33-4A | 1/4 | 1/8 |
| 33-4B | 1/4 | 1/4 |
| 33-6B | 3/8 | 1/4 |
| 33-8C | 1/2 | 3/8 |
| 33-8D | 1/2 | 1/2 |



CONNECTOR Tube To Female Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 46-3A | 3/16 | 1/8 |
| 46-4A | 1/4 | 1/8 |
| 46-4B | 1/4 | 1/4 |
| 46-4C | 1/4 | 3/8 |
| 46-4D | 1/4 | 1/2 |
| 46-5A | 5/16 | 1/8 |
| 46-5B | 5/16 | 1/4 |
| 46-6A | 3/8 | 1/8 |
| 46-6B | 3/8 | 1/4 |
| 46-6C | 3/8 | 3/8 |
| 46-6D | 3/8 | 1/2 |
| 46-6E | 3/8 | 3/4 |
| 46-8B | 1/2 | 1/4 |
| 46-8C | 1/2 | 3/8 |
| 46-8D | 1/2 | 1/2 |
| 46-8E | 1/2 | 3/4 |
| 46-10D | 5/8 | 1/2 |
| 46-10E | 5/8 | 3/4 |
| 46-12D | 3/4 | 1/2 |
| 46-12E | 3/4 | 3/4 |



CONNECTOR Tube To Male Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 48-2A | 1/8 | 1/8 |
| 48-3A | 3/16 | 1/8 |
| 48-4A | 1/4 | 1/8 |
| 48-4B | 1/4 | 1/4 |
| 48-4C | 1/4 | 3/8 |
| 48-4D | 1/4 | 1/2 |
| 48-5A | 5/16 | 1/8 |
| 48-5B | 5/16 | 1/4 |
| 48-5C | 5/16 | 3/8 |
| 48-6A | 3/8 | 1/8 |
| 48-6B | 3/8 | 1/4 |
| 48-6C | 3/8 | 3/8 |
| 48-6D | 3/8 | 1/2 |
| 48-6E | 3/8 | 3/4 |
| 48-8B | 1/2 | 1/4 |
| 48-8C | 1/2 | 3/8 |
| 48-8D | 1/2 | 1/2 |
| 48-8E | 1/2 | 3/4 |
| 48-10C | 5/8 | 3/8 |
| 48-10D | 5/8 | 1/2 |
| 48-10E | 5/8 | 3/4 |
| 48-12D | 3/4 | 1/2 |
| 48-12E | 3/4 | 3/4 |
| 48-14E | 7/8 | 3/4 |
| 48-16E | 1 | 3/4 |
| 48-16H | 1 | 1 |



90° ELBOW Tube To Male Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 49-2A | 1/8 | 1/8 |
| 49-3A | 3/16 | 1/8 |
| 49-4A | 1/4 | 1/8 |
| 49-4B | 1/4 | 1/4 |
| 49-4C | 1/4 | 3/8 |
| 49-4D | 1/4 | 1/2 |
| 49-5A | 5/16 | 1/8 |
| 49-5B | 5/16 | 1/4 |
| 49-5C | 5/16 | 3/8 |
| 49-6A | 3/8 | 1/8 |
| 49-6B | 3/8 | 1/4 |
| 49-6C | 3/8 | 3/8 |
| 49-6D | 3/8 | 1/2 |
| 49-6E | 3/8 | 3/4 |
| 49-8B | 1/2 | 1/4 |
| 49-8C | 1/2 | 3/8 |
| 49-8D | 1/2 | 1/2 |
| 49-8E | 1/2 | 3/4 |
| 49-10C | 5/8 | 3/8 |
| 49-10D | 5/8 | 1/2 |
| 49-10E | 5/8 | 3/4 |
| 49-12D | 3/4 | 1/2 |
| 49-12E | 3/4 | 3/4 |
| 49-12H | 3/4 | 1 |
| 49-16H | 1 | 1 |



90° ELBOW Tube To Swivel Female Flare

| PART No. | Tube |
|----------|------|
| 47-44 | 1/4 |
| 47-66 | 3/8 |



90° ELBOW Tube To Female Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 50-4A | 1/4 | 1/8 |
| 50-4B | 1/4 | 1/4 |
| 50-6A | 3/8 | 1/8 |
| 50-6B | 3/8 | 1/4 |
| 50-6C | 3/8 | 3/8 |
| 50-6D | 3/8 | 1/2 |
| 50-6E | 3/8 | 3/4 |
| 50-8C | 1/2 | 3/8 |
| 50-8D | 1/2 | 1/2 |
| 50-8E | 1/2 | 3/4 |
| 50-10C | 5/8 | 3/8 |
| 50-10D | 5/8 | 1/2 |
| 50-10E | 5/8 | 3/4 |
| 50-12D | 3/4 | 1/2 |
| 50-12E | 3/4 | 3/4 |

Select items are available in Lead-Free Brass (Special Order)

BRASS S.A.E. 45° FLARE



90° ELBOW
Tube
To
Tube

| PART No. | Tube |
|----------|-----------------|
| 55-4 | 1/4 |
| 55-5 | 5/16 |
| 55-6 | 3/8 |
| 55-8 | 1/2 |
| 55-10 | 5/8 |
| 55-12 | 3/4 |
| | Reducing |
| 55R-64 | 3/8 to 1/4 |
| 55R-86 | 1/2 to 3/8 |
| 55R-108 | 5/8 to 1/2 |

Note: Fairview 40 Series Flare Nuts are hot forged and marked C37700 in accordance with CAN/CSA-B149 gas installation code requirements.



45° ELBOW
Tube
To
Male Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 54-4A | 1/4 | 1/8 |
| 54-4B | 1/4 | 1/4 |
| 54-4C | 1/4 | 3/8 |
| 54-5A | 5/16 | 1/8 |
| 54-5B | 5/16 | 1/4 |
| 54-6B | 3/8 | 1/4 |
| 54-6C | 3/8 | 3/8 |
| 54-6D | 3/8 | 1/2 |
| 54-8C | 1/2 | 3/8 |
| 54-8D | 1/2 | 1/2 |
| 54-10D | 5/8 | 1/2 |
| 54-12D | 3/4 | 1/2 |
| 54-12E | 3/4 | 3/4 |



TEE
Tube
To
Female Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 36-4B | 1/4 | 1/4 |
| 36-6B | 3/8 | 1/4 |
| 36-6C | 3/8 | 3/8 |
| 36-8C | 1/2 | 3/8 |
| 36-8D | 1/2 | 1/2 |



TEE
Ends Male
And Female Pipe
Center Tube

| PART No. | Tube | Pipe |
|----------|------|------|
| 53-4A | 1/4 | 1/8 |



TEE
Ends Tube
And Male Pipe
Center Tube

| PART No. | Tube | Pipe |
|----------|------|------|
| 51-4A | 1/4 | 1/8 |
| 51-4B | 1/4 | 1/4 |
| 51-6B | 3/8 | 1/4 |
| 51-6C | 3/8 | 3/8 |
| 51-6D | 3/8 | 1/2 |
| 51-8C | 1/2 | 3/8 |
| 51-8D | 1/2 | 1/2 |
| 51-10D | 5/8 | 1/2 |



TEE
Tube
Three Ends

| PART No. | Tube |
|----------|------|
| 44-3 | 3/16 |
| 44-4 | 1/4 |
| 44-5 | 5/16 |
| 44-6 | 3/8 |
| 44-8 | 1/2 |
| 44-10 | 5/8 |
| 44-12 | 3/4 |



TEE
Tube
Three Ends

| PART No. | Reducing | | |
|----------|----------|-----|-----|
| | 1 | 2 | 3 |
| 44R-64 | 3/8 | 3/8 | 1/4 |
| 44R-68 | 3/8 | 3/8 | 1/2 |
| 44R-86 | 1/2 | 1/2 | 3/8 |
| 44R-866 | 1/2 | 3/8 | 3/8 |
| 44R-868 | 1/2 | 3/8 | 1/2 |
| 44R-810 | 1/2 | 1/2 | 5/8 |
| 44R-106 | 5/8 | 5/8 | 3/8 |
| 44R-108 | 5/8 | 5/8 | 1/2 |
| 44R-1088 | 5/8 | 1/2 | 1/2 |



TEE
Ends Tube
Center
Male Pipe

| PART No. | Tube | Pipe |
|----------|------|------|
| 45-4A | 1/4 | 1/8 |
| 45-4B | 1/4 | 1/4 |
| 45-5A | 5/16 | 1/8 |
| 45-5B | 5/16 | 1/4 |
| 45-6B | 3/8 | 1/4 |
| 45-6C | 3/8 | 3/8 |
| 45-6D | 3/8 | 1/2 |
| 45-8B | 1/2 | 1/4 |
| 45-8C | 1/2 | 3/8 |
| 45-8D | 1/2 | 1/2 |
| 45-10D | 5/8 | 1/2 |
| 45-12D | 3/4 | 1/2 |
| 45-12E | 3/4 | 3/4 |



CROSS
Tube
Four Ends

| PART No. | Tube |
|----------|-----------------|
| 52-6 | 3/8 |
| 52-8 | 1/2 |
| | Reducing |
| | 1 2 3 4 |
| 52R-866 | 1/2 3/8 3/8 3/8 |



SEALING
CAP
NUT

| PART No. | Tube |
|----------|-------------------|
| 56-4 | 1/4 |
| 56HP-4 | Heavy Pattern 1/4 |
| 56-5 | 5/16 |
| 56-6 | 3/8 |
| 56-8 | 1/2 |
| 56-10 | 5/8 |
| 56-12 | 3/4 |



SEALING
PLUG

| PART No. | Tube |
|----------|------|
| 58-4 | 1/4 |
| 58-5 | 5/16 |
| 58-6 | 3/8 |
| 58-8 | 1/2 |
| 58-10 | 5/8 |
| 58-12 | 3/4 |



COPPER
FLARE
GASKET

| PART No. | Tube |
|----------|------|
| 59-4 | 1/4 |
| 59-6 | 3/8 |
| 59-8 | 1/2 |
| 59-10 | 5/8 |
| 59-12 | 3/4 |

Select items are available in Lead-Free Brass (Special Order)

D



AUTOMOTIVE FITTINGS

BRASS AIR SHIFT TRANSMISSION FITTINGS



SLEEVE

| PART No. | Tube | Fuller No. |
|-----------|------|------------|
| 860-2 | 1/8 | 83001 |
| 860-2-1/2 | 5/32 | 83002 |



UNION COUPLING

| PART No. | Tube | Fuller No. |
|-----------|------|------------|
| 862-2 | 1/8 | 84101 |
| 862-2-1/2 | 5/32 | 84102 |



**90° ELBOW
Tube To
Male Pipe**

| PART No. | Tube | Pipe | Fuller No. |
|------------|------|------|------------|
| 869-2A | 1/8 | 1/8 | 85002 |
| 869-2-1/2A | 5/32 | 1/8 | 85001 |



NUT

| PART No. | Tube | Fuller No. |
|-----------|------|------------|
| 861-2 | 1/8 | 83501 |
| 861-2-1/2 | 5/32 | 83502 |



**CONNECTOR
Tube To
Male Pipe**

| PART No. | Tube | Pipe | Fuller No. |
|-------------|------|------|------------|
| 868-2-1 | 1/8 | 1/16 | 84001 |
| 868-2A | 1/8 | 1/8 | 84002 |
| 868-2-1/2-1 | 5/32 | 1/16 | 83003 |
| 868-2-1/2A | 5/32 | 1/8 | N/A |

TO ASSEMBLE

- 1 PLACE NUT AND SLEEVE OVER TUBE
- 2 PUSH TUBE INTO FITTING AS FAR AS POSSIBLE
- 3 FINGER TIGHTEN NUT
4. COMPLETE SEAL WITH WRENCH ONE FULL TURN

BRASS AIR SHIFT TRANSMISSION KITS

Fairview's Air Shift Transmission Kit has a selection of fittings in a light weight compact kit. It is ideal for any shop.



Split sleeve compression fittings



PART No. ASTM-KIT

| PART No. | Description | Qty. |
|-------------|--------------------------------|------|
| 862-2 | Union, 1/8 Tube | 3 |
| 862-2-1/2 | Union, 5/32 Tube | 3 |
| 868-2-1 | Connector, 1/8 Tube 1/16 Pipe | 3 |
| 868-2-1/2-1 | Connector, 5/32 Tube 1/16 Pipe | 3 |
| 868-2-1/2A | Connector, 5/32 Tube 1/8 Pipe | 3 |
| 868-2A | Connector, 1/8 Tube 1/8 Pipe | 3 |
| 869-2-1/2A | Elbow, 5/32 Tube 1/8 Pipe | 3 |
| 869-2A | Elbow, 1/8 Tube 1/8 Pipe | 3 |

Kit Dimensions

Height: 3.50 In.
Width: 6.25 In.
Depth: 1.25 In.

Fairview's Push-To-Connect Air Shift Transmission Kit has a selection of fittings in a light weight compact kit. Connections are faster and easier.



Push-to-connect fittings



PART No. ASTM-KIT-PC

| PART No. | Description | Qty. |
|--------------|--------------------------------|------|
| PC62-2 | Union, 1/8 Tube | 3 |
| PC62-2-1/2 | Union, 5/32 Tube | 3 |
| PC68-2X1 | Connector, 1/8 Tube 1/16 Pipe | 3 |
| PC68-2-1/2-1 | Connector, 5/32 Tube 1/16 Pipe | 3 |
| PC68-2-1/2A | Connector, 5/32 Tube 1/8 Pipe | 3 |
| PC68-2A | Connector, 1/8 Tube 1/8 Pipe | 3 |
| PC69-2-1/2A | Elbow, 5/32 Tube 1/8 Pipe | 3 |
| PC69-2A | Elbow, 1/8 Tube 1/8 Pipe | 3 |

Kit Dimensions

Height: 3.50 In.
Width: 6.25 In.
Depth: 1.25 In.



See Page 26 for D.O.T. Air Shift Transmission Assemblies

STEEL GREASE FITTINGS



STRAIGHT

| PART No. | Thread Size | Overall Length (IN.) |
|----------|-------------|----------------------|
| GN-607 | 1/8 x 27 | 1.25 |
| GN-610 | 1/8 x 27 | 0.62 |
| GN-627 | 1/4 x 18 | 0.80 |
| GN-641 | 1/4 x 28 | 0.54 |
| GN-652 | 1/4 x 28 | 0.67 |
| GN-680 | 1/4 x 28 | 0.93 |



STRAIGHT METRIC

| PART No. | Thread Size | Overall Length (mm) |
|----------|-------------|---------------------|
| GNM-301 | 10mm x 1 | 15.2 |
| GNM-601 | 6mm x 1 | 13.5 |
| GNM-901 | 8mm x 1 | 15.0 |

GREASE WHIP COUPLER



4-Jaw steel coupler for use with rubber or nylon grease whip hose assemblies.

| PART No. | Pipe |
|----------|------------|
| GWC-A | 1/8 |
| C-GWC-A | Carded X 1 |



45° ANGLE

| PART No. | Thread Size | Overall Length (IN.) |
|----------|-------------|----------------------|
| GN-637 | 1/4 x 28 | 0.88 |
| GN-688 | 1/8 x 27 | 0.98 |



45° ANGLE METRIC

| PART No. | Thread Size | Overall Length (mm) |
|----------|-------------|---------------------|
| GNM-045 | 6mm x 1 | 22.6 |
| GNM-345 | 10mm x 1 | 23.5 |
| GNM-445 | 8mm x 1 | 22.6 |



65° ANGLE

| PART No. | Thread Size | Overall Length (IN.) |
|----------|-------------|----------------------|
| GN-612 | 1/8 X 27 | 0.88 |
| GN-629 | 1/4 X 18 | 0.96 |

Grease fittings are available in retail carded blister packs, ten per card. Prefix PART No. with C10- (10 Pcs.) Example: C10-GN607



90° ANGLE

| PART No. | Thread Size | Overall Length (IN.) |
|----------|-------------|----------------------|
| GN-613 | 1/8 X 27 | 0.82 |
| GN-911 | 1/4 X 28 | 0.69 |



90° ANGLE METRIC

| PART No. | Thread Size | Overall Length (mm) |
|----------|-------------|---------------------|
| GNM-090 | 6mm x 1 | 18.0 |
| GNM-390 | 10mm x 1 | 19.0 |
| GNM-490 | 8mm x 1 | 18.0 |



DRIVE FIT

| PART No. | Thread Size | Overall Length (IN.) |
|----------|-------------|----------------------|
| GN-608 | 5/16 | 0.58 |
| GN-728 | 3/16 | 0.50 |
| GN-743 | 1/4 | 0.50 |

Grease Guns
See page 145

GREASE FITTING ASSORTMENT KITS

Fairview's Grease Fitting kits provide the most popular grease nipple fittings all in one place when you need them. This light weight compact kit is ideal for any shop.

| PART No. | Description |
|-------------|-------------|
| GN-100-KIT | Standard |
| GNM-100-KIT | Metric |



GREASE FITTING KIT
GN-100-KIT

Kit Dimensions

Height: 3.50 In.
Width: 6.25 In.
Depth: 1.25 In.

PART No. GN-100-KIT: 100 STANDARD GREASE FITTINGS IN 6 POPULAR SIZES. KIT CONTAINS:

| PART No. | Quantity | Style | Thread Size | Overall Length (IN.) |
|----------|----------|----------|-------------|----------------------|
| GN-610 | 20 | Straight | 1/8 x 27 | 0.62 |
| GN-613 | 4 | 90° | 1/8 X 27 | 0.82 |
| GN-637 | 6 | 45° | 1/4 x 28 | 0.88 |
| GN-641 | 60 | Straight | 1/4 x 28 | 0.54 |
| GN-688 | 4 | 45° | 1/8 x 27 | 0.98 |
| GN-911 | 6 | 90° | 1/4 X 28 | 0.69 |

PART No. GNM-100-KIT: 100 METRIC GREASE FITTINGS IN 6 POPULAR SIZES. KIT CONTAINS:

| PART No. | Quantity | Style | Thread Size | Overall Length (mm) |
|----------|----------|----------|-------------|---------------------|
| GNM-045 | 10 | 45° | 6mm x 1 | 22.6 |
| GNM-090 | 10 | 90° | 6mm x 1 | 18.0 |
| GNM-301 | 10 | Straight | 10mm x 1 | 15.2 |
| GNM-445 | 10 | 45° | 8mm x 1 | 22.6 |
| GNM-601 | 40 | Straight | 6mm x 1 | 13.5 |
| GNM-901 | 20 | Straight | 8mm x 1 | 15.0 |



CONNECTOR
Female 37°
Swivel To
Male Pipe

| PART No. | Swivel | Pipe |
|-----------|--------|-------|
| S3520-4A | 1/4 | 1/8 |
| S3520-4B | 1/4 | 1/4 |
| S3520-6B | 3/8 | 1/4 |
| S3520-6C | 3/8 | 3/8 |
| S3520-8C | 1/2 | 3/8 |
| S3520-8D | 1/2 | 1/2 |
| S3520-10D | 5/8 | 1/2 |
| S3520-10E | 5/8 | 3/4 |
| S3520-12D | 3/4 | 1/2 |
| S3520-12E | 3/4 | 3/4 |
| S3520-16E | 1 | 3/4 |
| S3520-16H | 1 | 1 |
| S3520-20J | 1-1/4 | 1-1/4 |
| S3520-24K | 1-1/2 | 1-1/2 |



CONNECTOR
Female 37°
Swivel To
Male O-Ring

| PART No. | Swivel | O-Ring |
|----------|--------|-------------|
| S3522-4 | 1/4 | 7/16 - 20 |
| S3522-6 | 3/8 | 9/16 - 18 |
| S3522-8 | 1/2 | 3/4 - 16 |
| S3522-10 | 5/8 | 7/8 - 14 |
| S3522-12 | 3/4 | 1-1/16 - 12 |
| S3522-16 | 1 | 1-5/16 - 12 |
| S3522-20 | 1-1/4 | 1-5/8 - 12 |



CONNECTOR
Female 37°
Swivel To
Female Pipe

| PART No. | Swivel | Pipe |
|-----------|--------|-------|
| S3526-4A | 1/4 | 1/8 |
| S3526-4B | 1/4 | 1/4 |
| S3526-6B | 3/8 | 1/4 |
| S3526-6C | 3/8 | 3/8 |
| S3526-8C | 1/2 | 3/8 |
| S3526-8D | 1/2 | 1/2 |
| S3526-10D | 5/8 | 1/2 |
| S3526-12E | 3/4 | 3/4 |
| S3526-16H | 1 | 1 |
| S3526-20J | 1-1/4 | 1-1/4 |
| S3526-24K | 1-1/2 | 1-1/2 |



UNION
Female 37°
Swivel

| PART No. | Swivel |
|----------|--------|
| S3542-4 | 1/4 |
| S3542-6 | 3/8 |
| S3542-8 | 1/2 |
| S3542-12 | 3/4 |
| S3542-16 | 1 |



CONNECTOR
Female 37°
Swivel To
Male JIC

| PART No. | Swivel | Tube |
|----------|--------|------|
| S3548-4 | 1/4 | 1/4 |
| S3548-6 | 3/8 | 3/8 |
| S3548-8 | 1/2 | 1/2 |
| S3548-10 | 5/8 | 5/8 |
| S3548-12 | 3/4 | 3/4 |
| S3548-16 | 1 | 1 |



90° ELBOW
Female 37°
Swivel To
Male Pipe

| PART No. | Swivel | Pipe |
|-----------|--------|------|
| S3516-4A | 1/4 | 1/8 |
| S3516-4B | 1/4 | 1/4 |
| S3516-6B | 3/8 | 1/4 |
| S3516-6C | 3/8 | 3/8 |
| S3516-8C | 1/2 | 3/8 |
| S3516-8D | 1/2 | 1/2 |
| S3516-10D | 5/8 | 1/2 |
| S3516-12E | 3/4 | 3/4 |
| S3516-16H | 1 | 1 |



90° ELBOW
Female 37°
Swivel To
Male O-Ring

| PART No. | Swivel | O-Ring |
|----------|--------|-------------|
| S3599-6 | 3/8 | 9/16 - 18 |
| S3599-8 | 1/2 | 3/4 - 16 |
| S3599-10 | 5/8 | 7/8 - 14 |
| S3599-12 | 3/4 | 1-1/16 - 12 |
| S3599-16 | 1 | 1-5/16 - 12 |



90° ELBOW
Female 37°
Swivel To
Male JIC

| PART No. | Swivel | Tube |
|-----------|--------|-------|
| S3549-4 | 1/4 | 1/4 |
| S3549-5 | 5/16 | 5/16 |
| S3549-6 | 3/8 | 3/8 |
| S3549-6B | 3/8 | 1/2 |
| S3549-8 | 1/2 | 1/2 |
| S3549-8B | 1/2 | 3/8 |
| S3549-810 | 1/2 | 5/8 |
| S3549-10 | 5/8 | 5/8 |
| S3549-12 | 3/4 | 3/4 |
| S3549-16 | 1 | 1 |
| S3549-20 | 1-1/4 | 1-1/4 |
| S3549-24 | 1-1/2 | 1-1/2 |



90° BENT TUBE
ELBOW
Female 37°
Swivel To
Male JIC

| PART No. | Swivel | Tube | Drop Length |
|------------|--------|-------|-------------|
| S3549BT-4 | 1/4 | 1/4 | 0.68 |
| S3549BT-8 | 1/2 | 1/2 | 1.09 |
| S3549BT-10 | 5/8 | 5/8 | 1.23 |
| S3549BT-12 | 3/4 | 3/4 | 1.83 |
| S3549BT-16 | 1 | 1 | 2.14 |
| S3549BT-20 | 1-1/4 | 1-1/4 | 9999 |



90° BENT TUBE
ELBOW
(LONG STYLE)
Female 37°
Swivel To M. JIC

| PART No. | Swivel | Tube | Drop Length |
|-------------|--------|------|-------------|
| S3549LBT-8 | 1/2 | 1/2 | 2.44 |
| S3549LBT-12 | 3/4 | 3/4 | 3.73 |
| S3549LBT-16 | 1 | 1 | 4.33 |



45° ELBOW
Female 37°
Swivel To
Male JIC

| PART No. | Swivel | Tube |
|----------|--------|-------|
| S3554-4 | 1/4 | 1/4 |
| S3554-6 | 3/8 | 3/8 |
| S3554-8 | 1/2 | 1/2 |
| S3554-10 | 5/8 | 5/8 |
| S3554-12 | 3/4 | 3/4 |
| S3554-16 | 1 | 1 |
| S3554-20 | 1-1/4 | 1-1/4 |
| S3554-24 | 1-1/2 | 1-1/2 |



TEE
Male JIC To
Male JIC To
Female 37°
Swivel

| PART No. | Swivel | Tube |
|----------|--------|-------|
| S3545-4 | 1/4 | 1/4 |
| S3545-6 | 3/8 | 3/8 |
| S3545-8 | 1/2 | 1/2 |
| S3545-10 | 5/8 | 5/8 |
| S3545-12 | 3/4 | 3/4 |
| S3545-16 | 1 | 1 |
| S3545-20 | 1-1/4 | 1-1/4 |



TEE
Tube To Female
37° Swivel To
Male JIC

| PART No. | Swivel | Tube |
|----------|--------|-------|
| S3551-4 | 1/4 | 1/4 |
| S3551-6 | 3/8 | 3/8 |
| S3551-8 | 1/2 | 1/2 |
| S3551-10 | 5/8 | 5/8 |
| S3551-12 | 3/4 | 3/4 |
| S3551-16 | 1 | 1 |
| S3551-20 | 1-1/4 | 1-1/4 |



TEE
Tube To Female
37° Swivel To
Male Pipe

| PART No. | Tube | Swivel | Pipe |
|----------|------|--------|------|
| S3536-8B | 1/2 | 1/2 | 1/4 |

STEEL 37° J.I.C. FLARE ADAPTERS



SLEEVE

| PART No. | Tube |
|----------|-------|
| S3721-4 | 1/4 |
| S3721-6 | 3/8 |
| S3721-8 | 1/2 |
| S3721-10 | 5/8 |
| S3721-12 | 3/4 |
| S3721-16 | 1 |
| S3721-20 | 1-1/4 |



SLEEVE NUT

| PART No. | Tube |
|----------|-------|
| S3720-4 | 1/4 |
| S3720-6 | 3/8 |
| S3720-8 | 1/2 |
| S3720-10 | 5/8 |
| S3720-12 | 3/4 |
| S3720-16 | 1 |
| S3720-20 | 1-1/4 |



REDUCER Female JIC To Male JIC (ONE PIECE TYPE)

| PART No. | Female Tube | Male Tube |
|------------|-------------|-----------|
| S3735-46 | 1/4 | 3/8 |
| S3735-64 | 3/8 | 1/4 |
| S3735-68 | 3/8 | 1/2 |
| S3735-84 | 1/2 | 1/4 |
| S3735-86 | 1/2 | 3/8 |
| S3735-810 | 1/2 | 5/8 |
| S3735-812 | 1/2 | 3/4 |
| S3735-106 | 5/8 | 3/8 |
| S3735-108 | 5/8 | 1/2 |
| S3735-1012 | 5/8 | 3/4 |
| S3735-124 | 3/4 | 1/4 |
| S3735-126 | 3/4 | 3/8 |
| S3735-128 | 3/4 | 1/2 |
| S3735-1210 | 3/4 | 5/8 |
| S3735-1216 | 3/4 | 1 |
| S3735-164 | 1 | 1/4 |
| S3735-166 | 1 | 3/8 |
| S3735-168 | 1 | 1/2 |
| S3735-1610 | 1 | 5/8 |
| S3735-1612 | 1 | 3/4 |
| S3735-1620 | 1 | 1-1/4 |
| S3735-2012 | 1-1/4 | 3/4 |
| S3735-2016 | 1-1/4 | 1 |
| S3735-2416 | 1-1/2 | 1 |
| S3735-2420 | 1-1/2 | 1-1/4 |
| S3735-3224 | 2 | 1-1/2 |



UNION Male JIC To Male JIC

| PART No. | Tube | Tube |
|------------|-------|-------|
| S3742-4 | 1/4 | 1/4 |
| S3742-5 | 5/16 | 5/16 |
| S3742-6 | 3/8 | 3/8 |
| S3742-64 | 3/8 | 1/4 |
| S3742-8 | 1/2 | 1/2 |
| S3742-86 | 1/2 | 3/8 |
| S3742-10 | 5/8 | 5/8 |
| S3742-108 | 5/8 | 1/2 |
| S3742-12 | 3/4 | 3/4 |
| S3742-128 | 3/4 | 1/2 |
| S3742-1210 | 3/4 | 5/8 |
| S3742-16 | 1 | 1 |
| S3742-1612 | 1 | 3/4 |
| S3742-20 | 1-1/4 | 1-1/4 |
| S3742-2016 | 1-1/4 | 1 |
| S3742-24 | 1-1/2 | 1-1/2 |
| S3742-32 | 2 | 2 |



CONNECTOR Male JIC To Female Pipe

| PART No. | Tube | Pipe |
|-----------|-------|-------|
| S3746-4A | 1/4 | 1/8 |
| S3746-4B | 1/4 | 1/4 |
| S3746-6B | 3/8 | 1/4 |
| S3746-6C | 3/8 | 3/8 |
| S3746-6D | 3/8 | 1/2 |
| S3746-8B | 1/2 | 1/4 |
| S3746-8C | 1/2 | 3/8 |
| S3746-8D | 1/2 | 1/2 |
| S3746-10D | 5/8 | 1/2 |
| S3746-10E | 5/8 | 3/4 |
| S3746-12D | 3/4 | 1/2 |
| S3746-12E | 3/4 | 3/4 |
| S3746-16H | 1 | 1 |
| S3746-20J | 1-1/4 | 1-1/4 |
| S3746-24K | 1-1/2 | 1-1/2 |
| S3746-32M | 2 | 2 |



CONNECTOR 37° Tube to British Standard Pipe Parallel Male

| PART No. | Tube | BSPP |
|--------------|------|------|
| S3748BSPP-44 | 1/4 | 1/4 |
| S3748BSPP-66 | 3/8 | 3/8 |
| S3748BSPP-88 | 1/2 | 1/2 |



CONNECTOR Male JIC To Male Pipe

| PART No. | Tube | Pipe |
|-----------|-------|-------|
| S3748-2A | 1/8 | 1/8 |
| S3748-3A | 3/16 | 1/8 |
| S3748-4A | 1/4 | 1/8 |
| S3748-4B | 1/4 | 1/4 |
| S3748-4C | 1/4 | 3/8 |
| S3748-4D | 1/4 | 1/2 |
| S3748-5A | 5/16 | 1/8 |
| S3748-5B | 5/16 | 1/4 |
| S3748-6A | 3/8 | 1/8 |
| S3748-6B | 3/8 | 1/4 |
| S3748-6C | 3/8 | 3/8 |
| S3748-6D | 3/8 | 1/2 |
| S3748-6E | 3/8 | 3/4 |
| S3748-8B | 1/2 | 1/4 |
| S3748-8C | 1/2 | 3/8 |
| S3748-8D | 1/2 | 1/2 |
| S3748-8E | 1/2 | 3/4 |
| S3748-8H | 1/2 | 1 |
| S3748-10C | 5/8 | 3/8 |
| S3748-10D | 5/8 | 1/2 |
| S3748-10E | 5/8 | 3/4 |
| S3748-12D | 3/4 | 1/2 |
| S3748-12E | 3/4 | 3/4 |
| S3748-12H | 3/4 | 1 |
| S3748-16D | 1 | 1/2 |
| S3748-16E | 1 | 3/4 |
| S3748-16H | 1 | 1 |
| S3748-16J | 1 | 1-1/4 |
| S3748-20H | 1-1/4 | 1 |
| S3748-20J | 1-1/4 | 1-1/4 |
| S3748-20K | 1-1/4 | 1-1/2 |
| S3748-24K | 1-1/2 | 1-1/2 |
| S3748-32K | 2 | 1-1/2 |
| S3748-32M | 2 | 2 |



Male JIC PLUG

| PART No. | Tube |
|----------|-------|
| S3758-3 | 3/16 |
| S3758-4 | 1/4 |
| S3758-5 | 5/16 |
| S3758-6 | 3/8 |
| S3758-8 | 1/2 |
| S3758-10 | 5/8 |
| S3758-12 | 3/4 |
| S3758-14 | 7/8 |
| S3758-16 | 1 |
| S3758-20 | 1-1/4 |
| S3758-24 | 1-1/2 |
| S3758-32 | 2 |

D



CAP NUT

| PART No. | Tube |
|----------|-------|
| S3756-4 | 1/4 |
| S3756-5 | 5/16 |
| S3756-6 | 3/8 |
| S3756-8 | 1/2 |
| S3756-10 | 5/8 |
| S3756-12 | 3/4 |
| S3756-14 | 7/8 |
| S3756-16 | 1 |
| S3756-20 | 1-1/4 |
| S3756-24 | 1-1/2 |
| S3756-32 | 2 |



**90° ELBOW
(EXTRA LONG
STYLE)
Male JIC To
Male Pipe**

| PART No. | Tube | Pipe |
|------------|------|------|
| S3749EL-4A | 1/4 | 1/8 |
| S3749EL-4B | 1/4 | 1/4 |



**90° ELBOW
Male JIC To Male
JIC**

| PART No. | Tube | Tube |
|----------|-------|-------|
| S3755-4 | 1/4 | 1/4 |
| S3755-6 | 3/8 | 3/8 |
| S3755-8 | 1/2 | 1/2 |
| S3755-10 | 5/8 | 5/8 |
| S3755-12 | 3/4 | 3/4 |
| S3755-16 | 1 | 1 |
| S3755-20 | 1-1/4 | 1-1/4 |



**90° ELBOW
Male JIC To
Male Pipe**

| PART No. | Tube | Pipe |
|-----------|-------|-------|
| S3749-2A | 1/8 | 1/8 |
| S3749-4A | 1/4 | 1/8 |
| S3749-4B | 1/4 | 1/4 |
| S3749-4C | 1/4 | 3/8 |
| S3749-4D | 1/4 | 1/2 |
| S3749-6A | 3/8 | 1/8 |
| S3749-6B | 3/8 | 1/4 |
| S3749-6C | 3/8 | 3/8 |
| S3749-6D | 3/8 | 1/2 |
| S3749-6E | 3/8 | 3/4 |
| S3749-8B | 1/2 | 1/4 |
| S3749-8C | 1/2 | 3/8 |
| S3749-8D | 1/2 | 1/2 |
| S3749-8E | 1/2 | 3/4 |
| S3749-8H | 1/2 | 1 |
| S3749-10C | 5/8 | 3/8 |
| S3749-10D | 5/8 | 1/2 |
| S3749-10E | 5/8 | 3/4 |
| S3749-12D | 3/4 | 1/2 |
| S3749-12E | 3/4 | 3/4 |
| S3749-12H | 3/4 | 1 |
| S3749-16E | 1 | 3/4 |
| S3749-16H | 1 | 1 |
| S3749-16J | 1 | 1-1/4 |
| S3749-20H | 1-1/4 | 1 |
| S3749-20J | 1-1/4 | 1-1/4 |
| S3749-20K | 1-1/4 | 1-1/2 |
| S3749-24J | 1-1/2 | 1-1/4 |
| S3749-24K | 1-1/2 | 1-1/2 |
| S3749-32M | 2 | 2 |



**90° ELBOW
(EXTRA-EXTRA
LONG STYLE)
Male JIC To
Male Pipe**

| PART No. | Tube | Pipe |
|-------------|------|------|
| S3749EEL-4A | 1/4 | 1/8 |



**45° ELBOW
Male JIC To
Male Pipe**

| PART No. | Tube | Pipe |
|-----------|-------|-------|
| S3754-4A | 1/4 | 1/8 |
| S3754-4B | 1/4 | 1/4 |
| S3754-6B | 3/8 | 1/4 |
| S3754-6C | 3/8 | 3/8 |
| S3754-6D | 3/8 | 1/2 |
| S3754-8C | 1/2 | 3/8 |
| S3754-8D | 1/2 | 1/2 |
| S3754-8E | 1/2 | 3/4 |
| S3754-10C | 5/8 | 3/8 |
| S3754-10D | 5/8 | 1/2 |
| S3754-12D | 3/4 | 1/2 |
| S3754-12E | 3/4 | 3/4 |
| S3754-16E | 1 | 3/4 |
| S3754-16H | 1 | 1 |
| S3754-20J | 1-1/4 | 1-1/4 |
| S3754-24K | 1-1/2 | 1-1/2 |



**90° ELBOW
37° Tube to
British Standard
Pipe Parallel
Male**

| PART No. | Tube | BSP |
|--------------|------|-----|
| S3749BSPP-42 | 1/4 | 1/8 |



**90° ELBOW
Male JIC To
Female Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| S3750-4A | 1/4 | 1/8 |
| S3750-4B | 1/4 | 1/4 |
| S3750-6B | 3/8 | 1/4 |
| S3750-6C | 3/8 | 3/8 |
| S3750-8C | 1/2 | 3/8 |
| S3750-8D | 1/2 | 1/2 |
| S3750-10D | 5/8 | 1/2 |
| S3750-12E | 3/4 | 3/4 |
| S3750-16H | 1 | 1 |



**TEE
Male JIC To
Male JIC To
Female Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| S3736-6B | 3/8 | 1/4 |
| S3736-8D | 1/2 | 1/2 |
| S3736-12E | 3/4 | 3/4 |

| PART No. | Tube | Pipe |
|-----------|------|------|
| S3749L-4A | 1/4 | 1/8 |
| S3749L-4B | 1/4 | 1/4 |
| S3749L-6B | 3/8 | 1/4 |
| S3749L-8D | 1/2 | 1/2 |

STEEL 37° J.I.C. FLARE ADAPTERS



**TEE
Male JIC
All Ends**

| PART No. | Tube | Tube |
|----------|-------|-------|
| S3744-4 | 1/4 | 1/4 |
| S3744-6 | 3/8 | 3/8 |
| S3744-8 | 1/2 | 1/2 |
| S3744-10 | 5/8 | 5/8 |
| S3744-12 | 3/4 | 3/4 |
| S3744-16 | 1 | 1 |
| S3744-20 | 1-1/4 | 1-1/4 |



**TEE
Male JIC To
Male Pipe To
Tube**

| PART No. | Tube | Pipe |
|-----------|------|------|
| S3751-4B | 1/4 | 1/4 |
| S3751-6B | 3/8 | 1/4 |
| S3751-6C | 3/8 | 3/8 |
| S3751-6D | 3/8 | 1/2 |
| S3751-8C | 1/2 | 3/8 |
| S3751-8D | 1/2 | 1/2 |
| S3751-12E | 3/4 | 3/4 |
| S3751-16H | 1 | 1 |



**TEE
Male JIC To
Male JIC To
Male Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| S3745-4B | 1/4 | 1/4 |
| S3745-6B | 3/8 | 1/4 |
| S3745-6C | 3/8 | 3/8 |
| S3745-8C | 1/2 | 3/8 |
| S3745-8D | 1/2 | 1/2 |
| S3745-12E | 3/4 | 3/4 |
| S3745-16H | 1 | 1 |



**CROSS
Male JIC
All Ends**

| PART No. | Tube |
|----------|------|
| S3752-6 | 3/8 |
| S3752-8 | 1/2 |



**Contact us for
Custom Made
Hose
Assemblies**

STEEL 37° S.A.E. FLARE BULKHEAD ADAPTERS



**BULKHEAD
UNION
Male JIC To
Male JIC**

| PART No. | Tube |
|----------|-------|
| S3842-4 | 1/4 |
| S3842-6 | 3/8 |
| S3842-8 | 1/2 |
| S3842-10 | 5/8 |
| S3842-12 | 3/4 |
| S3842-16 | 1 |
| S3842-20 | 1-1/4 |



**BULKHEAD
CONNECTOR
Tube To
Female Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| S3846-4A | 1/4 | 1/8 |
| S3846-4B | 1/4 | 1/4 |
| S3846-6C | 3/8 | 3/8 |
| S3846-8D | 1/2 | 1/2 |
| S3846-12E | 3/4 | 3/4 |
| S3846-16H | 1 | 1 |



**BULKHEAD
TEE
Tube All Ends**

| PART No. | Tube |
|----------|------|
| S3845-4 | 1/4 |
| S3845-6 | 3/8 |
| S3845-8 | 1/2 |
| S3845-12 | 3/4 |



**BULKHEAD
CONNECTOR
Tube To Pipe**

| PART No. | Tube | Pipe |
|-----------|-------|-------|
| S3848-4B | 1/4 | 1/4 |
| S3848-6B | 3/8 | 1/4 |
| S3848-6C | 3/8 | 3/8 |
| S3848-8D | 1/2 | 1/2 |
| S3848-10D | 5/8 | 1/2 |
| S3848-12E | 3/4 | 3/4 |
| S3848-16H | 1 | 1 |
| S3848-20J | 1-1/4 | 1-1/4 |



**45° BULKHEAD
ELBOW
Tube To Tube**

| PART No. | Tube |
|----------|------|
| S3854-6 | 3/8 |
| S3854-8 | 1/2 |
| S3854-12 | 3/4 |
| S3854-16 | 1 |



**90° BULKHEAD
ELBOW
Tube To Tube**

| PART No. | Tube |
|----------|------|
| S3855-4 | 1/4 |
| S3855-6 | 3/8 |
| S3855-8 | 1/2 |
| S3855-12 | 3/4 |
| S3855-16 | 1 |



**BULKHEAD
LOCKNUT**

| PART No. | Tube |
|-----------|------|
| S3831N-4 | 1/4 |
| S3831N-6 | 3/8 |
| S3831N-8 | 1/2 |
| S3831N-12 | 3/4 |
| S3831N-16 | 1 |

**NOTE:
BULKHEADS COME COMPLETE
WITH LOCKNUTS**

D

FLANGE ADAPTERS AND KITS

(CODE 61 MAXIMUM WORKING PRESSURE 3000 PSI)



SPLIT FLANGE ADAPTER
Male JIC To
Code 61 Flange

| PART No. | Tube | Split Flange |
|--------------|------|--------------|
| S3700BT-1212 | 3/4 | 3/4 |
| S3700BT-1216 | 3/4 | 1 |
| S3700BT-1616 | 1 | 1 |



90° ELBOW SPLIT FLANGE
Male JIC To
Code 61 Flange

| PART No. | Tube | Split Flange |
|--------------|-------|--------------|
| S3790BT-1212 | 3/4 | 3/4 |
| S3790BT-1616 | 1 | 1 |
| S3790BT-1620 | 1 | 1-1/4 |
| S3790BT-2020 | 1-1/4 | 1-1/4 |
| S3790BT-2424 | 1-1/2 | 1-1/2 |
| S3790BT-2432 | 1-1/2 | 2 |



45° ELBOW SPLIT FLANGE
Male JIC To
Code 61 Flange

| PART No. | Tube | Split Flange |
|--------------|------|--------------|
| S3740BT-812 | 1/2 | 3/4 |
| S3740BT-1212 | 3/4 | 3/4 |
| S3740BT-1616 | 1 | 1 |



HALVES KIT
Code 61 Split Flange

** Includes Bolts, Lock Washers and O-Ring.



FLANGE PAD KIT
Code 61 Female Pipe

** Includes Bolts, Lock Washers and O-Ring.



BUNA-N SPLIT FLANGE O-Ring

| PART No. | Flange Size | Head Size |
|----------|-------------|-----------|
| SFK61-12 | 3/4 | 1.50 |
| SFK61-16 | 1 | 1.75 |
| SFK61-20 | 1-1/4 | 2.00 |
| SFK61-24 | 1-1/2 | 2.38 |
| SFK61-32 | 2 | 2.81 |

| PART No. | Pipe | Pad Size |
|--------------|-------|----------|
| SFPK2661-16H | 1 | 1 |
| SFPK2661-20J | 1-1/4 | 1-1/4 |
| SFPK2661-24K | 1-1/2 | 1-1/2 |
| SFPK2661-32M | 2 | 2 |

| PART No. | Flange Size | Dia. |
|----------|-------------|-------|
| SFO-12 | 3/4 | .984 |
| SFO-16 | 1 | 1.296 |
| SFO-20 | 1-1/4 | 1.484 |
| SFO-24 | 1-1/2 | 1.859 |
| SFO-32 | 2 | 2.234 |

(CODE 62 MAXIMUM WORKING PRESSURE 6000 PSI)



SPLIT FLANGE ADAPTER
Male JIC To
Code 62 Flange

| PART No. | Tube | Split Flange |
|----------------|------|--------------|
| S3700BT62-1212 | 3/4 | 3/4 |
| S3700BT62-1616 | 1 | 1 |



HALVES KIT
Code 62 Split Flange

** Includes Bolts, Lock Washers and O-Ring.

| PART No. | Flange Size | Head Size |
|----------|-------------|-----------|
| SFK62-12 | 3/4 | 1.63 |
| SFK62-16 | 1 | 1.88 |
| SFK62-20 | 1-1/4 | 2.12 |



90° ELBOW SPLIT FLANGE
Male JIC To
Code 62 Flange

| PART No. | Tube | Split Flange |
|----------------|-------|--------------|
| S3790BT62-1212 | 3/4 | 3/4 |
| S3790BT62-1216 | 3/4 | 1 |
| S3790BT62-1616 | 1 | 1 |
| S3790BT62-1620 | 1 | 1-1/4 |
| S3790BT62-2020 | 1-1/4 | 1-1/4 |



BUNA-N SPLIT FLANGE O-Ring

| PART No. | Flange Size | Dia. |
|----------|-------------|-------|
| SFO-12 | 3/4 | .984 |
| SFO-16 | 1 | 1.296 |
| SFO-20 | 1-1/4 | 1.484 |
| SFO-24 | 1-1/2 | 1.859 |
| SFO-32 | 2 | 2.234 |

STEEL S.A.E. O-RING BOSS ADAPTERS

(BUNA-N O-RING STANDARD)



**CONNECTOR
Male O-Ring To
Female Pipe**

| PART No. | O-Ring | Pipe |
|-----------|-------------|-------|
| S3620-4A | 7/16 - 20 | 1/8 |
| S3620-4B | 7/16 - 20 | 1/4 |
| S3620-5A | 1/2 - 20 | 1/8 |
| S3620-5B | 1/2 - 20 | 1/4 |
| S3620-6A | 9/16 - 18 | 1/8 |
| S3620-6B | 9/16 - 18 | 1/4 |
| S3620-6C | 9/16 - 18 | 3/8 |
| S3620-6D | 9/16 - 18 | 1/2 |
| S3620-8C | 3/4 - 16 | 3/8 |
| S3620-8D | 3/4 - 16 | 1/2 |
| S3620-10C | 7/8 - 14 | 3/8 |
| S3620-10D | 7/8 - 14 | 1/2 |
| S3620-10E | 7/8 - 14 | 3/4 |
| S3620-12D | 1-1/16 - 12 | 1/2 |
| S3620-12E | 1-1/16 - 12 | 3/4 |
| S3620-16D | 1-5/16 - 12 | 1/2 |
| S3620-16E | 1-5/16 - 12 | 3/4 |
| S3620-16H | 1-5/16 - 12 | 1 |
| S3620-20J | 1-5/8 - 12 | 1-1/4 |



**CONNECTOR
MALE O-RING
TO FEMALE
O-RING**

| PART No. | Male | Female |
|------------|-------------|-------------|
| S3623-4 | 7/16 - 20 | 7/16 - 20 |
| S3623-6 | 9/16 - 18 | 9/16 - 18 |
| S3623-64 | 9/16 - 18 | 7/16 - 20 |
| S3623-68 | 9/16 - 18 | 3/4 - 16 |
| S3623-8 | 3/4 - 16 | 3/4 - 16 |
| S3623-86 | 3/4 - 16 | 9/16 - 18 |
| S3623-810 | 3/4 - 16 | 7/8 - 14 |
| S3623-106 | 7/8 - 14 | 9/16 - 18 |
| S3623-108 | 7/8 - 14 | 3/4 - 16 |
| S3623-1012 | 7/8 - 14 | 1-1/16 - 12 |
| S3623-128 | 1-1/16 - 12 | 3/4 - 16 |
| S3623-1210 | 1-1/16 - 12 | 7/8 - 14 |
| S3623-1612 | 1-5/16 - 12 | 1-1/16 - 12 |
| S3623-2016 | 1-5/8 - 12 | 1-5/16 - 12 |
| S3623-2416 | 1-7/8 - 12 | 1-5/16 - 12 |



**CONNECTOR
(LONG STYLE)
Tube To
Male O-Ring**

| PART No. | Tube | O-Ring |
|----------|------|-----------|
| S3648L-6 | 3/8 | 9/16 - 18 |
| S3648L-8 | 1/2 | 3/4 - 16 |



**UNION
Male O-Ring To
Male O-Ring**

| PART No. | O-Ring |
|----------|-------------|
| S3642-6 | 9/16 - 18 |
| S3642-8 | 3/4 - 16 |
| S3642-12 | 1-1/16 - 12 |
| S3642-16 | 1-5/16 - 12 |
| S3642-20 | 1-5/8 - 12 |



**CONNECTOR
Male O-Ring To
Male Pipe**

| PART No. | O-Ring | Pipe |
|-----------|-------------|-------|
| S3622-4B | 7/16 - 20 | 1/4 |
| S3622-6B | 9/16 - 18 | 1/4 |
| S3622-6C | 9/16 - 18 | 3/8 |
| S3622-6D | 9/16 - 18 | 1/2 |
| S3622-8B | 3/4 - 16 | 1/4 |
| S3622-8C | 3/4 - 16 | 3/8 |
| S3622-8D | 3/4 - 16 | 1/2 |
| S3622-10C | 7/8 - 14 | 3/8 |
| S3622-10D | 7/8 - 14 | 1/2 |
| S3622-12D | 1-1/16 - 12 | 1/2 |
| S3622-12E | 1-1/16 - 12 | 3/4 |
| S3622-16H | 1-5/16 - 12 | 1 |
| S3622-20J | 1-5/8 - 12 | 1-1/4 |



**CONNECTOR
Tube To
Male O-Ring**

| PART No. | Tube | O-Ring |
|------------|-------|-------------|
| S3648-4 | 1/4 | 7/16 - 20 |
| S3648-42 | 1/4 | 5/16 - 24 |
| S3648-45 | 1/4 | 1/2 - 20 |
| S3648-46 | 1/4 | 9/16 - 18 |
| S3648-48 | 1/4 | 3/4 - 16 |
| S3648-6 | 3/8 | 9/16 - 18 |
| S3648-64 | 3/8 | 7/16 - 20 |
| S3648-65 | 3/8 | 1/2 - 20 |
| S3648-68 | 3/8 | 3/4 - 16 |
| S3648-610 | 3/8 | 7/8 - 14 |
| S3648-612 | 3/8 | 1-1/16 - 12 |
| S3648-8 | 1/2 | 3/4 - 16 |
| S3648-84 | 1/2 | 7/16 - 20 |
| S3648-85 | 1/2 | 1/2 - 20 |
| S3648-86 | 1/2 | 9/16 - 18 |
| S3648-810 | 1/2 | 7/8 - 14 |
| S3648-812 | 1/2 | 1-1/16 - 12 |
| S3648-816 | 1/2 | 1-5/16 - 12 |
| S3648-10 | 5/8 | 7/8 - 14 |
| S3648-108 | 5/8 | 3/4 - 16 |
| S3648-1012 | 5/8 | 1-1/16 - 12 |
| S3648-12 | 3/4 | 1-1/16 - 12 |
| S3648-128 | 3/4 | 3/4 - 16 |
| S3648-1210 | 3/4 | 7/8 - 14 |
| S3648-1216 | 3/4 | 1-5/16 - 12 |
| S3648-1220 | 3/4 | 1-5/8 - 12 |
| S3648-16 | 1 | 1-5/16 - 12 |
| S3648-1610 | 1 | 7/8 - 14 |
| S3648-1612 | 1 | 1-1/16 - 12 |
| S3648-1620 | 1 | 1-5/8 - 12 |
| S3648-1624 | 1 | 1-7/8 - 12 |
| S3648-20 | 1-1/4 | 1-5/8 - 12 |
| S3648-2016 | 1-1/4 | 1-5/16 - 12 |
| S3648-2024 | 1-1/4 | 1-7/8 - 12 |
| S3648-24 | 1-1/2 | 1-7/8 - 12 |
| S3648-2420 | 1-1/2 | 1-5/8 - 12 |
| S3648-32 | 2 | 2-1/2 - 12 |



**PLUG
Counter Sunk
Hex**

| PART No. | O-Ring |
|----------|-------------|
| S3618-2 | 5/16 - 24 |
| S3618-4 | 7/16 - 20 |
| S3618-5 | 1/2 - 20 |
| S3618-6 | 9/16 - 18 |
| S3618-8 | 3/4 - 16 |
| S3618-10 | 7/8 - 14 |
| S3618-12 | 1-1/16 - 12 |
| S3618-16 | 1-5/16 - 12 |



**CONNECTOR
Female O-Ring
To Male Pipe**

| PART No. | O-Ring | Pipe |
|------------|-------------|------|
| S3622F-4B | 7/16 - 20 | 1/4 |
| S3622F-6B | 9/16 - 18 | 1/4 |
| S3622F-6C | 9/16 - 18 | 3/8 |
| S3622F-6D | 9/16 - 18 | 1/2 |
| S3622F-8D | 3/4 - 16 | 1/2 |
| S3622F-10D | 7/8 - 14 | 1/2 |
| S3622F-12E | 1-1/16 - 12 | 3/4 |



**PLUG
Hex
Head**

| PART No. | O-Ring |
|----------|-------------|
| S3621-4 | 7/16 - 20 |
| S3621-5 | 1/2 - 20 |
| S3621-6 | 9/16 - 18 |
| S3621-8 | 3/4 - 16 |
| S3621-10 | 7/8 - 14 |
| S3621-12 | 1-1/16 - 12 |
| S3621-14 | 1-3/16 - 12 |
| S3621-16 | 1-5/16 - 12 |
| S3621-20 | 1-5/8 - 12 |
| S3621-24 | 1-7/8 - 12 |
| S3621-32 | 2-1/2 - 12 |

STEEL S.A.E. O-RING BOSS ADAPTERS

(BUNA-N O-RING STANDARD)



**90° ELBOW
Male O-Ring To
Female Pipe**

| PART No. | O-Ring | Pipe |
|-----------|-------------|-------|
| S3616-6B | 9/16 - 18 | 1/4 |
| S3616-8C | 3/4 - 16 | 3/8 |
| S3616-8D | 3/4 - 16 | 1/2 |
| S3616-10D | 7/8 - 14 | 1/2 |
| S3616-12E | 1-1/16 - 12 | 3/4 |
| S3616-16H | 1-5/16 - 12 | 1 |
| S3616-20J | 1-5/8 - 12 | 1-1/4 |



**90° ELBOW
Tube To
Male O-Ring**

| PART No. | Tube | O-Ring |
|------------|-------|-------------|
| S3649-4 | 1/4 | 7/16 - 20 |
| S3649-45 | 1/4 | 1/2 - 20 |
| S3649-46 | 1/4 | 9/16 - 18 |
| S3649-48 | 1/4 | 3/4 - 16 |
| S3649-6 | 3/8 | 9/16 - 18 |
| S3649-64 | 3/8 | 7/16 - 20 |
| S3649-65 | 3/8 | 1/2 - 20 |
| S3649-68 | 3/8 | 3/4 - 16 |
| S3649-610 | 3/8 | 7/8 - 14 |
| S3649-612 | 3/8 | 1-1/16 - 12 |
| S3649-8 | 1/2 | 3/4 - 16 |
| S3649-86 | 1/2 | 9/16 - 18 |
| S3649-810 | 1/2 | 7/8 - 14 |
| S3649-812 | 1/2 | 1-1/16 - 12 |
| S3649-10 | 5/8 | 7/8 - 14 |
| S3649-108 | 5/8 | 3/4 - 16 |
| S3649-1012 | 5/8 | 1-1/16 - 12 |
| S3649-12 | 3/4 | 1-1/16 - 12 |
| S3649-128 | 3/4 | 3/4 - 16 |
| S3649-1210 | 3/4 | 7/8 - 14 |
| S3649-1216 | 3/4 | 1-5/16 - 12 |
| S3649-1220 | 3/4 | 1-5/8 - 12 |
| S3649-16 | 1 | 1-5/16 - 12 |
| S3649-1612 | 1 | 1-1/16 - 12 |
| S3649-1620 | 1 | 1-5/8 - 12 |
| S3649-20 | 1-1/4 | 1-5/8 - 12 |
| S3649-2016 | 1-1/4 | 1-5/16 - 12 |
| S3649-2024 | 1-1/4 | 1-7/8 - 12 |
| S3649-24 | 1-1/2 | 1-7/8 - 12 |
| S3649-32 | 2 | 2-1/2 - 12 |



**90° ELBOW
(EXTRA LONG
STYLE)
Tube To
Male O-Ring**

| PART No. | Tube | O-Ring |
|-----------|------|-----------|
| S3649EL-6 | 3/8 | 9/16 - 18 |
| S3649EL-8 | 1/2 | 3/4 - 16 |



**90° ELBOW
Male O-Ring To
Male O-Ring**

| PART No. | O-Ring |
|----------|-----------|
| S3655-6 | 9/16 - 18 |



**90° ELBOW
Male O-Ring To
Male Pipe**

| PART No. | O-Ring | Pipe |
|-----------|-------------|------|
| S3699-6B | 9/16 - 18 | 1/4 |
| S3699-8C | 3/4 - 16 | 3/8 |
| S3699-8D | 3/4 - 16 | 1/2 |
| S3699-10D | 7/8 - 14 | 1/2 |
| S3699-12E | 1-1/16 - 12 | 3/4 |
| S3699-16H | 1-5/16 - 12 | 1 |



**45° ELBOW
Tube To
Male O-Ring**

| PART No. | Tube | O-Ring |
|------------|-------|-------------|
| S3654-4 | 1/4 | 7/16 - 20 |
| S3654-6 | 3/8 | 9/16 - 18 |
| S3654-68 | 3/8 | 3/4 - 16 |
| S3654-8 | 1/2 | 3/4 - 16 |
| S3654-86 | 1/2 | 9/16 - 18 |
| S3654-810 | 1/2 | 7/8 - 14 |
| S3654-10 | 5/8 | 7/8 - 14 |
| S3654-108 | 5/8 | 3/4 - 16 |
| S3654-1012 | 5/8 | 1-1/16 - 12 |
| S3654-12 | 3/4 | 1-1/16 - 12 |
| S3654-1210 | 3/4 | 7/8 - 14 |
| S3654-1216 | 3/4 | 1-5/16 - 12 |
| S3654-16 | 1 | 1-5/16 - 12 |
| S3654-1612 | 1 | 1-1/16 - 12 |
| S3654-1620 | 1 | 1-5/8 - 12 |
| S3654-20 | 1-1/4 | 1-5/8 - 12 |



**TEE
Tube To Tube To
Male O-Ring**

| PART No. | Tube | O-Ring |
|-----------|-------|-------------|
| S3645-4 | 1/4 | 7/16 - 20 |
| S3645-6 | 3/8 | 9/16 - 18 |
| S3645-8 | 1/2 | 3/4 - 16 |
| S3645-86 | 1/2 | 9/16 - 18 |
| S3645-810 | 1/2 | 7/8 - 14 |
| S3645-10 | 5/8 | 7/8 - 14 |
| S3645-12 | 3/4 | 1-1/16 - 12 |
| S3645-16 | 1 | 1-5/16 - 12 |
| S3645-20 | 1-1/4 | 1-5/8 - 12 |



**TEE
Tube To
Male O-Ring To
Tube**

| PART No. | Tube | O-Ring |
|-----------|-------|-------------|
| S3651-4 | 1/4 | 7/16 - 20 |
| S3651-6 | 3/8 | 9/16 - 18 |
| S3651-8 | 1/2 | 3/4 - 16 |
| S3651-810 | 1/2 | 7/8 - 14 |
| S3651-10 | 5/8 | 7/8 - 14 |
| S3651-12 | 3/4 | 1-1/16 - 12 |
| S3651-16 | 1 | 1-5/16 - 12 |
| S3651-20 | 1-1/4 | 1-5/8 - 12 |



**BUNA-N
O-RING**

| PART No. | O-Ring | Dia. |
|-----------|--------|-------|
| S3631R-2 | 1/8 | .239 |
| S3631R-3 | 3/16 | .301 |
| S3631R-4 | 1/4 | .351 |
| S3631R-5 | 5/16 | .414 |
| S3631R-6 | 3/8 | .468 |
| S3631R-8 | 1/2 | .644 |
| S3631R-10 | 5/8 | .755 |
| S3631R-12 | 3/4 | .924 |
| S3631R-14 | 7/8 | 1.048 |
| S3631R-16 | 1 | 1.171 |
| S3631R-20 | 1-1/4 | 1.475 |
| S3631R-24 | 1-1/2 | 1.720 |

STEEL O-RING FACE SEAL ADAPTERS

(BUNA-N O-RING STANDARD)



CONNECTOR
Female O-Ring
Face Seal To
Male O-Ring
Face Seal

| PART No. | Female ORFS | Male ORFS |
|------------|-------------|-------------|
| S3935-86 | 13/16 - 16 | 11/16 - 16 |
| S3935-1012 | 1 - 14 | 1-3/16 - 12 |
| S3935-126 | 1-3/16 - 12 | 11/16 - 16 |
| S3935-128 | 1-3/16 - 12 | 13/16 - 16 |
| S3935-1210 | 1-3/16 - 12 | 1 - 14 |
| S3935-1612 | 1-7/16 - 12 | 1-3/16 - 12 |



CONNECTOR
O-Ring Face
Seal To
Male JIC

| PART No. | ORFS | Tube |
|----------|-------------|------|
| S3937-4 | 9/16 - 18 | 1/4 |
| S3937-6 | 11/16 - 16 | 3/8 |
| S3937-8 | 13/16 - 16 | 1/2 |
| S3937-10 | 1 - 14 | 5/8 |
| S3937-12 | 1-3/16 - 12 | 3/4 |
| S3937-16 | 1-7/16 - 12 | 1 |



**BULKHEAD
UNION O-Ring
Face Seal**

| PART No. | ORFS |
|-----------|------------|
| S3942BH-4 | 9/16 - 18 |
| S3942BH-6 | 11/16 - 16 |



**UNION
O-Ring Face
Seal**

| PART No. | ORFS |
|----------|-------------|
| S3942-6 | 1-1/16 - 16 |
| S3942-8 | 13/16 - 16 |
| S3942-10 | 1 - 14 |
| S3942-12 | 1-3/16 - 12 |
| S3942-16 | 1-7/16 - 12 |



CONNECTOR
Female
O-Ring Face
Seal To
Male JIC

| PART No. | Female ORFS | Tube |
|-----------|-------------|------|
| S3937F-4 | 9/16 - 18 | 1/4 |
| S3937F-6 | 11/16 - 16 | 3/8 |
| S3937F-8 | 13/16 - 16 | 1/2 |
| S3937F-10 | 1 - 14 | 5/8 |
| S3937F-12 | 1-3/16 - 12 | 3/4 |
| S3937F-16 | 1-7/16 - 12 | 1 |



**90° ELBOW
Male O-Ring
Face Seal To
Female O-Ring
Face Seal**

| PART No. | Male ORFS | Female ORFS |
|----------|--------------|--------------|
| S3947-4 | 9/16 - 18 | 9/16 - 18 |
| S3947-6 | 11/16 - 16 | 11/16 - 16 |
| S3947-8 | 13/16 - 16 | 13/16 - 16 |
| S3947-10 | 1 - 14 | 1 - 14 |
| S3947-12 | 1-3/16 - 12 | 1-3/16 - 12 |
| S3947-16 | 1-7/16 - 12 | 1-7/16 - 12 |
| S3947-20 | 1-11/16 - 12 | 1-11/16 - 12 |



CONNECTOR
O-Ring Face Seal
To Male Pipe

| PART No. | ORFS | Pipe |
|-----------|-------------|------|
| S3948-4A | 9/16 - 18 | 1/8 |
| S3948-6B | 11/16 - 16 | 1/4 |
| S3948-6C | 11/16 - 16 | 3/8 |
| S3948-8D | 13/16 - 16 | 1/2 |
| S3948-10D | 1 - 14 | 1/2 |
| S3948-12E | 1-3/16 - 12 | 3/4 |
| S3948-16H | 1-7/16 - 12 | 1 |



**PLUG
O-Ring Face
Seal**

| PART No. | ORFS |
|----------|--------------|
| S3958-4 | 9/16 - 18 |
| S3958-6 | 11/16 - 16 |
| S3958-8 | 13/16 - 16 |
| S3958-10 | 1 - 14 |
| S3958-12 | 1-3/16 - 12 |
| S3958-16 | 1-7/16 - 12 |
| S3958-20 | 1-11/16 - 12 |
| S3958-24 | 2 - 12 |



**90° ELBOW
Male O-Ring Face
Seal To Male
O-Ring Boss**

| PART No. | Male ORFS | Male O-Ring |
|----------|--------------|-------------|
| S3969-4 | 9/16 - 18 | 7/16 - 20 |
| S3969-6 | 9/16 - 18 | 9/16 - 18 |
| S3969-8 | 11/16 - 16 | 9/16 - 18 |
| S3969-10 | 11/16 - 16 | 3/4 - 16 |
| S3969-12 | 13/16 - 16 | 3/4 - 16 |
| S3969-14 | 13/16 - 16 | 9/16 - 18 |
| S3969-16 | 13/16 - 16 | 7/8 - 14 |
| S3969-18 | 13/16 - 16 | 1-1/16 - 12 |
| S3969-20 | 1 - 14 | 7/8 - 14 |
| S3969-22 | 1 - 14 | 3/4 - 16 |
| S3969-24 | 1-3/16 - 12 | 1-1/16 - 12 |
| S3969-26 | 1-3/16 - 12 | 7/8 - 14 |
| S3969-28 | 1-7/16 - 12 | 1-5/16 - 12 |
| S3969-30 | 1-11/16 - 12 | 1-5/8 - 12 |



CONNECTOR
O-Ring Face Seal
To Male
O-Ring Boss

| PART No. | ORFS | O-Ring |
|----------|--------------|-------------|
| S3968-4 | 9/16 - 18 | 7/16 - 20 |
| S3968-6 | 9/16 - 18 | 9/16 - 18 |
| S3968-8 | 11/16 - 16 | 9/16 - 18 |
| S3968-10 | 11/16 - 16 | 3/4 - 16 |
| S3968-12 | 11/16 - 16 | 7/8 - 14 |
| S3968-14 | 13/16 - 16 | 3/4 - 16 |
| S3968-16 | 13/16 - 16 | 9/16 - 18 |
| S3968-18 | 13/16 - 16 | 7/8 - 14 |
| S3968-20 | 1 - 14 | 7/8 - 14 |
| S3968-22 | 1-3/16 - 12 | 1-1/16 - 12 |
| S3968-24 | 1-3/16 - 12 | 1-5/16 - 12 |
| S3968-26 | 1-7/16 - 12 | 1-5/16 - 12 |
| S3968-28 | 1-7/16 - 12 | 1-1/16 - 12 |
| S3968-30 | 1-11/16 - 12 | 1-5/8 - 12 |
| S3968-32 | 1-11/16 - 12 | 1-5/16 - 12 |



**CAP
O-Ring Face
Seal**

| PART No. | ORFS |
|----------|--------------|
| S3956-4 | 9/16 - 18 |
| S3956-6 | 11/16 - 16 |
| S3956-8 | 13/16 - 16 |
| S3956-10 | 1 - 14 |
| S3956-12 | 1-3/16 - 12 |
| S3956-16 | 1-7/16 - 12 |
| S3956-20 | 1-11/16 - 12 |

D

STEEL O-RING FACE SEAL ADAPTERS

(BUNA-N O-RING STANDARD)



**45° ELBOW
O-Ring Face
Seal To Male
O-Ring Boss**

| PART No. | ORFS | O-Ring |
|----------|------------|-----------|
| S3974-4 | 9/16 - 18 | 7/16 - 20 |
| S3974-6 | 11/16 - 16 | 9/16 - 18 |
| S3974-8 | 13/16 - 16 | 3/4 - 16 |
| S3974-10 | 1 - 14 | 7/8 - 14 |



**TEE
Male To Female
To Male O-Ring
Face Seal**

| PART No. | Male ORFS | Female ORFS |
|-----------|-------------|-------------|
| S3951F-4 | 9/16 - 18 | 9/16 - 18 |
| S3951F-6 | 11/16 - 16 | 11/16 - 16 |
| S3951F-8 | 13/16 - 16 | 13/16 - 16 |
| S3951F-10 | 1 - 14 | 1 - 14 |
| S3951F-12 | 1-3/16 - 12 | 1-3/16 - 12 |
| S3951F-16 | 1-7/16 - 12 | 1-7/16 - 12 |



LOCK NUT

| PART No. | ORFS |
|-----------|-------------|
| S3931N-4 | 9/16 - 18 |
| S3931N-6 | 11/16 - 16 |
| S3931N-8 | 13/16 - 16 |
| S3931N-10 | 1 - 14 |
| S3931N-12 | 1-3/16 - 12 |
| S3931N-16 | 1-7/16 - 12 |



**TEE
Female O-Ring
Face Seal To
Male O-Ring
Face Seal To
Pipe**

| PART No. | ORFS | Male Pipe |
|-----------|-------------|-----------|
| S3936-4B | 9/16 - 18 | 1/4 |
| S3936-6B | 11/16 - 16 | 1/4 |
| S3936-8B | 13/16 - 16 | 1/4 |
| S3936-12B | 1-3/16 - 12 | 1/4 |



**BUNA-N
O-RING
Face Seal**

| PART No. | ORFS | DIA. |
|-----------|--------------|-------|
| S3931R-4 | 9/16 - 18 | .301 |
| S3931R-6 | 11/16 - 16 | .364 |
| S3931R-8 | 13/16 - 16 | .489 |
| S3931R-10 | 1 - 14 | .614 |
| S3931R-12 | 1-3/16 - 12 | .739 |
| S3931R-16 | 1-7/16 - 12 | .926 |
| S3931R-20 | 1-11/16 - 12 | 1.176 |

Steel O-Ring Face Seal Fittings (ORFS):

Steel O-ring face seal adapter fittings use a straight thread and have a machined groove in the face of the male fitting to accept an O-ring (of either Buna N or Viton material). This O-ring is compressed against the flat face of the female fitting for a leak proof connection, and offers excellent leak protection at high pressures.

STEEL FLARELESS ADAPTERS



TUBE SLEEVE

| PART No. | Tube |
|----------|------|
| S6760-4 | 1/4 |
| S6760-6 | 3/8 |
| S6760-8 | 1/2 |
| S6760-10 | 5/8 |
| S6760-16 | 1 |



**CONNECTOR
Tube To
Female Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| S6766-4A | 1/4 | 1/8 |
| S6766-4B | 1/4 | 1/4 |
| S6766-6B | 3/8 | 1/4 |
| S6766-6C | 3/8 | 3/8 |
| S6766-8C | 1/2 | 3/8 |
| S6766-10D | 5/8 | 1/2 |
| S6766-12E | 3/4 | 3/4 |
| S6766-16H | 1 | 1 |



**90° ELBOW
Tube To
Tube**

| PART No. | Tube |
|----------|------|
| S6765-4 | 1/4 |
| S6765-6 | 3/8 |
| S6765-8 | 1/2 |
| S6765-12 | 3/4 |



TUBE NUT

| PART No. | Tube |
|----------|------|
| S6761-4 | 1/4 |
| S6761-6 | 3/8 |
| S6761-8 | 1/2 |
| S6761-10 | 5/8 |
| S6761-12 | 3/4 |
| S6761-16 | 1 |



**90° ELBOW
Tube To
Male Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| S6769-4A | 1/4 | 1/8 |
| S6769-4B | 1/4 | 1/4 |
| S6769-6B | 3/8 | 1/4 |
| S6769-6C | 3/8 | 3/8 |
| S6769-8C | 1/2 | 3/8 |
| S6769-8D | 1/2 | 1/2 |
| S6769-10D | 5/8 | 1/2 |
| S6769-12E | 3/4 | 3/4 |



**UNION
Tube To
Tube**

| PART No. | Tube |
|----------|------|
| S6762-3 | 3/16 |
| S6762-4 | 1/4 |
| S6762-6 | 3/8 |
| S6762-8 | 1/2 |
| S6762-10 | 5/8 |
| S6762-12 | 3/4 |
| S6762-16 | 1 |



**CONNECTOR
Tube To Male
Pipe**

| PART No. | Tube | Pipe |
|-----------|------|------|
| S6768-4A | 1/4 | 1/8 |
| S6768-4B | 1/4 | 1/4 |
| S6768-6B | 3/8 | 1/4 |
| S6768-6C | 3/8 | 3/8 |
| S6768-8C | 1/2 | 3/8 |
| S6768-8D | 1/2 | 1/2 |
| S6768-10C | 5/8 | 3/8 |
| S6768-10D | 5/8 | 1/2 |
| S6768-12D | 3/4 | 1/2 |
| S6768-12E | 3/4 | 3/4 |
| S6768-16H | 1 | 1 |



**TEE
Tube
Three Ends**

| PART No. | Tube |
|----------|------|
| S6764-4 | 1/4 |
| S6764-6 | 3/8 |
| S6764-8 | 1/2 |
| S6764-10 | 5/8 |

STEEL S.A.E. PIPE ADAPTERS



COUPLING
Female Both
Ends

| PART No. | Pipe | Pipe |
|----------|-------|-------|
| S1003-A | 1/8 | 1/8 |
| S1003-B | 1/4 | 1/4 |
| S1003-BA | 1/4 | 1/8 |
| S1003-C | 3/8 | 3/8 |
| S1003-CA | 3/8 | 1/8 |
| S1003-CB | 3/8 | 1/4 |
| S1003-D | 1/2 | 1/2 |
| S1003-DB | 1/2 | 1/4 |
| S1003-DC | 1/2 | 3/8 |
| S1003-E | 3/4 | 3/4 |
| S1003-ED | 3/4 | 1/2 |
| S1003-H | 1 | 1 |
| S1003-HE | 1 | 3/4 |
| S1003-J | 1-1/4 | 1-1/4 |
| S1003-K | 1-1/2 | 1-1/2 |
| S1003-M | 2 | 2 |



REDUCER
Female To Male
(Cont.)

| PART No. | Female Pipe | Male Pipe |
|----------|----------------|--------------|
| S1020-DC | 1/2 | 3/8 |
| S1020-DD | 1/2 | 1/2 |
| S1020-DE | 1/2 | 3/4 |
| S1020-EB | 3/4 | 1/4 |
| S1020-EC | 3/4 | 3/8 |
| S1020-ED | 3/4 | 1/2 |
| S1020-EE | 3/4 | 3/4 |
| S1020-HD | 1 | 1/2 |
| S1020-HE | 1 | 3/4 |
| S1020-HH | 1 | 1 |
| S1020-JH | 1-1/4 | 1 |
| S1020-KJ | 1-1/2 | 1-1/4 |



PLUG
COUNTER SUNK
HEX

| PART No. | Pipe |
|----------|-------|
| S1018-A | 1/8 |
| S1018-B | 1/4 |
| S1018-C | 3/8 |
| S1018-D | 1/2 |
| S1018-E | 3/4 |
| S1018-H | 1 |
| S1018-J | 1-1/4 |
| S1018-K | 1-1/2 |
| S1018-M | 2 |



BUSHING
Male To
Female

| PART No. | Male Pipe | Female Pipe |
|----------|--------------|----------------|
| S1010-BA | 1/4 | 1/8 |
| S1010-CA | 3/8 | 1/8 |
| S1010-CB | 3/8 | 1/4 |
| S1010-DA | 1/2 | 1/8 |
| S1010-DB | 1/2 | 1/4 |
| S1010-DC | 1/2 | 3/8 |
| S1010-EB | 3/4 | 1/4 |
| S1010-EC | 3/4 | 3/8 |
| S1010-ED | 3/4 | 1/2 |
| S1010-HB | 1 | 1/4 |
| S1010-HC | 1 | 3/8 |
| S1010-HD | 1 | 1/2 |
| S1010-HE | 1 | 3/4 |
| S1010-JD | 1-1/4 | 1/2 |
| S1010-JE | 1-1/4 | 3/4 |
| S1010-JH | 1-1/4 | 1 |
| S1010-KD | 1-1/2 | 1/2 |
| S1010-KE | 1-1/2 | 3/4 |
| S1010-KH | 1-1/2 | 1 |
| S1010-KJ | 1-1/2 | 1-1/4 |
| S1010-MH | 2 | 1 |
| S1010-MJ | 2 | 1-1/4 |
| S1010-MK | 2 | 1-1/2 |



HEX NIPPLE
Male Both
Ends

| PART No. | Pipe | Pipe |
|----------|-------|-------|
| S1022-A | 1/8 | 1/8 |
| S1022-B | 1/4 | 1/4 |
| S1022-BA | 1/4 | 1/8 |
| S1022-C | 3/8 | 3/8 |
| S1022-CA | 3/8 | 1/8 |
| S1022-CB | 3/8 | 1/4 |
| S1022-D | 1/2 | 1/2 |
| S1022-DB | 1/2 | 1/4 |
| S1022-DC | 1/2 | 3/8 |
| S1022-E | 3/4 | 3/4 |
| S1022-EC | 3/4 | 3/8 |
| S1022-ED | 3/4 | 1/2 |
| S1022-H | 1 | 1 |
| S1022-HD | 1 | 1/2 |
| S1022-HE | 1 | 3/4 |
| S1022-J | 1-1/4 | 1-1/4 |
| S1022-JH | 1-1/4 | 1 |
| S1022-K | 1-1/2 | 1-1/2 |
| S1022-KJ | 1-1/2 | 1-1/4 |
| S1022-M | 2 | 2 |



PLUG
HEX HEAD

| PART No. | Pipe |
|----------|-------|
| S1021-A | 1/8 |
| S1021-B | 1/4 |
| S1021-C | 3/8 |
| S1021-D | 1/2 |
| S1021-E | 3/4 |
| S1021-H | 1 |
| S1021-J | 1-1/4 |
| S1021-K | 1-1/2 |
| S1021-M | 2 |



SHORT NIPPLE

| PART No. | Pipe | Length |
|----------|------|--------|
| S1012-A | 1/8 | 3/4 |
| S1012-B | 1/4 | 7/8 |
| S1012-C | 3/8 | 1 |
| S1012-D | 1/2 | 1-1/8 |
| S1012-E | 3/4 | 1-3/8 |
| S1012-H | 1 | 1-1/2 |



REDUCER
Female To Male

| PART No. | Female Pipe | Male Pipe |
|----------|----------------|--------------|
| S1020-AA | 1/8 | 1/8 |
| S1020-BA | 1/4 | 1/8 |
| S1020-BB | 1/4 | 1/4 |
| S1020-BC | 1/4 | 3/8 |
| S1020-CA | 3/8 | 1/8 |
| S1020-CB | 3/8 | 1/4 |
| S1020-CC | 3/8 | 3/8 |
| S1020-CD | 3/8 | 1/2 |
| S1020-DA | 1/2 | 1/8 |
| S1020-DB | 1/2 | 1/4 |



PLUG
SQUARE
HEAD

| PART No. | Pipe |
|----------|-------|
| S1009-A | 1/8 |
| S1009-B | 1/4 |
| S1009-C | 3/8 |
| S1009-D | 1/2 |
| S1009-E | 3/4 |
| S1009-H | 1 |
| S1009-K | 1-1/2 |



LONG NIPPLE

| PART No. | Pipe | Length |
|--------------|------|--------|
| S1013-B1-1/2 | 1/4 | 1-1/2 |
| S1013-B2 | 1/4 | 2 |
| S1013-B2-1/2 | 1/4 | 2-1/2 |
| S1013-B3 | 1/4 | 3 |
| S1013-C1-1/2 | 3/8 | 1-1/2 |
| S1013-C2 | 3/8 | 2 |
| S1013-C3 | 3/8 | 3 |
| S1013-C4 | 3/8 | 4 |
| S1013-D1-1/2 | 1/2 | 1-1/2 |
| S1013-D2 | 1/2 | 2 |
| S1013-D3 | 1/2 | 3 |
| S1013-D4 | 1/2 | 4 |
| S1013-E3 | 3/4 | 3 |
| S1013-E4 | 3/4 | 4 |

D



**90° ELBOW
Female To
Female**

| PART No. | Pipe | Pipe |
|----------|-------|-------|
| S1000-A | 1/8 | 1/8 |
| S1000-B | 1/4 | 1/4 |
| S1000-C | 3/8 | 3/8 |
| S1000-CB | 3/8 | 1/4 |
| S1000-D | 1/2 | 1/2 |
| S1000-DC | 1/2 | 3/8 |
| S1000-E | 3/4 | 3/4 |
| S1000-ED | 3/4 | 1/2 |
| S1000-H | 1 | 1 |
| S1000-J | 1-1/4 | 1-1/4 |
| S1000-K | 1-1/2 | 1-1/2 |
| S1000-M | 2 | 2 |



**90° ELBOW
Male To Female**

| PART No. | Male Pipe | Female Pipe |
|----------|--------------|----------------|
| S1016-A | 1/8 | 1/8 |
| S1016-AB | 1/8 | 1/4 |
| S1016-B | 1/4 | 1/4 |
| S1016-BC | 1/4 | 3/8 |
| S1016-C | 3/8 | 3/8 |
| S1016-CB | 3/8 | 1/4 |
| S1016-CD | 3/8 | 1/2 |
| S1016-D | 1/2 | 1/2 |
| S1016-DC | 1/2 | 3/8 |
| S1016-DE | 1/2 | 3/4 |
| S1016-E | 3/4 | 3/4 |
| S1016-ED | 3/4 | 1/2 |
| S1016-H | 1 | 1 |
| S1016-J | 1-1/4 | 1-1/4 |
| S1016-M | 2 | 2 |



**90° ELBOW
Female To Male
Swivel**

| PART No. | Female Pipe | Male Pipe |
|-----------|----------------|--------------|
| S1016SW-B | 1/4 | 1/4 |
| S1016SW-C | 3/8 | 3/8 |
| S1016SW-D | 1/2 | 1/2 |



**90° ELBOW
Male To
Male**

| PART No. | Pipe | Pipe |
|----------|-------|-------|
| S1099-A | 1/8 | 1/8 |
| S1099-B | 1/4 | 1/4 |
| S1099-C | 3/8 | 3/8 |
| S1099-CB | 3/8 | 1/4 |
| S1099-D | 1/2 | 1/2 |
| S1099-DC | 1/2 | 3/8 |
| S1099-E | 3/4 | 3/4 |
| S1099-ED | 3/4 | 1/2 |
| S1099-H | 1 | 1 |
| S1099-J | 1-1/4 | 1-1/4 |
| S1099-K | 1-1/2 | 1-1/2 |



**45° ELBOW
Female To
Female**

| PART No. | Pipe |
|----------|------|
| S1005-B | 1/4 |
| S1005-C | 3/8 |
| S1005-D | 1/2 |
| S1005-E | 3/4 |
| S1005-H | 1 |



**45° ELBOW
Male To
Male**

| PART No. | Pipe |
|----------|-------|
| S1005M-B | 1/4 |
| S1005M-C | 3/8 |
| S1005M-D | 1/2 |
| S1005M-E | 3/4 |
| S1005M-H | 1 |
| S1005M-J | 1-1/4 |



**45° ELBOW
Male To
Female**

| PART No. | Male Pipe | Female Pipe |
|----------|--------------|----------------|
| S1024-A | 1/8 | 1/8 |
| S1024-B | 1/4 | 1/4 |
| S1024-C | 3/8 | 3/8 |
| S1024-D | 1/2 | 1/2 |
| S1024-E | 3/4 | 3/4 |
| S1024-H | 1 | 1 |
| S1024-J | 1-1/4 | 1-1/4 |



**TEE
Female
All Ends**

| PART No. | Pipe |
|----------|-------|
| S1001-A | 1/8 |
| S1001-B | 1/4 |
| S1001-C | 3/8 |
| S1001-D | 1/2 |
| S1001-E | 3/4 |
| S1001-H | 1 |
| S1001-J | 1-1/4 |
| S1001-K | 1-1/2 |
| S1001-M | 2 |



**TEE
Male To
Female To
Male**

| PART No. | Female Pipe | Male Pipe |
|----------|----------------|--------------|
| S1004-B | 1/4 | 1/4 |
| S1004-C | 3/8 | 3/8 |
| S1004-D | 1/2 | 1/2 |
| S1004-E | 3/4 | 3/4 |
| S1004-H | 1 | 1 |



**TEE
Male
All Ends**

| PART No. | Pipe |
|----------|------|
| S1001M-C | 3/8 |
| S1001M-E | 3/4 |



**TEE
Female To
Female To
Male**

| PART No. | Female Pipe | Male Pipe |
|----------|----------------|--------------|
| S1006-A | 1/8 | 1/8 |
| S1006-B | 1/4 | 1/4 |
| S1006-C | 3/8 | 3/8 |
| S1006-D | 1/2 | 1/2 |
| S1006-E | 3/4 | 3/4 |
| S1006-H | 1 | 1 |



**TEE
Male To Male
To Female**

| PART No. | Male Pipe | Female Pipe |
|----------|--------------|----------------|
| S1006M-B | 1/4 | 1/4 |
| S1006M-C | 3/8 | 3/8 |
| S1006M-D | 1/2 | 1/2 |
| S1006M-E | 3/4 | 3/4 |
| S1006M-H | 1 | 1 |



**TEE
Female To
Male To
Female**

| PART No. | Female Pipe | Male Pipe |
|----------|----------------|--------------|
| S1007-A | 1/8 | 1/8 |
| S1007-B | 1/4 | 1/4 |
| S1007-C | 3/8 | 3/8 |
| S1007-D | 1/2 | 1/2 |
| S1007-E | 3/4 | 3/4 |
| S1007-H | 1 | 1 |
| S1007-J | 1-1/4 | 1-1/4 |



**CROSS
Female All
Ends**

| PART No. | Pipe |
|----------|------|
| S1002-B | 1/4 |
| S1002-C | 3/8 |
| S1002-D | 1/2 |
| S1002-E | 3/4 |
| S1002-H | 1 |



**CAP
Female**

| PART No. | Pipe |
|----------|------|
| S1008-A | 1/8 |
| S1008-B | 1/4 |
| S1008-C | 3/8 |
| S1008-D | 1/2 |
| S1008-E | 3/4 |

STEEL MERCHANT PIPE FITTINGS (Weldable)



BUSHING

| PART No. | Pipe |
|-------------|------------|
| BI-110MC-CB | 3/8 to 1/4 |
| BI-110MC-DB | 1/2 to 1/4 |
| BI-110MC-DC | 1/2 to 3/8 |
| BI-110MC-EB | 3/4 to 1/4 |
| BI-110MC-EC | 3/4 to 3/8 |
| BI-110MC-ED | 3/4 to 1/2 |



**PLUG
(Square Head)**

| PART No. | Pipe |
|------------|------|
| BI-109MC-A | 1/8 |
| BI-109MC-B | 1/4 |
| BI-109MC-C | 3/8 |
| BI-109MC-D | 1/2 |
| BI-109MC-E | 3/4 |
| BI-109MC-H | 1 |



COUPLING

| PART No. | Pipe |
|-----------------------|-------|
| BI-103MC-A | 1/8 |
| BI-103MC-B | 1/4 |
| BI-103MC-C | 3/8 |
| BI-103MC-C-3000 (psi) | 3/8 |
| BI-103MC-D | 1/2 |
| BI-103MC-E | 3/4 |
| BI-103MC-E-3000 (psi) | 3/4 |
| BI-103MC-H | 1 |
| BI-103MC-J | 1-1/4 |
| BI-103MC-K | 1-1/2 |
| BI-103MC-M | 2 |
| BI-103MC-N | 2-1/2 |
| BI-103MC-P | 3 |
| BI-103MC-S | 4 |



**COUPLING
(Half Height)**

| PART No. | Pipe |
|-------------|-------|
| BI-103HMC-A | 1/8 |
| BI-103HMC-B | 1/4 |
| BI-103HMC-C | 3/8 |
| BI-103HMC-D | 1/2 |
| BI-103HMC-E | 3/4 |
| BI-103HMC-H | 1 |
| BI-103HMC-J | 1-1/4 |
| BI-103HMC-K | 1-1/2 |
| BI-103HMC-M | 2 |

O-RING BOSS TO NPSM (BUNA-N O-RING STANDARD)



**CONNECTOR
Male O-Ring To
NPSM Swivel**

| PART No. | O-Ring | Swivel |
|------------|-------------|--------|
| SO1120-4B | 7/16 - 20 | 1/4 |
| SO1120-6B | 9/16 - 18 | 1/4 |
| SO1120-6C | 9/16 - 18 | 3/8 |
| SO1120-6D | 9/16 - 18 | 1/2 |
| SO1120-8B | 3/4 - 16 | 1/4 |
| SO1120-8C | 3/4 - 16 | 3/8 |
| SO1120-8D | 3/4 - 16 | 1/2 |
| SO1120-8E | 3/4 - 16 | 3/4 |
| SO1120-10C | 7/8 - 14 | 3/8 |
| SO1120-10D | 7/8 - 14 | 1/2 |
| SO1120-10E | 7/8 - 14 | 3/4 |
| SO1120-12D | 1-1/16 - 12 | 1/2 |
| SO1120-12E | 1-1/16 - 12 | 3/4 |
| SO1120-16E | 1-5/16 - 12 | 3/4 |
| SO1120-16H | 1-5/16 - 12 | 1 |



**90° ELBOW
Male O-Ring To
NPSM Swivel**

| PART No. | O-Ring | Swivel |
|------------|-------------|--------|
| SO1116-4B | 7/16 - 20 | 1/4 |
| SO1116-6B | 9/16 - 18 | 1/4 |
| SO1116-6C | 9/16 - 18 | 3/8 |
| SO1116-6D | 9/16 - 18 | 1/2 |
| SO1116-8C | 3/4 - 16 | 3/8 |
| SO1116-8D | 3/4 - 16 | 1/2 |
| SO1116-8E | 3/4 - 16 | 3/4 |
| SO1116-10C | 7/8 - 14 | 3/8 |
| SO1116-10D | 7/8 - 14 | 1/2 |
| SO1116-10E | 7/8 - 14 | 3/4 |
| SO1116-12D | 1-1/16 - 12 | 1/2 |
| SO1116-12E | 1-1/16 - 12 | 3/4 |
| SO1116-16E | 1-5/16 - 12 | 3/4 |
| SO1116-16H | 1-5/16 - 12 | 1 |
| SO1116-20J | 1-5/8 - 12 | 1-1/4 |



**45° ELBOW
Male O-Ring To
NPSM Swivel**

| PART No. | O-Ring | Swivel |
|------------|-------------|--------|
| SO1124-4B | 7/16 - 20 | 1/4 |
| SO1124-6B | 9/16 - 18 | 1/4 |
| SO1124-6C | 9/16 - 18 | 3/8 |
| SO1124-8C | 3/4 - 16 | 3/8 |
| SO1124-8D | 3/4 - 16 | 1/2 |
| SO1124-10D | 7/8 - 14 | 1/2 |
| SO1124-10E | 7/8 - 14 | 3/4 |
| SO1124-12E | 1-1/16 - 12 | 3/4 |
| SO1124-16H | 1-5/16 - 12 | 1 |

D



CONNECTOR
Female Pipe To
NPSM Swivel

| PART No. | Pipe | Swivel |
|----------|-------|--------|
| S1103-AA | 1/8 | 1/8 |
| S1103-BB | 1/4 | 1/4 |
| S1103-BC | 1/4 | 3/8 |
| S1103-CB | 3/8 | 1/4 |
| S1103-CC | 3/8 | 3/8 |
| S1103-CD | 3/8 | 1/2 |
| S1103-DC | 1/2 | 3/8 |
| S1103-DD | 1/2 | 1/2 |
| S1103-EE | 3/4 | 3/4 |
| S1103-HE | 1 | 3/4 |
| S1103-HH | 1 | 1 |
| S1103-JJ | 1-1/4 | 1-1/4 |
| S1103-KK | 1-1/2 | 1-1/2 |
| S1103-MM | 2 | 2 |



CONNECTOR
Male Pipe To
NPSM Swivel

| PART No. | Pipe | Swivel |
|---------------|-------|--------|
| S1120-AA | 1/8 | 1/8 |
| S1120-AB | 1/8 | 1/4 |
| S1120-BA | 1/4 | 1/8 |
| S1120-BB | 1/4 | 1/4 |
| S1120-BC | 1/4 | 3/8 |
| S1120-CB | 3/8 | 1/4 |
| S1120-CC | 3/8 | 3/8 |
| *S1120-CC.000 | 3/8 | 3/8 |
| S1120-CD | 3/8 | 1/2 |
| S1120-DB | 1/2 | 1/4 |
| S1120-DC | 1/2 | 3/8 |
| S1120-DD | 1/2 | 1/2 |
| *S1120-DD.000 | 1/2 | 1/2 |
| S1120-DE | 1/2 | 3/4 |
| S1120-ED | 3/4 | 1/2 |
| S1120-EE | 3/4 | 3/4 |
| S1120-EH | 3/4 | 1 |
| S1120-HE | 1 | 3/4 |
| S1120-HH | 1 | 1 |
| S1120-HJ | 1 | 1-1/4 |
| S1120-JJ | 1-1/4 | 1-1/4 |
| S1120-KJ | 1-1/2 | 1-1/4 |
| S1120-KK | 1-1/2 | 1-1/2 |
| S1120-MM | 2 | 2 |



90° ELBOW
Female Pipe To
NPSM Swivel

| PART No. | Pipe | Swivel |
|----------|------|--------|
| S1100-AA | 1/8 | 1/8 |
| S1100-BB | 1/4 | 1/4 |
| S1100-CC | 3/8 | 3/8 |
| S1100-DD | 1/2 | 1/2 |
| S1100-EE | 3/4 | 3/4 |
| S1100-HH | 1 | 1 |



90° ELBOW
Male Pipe To
NPSM Swivel

| PART No. | Pipe | Swivel |
|----------|-------|--------|
| S1116-AA | 1/8 | 1/8 |
| S1116-AB | 1/8 | 1/4 |
| S1116-BB | 1/4 | 1/4 |
| S1116-BC | 1/4 | 3/8 |
| S1116-CB | 3/8 | 1/4 |
| S1116-CC | 3/8 | 3/8 |
| S1116-CD | 3/8 | 1/2 |
| S1116-DC | 1/2 | 3/8 |
| S1116-DD | 1/2 | 1/2 |
| S1116-ED | 3/4 | 1/2 |
| S1116-EE | 3/4 | 3/4 |
| S1116-EH | 3/4 | 1 |
| S1116-HE | 1 | 3/4 |
| S1116-HH | 1 | 1 |
| S1116-HJ | 1 | 1-1/4 |
| S1116-JH | 1-1/4 | 1 |
| S1116-JJ | 1-1/4 | 1-1/4 |
| S1116-KK | 1-1/2 | 1-1/2 |
| S1116-MM | 2 | 2 |



90° ELBOW
(LONG STYLE)
Male Pipe To
NPSM Swivel

| PART No. | Pipe | Swivel |
|-----------|------|--------|
| S1116L-CC | 3/8 | 3/8 |
| S1116L-DD | 1/2 | 1/2 |

* When ordering restricted flow adapters suffix part number with required restriction hole size. (example: S1120-BB.040)



45° ELBOW
Male Pipe To
NPSM Swivel

| PART No. | Pipe | Swivel |
|----------|-------|--------|
| S1124-AA | 1/8 | 1/8 |
| S1124-BB | 1/4 | 1/4 |
| S1124-CC | 3/8 | 3/8 |
| S1124-CD | 3/8 | 1/2 |
| S1124-DC | 1/2 | 3/8 |
| S1124-DD | 1/2 | 1/2 |
| S1124-EE | 3/4 | 3/4 |
| S1124-HE | 1 | 3/4 |
| S1124-HH | 1 | 1 |
| S1124-JJ | 1-1/4 | 1-1/4 |
| S1124-KK | 1-1/2 | 1-1/2 |



45° ELBOW
Female Pipe To
NPSM Swivel

| PART No. | Pipe | Swivel |
|----------|------|--------|
| S1105-CC | 3/8 | 3/8 |
| S1105-DD | 1/2 | 1/2 |
| S1105-EE | 3/4 | 3/4 |
| S1105-HH | 1 | 1 |



TEE
NPSM Swivel To
NPSM Swivel To
Female Pipe

| PART No. | Pipe | Swivel |
|----------|------|--------|
| S1101-BB | 1/4 | 1/4 |
| S1101-CC | 3/8 | 3/8 |
| S1101-DD | 1/2 | 1/2 |



TEE
NPSM Swivel To
NPSM Swivel To
Male Pipe

| PART No. | Pipe | Swivel |
|----------|------|--------|
| S1106-BB | 1/4 | 1/4 |
| S1106-CC | 3/8 | 3/8 |
| S1106-DD | 1/2 | 1/2 |
| S1106-EE | 3/4 | 3/4 |



TEE
NPSM Swivel
All Ends

| PART No. | Swivel |
|----------|--------|
| S1111-B | 1/4 |
| S1111-C | 3/8 |
| S1111-D | 1/2 |
| S1111-E | 3/4 |

QUICK DISCONNECTS

HYDRAULIC - PNEUMATIC

| | |
|--|-----|
| AGRICULTURAL INTERCHANGE (PIONEER 4000) | 90 |
| ARO210 / ARO310) INTERCHANGES | 97 |
| AUTOMOTIVE INTERCHANGE (TRU-FLATE) | 97 |
| HIGH PRESSURE FLUSH FACE (71-3) | 93 |
| HYDRAULIC CROSSOVER | 88 |
| HYDRAULIC FLUSH FACE (ISO 16028 HTMA) | 93 |
| HYDRAULIC (ISO A) INTERCHANGE | 92 |
| HYDRAULIC (ISO B) INTERCHANGE | 91 |
| INDUSTRIAL INTERCHANGE - AUTOMATIC | 96 |
| INDUSTRIAL INTERCHANGE - MANUAL | 95 |
| LINCOLN INTERCHANGE | 98 |
| MINIATURE HIGH CAPACITY SERIES - AUTOMATIC | 98 |
| PNEUMATIC CROSSOVER | 94 |
| PNEUMATIC INTERCHANGE (ARO210 / ARO310) | 97 |
| PRESSURE WASH COUPLINGS & ADAPTERS | 100 |
| SNOW PLOW Q.D. | 90 |
| SWING COUPLINGS | 99 |
| THREAD-TO-CONNECT HIGH PRESSURE (TCC) | 92 |
| THREAD-TO-CONNECT UNDER PRESSURE (75) | 92 |
| UNIVERSAL INTERCHANGE COUPLING - AUTOMATIC ... | 98 |
| WATER COUPLINGS | 100 |
| WING COUPLERS - HEAVY DUTY | 89 |



Fairview®

WHAT'S NEW IN THIS SECTION

Pressure Wash Swivel Adapter100



HYDRAULIC QUICK DISCONNECT CROSSOVER LISTING

| BODY | FAIRVIEW PART No. | AEROQUIP | FOSTER | PARKER | SAFEWAY | FASTER | PIONEER |
|-------|-------------------|-----------------|--------|-----------------|--------------|------------------|---------|
| 1/2 | QD-AGC8-8F | | | | S45-4 | | |
| 1/2 | QD-AGN8-8F | | | | S71-4 | | |
| 1/4 | QD-AGC4-4F | FD42-1001-4-4 | | 4050-2P | S25A-2P | | 4050-2P |
| 3/8 | QD-AGC6-6F | | | 4250-3P | S45-3P | | 4250-3P |
| 3/4 | QD-AGC12-12F | | | 4150-5 | S25F-6 | NSP-34-NPT-F | 4150-5 |
| 1 | QD-AGC16-16F | | | 4050-6P | S25-8P | NV-1-NPT-F | 4050-6P |
| 1/4 | QD-AGN4-4F | FD42-1002-4-4 | | 4010-2P | S41-2P | | 4010-2P |
| 3/8 | QD-AGN6-6F | | | 4010-3 | S41-3P | | 4010-3 |
| 1/2 | QD-AGN8-8F | | | 8010-4 | S71-4 | 2NS-12-NPT-M | 8010-4 |
| 3/4 | QD-AGN12-12F | | | 4110-5 | S21F-6 | NSP-34-NPT-M | 4110-5 |
| 1 | QD-AGN16-16F | | | 4010-6P | S21-8P | NV-1-NPT-M | 4010-6P |
| 1/4 | QD-ISOAC4-4F | 5601-4-4S | | 6601-4-4 | S565-2 | ANV 14 NPT F | |
| 3/8 | QD-ISOAC6-6F | 5601-6-6S | | 6601-6-6 | S565-3 | ANV 38 NPT F | 4050-3 |
| 1/2 | QD-ISOAC8-8F | 5601-8-10S | | 6601-8-10 | S565-4 | ANV 12 NPT F | 4050-4 |
| 3/4 | QD-ISOAC12-12F | 5601-12-12S | | 6601-12-12 | S565-6 | ANV 34 NPT F | |
| 1 | QD-ISOAC16-16F | 5601-16-16S | | 6601-16-16 | S565-8 | ANV 1 NPT F | |
| 1/4 | QD-ISOAN4-4F | 5602-4-4S | | 6602-4-4 | S561-2 | ANV 14 NPT M | |
| 3/8 | QD-ISOAN6-6F | 5602-6-6S | | 6602-6-6 | S561-3 | ANV 38 NPT M | |
| 1/2 | QD-ISOAN8-8F | 5602-8-10S | | 6602-8-10 | S561-4 | ANV 12 NPT M | 8010-4 |
| 3/4 | QD-ISOAN12-12F | 5602-12-12S | | 6602-12-12 | S561-6 | ANV 34 NPT M | |
| 1 | QD-ISOAN16-16F | 5602-16-16S | | 6602-16-16 | S561-8 | ANV 1 NPT M | |
| 1/4 | QD-ISOBC4-4F | FD45-1003-4-4 | H2S | H2-62 | S105-2 | HNV-14-NPT-F | |
| 3/8 | QD-ISOBC6-6F | FD45-1003-6-6 | H3S | H3-62 | S105-3 | HNV-38-NPT-F | |
| 1/2 | QD-ISOBC8-8F | FD45-1003-8-10 | H4S | H4-62 | S105-4 | HNV-12-NPT-F | |
| 3/4 | QD-ISOBC12-12F | FD45-1003-12-12 | H6S | H6-62 | S105-6 | HNV-34-NPT-F | |
| 1 | QD-ISOBC16-16F | FD45-1003-16-16 | H8S | H8-62 | S105-8 | HNV-1-NPT-F | |
| 1/4 | QD-ISOBN4-4F | FD45-1002-4-4 | K2S | H2-63 & HDH2-63 | S101-2 | HNV-14-NPT-M | |
| 3/8 | QD-ISOBN6-6F | FD45-1002-6-6 | K3S | H3-63 & HDH3-63 | S101-3 | HNV-38-NPT-M | |
| 1/2 | QD-ISOBN8-8F | FD45-1002-8-10 | K4S | H4-63 & HDH4-63 | S101-4 | HNV-12-NPT-M | |
| 3/4 | QD-ISOBN12-12F | FD45-1002-12-12 | K6S | H6-63 & HDH6-63 | S101-6 | HNV-34-NPT-M | |
| 1 | QD-ISOBN16-16F | FD45-1002-16-16 | K8S | H8-63 & HDH8-63 | S101-8 | HNV-1-NPT-M | |
| 1/4 | QD-TCC4-4M | | | 3050-2 | S35-2P | PVVM1/14-NPT-M | 3050-2 |
| 3/8 | QD-TCC6-6M | | | 3050-3 | S35-3P | PVVM1/38-NPT-M | 3050-3 |
| 1/4 | QD-TCN4-4F | | | 3010-2 | S31-2P | PVVM-14-NPT-F | 3010-2 |
| 3/8 | QD-TCN6-6F | | | 3010-3 | S31-3P | PVVM-38-NPT-F | 3010-3 |
| 1/4 | QD-BISOBC4-4F | FD45-1101-4-4 | H2B | BH2-60 | BS105-2 | HNV-14-NPT-F5 | |
| 3/8 | QD-BISOBC6-6F | FD45-1101-6-6 | H3B | BH3-60 | BS105-3 | HNV-38-NPT-F5 | |
| 1/2 | QD-BISOBC8-8F | FD45-1101-8-10 | H4B | BH4-60 | BS105-4 | HNV-12-NPT-F5 | |
| 3/4 | QD-BISOBC12-12F | FD45-1101-12-12 | H6B | BH6-60 | BS105-6 | HNV-34-NPT-F5 | |
| 1 | QD-BISOBC16-16F | FD45-1101-16-16 | H8B | BH8-60 | BS105-8 | HNV-1-NPT-F5 | |
| 1/4 | QD-BISOBN4-4F | FD45-1086-4-4 | K2B | BH2-61 | BS101-2 | HNV-14-NPT-M5 | |
| 3/8 | QD-BISOBN6-6F | FD45-1086-6-6 | K3B | BH3-61 | BS101-3 | HNV-38-NPT-M5 | |
| 1/2 | QD-BISOBN8-8F | FD45-1086-8-10 | K4B | BH4-61 | BS101-4 | HNV-12-NPT-M5 | |
| 3/4 | QD-BISOBN12-12F | FD45-1086-12-12 | K6B | BH6-61 | BS101-6 | HNV-34-NPT-M5 | |
| 1 | QD-BISOBN16-16F | FD45-1086-16-16 | K8B | BH8-61 | BS101-8 | HNV-1-NPT-M5 | |
| 3/4 | QD-BTTWC12-12F | 5100-S5-12B | | 6125-12 | | | |
| 1 | QD-BTTWC16-16F | 5100-S5-16B | | 6125-16 | | FB16/1 NPT F5 | |
| 1-1/4 | QD-BTTWC20-20F | 5100-S5-20B | | 6125-20 | | | |
| 1-1/2 | QD-BTTWC24-24F | 5100-S5-24B | | 6125-24 | | | |
| 3/4 | QD-BTTWN12-12F | 5100-S2-12B | | 6105-12 | | | |
| 1 | QD-BTTWN16-16F | 5100-S2-16B | | 6105-16 | | FB16/1 NPT M5 | |
| 1-1/4 | QD-BTTWN20-20F | 5100-S2-20B | | 6105-20 | | | |
| 1-1/2 | QD-BTTWN24-24F | 5100-S2-24B | | 6105-24 | | | |
| 1/4 | QD-HTMAC4-4F | FD89-1001-04-04 | | | FFE495-2 | 2FFI14 NPT F | |
| 3/8 | QD-HTMAC6-6F | FD89-1001-06-06 | | FF-371-6FP | FFE495-3 | 2FFI38 NPT F | |
| 3/8 | QD-HTMAC6-8F | FD89-1001-08-06 | | FF-371-8FP | FFE495-3-8 | 2FFI38-1/2 NPT F | |
| 1/2 | QD-HTMAC8-8F | FD89-1001-08-08 | | | FFE495-8 | 2FFI12 NPT F | |
| 1/2 | QD-HTMAC8-12F | FD89-1001-12-08 | | | FFE495-8-3/4 | 2FFI12-34 NPT F | |
| 3/4 | QD-HTMAC12-12F | FD89-1001-12-12 | | | FFE495-6 | 2FFI34 NPT F | |
| 1 | QD-HTMAC16-16F | FD89-1001-16-16 | | | FFE495-8 | 2FFI1 NPT F | |
| 1/4 | QD-HTMAN4-4F | FD89-1002-04-04 | | | FFE491-2 | 2FFI14 NPT M | |
| 3/8 | QD-HTMAN6-6F | FD89-1002-06-06 | | FF-372-6FP | FFE491-3 | 2FFI38 NPT M | |
| 3/8 | QD-HTMAN6-8F | FD89-1002-08-06 | | FF-372-8FP | FFE491-3-8 | 2FFI38-1/2 NPT M | |
| 1/2 | QD-HTMAN8-8F | FD89-1002-08-08 | | | FFE491-8 | 2FFI12 NPT M | |
| 1/2 | QD-HTMAN8-12F | FD89-1002-12-08 | | | FFE491-8-3/4 | 2FFI12-34 NPT M | |
| 3/4 | QD-HTMAN12-12F | FD89-1002-12-12 | | | FFE491-6 | 2FFI34 NPT M | |
| 1 | QD-HTMAN16-16F | FD89-1002-16-16 | | | FFE491-8 | 2FFI1 NPT M | |

HEAVY DUTY WING SERIES INTERCHANGE



- Interchangeable with Aeroquip 5100 series and Parker 6100 series.
- Heavy duty wing nut or hex nut for easy connection.
- Thread-To-Connect.
- Dry-Break feature minimizes air inclusion and contamination of systems.
- Up to 3,000 PSI connected and disconnected.
- Ideal for use on hydraulic dump trucks, coal trucks, sand and salt spreaders and oil well equipment.

| Operating Pressure | | Air Inclusion | Spillage |
|--------------------|-------|---------------|----------|
| Size | (PSI) | CC. Max. | CC. Max. |
| 3/4 | 3000 | .34 | .26 |
| 1 | 3000 | .50 | .35 |
| 1-1/4 | 2750 | .68 | .70 |
| 1-1/2 | 2750 | .60 | .94 |

VALVED COUPLER - BRASS

| PART No. | Body Size | Female Pipe |
|----------------|-----------|-------------|
| QD-BTTWC12-12F | 3/4 | 3/4 |
| QD-BTTWC16-16F | 1 | 1 |
| QD-BTTWC20-20F | 1-1/4 | 1-1/4 |
| QD-BTTWC24-24F | 1-1/2 | 1-1/2 |

VALVED NIPPLE - BRASS

| PART No. | Body Size | Female Pipe |
|----------------|-----------|-------------|
| QD-BTTWN12-12F | 3/4 | 3/4 |
| QD-BTTWN16-16F | 1 | 1 |
| QD-BTTWN20-20F | 1-1/4 | 1-1/4 |
| QD-BTTWN24-24F | 1-1/2 | 1-1/2 |

HEAVY DUTY WING INTERCHANGE (BTTW) ACCESSORIES



BRASS DUST CAP

| PART No. | Size |
|--------------|-------|
| QD-BTTWDC-12 | 3/4 |
| QD-BTTWDC-16 | 1 |
| QD-BTTWDC-20 | 1-1/4 |
| QD-BTTWDC-24 | 1-1/2 |



BRASS DUST PLUG

| PART No. | Size |
|--------------|-------|
| QD-BTTWDP-12 | 3/4 |
| QD-BTTWDP-16 | 1 |
| QD-BTTWDP-20 | 1-1/4 |
| QD-BTTWDP-24 | 1-1/2 |

THREAD-TO-CONNECT (CONNECT UNDER PRESSURE)



- Connect under pressure - designed for up to 5,000 PSI operating pressures.
- Thread-To-Connect valves shut off automatically during connection under normal circumstances.
- Superior flow and low pressure drop.
- Large capacity.

VALVED COUPLER - STEEL

| PART No. | Body Size | Female Pipe |
|--------------|-----------|-------------|
| QD-75C12-12F | 3/4 | 3/4 |
| QD-75C16-16F | 1 | 1 |

VALVED NIPPLE - STEEL

| PART No. | Body Size | Female Pipe |
|--------------|-----------|-------------|
| QD-75N12-12F | 3/4 | 3/4 |
| QD-75N16-16F | 1 | 1 |



AGRICULTURAL (PIONEER 4000) INTERCHANGE



- Interchangeable with Pioneer 4000 series, Safeway S20 and S40 series
- High Strength Steel Construction
- Superior "Poppet" style valves
- Nitrile NBR seals with PTFE back-up ring
- Typical applications include agricultural equipment, gravel trucks and dump trucks.

| COUPLER SET | | | | | |
|--------------------------------|------|------|------|------|------|
| MAXIMUM WORKING PRESSURE (PSI) | | | | | |
| | 1/4 | 3/8 | 1/2 | 3/4 | 1 |
| STEEL | 5000 | 4350 | 3600 | 3600 | 3300 |

VALVED COUPLER - STEEL

| PART No. | Body Size | Female Pipe | Sleeve Style |
|--------------|-------------|-------------|--------------|
| QD-AGC4-4F | 1/4 Coupler | 1/4 | One Way |
| QD-AGC6-6F | 3/8 Coupler | 3/8 | One Way |
| QD-AGC8-8F | 1/2 Coupler | 1/2 | Two Way |
| QD-AGC12-12F | 3/4 Coupler | 3/4 | One Way |
| QD-AGC16-16F | 1 Coupler | 1 | One Way |

VALVED NIPPLE - STEEL

| PART No. | Body Size | Female Pipe |
|--------------|------------|-------------|
| QD-AGN4-4F | 1/4 Nipple | 1/4 |
| QD-AGN6-6F | 3/8 Nipple | 3/8 |
| QD-AGN8-8F | 1/2 Nipple | 1/2 |
| QD-AGN12-12F | 3/4 Nipple | 3/4 |
| QD-AGN16-16F | 1 Nipple | 1 |

E



DUST PLUG

| ACCESSORIES | Size | Dust Plug | Dust Cap |
|-------------|------|-----------|-----------|
| | 1/4 | QD-PDP-10 | QD-PDC-11 |
| | 3/8 | QD-PDP-13 | QD-PDC-14 |
| | 1/2 | QD-PDP-14 | QD-PDC-15 |
| | 3/4 | QD-PDP-20 | QD-PDC-20 |
| | 1 | QD-PDP-23 | QD-PDC-24 |



DUST CAP

SNOW PLOW QUICK DISCONNECT



This high quality economical coupler is at the center of every snow plow replacement parts package.

- High strength steel construction.
- Coupler set maximum working pressure is 4000 P.S.I.

Also ask us about...

- 1/4" S.A.E. 100R7 Hose Assemblies in various lengths and configurations.
- Steel Hydraulic Adapters and Brass Adapters to meet all your fitting needs.

| PART No. | Description | Body Size | Female Pipe |
|----------|---------------|-----------|-------------|
| QD-SP90 | Snow Plow Set | 1/4 | 1/4 |



SERIES B ISO 7241-1 INDUSTRIAL INTERCHANGE



STEEL



BRASS



- High flow characteristics and pressure ratings superior to Parker 60 series.
- Industry interchangeability with other manufacturer's ISO "B" couplers and nipples.
- Poppet style double shut-off.
- Nitrile NBR seals with PTFE back-up ring
- Proven ball lock mechanism.
- 4 To 1 safety factor (Min. Burst = W.P. X 4)
- Ideal for use with hydraulic and other fluids in both stationary and mobile industrial applications.

| COUPLER SET MAXIMUM WORKING PRESSURE (PSI) | | | | | |
|---|------|------|------|------|------|
| | 1/4 | 3/8 | 1/2 | 3/4 | 1 |
| STEEL | 5000 | 4350 | 4000 | 2600 | 2175 |
| BRASS | 3500 | 3500 | 3500 | 2500 | 1500 |
| STAINLESS | 5500 | 3750 | 3750 | 3000 | 3000 |

VALVED COUPLER - STEEL

| PART No. | Body Size | Female Pipe |
|----------------|-----------|-------------|
| QD-ISOBC4-4F | 1/4 | 1/4 |
| QD-ISOBC6-6F | 3/8 | 3/8 |
| QD-ISOBC8-8F | 1/2 | 1/2 |
| QD-ISOBC12-12F | 3/4 | 3/4 |
| QD-ISOBC16-16F | 1 | 1 |

VALVED COUPLER - BRASS

| PART No. | Body Size | Female Pipe |
|-----------------|-----------|-------------|
| QD-BISOBC4-4F | 1/4 | 1/4 |
| QD-BISOBC6-6F | 3/8 | 3/8 |
| QD-BISOBC8-8F | 1/2 | 1/2 |
| QD-BISOBC12-12F | 3/4 | 3/4 |
| QD-BISOBC16-16F | 1 | 1 |

VALVED COUPLER - STAINLESS (303)

| PART No. | Body Size | Female Pipe |
|---------------|-----------|-------------|
| QD-SISOBC4-4F | 1/4 | 1/4 |
| QD-SISOBC6-6F | 3/8 | 3/8 |
| QD-SISOBC8-8F | 1/2 | 1/2 |

VALVED NIPPLE - STEEL

| PART No. | Body Size | Female Pipe |
|----------------|-----------|-------------|
| QD-ISOBN4-4F | 1/4 | 1/4 |
| QD-ISOBN6-6F | 3/8 | 3/8 |
| QD-ISOBN8-8F | 1/2 | 1/2 |
| QD-ISOBN12-12F | 3/4 | 3/4 |
| QD-ISOBN16-16F | 1 | 1 |

VALVED NIPPLE - BRASS

| PART No. | Body Size | Female Pipe |
|-----------------|-----------|-------------|
| QD-BISOBN4-4F | 1/4 | 1/4 |
| QD-BISOBN6-6F | 3/8 | 3/8 |
| QD-BISOBN8-8F | 1/2 | 1/2 |
| QD-BISOBN12-12F | 3/4 | 3/4 |
| QD-BISOBN16-16F | 1 | 1 |

VALVED NIPPLE - STAINLESS (303)

| PART No. | Body Size | Female Pipe |
|---------------|-----------|-------------|
| QD-SISOBN4-4F | 1/4 | 1/4 |
| QD-SISOBN6-6F | 3/8 | 3/8 |
| QD-SISOBN8-8F | 1/2 | 1/2 |



DUST PLUG

ACCESSORIES

| Size | Dust Plug | Dust Cap |
|------|-----------|-----------|
| 1/4 | QD-PDP-9 | QD-PDC-11 |
| 3/8 | QD-PDP-12 | QD-PDC-14 |
| 1/2 | QD-PDP-16 | QD-PDC-17 |
| 3/4 | QD-PDP-20 | QD-PDC-21 |
| 1 | QD-PDP-24 | QD-PDC-26 |



DUST CAP



HYDRAULIC QUICK DISCONNECT COUPLINGS



SERIES A ISO 7241-1 INTERCHANGE



- Interchangeable with Parker 6600 series, Aeroquip 5600 Series, Safeway S56 Series and other manufacturer's couplers and nipples built in accordance to I.S.O. 7241-1 Series "A".
- 4 to 1 Safety factor (Min. Burst = W.P. X 4)
- High Strength Steel Construction.
- Proven ball lock mechanism.
- Nitrile NBR seals with PTFE back-up ring
- For use with hydraulic fluids in mobile and stationary applications.
- Temperature Range: -40F to 250F

| COUPLER SET | | | | | |
|--------------------------------|------|------|------|------|------|
| MAXIMUM WORKING PRESSURE (PSI) | | | | | |
| | 1/4 | 3/8 | 1/2 | 3/4 | 1 |
| STEEL | 4600 | 4600 | 4000 | 4000 | 3000 |

VALVED COUPLER - STEEL

| PART No. | Body Size | Female Pipe |
|----------------|-----------|-------------|
| QD-ISOAC4-4F | 1/4 | 1/4 |
| QD-ISOAC6-6F | 3/8 | 3/8 |
| QD-ISOAC8-8F | 1/2 | 1/2 |
| QD-ISOAC12-12F | 3/4 | 3/4 |
| QD-ISOAC16-16F | 1 | 1 |

VALVED NIPPLE - STEEL

| PART No. | Body Size | Female Pipe |
|----------------|-----------|-------------|
| QD-ISOAN4-4F | 1/4 | 1/4 |
| QD-ISOAN6-6F | 3/8 | 3/8 |
| QD-ISOAN8-8F | 1/2 | 1/2 |
| QD-ISOAN12-12F | 3/4 | 3/4 |
| QD-ISOAN16-16F | 1 | 1 |

E



DUST PLUG

| ACCESSORIES | Size | Dust Plug | Dust Cap |
|-------------|------|-----------|-----------|
| | 1/4 | QD-PDP-7 | QD-PDC-9 |
| | 3/8 | QD-PDP-11 | QD-PDC-13 |
| | 1/2 | QD-PDP-14 | QD-PDC-15 |
| | 3/4 | QD-PDP-19 | QD-PDC-20 |
| | 1 | QD-PDP-23 | QD-PDC-24 |



DUST CAP

HIGH PRESSURE / THREAD TO CONNECT (PARKER 3000) INTERCHANGE



- Interconnect with Parker 3000 series, Faster PVV series and other screw to connect couplings used in the hydraulic tool and rescue equipment markets.
- Zero leakage and higher flow rates than commonly used metal to metal sealing.
- High strength steel construction with heavy duty clear zinc plating for excellent corrosion resistance

VALVED COUPLER - STEEL

| PART No. | Body Size | Pipe | Working Pressure (PSI) |
|------------|-------------|---------|------------------------|
| QD-TCC4-4M | 1/4 Coupler | 1/4 NPT | 10,000 |
| QD-TCC6-6F | 3/8 Coupler | 3/8 FPT | 10,000 |
| QD-TCC6-6M | 3/8 Coupler | 3/8 NPT | 10,000 |

VALVED NIPPLE - STEEL

| PART No. | Body Size | Pipe | Working Pressure (PSI) |
|------------|------------|---------|------------------------|
| QD-TCN4-4F | 1/4 Nipple | 1/4 FPT | 10,000 |
| QD-TCN6-6F | 3/8 Nipple | 3/8 FPT | 10,000 |

ISO 16028 HTMA FLUSH FACE



- Interchange with Aeroquip FD89/FD49 and Parker FE, FF size 3/8.
- Up to 4,000 PSI operation pressures.
- Superior flow and low pressure drop.
- Sleeve lock feature.
- Exceeds ANSI/NFPA T3.20.15-1991

| COUPLER SET | | | | | |
|--|------|------|------|------|------|
| MAXIMUM IMPULSE WORKING PRESSURE (PSI) * | | | | | |
| | 1/4 | 3/8 | 1/2 | 3/4 | 1 |
| STEEL | 4285 | 4285 | 3571 | 3571 | 3571 |

* Note: For Maximum Static W.P. Multiply By 1.67

VALVED COUPLER - STEEL

| PART No. | Body Size | Female Pipe |
|----------------|-----------|-------------|
| QD-HTMAC4-4F | 1/4 | 1/4 |
| QD-HTMAC6-6F | 3/8 | 3/8 |
| QD-HTMAC6-8F | 3/8 | 1/2 |
| QD-HTMAC8-8F | 1/2 | 1/2 |
| QD-HTMAC8-12F | 1/2 | 3/4 |
| QD-HTMAC12-12F | 3/4 | 3/4 |
| QD-HTMAC16-16F | 1 | 1 |

Note: Available with Female S.A.E. thread suffix with -EF

VALVED NIPPLE - STEEL

| PART No. | Body Size | Female Pipe |
|----------------|-----------|-------------|
| QD-HTMAN4-4F | 1/4 | 1/4 |
| QD-HTMAN6-6F | 3/8 | 3/8 |
| QD-HTMAN6-8F | 3/8 | 1/2 |
| QD-HTMAN8-8F | 1/2 | 1/2 |
| QD-HTMAN8-12F | 1/2 | 3/4 |
| QD-HTMAN12-12F | 3/4 | 3/4 |
| QD-HTMAN16-16F | 1 | 1 |

Note: Available with Female S.A.E. thread suffix with -EF

HIGH PRESSURE FLUSH FACE



- Air inclusion and fluid loss minimized to prevent spillage and contamination of systems.
- Push-To-Connect one hand operation.
- Up to 10,000 PSI operation pressures.
- Superior flow and low pressure drop.
- Sleeve lock to provide protection against accidental disconnection.
- (316) Stainless available upon request.

Note: Pressure ratings established under static pressure conditions. Multiply by 0.6 for high impulse applications.

| COUPLER SET | | | | | |
|---------------------------------------|-------|-------|------|------|------|
| MAXIMUM STATIC WORKING PRESSURE (PSI) | | | | | |
| | 3/8 | 1/2 | 3/4 | 1 | 2 |
| STEEL | 10000 | 10000 | 7500 | 7500 | 5000 |

VALVED COUPLER - STEEL

| PART No. | Body Size | Female Pipe |
|----------------|-----------|-------------|
| QD-71-3C8-8F | 1/2 | 1/2 |
| QD-71-3C12-12F | 3/4 | 3/4 |
| QD-71-3C16-16F | 1 | 1 |

VALVED NIPPLE - STEEL

| PART No. | Body Size | Female Pipe |
|----------------|-----------|-------------|
| QD-71-3N8-8F | 1/2 | 1/2 |
| QD-71-3N12-12F | 3/4 | 3/4 |
| QD-71-3N16-16F | 1 | 1 |

PNEUMATIC QUICK DISCONNECT CROSSOVER

INDUSTRIAL INTERCHANGE

| SIZE | THREAD | FAIRVIEW PART No. | AMFLO | PARKER | DIXON | FOSTER | TOP-RING | MILTON | SCHRADER BRIDGEPORT | TRUFLATE |
|------|-----------|-------------------|---------|--------|---------|--------|----------|--------|---------------------|----------|
| 1/4 | 1/4 FPT | QD-INDMC4-4F | C20 | B23 | DC20 | 3003 | 20.842 | 715 | 5142-12 | 13-234 |
| 1/4 | 3/8 FPT | QD-INDMC4-6F | C20-23 | B23E | DC2023 | 3203 | 20.862 | 718 | 5263-12 | 13-254 |
| 3/8 | 1/4 FPT | QD-INDMC6-4F | C26-22 | 25C | DC2622 | 4004 | 21.842 | 1833 | | |
| 3/8 | 3/8 FPT | QD-INDMC6-6F | C26 | 25 | DC26 | 4204 | 21.862 | 1835 | 3541 | 13-536 |
| 3/8 | 1/2 FPT | QD-INDMC6-8F | C26-24 | 25F | DC2624 | 4404 | 21.882 | | | 13-556 |
| 1/2 | 1/2 FPT | QD-INDMC8-8F | C10 | 17 | DC10 | 5205 | 22.882 | 1815 | | |
| 1/4 | 1/4 NPT | QD-INDMC4-4M | C21 | B22 | DC21 | 3103 | 20.942 | 716 | 5141-12 | 13-224 |
| 1/4 | 3/8 NPT | QD-INDMC4-6M | C21-03 | B22E | DC-2103 | 3303 | 20.962 | 719 | 5140-12 | 13-244 |
| 3/8 | 1/4 NPT | QD-INDMC6-4M | C25-02 | 24C | DC2502 | 4104 | 21.942 | | | |
| 3/8 | 3/8 NPT | QD-INDMC6-6M | C25 | 24 | DC25 | 4304 | 21.962 | 1836 | | 13-526 |
| 3/8 | 1/2 NPT | QD-INDMC6-8M | C25-04 | 24F | DC2504 | 4504 | 21.982 | | | 13-546 |
| 1/2 | 1/2 NPT | QD-INDMC8-8M | C9 | 16 | DC9 | 5305 | 22.982 | 1816 | | |
| 1/4 | 1/4 Hbarb | QD-INDMC4-4H | C20-42 | B20-3B | DC2042 | 3603 | 20.542 | 717 | 171 | |
| 1/4 | 3/8 Hbarb | QD-INDMC4-6H | C20-44 | B20-5B | DC2044 | 3703 | 20.562 | 717-6 | | |
| 3/8 | 3/8 Hbarb | QD-INDMC6-6H | C26-44 | 24-5B | DC2644 | 4804 | 21.562 | 1836-6 | | |
| 3/8 | 1/2 Hbarb | QD-INDMC6-8H | C26-45 | 24-6B | DC2645 | 4904 | 21.582 | | | |
| 1/4 | 1/4 FPT | QD-INDN4-4F | CP20 | H3C | DCP20 | 11-3 | 20.142 | 728 | 5139-11 | 12-234 |
| 1/4 | 3/8 FPT | QD-INDN4-6F | CP20-23 | H3C-E | DCP2023 | 15-3 | 20.162 | 732 | 5263-11 | 12-236 |
| 3/8 | 1/4 FPT | QD-INDN6-4F | CP26-22 | H1E | DCP2622 | 41-4 | 21.142 | 1840 | | |
| 3/8 | 3/8 FPT | QD-INDN6-6F | CP26 | H3E | DCP26 | 43-4 | 21.162 | 1838 | 3543 | 12-536 |
| 3/8 | 1/2 FPT | QD-INDN6-8F | CP26-24 | H3E-F | DCP2624 | 45-4 | 21.182 | | | |
| 1/2 | 1/2 FPT | QD-INDN8-8F | CP18 | H3F | DCP18 | 55-5 | 22.182 | 1858 | | 12-762 |
| 1/4 | 1/4 NPT | QD-INDN4-4M | CP21 | H2C | DCP21 | 10-3 | 20.242 | 727 | 5138-11 | 12-224 |
| 1/4 | 3/8 NPT | QD-INDN4-6M | CP21-03 | H2C-E | DCP2103 | 14-3 | 20.262 | 733 | 5263-11 | 12-226 |
| 3/8 | 1/4 NPT | QD-INDN6-4M | CP25-02 | H0E | DCP2502 | 40-4 | 21.242 | 1839 | | |
| 3/8 | 3/8 NPT | QD-INDN6-6M | CP25 | H2E | DCP25 | 42-4 | 21.262 | 1837 | 3542 | 12-526 |
| 3/8 | 1/2 NPT | QD-INDN6-8M | CP25-04 | H2E-F | DCP2504 | 44-4 | 21.282 | | | |
| 1/2 | 1/2 NPT | QD-INDN8-8M | CP17 | H2F | DCP9 | 54-5 | 22.282 | 1857 | | 12-752 |
| 1/4 | 1/4 Hbarb | QD-INDN4-4H | CP21-42 | H8C | DCP2142 | 16-3 | 20.342 | 736 | 5223-11 | |
| 1/4 | 3/8 Hbarb | QD-INDN4-6H | CP21-44 | H9C | DCP2144 | 17-3 | 20.362 | 736-6 | | |
| 3/8 | 3/8 Hbarb | QD-INDN6-6H | CP25-44 | H5E | DCP2544 | 48-4 | 21.362 | 1837-6 | | |
| 3/8 | 1/2 Hbarb | QD-INDN6-8H | CP25-45 | H6E | DCP2545 | 49-4 | 21.382 | | | |

ARO 210 INTERCHANGE

| SIZE | THREAD | FAIRVIEW PART No. | AMFLO | PARKER | DIXON | FOSTER | TOP-RING | MILTON | SCHRADER BRIDGEPORT | TRUFLATE |
|------|-----------|-------------------|--------|--------|---------|----------|----------|--------|---------------------|----------|
| 1/4 | 1/4 FPT | QD-AROAC4-4F | C38 | B53 | DC38 | 210-3003 | 23.442 | 775 | 3526 | 13-334 |
| 1/4 | 3/8 FPT | QD-AROAC4-6F | C38-23 | B53E | DC3823 | 210-3203 | 23.462 | | | |
| 1/4 | 1/4 NPT | QD-AROAC4-4M | C37 | B52 | DC37 | 210-3103 | 23.642 | 776-4 | 3525 | 13-324 |
| 1/4 | 3/8 NPT | QD-AROAC4-6M | C37-03 | B52E | DC3703 | 210-3303 | 23.662 | 776-6 | | |
| 1/4 | 1/4 Hbarb | QD-AROAC4-4H | C38-42 | B50-3B | DC3842 | 210-3603 | 23.742 | | | |
| 1/4 | 1/4 FPT | QD-ARON4-4F | CP38 | A3C | DCP38 | 210-11 | 23.142 | 778 | 3530 | 12-334 |
| 1/4 | 1/4 NPT | QD-ARON4-4M | CP37 | A2C | DCP37 | 210-10 | 23.242 | 777 | 3529 | 12-324 |
| 1/4 | 1/4 Hbarb | QD-ARON4-4H | C37-42 | A8C | DCP3742 | 210-16 | 23.342 | 777-4 | | |

TRU-FLATE (AUTOMOTIVE) INTERCHANGE

| SIZE | THREAD | FAIRVIEW PART No. | AMFLO | PARKER | DIXON | FOSTER | TOP-RING | MILTON | SCHRADER BRIDGEPORT | TRUFLATE |
|------|---------|-------------------|-------|--------|-------|--------|----------|--------|---------------------|----------|
| 1/4 | 1/4 FPT | QD-TFMC4-4F | C2 | B13 | DC2 | TF3003 | 24.842 | 785 | 3504 | 13-134 |
| 3/8 | 3/8 FPT | QD-TFMC6-6F | C6 | B15 | DC6 | TF4204 | 25.862 | 1805 | 3516 | 13-612 |
| 1/4 | 1/4 NPT | QD-TFMC4-4M | C1 | B12 | DC1 | TF3103 | 24.942 | 786 | 3503 | 13-124 |
| 3/8 | 1/4 NPT | QD-TFMC6-4M | C7 | 14C | DC7 | TF4104 | 25.842 | | | 13-602 |
| 3/8 | 3/8 NPT | QD-TFMC6-6M | C5 | 14 | DC5 | TF4304 | 25.962 | 1806 | 3515 | 13-604 |
| 1/4 | 1/4 FPT | QD-TFN4-4F | CP2 | 3C | DCP2 | TF11 | 24.142 | 784 | 3507 | 12-134 |
| 3/8 | 3/8 FPT | QD-TFN6-6F | CP6 | 3E | DCP6 | TF43 | 25.162 | 1808 | 3518 | 12-612 |
| 1/4 | 1/4 NPT | QD-TFN4-4M | CP1 | 2C | DCP1 | TF10 | 24.242 | 783 | 3506 | 12-124 |
| 3/8 | 1/4 NPT | QD-TFN6-4M | CP7 | 0E | DCP7 | TF40 | 25.242 | 1809 | 3519 | 12-602 |
| 3/8 | 3/8 NPT | QD-TFN6-6M | CP5 | 2E | DCP5 | TF42 | 25.262 | 1807 | 3517 | 12-604 |

LINCOLN INTERCHANGE

| SIZE | THREAD | FAIRVIEW PART No. | AMFLO | PARKER | DIXON | FOSTER | TOP-RING | MILTON | SCHRADER BRIDGEPORT | TRUFLATE |
|------|---------|-------------------|-------|--------|-------|--------|----------|--------|---------------------|----------|
| 1/4 | 1/4 FPT | QD-LINMC4-4F | C28 | B73 | DC28 | LN3003 | | 790 | 3528 | 13-434 |
| 1/4 | 1/4 NPT | QD-LINMC4-4M | C27 | B72 | DC27 | LN3103 | | | | |
| 1/4 | 1/4 FPT | QD-LINN4-4F | CP28 | L3C | DCP28 | LN10 | | 792 | 3532 | 12-434 |
| 1/4 | 1/4 NPT | QD-LINN4-4M | CP27 | L2C | DCP27 | LN11 | | 791 | 3531 | 12-424 |

INDUSTRIAL INTERCHANGE - MANUAL

1/4" Size



3/8" Size



The industrial interchange design is considered the industry standard. The nipple can be easily identified by its' short pilot and flat bottomed ball groove.

See Pneumatic Quick Disconnect Crossover - Page 193

Operating pressure: 300 P.S.I. (21 BAR)

Industrial Interchange -- Standard nose length. NOTE: NOT ACTUAL SIZE



Styles May Vary Depending on Size.

COUPLERS

| PART No. | Body Size | Pipe |
|--------------|-----------|---------|
| QD-INDMC4-4F | 1/4 | 1/4 FPT |
| QD-INDMC4-6F | 1/4 | 3/8 FPT |
| QD-INDMC6-4F | 3/8 | 1/4 FPT |
| QD-INDMC6-6F | 3/8 | 3/8 FPT |
| QD-INDMC6-8F | 3/8 | 1/2 FPT |
| QD-INDMC8-8F | 1/2 | 1/2 FPT |
| | | |
| QD-INDMC4-4M | 1/4 | 1/4 NPT |
| QD-INDMC4-6M | 1/4 | 3/8 NPT |
| QD-INDMC6-4M | 3/8 | 1/4 NPT |
| QD-INDMC6-6M | 3/8 | 3/8 NPT |
| QD-INDMC6-8M | 3/8 | 1/2 NPT |
| QD-INDMC8-6M | 1/2 | 3/8 NPT |
| QD-INDMC8-8M | 1/2 | 1/2 NPT |
| | | |
| PART No. | Body Size | Hose |
| QD-INDMC4-4H | 1/4 | 1/4 |
| QD-INDMC4-6H | 1/4 | 3/8 |
| QD-INDMC6-6H | 3/8 | 3/8 |
| QD-INDMC6-8H | 3/8 | 1/2 |
| QD-INDMC8-8H | 1/2 | 1/2 |

NIPPLES

| PART No. | Body Size | Pipe |
|-------------|-----------|---------|
| QD-INDN4-4F | 1/4 | 1/4 FPT |
| QD-INDN4-6F | 1/4 | 3/8 FPT |
| QD-INDN6-4F | 3/8 | 1/4 FPT |
| QD-INDN6-6F | 3/8 | 3/8 FPT |
| QD-INDN6-8F | 3/8 | 1/2 FPT |
| QD-INDN8-6F | 1/2 | 3/8 FPT |
| QD-INDN8-8F | 1/2 | 1/2 FPT |
| | | |
| QD-INDN4-4M | 1/4 | 1/4 NPT |
| QD-INDN4-6M | 1/4 | 3/8 NPT |
| QD-INDN6-4M | 3/8 | 1/4 NPT |
| QD-INDN6-6M | 3/8 | 3/8 NPT |
| QD-INDN6-8M | 3/8 | 1/2 NPT |
| QD-INDN8-6M | 1/2 | 3/8 NPT |
| QD-INDN8-8M | 1/2 | 1/2 NPT |
| | | |
| PART No. | Body Size | Hose |
| QD-INDN4-4H | 1/4 | 1/4 |
| QD-INDN4-6H | 1/4 | 3/8 |
| QD-INDN6-6H | 3/8 | 3/8 |
| QD-INDN6-8H | 3/8 | 1/2 |



see page 143



see page 25



see page 25

E

INDUSTRIAL INTERCHANGE - AUTOMATIC

1/4" Size



3/8" Size



Industrial Interchange -- Standard nose length. NOTE: NOT ACTUAL SIZE

Interchangeable with QD-INDM series featured on previous page, Fairview's QD-INDA series industrial interchange features a push-to-connect style **Automatic Coupler** for easy one handed installations.

Operating pressure: 300 P.S.I. (21 BAR)



Styles May Vary Depending on Size.



COUPLERS

| PART No. | Body Size | Pipe |
|--------------|-----------|---------|
| QD-INDAC4-4F | 1/4 | 1/4 FPT |
| QD-INDAC4-6F | 1/4 | 3/8 FPT |
| QD-INDAC6-4F | 3/8 | 1/4 FPT |
| QD-INDAC6-6F | 3/8 | 3/8 FPT |
| QD-INDAC8-8F | 1/2 | 1/2 FPT |
| QD-INDAC4-4M | 1/4 | 1/4 NPT |
| QD-INDAC4-6M | 1/4 | 3/8 NPT |
| QD-INDAC6-4M | 3/8 | 1/4 NPT |
| QD-INDAC6-6M | 3/8 | 3/8 NPT |
| QD-INDAC6-8M | 3/8 | 1/2 NPT |

| PART No. | Body Size | Hose |
|--------------|-----------|------|
| QD-INDAC4-4H | 1/4 | 1/4 |
| QD-INDAC4-6H | 1/4 | 3/8 |
| QD-INDAC6-6H | 3/8 | 3/8 |

NIPPLES

| PART No. | Body Size | Pipe |
|-------------|-----------|---------|
| QD-INDN4-4F | 1/4 | 1/4 FPT |
| QD-INDN4-6F | 1/4 | 3/8 FPT |
| QD-INDN6-4F | 3/8 | 1/4 FPT |
| QD-INDN6-6F | 3/8 | 3/8 FPT |
| QD-INDN6-8F | 3/8 | 1/2 FPT |
| QD-INDN8-8F | 1/2 | 1/2 FPT |
| QD-INDN4-4M | 1/4 | 1/4 NPT |
| QD-INDN4-6M | 1/4 | 3/8 NPT |
| QD-INDN6-4M | 3/8 | 1/4 NPT |
| QD-INDN6-6M | 3/8 | 3/8 NPT |
| QD-INDN6-8M | 3/8 | 1/2 NPT |
| QD-INDN8-6M | 1/2 | 3/8 NPT |
| QD-INDN8-8M | 1/2 | 1/2 NPT |

| PART No. | Body Size | Hose |
|-------------|-----------|------|
| QD-INDN4-4H | 1/4 | 1/4 |
| QD-INDN4-6H | 1/4 | 3/8 |
| QD-INDN6-4H | 3/8 | 1/4 |
| QD-INDN6-6H | 3/8 | 3/8 |
| QD-INDN6-8H | 3/8 | 1/2 |
| QD-INDN8-8H | 1/2 | 1/2 |



see page 143



see page 25



see page 25

ARO210 / ARO310 INTERCHANGE SERIES - AUTOMATIC

1/4" Size



Slightly longer nose length.
NOTE: NOT ACTUAL SIZE

Fairview's QD-ARO series is a pin-type push-to-connect coupler designed for one way shut-off operation. It is interchangeable with ARO-210 / ARO-310 style couplers available from various manufacturers.

See Pneumatic Quick Disconnect Crossover - Page 94

Operating pressure: 250 P.S.I. (17 BAR)



COUPLERS

| PART No. | Body Size | Pipe |
|--------------|-----------|----------|
| QD-AROAC4-4F | 1/4 | 1/4 FPT |
| QD-AROAC4-6F | 1/4 | 3/8 FPT |
| QD-AROAC6-6F | 3/8 | 3/8 FPT |
| QD-AROAC4-4M | 1/4 | 1/4 NPT |
| QD-AROAC4-6M | 1/4 | 3/8 NPT |
| QD-AROAC6-6M | 3/8 | 3/8 NPT |
| QD-AROAC4-4H | 1/4 | 1/4 HOSE |
| QD-AROAC4-6H | 1/4 | 3/8 HOSE |

NIPPLES

| PART No. | Body Size | Pipe |
|-------------|-----------|----------|
| QD-ARON4-4F | 1/4 | 1/4 FPT |
| QD-ARON4-6F | 1/4 | 3/8 FPT |
| QD-ARON6-6F | 3/8 | 3/8 FPT |
| QD-ARON4-4M | 1/4 | 1/4 NPT |
| QD-ARON4-6M | 1/4 | 3/8 NPT |
| QD-ARON6-6M | 3/8 | 3/8 NPT |
| QD-ARON4-4H | 1/4 | 1/4 HOSE |

TRU-FLATE INTERCHANGE (AUTOMOTIVE STANDARD)

1/4" Size

3/8" Size



Very short nose
NOTE: NOT ACTUAL SIZE

Fairview's automotive standard series interchanges with Tru-Flate design as well as automotive standards produced by most manufacturers. The nipple can be easily identified by its' extremely short pilot.

See Pneumatic Quick Disconnect Crossover - Page 94

Operating pressure: 300 P.S.I. (21 BAR)



COUPLERS

| PART No. | Body Size | Material | Pipe |
|-------------|-----------|----------|---------|
| QD-TFMC4-4F | 1/4 | Steel | 1/4 FPT |
| QD-TFMC6-4F | 3/8 | | 1/4 FPT |
| QD-TFMC6-6F | 3/8 | | 3/8 FPT |
| QD-TFMC8-8F | 1/2 | | 1/2 FPT |
| QD-TFMC4-4M | 1/4 | | 1/4 NPT |
| QD-TFMC6-4M | 3/8 | | 1/4 NPT |
| QD-TFMC6-6M | 3/8 | | 3/8 NPT |

NIPPLES

| PART No. | Body Size | Material | Pipe |
|-------------|-----------|----------|---------|
| QD-TFN4-4F | 1/4 | Brass | 1/4 FPT |
| QD-TFN6-4F | 3/8 | Steel | 1/4 FPT |
| QD-TFN6-6F | 3/8 | Steel | 3/8 FPT |
| QD-TFN8-8F | 1/2 | Steel | 1/2 FPT |
| QD-TFN4-4M | 1/4 | Brass | 1/4 NPT |
| QD-TFN6-4M | 3/8 | Steel | 1/4 NPT |
| QD-TFN6-6M | 3/8 | Steel | 3/8 NPT |
| QD-STFN4-4F | 1/4 | Steel | 1/4 FPT |
| QD-STFN4-4M | 1/4 | Steel | 1/4 NPT |

E



PNEUMATIC COUPLINGS

LINCOLN INTERCHANGE COUPLING - MANUAL

1/4" Size



Very long nose length.
NOTE: NOT ACTUAL SIZE

Fairview's Lincoln series interchange is a manual style connection easily identified by its' long pilot and short ball groove. It interchanges with Lincoln style couplings available from other manufacturers.

See Pneumatic Quick Disconnect Crossover - Page 94

Operating pressure: 300 P.S.I. (21 BAR)



COUPLERS

| PART No. | Body Size | Pipe |
|--------------|-----------|---------|
| QD-LINMC4-4F | 1/4 | 1/4 FPT |
| QD-LINMC4-4M | 1/4 | 1/4 NPT |

NIPPLES

| PART No. | Body Size | Pipe |
|-------------|-----------|---------|
| QD-LINN4-4F | 1/4 | 1/4 FPT |
| QD-LINN4-4M | 1/4 | 1/4 NPT |

MINIATURE HIGH CAPACITY SERIES - AUTOMATIC

- One-handed operation
- High flow-low pressure drop
- Large range of connections
- Brass construction

Ideally suited for medical, dental equipment, small air tools, robotics, laboratories, air conditioning systems, plant feeding, training aids, auto emission testing, cooling lines, photo processing and breathing apparatus.

Maximum pressure rating: 1000 psi

Working pressure: 0-230 psi

Vacuum: Over 12" Mercury

Temperature range: -40°F to +250°F, -40°C to +121°C



COUPLERS

| PART No. | Body Size | Pipe |
|---------------|-----------|---------|
| QD-MINIAC2-2F | 1/8 | 1/8 FPT |
| QD-MINIAC2-4F | 1/8 | 1/4 FPT |
| QD-MINIAC2-2M | 1/8 | 1/8 NPT |
| QD-MINIAC2-4M | 1/8 | 1/4 NPT |

NIPPLES

| PART No. | Body Size | Pipe |
|--------------|-----------|---------|
| QD-MININ2-2F | 1/8 | 1/8 FPT |
| QD-MININ2-4F | 1/8 | 1/4 FPT |
| QD-MININ2-2M | 1/8 | 1/8 NPT |
| QD-MININ2-4M | 1/8 | 1/4 NPT |

UNIVERSAL INTERCHANGE COUPLING - AUTOMATIC

Industrial Tru-Flate ARO 210



Fairview's Universal series is a push-to-connect style coupler capable of accepting ARO 210, Industrial and Tru-Flate Interchanges.

Operating pressure: 300 P.S.I. (21 BAR)



COUPLERS

| PART No. | Body Size | Pipe |
|--------------|-----------|---------|
| QD-UNIAC4-4F | 1/4 | 1/4 FPT |
| QD-UNIAC4-6F | 1/4 | 3/8 FPT |
| QD-UNIAC4-4M | 1/4 | 1/4 NPT |
| QD-UNIAC4-6M | 1/4 | 3/8 NPT |

COUPLERS

| PART No. | Body Size | Hose |
|--------------|-----------|------|
| QD-UNIAC4-4H | 1/4 | 1/4 |
| QD-UNIAC4-6H | 1/4 | 3/8 |

INDUSTRIAL INTERCHANGE SWING COUPLINGS

1/4" Size

3/8" Size



NOTE: NOT ACTUAL SIZE



Industrial interchange swing coupling offers full flow, safety exhaust, locking feature, and connect and disconnect under pressure. Operating pressure 360 P.S.I. (25 BAR)

| PART No. | Body Size | Pipe |
|----------------|-----------|---------|
| QD-SCINDMC4-4F | 1/4 | 1/4 FPT |
| QD-SCINDMC4-6F | 1/4 | 3/8 FPT |
| QD-SCINDMC6-4F | 3/8 | 1/4 FPT |
| QD-SCINDMC6-6F | 3/8 | 3/8 FPT |
| QD-SCINDMC6-8F | 3/8 | 1/2 FPT |
| QD-SCINDMC8-8F | 1/2 | 1/2 FPT |
| QD-SCINDMC4-4M | 1/4 | 1/4 NPT |

| PART No. | Body Size | Hose |
|----------------|-----------|------|
| QD-SCINDMC4-4H | 1/4 | 1/4 |
| QD-SCINDMC4-6H | 1/4 | 3/8 |
| QD-SCINDMC6-6H | 3/8 | 3/8 |

Note: Use with QD-INDN Series Nipples Page 96

ARO210 INTERCHANGE SWING COUPLINGS

1/4" Size



Slightly longer nose length.
NOTE: NOT ACTUAL SIZE



ARO210 Swing couplings offers full flow, safety exhaust, locking feature, and connect and disconnect under pressure. It is interchangeable with ARO210 style available from various manufacturers. Operating Pressure: 360 P.S.I. (25 BAR)

| PART No. | Body Size | Pipe |
|----------------|-----------|---------|
| QD-SCAROMC4-4F | 1/4 | 1/4 FPT |
| QD-SCAROMC4-6F | 1/4 | 3/8 FPT |
| QD-SCAROMC4-4M | 1/4 | 1/4 NPT |
| QD-SCAROMC4-6M | 1/4 | 3/8 NPT |

| PART No. | Body Size | Hose |
|----------------|-----------|------|
| QD-SCAROMC4-4H | 1/4 | 1/4 |
| QD-SCAROMC4-6H | 1/4 | 3/8 |

Note: Use with QD-ARON Series Nipples Page 97

CEJN INTERCHANGE SWING COUPLINGS

1/4" Size

3/8" Size



CEJN Interchange -- Short wide nose.
NOTE: NOT ACTUAL SIZE



CEJN interchange Swing couplings offer full flow, safety exhaust, locking feature, and connect and disconnect under pressure. Operating Pressure: 360 P.S.I. (25 BAR)

SWING COUPLERS

| PART No. | Body Size | Pipe |
|----------------|-----------|---------|
| QD-SCCEJNC4-6F | 1/4 | 3/8 FPT |

NIPPLES

| PART No. | Body Size | Pipe |
|--------------|-----------|---------|
| QD-CEJNN4-4M | 1/4 | 1/4 NPT |



WATER / PRESSURE WASH COUPLINGS

STRAIGHT THROUGH PRESSURE WASH Q.D.'S



- Smooth bore permits free flow.
- Ideal for high pressure water applications (Pressure Washers)

STRAIGHT THROUGH COUPLER - BRASS

| PART No. | Body Size | Female Pipe |
|-------------|-----------|-------------|
| QD-BSTC4-4F | 1/4 | 1/4 |
| QD-BSTC6-6F | 3/8 | 3/8 |
| QD-BSTC8-8F | 1/2 | 1/2 |

| PART No. | Body Size | Male Pipe |
|-------------|-----------|-----------|
| QD-BSTC4-4M | 1/4 | 1/4 |
| QD-BSTC6-6M | 3/8 | 3/8 |
| QD-BSTC8-8M | 1/2 | 1/2 |

STRAIGHT THROUGH COUPLER - STAINLESS STEEL

| PART No. | Body Size | Female Pipe |
|-------------|-----------|-------------|
| QD-SSTC4-4F | 1/4 | 1/4 |
| QD-SSTC6-6F | 3/8 | 3/8 |
| QD-SSTC8-8F | 1/2 | 1/2 |

| PART No. | Body Size | Male Pipe |
|-------------|-----------|-----------|
| QD-SSTC4-4M | 1/4 | 1/4 |
| QD-SSTC6-6M | 3/8 | 3/8 |

• Temperature: Hot Water +200°F, +93°C With EPR O-Ring

COUPLER SET PRESSURE RATINGS (P.S.I.)

| | 1/4 | 3/8 | 1/2 |
|-----------------|------|------|------|
| BRASS | 4000 | 4000 | 2200 |
| STEEL | 4000 | 4000 | 2700 |
| STAINLESS STEEL | 4000 | 4000 | 3000 |

STRAIGHT THROUGH NIPPLE - BRASS

| PART No. | Body Size | Female Pipe |
|-------------|-----------|-------------|
| QD-BSTN4-4F | 1/4 | 1/4 |
| QD-BSTN6-6F | 3/8 | 3/8 |
| QD-BSTN8-8F | 1/2 | 1/2 |

| PART No. | Body Size | Male Pipe |
|-------------|-----------|-----------|
| QD-BSTN4-4M | 1/4 | 1/4 |
| QD-BSTN6-6M | 3/8 | 3/8 |
| QD-BSTN8-8M | 1/2 | 1/2 |

STRAIGHT THROUGH NIPPLE - STEEL

| PART No. | Body Size | Female Pipe |
|------------|-----------|-------------|
| QD-STN4-4F | 1/4 | 1/4 |
| QD-STN6-6F | 3/8 | 3/8 |
| QD-STN8-8F | 1/2 | 1/2 |

| PART No. | Body Size | Male Pipe |
|------------|-----------|-----------|
| QD-STN4-4M | 1/4 | 1/4 |
| QD-STN6-6M | 3/8 | 3/8 |
| QD-STN8-8M | 1/2 | 1/2 |

STRAIGHT THROUGH NIPPLE - STAINLESS STEEL

| PART No. | Body Size | Female Pipe |
|-------------|-----------|-------------|
| QD-SSTN4-4F | 1/4 | 1/4 |
| QD-SSTN6-6F | 3/8 | 3/8 |
| QD-SSTN8-8F | 1/2 | 1/2 |

| PART No. | Body Size | Male Pipe |
|-------------|-----------|-----------|
| QD-SSTN4-4M | 1/4 | 1/4 |
| QD-SSTN6-6M | 3/8 | 3/8 |
| QD-SSTN8-8M | 1/2 | 1/2 |

PRESSURE WASH HOSE ADAPTERS



| PART No. | Pipe Size | PART No. | Pipe Size | PART No. | Pipe Size |
|---------------|---------------------|------------|---------------------|---------------|--------------------------|
| QD-KARCHER-6F | 3/8 FPT X M22 X 1.5 | QD-KARN-6F | 3/8 FPT X M22 X 1.5 | B1120-CC-3000 | 3/8 MPT x 3/8 FPT Swivel |
| QD-KARCHER-6M | 3/8 NPT X M22 X 1.5 | QD-KARN-6M | 3/8 NPT X M22 X 1.5 | | |

• USED TO ADAPT STANDARD PRESSURE WASH HOSES TO KARCHER STYLE EQUIPMENT • ABOVE PRESSURE WASH COUPLINGS COME WITH EPR O-RING GOOD FOR HOT WATER UP TO 200°F • PRESSURE RATING: 4000 PSI

3000 PSI Brass Swivel Adapter: designed for use with pressure wash assemblies

BRASS WATER HOSE (GARDEN HOSE) QUICK DISCONNECTS



| PART No. | DESCRIPTION |
|----------|--|
| QD-WHCF | Quick Disconnect Coupler X Water Hose Thread |
| QD-WHVCF | Valved QD Coupler X Water Hose Thread |



| PART No. | DESCRIPTION |
|----------|---|
| QD-WHNM | Quick Disconnect Nipple X Water Hose Thread |

• TO BE USED WITH DOMESTIC (CITY) WATER SUPPLY • WATER NOZZLES SEE PAGE 144



VALVES AND SHUT-OFF COCKS **F**

BRASS - STEEL - STAINLESS

| | |
|--|----------|
| AIR CONTROL ACCESSORIES | 114 |
| AIR CONTROL PRESSURE REGULATOR | 114 |
| AIR CHUCKS | 113 |
| AIR CONTROL SOLENOIDS | 114 |
| AIR TANK DRAIN VALVE | 113 |
| AIR VENTS AND MUFFLERS | 112 |
| ANGLE VALVES | 106 |
| BALL (CARBON STEEL) | 104, 105 |
| BALL (CAST BRASS) | 102 |
| BALL (FORGED BRASS - FULL PORT) | 102 |
| BALL (LEAD FREE BRASS - FULL PORT) | 102 |
| BALL (STAINLESS STEEL) | 104, 105 |
| BALL (THREE WAY) | 103 |
| CHECK VALVES | 109 |
| COMPRESSION VALVES | 103 |
| DRAIN COCKS & VALVES | 108 |
| GATE VALVES | 106 |
| GLADHANDS - SAE J318 | 110, 111 |
| FIFTH WHEEL SLIDER CYLINDER | 114 |
| MINIATURE VALVES | 103 |
| NEEDLE SEAT VALVES | 108 |
| PRESSURE PROTECTION VALVES | 113 |
| SAFETY EXHAUST (BRASS) | 102 |
| SELECTOR VALVES (WITH CLICK) | 106 |
| SHUT-OFF COCKS | 107 |
| SWING CHECK | 109 |
| TANK VALVE | 113 |
| TIRE PRESSURE GAUGE | 114 |
| UTILITY VALVES | 106 |
| WATER THREAD VALVES | 106 |






BRASS BALL VALVES

W.O.G. = WATER, OIL AND GAS W.S.P. = WORKING STEAM PRESSURE

FORGED BRASS BALL VALVE - FULL PORT

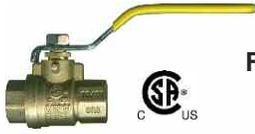

PIPE
Female To
Female

| PART No. | Pipe | W.O.G. | W.S.P. |
|----------|-------|--------|--------|
| BV2103-A | 1/8 | 600 | 150 |
| BV2103-B | 1/4 | 600 | 150 |
| BV2103-C | 3/8 | 600 | 150 |
| BV2103-D | 1/2 | 600 | 150 |
| BV2103-E | 3/4 | 600 | 150 |
| BV2103-H | 1 | 600 | 150 |
| BV2103-J | 1-1/4 | 600 | 150 |
| BV2103-K | 1-1/2 | 600 | 150 |
| BV2103-M | 2 | 600 | 150 |
| BV2103-N | 2-1/2 | 400 | 150 |
| BV2103-P | 3 | 400 | 150 |



Female
To
Female

| PART No. | Type K Size | W.O.G. |
|--------------|----------------|--------|
| BVC4103-10 * | 1/2 | 600 |
| BVC4103-14 * | 3/4 | 600 |
| BVC4103-18 * | 1 | 600 |
| BVC4103-22 | 1-1/4 | 600 |
| BVC4103-26 | 1-1/2 | 600 |
| BVC4103-34 | 2 | 600 |

* C.S.A. Certified to 200 PSI for use with Fuel Oil

Soldering Temp. NOT TO EXCEED 400° F.

SS handles Available



PIPE
Female To
Female

With Locking Handle

| PART No. | Pipe | W.O.G. | W.S.P. |
|-------------|-------|--------|--------|
| BV2103-B-LH | 1/4 | 600 | 150 |
| BV2103-C-LH | 3/8 | 600 | 150 |
| BV2103-D-LH | 1/2 | 600 | 150 |
| BV2103-E-LH | 3/4 | 600 | 150 |
| BV2103-H-LH | 1 | 600 | 150 |
| BV2103-J-LH | 1-1/4 | 600 | 150 |
| BV2103-K-LH | 1-1/2 | 600 | 150 |
| BV2103-M-LH | 2 | 600 | 150 |



PIPE
Female
To
Female

| PART No. | Pipe | W.O.G. |
|----------|-------|--------|
| BV4103-B | 1/4 | 600 |
| BV4103-C | 3/8 | 600 |
| BV4103-D | 1/2 | 600 |
| BV4103-E | 3/4 | 600 |
| BV4103-H | 1 | 600 |
| BV4103-J | 1-1/4 | 600 |
| BV4103-K | 1-1/2 | 600 |
| BV4103-M | 2 | 600 |
| BV4103-N | 2-1/2 | 400 |
| BV4103-P | 3 | 400 |
| BV4103-S | 4 | 400 |



PIPE
Female
To
Female

With Stainless Handle

Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content less than or equal to 0.25%.

| PART No. | Pipe | W.O.G. |
|--------------|-------|--------|
| BV4103-B-SSH | 1/4 | 600 |
| BV4103-C-SSH | 3/8 | 600 |
| BV4103-D-SSH | 1/2 | 600 |
| BV4103-E-SSH | 3/4 | 600 |
| BV4103-H-SSH | 1 | 600 |
| BV4103-J-SSH | 1-1/4 | 600 |
| BV4103-K-SSH | 1-1/2 | 600 |
| BV4103-M-SSH | 2 | 600 |
| BV4103-N-SSH | 2-1/2 | 600 |
| BV4103-P-SSH | 3 | 600 |
| BV4103-S-SSH | 4 | 600 |


F

SAFETY EXHAUST BALL VALVE



PIPE
Female
To
Female

| PART No. | Pipe Lead Free | W.O.G. |
|-------------|-------------------|--------|
| LF-BV4103-B | 1/4 | 600 |
| LF-BV4103-C | 3/8 | 600 |
| LF-BV4103-D | 1/2 | 600 |
| LF-BV4103-E | 3/4 | 600 |
| LF-BV4103-H | 1 | 600 |
| LF-BV4103-J | 1-1/4 | 600 |
| LF-BV4103-K | 1-1/2 | 600 |
| LF-BV4103-M | 2 | 600 |

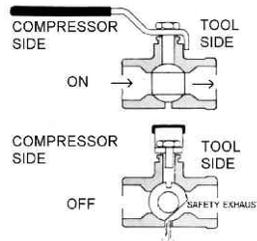

PIPE
Female
To
Female



PIPE
Female
To
Female

With Locking Handle

| PART No. | Pipe |
|------------|------|
| BVSE2103-B | 1/4 |
| BVSE2103-C | 3/8 |
| BVSE2103-D | 1/2 |
| BVSE2103-E | 3/4 |

THIS VALVE IS DESIGNED TO EXHAUST DOWNSTREAM AIR IN THE CLOSED POSITION.

| PART No. | Pipe |
|---------------|------|
| BVSE2103-B-LH | 1/4 |
| BVSE2103-C-LH | 3/8 |
| BVSE2103-D-LH | 1/2 |
| BVSE2103-E-LH | 3/4 |

THIS VALVE IS DESIGNED TO EXHAUST DOWNSTREAM AIR IN THE CLOSED POSITION.

BRASS BALL VALVES



FORGED BRASS 3-WAY BALL VALVE



**PIPE
Female
Ends
3 Port
2 - Way**

| PART No. | Pipe | W.O.G. |
|----------|-------|--------|
| BV2101-B | 1/4 | 400 |
| BV2101-C | 3/8 | 400 |
| BV2101-D | 1/2 | 400 |
| BV2101-E | 3/4 | 400 |
| BV2101-H | 1 | 400 |
| BV2101-J | 1-1/4 | 400 |
| BV2101-K | 1-1/2 | 400 |
| BV2101-M | 2 | 400 |



**PIPE
Female
Ends
3 Port
2 - Way**

PRESSURE RATING:
Bottom Port as inlet 500 P.S.I.
Side Port as inlet 100 P.S.I.

| PART No. | Pipe |
|-----------|------|
| BV2101T-B | 1/4 |
| BV2101T-C | 3/8 |
| BV2101T-D | 1/2 |

MINIATURE BALL VALVES

- Up to 600 P.S.I. Working Pressure.
- Temperature: -40°F to +300°F -40°C to 149°C
- Non-adjusting O-Ring stem seal design never needs tightening.



**PIPE
Female
To
Female**

| PART No. | Pipe | Pipe |
|----------|------|------|
| BV3103-A | 1/8 | 1/8 |
| BV3103-B | 1/4 | 1/4 |

- Long life nickel plated brass ball.
- Instantaneous on-off operation.
- Designed for use with water, oil and air pressure systems.



**PIPE
Female
To
Male**

| PART No. | Pipe | Pipe |
|----------|------|------|
| BV3120-A | 1/8 | 1/8 |
| BV3120-B | 1/4 | 1/4 |

COMPRESSION BALL VALVE



**FORGED BODY
TUBE TO TUBE**

| PART No. | Copper L Size |
|--------------|------------------|
| BV2062-10 | 1/2 |
| BV2062-14 | 3/4 |
| BV2062-18 | 1 |
| LF-BV2062-10 | 1/2 |
| LF-BV2062-14 | 3/4 |

F

ACCUTEK™ CARBON AND STAINLESS STEEL BALL VALVES

1 - PIECE DESIGN, STANDARD PORT 316 STAINLESS STEEL



PIPE
Female
To
Female

| PART No. | W.O.G. | Pipe |
|------------|--------|-------|
| BVSS2003-B | 1000 | 1/4 |
| BVSS2003-C | 1000 | 3/8 |
| BVSS2003-D | 1000 | 1/2 |
| BVSS2003-E | 1000 | 3/4 |
| BVSS2003-H | 1000 | 1 |
| BVSS2003-J | 1000 | 1-1/4 |
| BVSS2003-K | 1000 | 1-1/2 |
| BVSS2003-M | 1000 | 2 |

2 - PIECE DESIGN, FULL PORT 316 STAINLESS STEEL



PIPE
Female
To
Female

| PART No. | W.O.G. | Pipe |
|-----------------|--------|-------|
| BVSS2003-B-1000 | 1000 | 1/4 |
| BVSS2003-C-1000 | 1000 | 3/8 |
| BVSS2003-D-1000 | 1000 | 1/2 |
| BVSS2003-E-1000 | 1000 | 3/4 |
| BVSS2003-H-1000 | 1000 | 1 |
| BVSS2003-J-1000 | 1000 | 1-1/4 |
| BVSS2003-K-1000 | 1000 | 1-1/2 |
| BVSS2003-M-1000 | 1000 | 2 |

1 - PIECE BAR STOCK DESIGN, STANDARD PORT CARBON STEEL



PIPE
Female
To
Female

| PART No. | W.O.G. | Pipe |
|------------|--------|-------|
| BVCS2103-B | 2000 | 1/4 |
| BVCS2103-C | 2000 | 3/8 |
| BVCS2103-D | 2000 | 1/2 |
| BVCS2103-E | 2000 | 3/4 |
| BVCS2103-H | 2000 | 1 |
| BVCS2103-J | 2000 | 1-1/4 |
| BVCS2103-K | 2000 | 1-1/2 |
| BVCS2103-M | 2000 | 2 |

1 - PIECE BAR STOCK DESIGN, STANDARD PORT 316 STAINLESS STEEL



PIPE
Female
To
Female

| PART No. | W.O.G. | Pipe |
|------------|--------|-------|
| BVSS2103-B | 2000 | 1/4 |
| BVSS2103-C | 2000 | 3/8 |
| BVSS2103-D | 2000 | 1/2 |
| BVSS2103-E | 2000 | 3/4 |
| BVSS2103-H | 2000 | 1 |
| BVSS2103-J | 2000 | 1-1/4 |
| BVSS2103-K | 2000 | 1-1/2 |
| BVSS2103-M | 2000 | 2 |

F

ACCUITEK™ CARBON AND STAINLESS STEEL BALL VALVES

2 - PIECE DESIGN, FULL PORT


CARBON STEEL



PIPE
Female
To
Female

| PART No. | W.O.G. | Pipe |
|------------|--------|-------|
| BVCS2203-B | 2000 | 1/4 |
| BVCS2203-C | 2000 | 3/8 |
| BVCS2203-D | 2000 | 1/2 |
| BVCS2203-E | 2000 | 3/4 |
| BVCS2203-H | 2000 | 1 |
| BVCS2203-J | 1500 | 1-1/4 |
| BVCS2203-K | 1500 | 1-1/2 |
| BVCS2203-M | 1500 | 2 |

316 STAINLESS STEEL

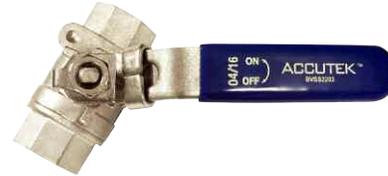

PIPE
Female
To
Female

| PART No. | W.O.G. | Pipe |
|------------|--------|-------|
| BVSS2203-B | 2000 | 1/4 |
| BVSS2203-C | 2000 | 3/8 |
| BVSS2203-D | 2000 | 1/2 |
| BVSS2203-E | 2000 | 3/4 |
| BVSS2203-H | 2000 | 1 |
| BVSS2203-J | 1500 | 1-1/4 |
| BVSS2203-K | 1500 | 1-1/2 |
| BVSS2203-M | 1500 | 2 |

2 - PIECE DESIGN, MEDIUM PRESSURE, FULL PORT

CARBON STEEL



PIPE
Female
To
Female

| PART No. | W.O.G. | Pipe |
|------------|--------|------|
| BVCS2303-B | 3000 | 1/4 |
| BVCS2303-C | 3000 | 3/8 |
| BVCS2303-D | 3000 | 1/2 |
| BVCS2303-E | 3000 | 3/4 |
| BVCS2303-H | 3000 | 1 |

3 - PIECE DESIGN, HIGH PRESSURE, FULL PORT

316 STAINLESS STEEL



PIPE
Female
To
Female

| PART No. | W.O.G. | Pipe |
|------------|--------|------|
| BVSS2403-B | 7250 | 1/4 |
| BVSS2403-C | 7250 | 3/8 |
| BVSS2403-D | 7250 | 1/2 |
| BVSS2403-E | 5075 | 3/4 |
| BVSS2403-H | 5075 | 1 |

3 - PIECE DESIGN, HIGH PRESSURE

CARBON STEEL



PIPE
Female
To
Female

| PART No. | W.O.G. | Female Pipe | Port Style |
|------------|--------|-------------|------------|
| BVCS2403-B | 7250 | 1/4 | Full |
| BVCS2403-C | 7250 | 3/8 | Full |
| BVCS2403-D | 7250 | 1/2 | Full |
| BVCS2403-E | 5075 | 3/4 | Full |
| BVCS2403-H | 5075 | 1 | Full |
| BVCS2403-J | 5075 | 1-1/4 | Standard |

CARBON STEEL - ORB PORTS



Female
ORB
To
Female
ORB

| PART No. | W.O.G. | Female O-Ring | Port Style |
|-------------|--------|---------------|------------|
| BVCS2434-6 | 7250 | 9/16 - 18 | Full |
| BVCS2434-8 | 7250 | 3/4 - 16 | Full |
| BVCS2434-12 | 5075 | 1-1/16 - 12 | Full |
| BVCS2434-16 | 5075 | 1-5/16 - 12 | Full |

* OTHER CONFIGURATIONS AVAILABLE UPON REQUEST * ALSO AVAILABLE IN S.A.E. THREADS

F

GATE VALVES



FEMALE PIPE

| PART No. | Pipe | W.O.G. |
|----------|-------|--------|
| 217-B | 1/4 | 200 |
| 217-C | 3/8 | 200 |
| 217-D | 1/2 | 200 |
| 217-E | 3/4 | 200 |
| 217-H | 1 | 200 |
| 217-J | 1-1/4 | 200 |
| 217-K | 1-1/2 | 200 |
| 217-M | 2 | 200 |
| 217-N | 2-1/2 | 200 |
| 217-P | 3 | 200 |
| 217-S | 4 | 200 |

ANGLE VALVES

FLARE TO MALE PIPE

Forged Body



| PART No. | Tube | Pipe | P.S.I. |
|----------|------|------|--------|
| 1049-6B | 3/8 | 1/4 | 200 |
| 1049-6C | 3/8 | 3/8 | 200 |
| 1049-6D | 3/8 | 1/2 | 200 |
| 1049-8C | 1/2 | 3/8 | 200 |
| 1049-10D | 5/8 | 1/2 | 200 |

SELECTOR VALVES WITH CLICK



THREE WAY SHUT-OFF
With Mounting Bracket
Flow Either Of
Two Side Ports
To Center Port,
All Ports Female Pipe

| PART No. | Pipe | Stem Length | P.S.I. |
|----------|------|-------------|--------|
| 2101-B | 1/4 | 1-3/8" | 30 |
| 2101-C | 3/8 | 1-3/8" | 30 |

OPERATING TEMPERATURE: -40°F to +180°F, -40°C to +82°C



FOUR WAY SHUT-OFF
With Mounting Bracket
Flow Either Of
Three Side Ports
To Bottom Port,
All Ports Female Pipe

| PART No. | Pipe | Stem Length | P.S.I. |
|----------|------|-------------|--------|
| 2102-B | 1/4 | 1-3/8" | 30 |
| 2102-C | 3/8 | 1-3/8" | 30 |

OPERATING TEMPERATURE: -40°F to +180°F, -40°C to +82°C

HOSE TO MALE PIPE

Forged Body



| PART No. | Hose I.D. | Pipe | P.S.I. |
|----------|-----------|------|--------|
| 1139-6C | 3/8 | 3/8 | 200 |
| 1139-8C | 1/2 | 3/8 | 200 |
| 1139-10C | 5/8 | 3/8 | 200 |
| 1139-10D | 5/8 | 1/2 | 200 |
| 1139-12C | 3/4 | 3/8 | 200 |
| 1139-12D | 3/4 | 1/2 | 200 |

HOSE TO MALE PIPE

Forged Body Heater Valve



| PART No. | Hose I.D. | Pipe | P.S.I. |
|------------|-----------|------|--------|
| HV1139-10C | 5/8 | 3/8 | 200 |

MALE PIPE TO FEMALE PIPE

Forged Body



| PART No. | Male Pipe | Female Pipe | P.S.I. |
|----------|-----------|-------------|--------|
| 1115-CC | 3/8 | 3/8 | 200 |
| 1115-DC | 1/2 | 3/8 | 200 |

FLARE TO MALE PIPE

Forged Body



| PART No. | Tube | Pipe | P.S.I. |
|----------|------|------|--------|
| 1054-6D | 3/8 | 1/2 | 200 |
| 1054-6E | 3/8 | 3/4 | 200 |

C.S.A. CERTIFIED WATER THREAD VALVES (Also known as Sediment Faucets)



WATER HOSE TO MALE PIPE

* I.D. OF MALE PIPE WILL ACCOMMODATE 1/2 TYPE K COPPER TUBE FOR SOLDERING

CSA Certified to 200 PSI for use with Fuel Oil.
Temperature: -40°F to +149°F
-40°C to +65°C

| PART No. | Pipe |
|----------|------|
| 224-D * | 1/2 |
| 224-E | 3/4 |



WATER HOSE TO MALE PIPE

* I.D. OF MALE PIPE WILL ACCOMMODATE 1/2 TYPE K COPPER TUBE FOR SOLDERING

CSA Certified to 200 PSI for use with Fuel Oil.
Temperature: -40°F to +149°F
-40°C to +65°C

| PART No. | Pipe |
|----------|------|
| 225-D * | 1/2 |

BRASS SPRING BOTTOM SHUT-OFF COCKS

(Not Recommended For Use With Liquids)



FLARE
Tube
To
Tube

| PART No. | Tube | P.S.I. |
|----------|------|--------|
| 2042-6 | 3/8 | 30 |

TEMPERATURE: -40°F to +250°F
-40°C to +121°C



PIPE
Female
To
Female

| PART No. | Pipe | P.S.I. |
|----------|------|--------|
| 2103-A | 1/8 | 30 |
| 2103-B | 1/4 | 30 |
| 2103-C | 3/8 | 30 |

TEMPERATURE: -40°F to +250°F
-40°C to +121°C



FLARE
Tube
To
Male Pipe

| PART No. | Tube | Pipe | P.S.I. |
|----------|------|------|--------|
| 2048-4B | 1/4 | 1/4 | 30 |
| 2048-5B | 5/16 | 1/4 | 30 |
| 2048-6B | 3/8 | 1/4 | 30 |

TEMPERATURE: -40°F to +250°F
-40°C to +121°C



PIPE
Female
To
Male

| PART No. | Pipe | P.S.I. |
|----------|------|--------|
| 2120-A | 1/8 | 30 |
| 2120-B | 1/4 | 30 |
| 2120-C | 3/8 | 30 |

TEMPERATURE: -40°F to +250°F
-40°C to +121°C



COMPRESSION
Tube
To
Male Pipe

| PART No. | Tube | Pipe | P.S.I. |
|----------|------|------|--------|
| 2068-4B | 1/4 | 1/4 | 30 |

TEMPERATURE: -40°F to +250°F
-40°C to +121°C



PIPE
Male
To
Male

| PART No. | Pipe | P.S.I. |
|----------|------|--------|
| 2122-B | 1/4 | 30 |
| 2122-C | 3/8 | 30 |

TEMPERATURE: -40°F to +250°F
-40°C to +121°C

BRASS CLOSED BOTTOM SHUT-OFF COCKS



PIPE
Female
To
Female

| PART No. | Pipe | P.S.I. |
|----------|------|--------|
| 5103-B | 1/4 | 30 |
| 5103-C | 3/8 | 30 |

TEMPERATURE: -40°F to +250°F
-40°C to +121°C



PIPE
Female
To
Male

| PART No. | Pipe | P.S.I. |
|----------|------|--------|
| 5120-A | 1/8 | 30 |
| 5120-B | 1/4 | 30 |
| 5120-C | 3/8 | 30 |

TEMPERATURE: -40°F to +250°F
-40°C to +121°C

F



DRAIN COCKS AND VALVES

BACK SEATING TYPE



BACK SEATING TYPE WITH EXTENSION OUTLET

PART No.
239-B

Pipe
1/4

Working Pressure (P.S.I.)
Designed for Constant Pressure use between 20 and 150 PSI



BACK SEATING TYPE

PART No.
240-A
240-B
240-C
240-D

Pipe
1/8
1/4
3/8
1/2

Working Pressure (P.S.I.)
Designed for Constant Pressure use between 15 and 150 PSI

GROUND KEY PLUG TYPE



GROUND KEY PLUG TYPE LEVER HANDLE

PART No.
241-A
241-B
241-C
241-D

Pipe
1/8
1/4
3/8
1/2

Working Pressure (P.S.I.)
30
30
30
30



GROUND KEY PLUG TYPE LEVER HANDLE (Heavy Pattern)

PART No.
241HP-B

Pipe
1/4

Working Pressure (P.S.I.)
150



HEAVY DUTY GROUND KEY PLUG TYPE TEE HANDLE

PART No.
T241-B

Pipe
1/4

Working Pressure (P.S.I.)
150

LIMITED STOCK OF SOME DISCONTINUED ITEMS IS STILL AVAILABLE; ASK AT YOUR LOCAL FAIRVIEW LOCATION.

NEEDLE SEAT TYPE



NEEDLE SEAT ONE PIECE PLUG AND HANDLE

PART No.
242-A
242-B
242-C

Pipe
1/8
1/4
3/8

Working Pressure (P.S.I.)
200
200
200



SHUT-OFF WITH SPOUT

PART No.
244-A

Hose I.D.
1/4

Pipe
1/8

Working Pressure (P.S.I.)
Designed for Constant Pressure use between 15 and 150 PSI



NEEDLE SEAT

PART No.
243-A
243-B
243-C

Pipe
1/8
1/4
3/8

Working Pressure (P.S.I.)
Designed for Constant Pressure use between 15 and 150 PSI



90° ELBOW SHUT-OFF WITH SPOUT

PART No.
245-A
245-B

Hose I.D.
1/4
3/8

Pipe
1/8
1/4

Working Pressure (P.S.I.)
50
50

F

CARBON STEEL



This check valve design is safe, compact, suitable to any hydraulic application using non-corrosive liquids. Also available with SAE threads, or with 65 PSI crack pressure.

COUPLING STYLE CHECK VALVE

| PART No. | Female Pipe | Working P.S.I. | CRACK P.S.I |
|-----------|-------------|----------------|-------------|
| SCV1003-A | 1/8 | 5000 | 5 PSI |
| SCV1003-B | 1/4 | 5000 | 5 PSI |
| SCV1003-C | 3/8 | 5000 | 5 PSI |
| SCV1003-D | 1/2 | 4000 | 5 PSI |
| SCV1003-E | 3/4 | 4000 | 5 PSI |
| SCV1003-H | 1 | 4000 | 5 PSI |

STEEL ONE WAY CHECK



Precision engineered and manufactured to provide optimum performance for each specified application. Steel construction for years of dependable operation. Less than 1 P.S.I. cracking pressure.

| PART No. | Pipe | MAX. PSI |
|----------|------|----------|
| CV1-B | 1/4 | 135 |
| CV1-C | 3/8 | 135 |
| CV1-D | 1/2 | 135 |

ALLOWS FLOW IN ONE DIRECTION ONLY

BRASS HIGH PRESSURE



3000 P.S.I. Positive check valve. Stainless steel poppet and spring, viton seal - Less than 1 P.S.I. cracking pressure. Maxi-Flow Check Valves used in applications where back flow is not permitted. Can be used in air or fluid applications (This valve is intended for use with air and water only) Install valve so that flow is in the direction of the arrow on the part.

COUPLING STYLE CHECK VALVE

| PART No. | Female Pipe | MAX. P.S.I. |
|--------------|-------------|-------------|
| 103CV-B-3000 | 1/4 | 3000 |
| 103CV-C-3000 | 3/8 | 3000 |

BRONZE CHECK SWING VALVES



SWING CHECK FEMALE PIPE HEX HEAD

| PART No. | Female Pipe | W.S.P. | C.W.P. |
|----------|-------------|--------|--------|
| 293-C | 3/8 | 150 | 300 |
| 293-D | 1/2 | 150 | 300 |
| 293-E | 3/4 | 150 | 300 |
| 293-H | 1 | 150 | 300 |
| 293-J | 1-1/4 | 150 | 300 |
| 293-K | 1-1/2 | 150 | 300 |

ALLOWS FLOW IN ONE DIRECTION ONLY

BRASS LOW PRESSURE



250 P.S.I. non-shock cold water. Forged brass construction for greater strength. May be installed horizontally or vertically. Less than 1 P.S.I. cracking pressure. (This valve is intended for use with air and water only)
Temperature: -20°F to +100°F (-29°C to 38°C)

COUPLING STYLE CHECK VALVE

| PART No. | Female Pipe | MAX. P.S.I. |
|----------|-------------|-------------|
| 103CV-C | 3/8 | 250 |
| 103CV-D | 1/2 | 250 |
| 103CV-E | 3/4 | 250 |
| 103CV-H | 1 | 250 |
| 103CV-J | 1-1/4 | 250 |
| 103CV-K | 1-1/2 | 250 |

Y CHECK VALVES



"Y" VALVE FEMALE PIPE HEX HEAD

| PART No. | Female Pipe | W.S.P. | W.O.G. |
|----------|-------------|--------|--------|
| 298-D | 1/2 | 125 | 200 |
| 298-E | 3/4 | 125 | 200 |
| 298-H | 1 | 125 | 200 |
| 298-J | 1-1/4 | 125 | 200 |
| 298-K | 1-1/2 | 125 | 200 |
| 298-M | 2 | 125 | 200 |

ALLOWS FLOW IN ONE DIRECTION ONLY

F

GHM SERIES (Rear & Bottom Mounting)



(Plug & Gasket Included)

| PART No. | Pipe Size | Type | Color Code |
|----------|-----------|-----------|------------|
| GHM-E | 3/8 NPTF | Emergency | Red |
| GHM-S | 3/8 NPTF | Service | Blue |

GHM Series With Screen Seal

| PART No. | Pipe Size | Type | Color Code |
|----------|-----------|-----------|------------|
| GHM-E-SC | 3/8 NPTF | Emergency | Red |
| GHM-S-SC | 3/8 NPTF | Service | Blue |

GH SERIES (Standard Style)



| PART No. | Pipe Size | Type | Color Code |
|----------|-----------|-----------|------------|
| GHU | 1/2 NPTF | Universal | Plain |
| GHE | 1/2 NPTF | Emergency | Red |
| GHS | 1/2 NPTF | Service | Blue |

GH Series With Screen Seal

| PART No. | Pipe Size | Type | Color Code |
|----------|-----------|-----------|------------|
| GHU-SC | 1/2 NPTF | Universal | Plain |
| GHE-SC | 1/2 NPTF | Emergency | Red |
| GHS-SC | 1/2 NPTF | Service | Blue |

SWING AWAY GLADHAND



| PART No. | Pipe Size | Type | Color Code |
|----------|-----------|------------|------------|
| GHU-SW | 3/8 NPTF | Swing Away | Plain |
| GHE-SW | 3/8 NPTF | Swing Away | Red |
| GHS-SW | 3/8 NPTF | Swing Away | Blue |

GH Series With Umbrella Seal

| PART No. | Pipe Size | Type | Color Code |
|----------|-----------|-----------|------------|
| GHU-2 | 1/2 FPT | Universal | Plain |
| GHE-2 | 1/2 FPT | Emergency | Red |
| GHS-2 | 1/2 FPT | Service | Blue |

GHV (Valved) SERIES




GHV Series With Bulkhead GHV (Valved) Series

| PART No. | Bottom Pipe Size | Back Pipe Size | Type | Color Code |
|----------|------------------|----------------|-----------|------------|
| GHV-E | 3/8 NPTF | 1/4 FPT | Emergency | Red |
| GHV-S | 3/8 NPTF | --- | Service | Blue |

| PART No. | Bulkhead Pipe Size | Type | Color Code |
|----------|--------------------|-----------|------------|
| GHV-E-BH | 3/8 F - 3/4 M | Emergency | Red |
| GHV-S-BH | 3/8 F - 3/4 M | Service | Blue |

REPLACEMENT SEALS

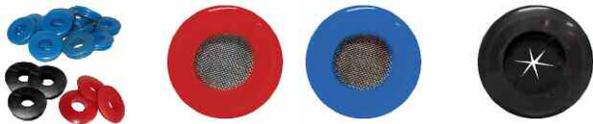

GH-SEAL
STANDARD

WITH SCREEN

GH-SEAL-2
UMBRELLA

| PART No. | Type | Color Code |
|-------------|--------------------------|------------|
| GH-SEAL | Rubber | Black |
| GH-SEAL-2 | Rubber Umbrella Seal | Black |
| GHE-SEAL | Polyurethane | Red |
| GHE-SEAL-SC | Polyurethane with Screen | Red |
| GHS-SEAL | Polyurethane | Blue |
| GHS-SEAL-SC | Polyurethane with Screen | Blue |

COUPLING BRACKET



PART No.
GH-BRACKET

Description
Gladhand Holder

GLADHAND DUMMY



PART No.
GH-DUMMY

Description
C/W 26" SECURITY CABLE

Color Code
Plain

GLADHAND DUMMY KIT



With Chain

PART No.
GH-DUMMY-NVI

Description
NON-VENTED

GLADHAND LOCKS



(STEEL)
Comes with 2 keys.
Keyed Different
Designed for use with
screened style and
regular glad hands.

PART No.
GH-LOCK-ST

Description
Gladhand Lock

GLADHAND GRIPS



Description
Gladhand Grip
Handles With
Thread Sealant.
Sold Only in sets.
(Red and Blue)

PART No.
GH-GRIP

Pipe Size
1/2



Description
Knurled Solid Aluminum
Gladhand Grip Handles
With Thread Sealant.
Sold Only in sets.
(Red and Blue)

PART No.
GH-GRIP-ALUM

Pipe Size
1/2



Description
Gladhand Lock
(PLASTIC)
Comes with 2 keys.
Keyed Different
Designed for use with
screened style and
regular glad hands.

PART No.
GH-LOCK-PL

Description
Gladhand Lock

F



AIR VENTS AND MUFFLERS

Low profile breather vents used on single acting cylinders or valves to prevent dirt and foreign particles from entering ports open to the atmosphere. Also used for vacuum relief in pressure equalization of gear boxes, crank cases, storage tanks or reservoirs.



| PART No. | Pipe |
|----------|------|
| BBV-A | 1/8 |
| BBV-B | 1/4 |
| BBV-C | 3/8 |
| BBV-D | 1/2 |

Maximum Operating Pressure: 300 P.S.I.
Operating Temperature: +35°F to +300°F, +2°C to +149°C
Sintered Bronze (40 micron)



| PART No. | ORB |
|-----------|-----------|
| BBV-ORB-6 | 9/16 - 18 |
| BBV-ORB-8 | 3/4 - 16 |

O-Ring Boss Thread
Maximum Operating Pressure: 300 P.S.I.
Operating Temperature: +35°F to +300°F, +2°C to +149°C
Sintered Bronze (40 micron)

Exhaust mufflers utilize porous sintered bronze filter element secured to nickel plated pipe fittings. Used to diffuse air and muffle noise from the exhaust ports of air valves, air cylinders and air tools to an acceptable level within OSHA noise requirement. Also used as filters for gasoline, oil and air exhaust and intake.



| PART No. | Pipe |
|----------|------|
| BEM-A | 1/8 |
| BEM-B | 1/4 |
| BEM-C | 3/8 |
| BEM-D | 1/2 |
| BEM-E | 3/4 |

Maximum Operating Pressure: 300 P.S.I.
Operating Temperature: +35°F to +300°F, +2°C to +149°C
Sintered bronze (40 micron)

Speed control mufflers provide an infinite variation of control of air flow at an acceptable sound level on exhaust ports of air valves with complete safety. The speed of an operating cylinder or air tool may be increased or decreased by adjusting the screw. Final position is then locked in place by the lock nut. Objectionable exhaust air noise is eliminated by the surrounding sleeve of sintered bronze.



| PART No. | Pipe |
|----------|------|
| BSCM-A | 1/8 |
| BSCM-B | 1/4 |
| BSCM-C | 3/8 |
| BSCM-D | 1/2 |

Maximum Operating Pressure: 300 P.S.I.
Operating Temperature: +35°F to +300°F, +2°C to +149°C
Sintered Bronze (40 micron)

Brass Air Vent. Set screw has 10/32 national fine thread.



| PART No. | Pipe |
|----------|------|
| WH-705 | 1/8 |

Maximum Operating Pressure: 150 P.S.I.
Operating Temperature: +35°F to +300°F, +2°C to +149°C

F



AIR CHUCKS



ACCUTEK®

Fairview's industrial grade brass ball chucks with 1/4" female NPT thread are ideally suited for use on live air lines supplying compressed air.

| PART No. | Description |
|----------|--------------------------------|
| BC-B | Ball Chuck |
| BC-B-LH | Ball Chuck (Locking handle) ** |



Fairview's industrial grade dual foot filler valve with 1/4" female NPT thread are ideally suited for use on live air lines supplying compressed air.

| PART No. | Description |
|----------|-------------------------------|
| BC-B-DF | Dual Foot (6" Overall Length) |

BRASS TANK VALVES



AIR TANK VALVE

Fairview's industrial grade brass air tank valve with Male NPT thread for use on compressed air systems.

| PART No. | Pipe | Description |
|----------|------|-------------------|
| BTV-A | 1/8" | Complete with Cap |
| BTV-B | 1/4" | Complete with Cap |


AIR TANK DRAIN VALVE



AIR TANK DRAIN VALVE WITH PULL CABLE

| PART No. | Pipe | Description |
|----------|------|-------------|
| 14DV-60B | 1/4" | 60" Cable |

PRESSURE PROTECTION VALVE

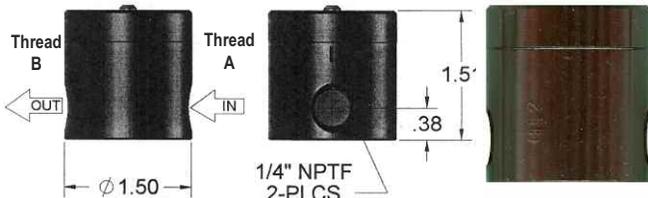

PPV Series

- **Material:** Black Anodized Aluminum
 - **Diaphragm:** Low-Temp Buna
 - **Temp Rating:** -40°F To +180°F (-40°C To 82°C)
 - **Max Pressure:** 200 PSI max. supply
- Pressure to open Adjustable 45-95 psi, Pressure to close Adjustable 40-90 psi
Downstream Check, (Optional) Stainless Steel Adjustment Screw


| PART No. | Thread "A" | Thread "B" | Closing Pressure (P.S.I.) | Opening Pressure (P.S.I.) |
|------------------|------------|------------|---------------------------|---------------------------|
| PPV90PC-60/65-6C | 1/4 NPTF | 1/4 NPTF | 60 | 65 |

PPV Series

- **Material:** Black Anodized Aluminum
- **Diaphragm:** Low-Temp Buna
- **Temp Rating:** -40°F To +225°F (-40°C To 107°C)
- **Max Pressure:** 200 PSI max. supply



Reverse check when closed.
Non Adjustable Standard.
Panel Mount Standard.
Light weight only 5-1/2 oz.

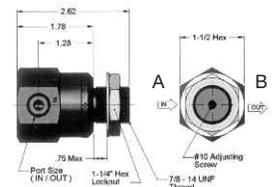

DISCONTINUED PRODUCT LIMITED STOCK SEE PPV90PC-60/65-6C

| PART No. | Thread "A" | Thread "B" | Closing Pressure (P.S.I.) | Opening Pressure (P.S.I.) |
|-------------|------------|------------|---------------------------|---------------------------|
| PPV-60/65-B | 1/4 NPTF | 1/4 NPTF | 60 | 65 |

F

AIR SHIFT SOLENOIDS

Note: Must Be Mounted In Upright Position.



- 2 Ports - 1/4 Female NPT
- 1 Vent
- 0 - 120 P.S.I.
- 12 Volt D.C.
- Electrically Actuated

PART No.
SV-120B12V

Description
NORMALLY CLOSED

3 WAY DIRECTIONAL CONTROL



- 3 Ports - 1/4 Female NPT
- 0 - 100 P.S.I.
- 12 Volt D.C.
- Electrically Actuated

PART No.
SV-100B12V30

Description
NORMALLY OPEN

AIR CONTROL PRESSURE REGULATORS



- Inlet-Outlet - 1/4 NPT
- Gauge Ports - 1/8 NPT
- Max. Flow Range 51 to 75 cfm
- Adjustment Range - Regulators 0 - 140 PSI
- Max. Inlet Pressure 250 PSIG
- Relieving Type
- Standard Knob

PART No.
R16-02-000

Description
Pressure Regulator 3.5" in height



- Inlet-Outlet - 3/8 NPT
- Gauge Ports - 1/8 NPT
- Max. Flow Range 101 to 200 cfm
- Adjustment Range - Regulators 0 - 140 PSI
- Max. Inlet Pressure 250 PSIG
- Relieving Type
- Standard Knob

PART No.
R16-03-000

Description
Pressure Regulator 5.5" in height

HEAVY DUTY TRUCK TIRE PRESSURE GAUGE



6" Wand allows for extended reach.



Maintaining proper tire pressure improves mileage, reduces tire wear and increase driving safety.

| PART No. | Pressure Range | Wand Length |
|----------|----------------|-------------|
| TPG-1 | 0-60 psi | 6" |

- Dual Foot filler valve.
- Exceeds Standard ANSI-ASME B-40.1 Grade B requirements for 2% accuracy.
- Highly shock resistant.
- Employs Award-winning gearless diaphragms design-No Bourdon Tube!
- Features Bleeder Valve, which holds pressure until released.

FIFTH WHEEL SLIDER CYLINDER



PART No. FW-CYLINDER-1

- Port Size: 1/4" NPT
- Shaft Size: 5/8" Diameter
- Clevis Hole: 17/32"
- Retracted Length: 12.75"
- Extended Length: 19.25"
- Operating Pressure: 100 PSI
- Max. Operating Pressure: 125 PSI
- Stroke: 6.5"

F

PRESSURE GAUGES

DRY - LIQUID

| | |
|---|---------------|
| CENTER BACK MOUNT (DRY) | 119, 120, 122 |
| CENTER BACK MOUNT (LIQUID FILLED) | 116, 117 |
| EQUALIZER (DRY) | 120 - 122 |
| MOUNTING BRACKETS | 118 |
| PROTECTIVE COVER | 118 |
| SNUBBER | 118 |
| STEM MOUNT (DRY) | 119 - 122 |
| STEM MOUNT (LIQUID FILLED) | 116 - 118 |
| VACUUM SERVICE | 118 |



WHAT'S NEW IN THIS SECTION

Equalizer Gauges120 - 122

LIQUID FILLED PRESSURE GAUGES

- Glycerin Liquid Gauge • #304 Stainless Steel Case • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -4°F To + 150°F, -20°C To +65°C • Meets ASME B40.100 Standards

Liquid Gauge Identification:



Black Plug Signifies Standard



Brown Plug Signifies Low Temp Liquid

After installation lift plunger to vent gauge

1/4 NPT BRASS STEM MOUNT (2.5" DIAL)



| PART No. | Dial Diameter | | Range | |
|--------------|---------------|----------|--------|--|
| | (IN.) | (P.S.I.) | (kPa) | |
| PG-15SG25 | 2.5 | 0-15 | 0-100 | |
| PG-30SG25 | 2.5 | 0-30 | 0-200 | |
| PG-60SG25 | 2.5 | 0-60 | 0-400 | |
| PG-100SG25 | 2.5 | 0-100 | 0-700 | |
| PG-100SG25LT | 2.5 | 0-100 | 0-700 | |
| PG-160SG25 | 2.5 | 0-160 | 0-1100 | |
| PG-160SG25LT | 2.5 | 0-160 | 0-1100 | |
| PG-200SG25 | 2.5 | 0-200 | 0-1400 | |
| PG-300SG25 | 2.5 | 0-300 | 0-2100 | |

| PART No. | Dial Diameter | | Range | |
|--------------|---------------|----------|---------|--|
| | (IN.) | (P.S.I.) | (kPa) | |
| PG-400SG25 | 2.5 | 0-400 | 0-2800 | |
| PG-600SG25 | 2.5 | 0-600 | 0-4000 | |
| PG-1000SG25 | 2.5 | 0-1000 | 0-7000 | |
| PG-1500SG25 | 2.5 | 0-1500 | 0-10000 | |
| PG-2000SG25 | 2.5 | 0-2000 | 0-14000 | |
| PG-3000SG25 | 2.5 | 0-3000 | 0-21000 | |
| PG-5000SG25 | 2.5 | 0-5000 | 0-35000 | |
| PG-10000SG25 | 2.5 | 0-10000 | 0-70000 | |

("LT" -76°F To + 392°F, -60°C To +200°C Low Temp)

1/4 NPT BRASS STEM MOUNT (4" DIAL)



| PART No. | Dial Diameter | | Range | |
|-------------|---------------|----------|--------|--|
| | (IN.) | (P.S.I.) | (kPa) | |
| PG-30SG4 | 4 | 0-30 | 0-200 | |
| PG-60SG4 | 4 | 0-60 | 0-400 | |
| PG-100SG4 | 4 | 0-100 | 0-700 | |
| PG-160SG4 | 4 | 0-160 | 0-1100 | |
| PG-160SG4LT | 4 | 0-160 | 0-1100 | |
| PG-200SG4 | 4 | 0-160 | 0-1400 | |
| PG-300SG4 | 4 | 0-300 | 0-2100 | |

| PART No. | Dial Diameter | | Range | |
|-------------|---------------|----------|---------|--|
| | (IN.) | (P.S.I.) | (kPa) | |
| PG-1000SG4 | 4 | 0-1000 | 0-7000 | |
| PG-1500SG4 | 4 | 0-1500 | 0-10000 | |
| PG-3000SG4 | 4 | 0-3000 | 0-21000 | |
| PG-5000SG4 | 4 | 0-5000 | 0-35000 | |
| PG-10000SG4 | 4 | 0-10000 | 0-70000 | |

("LT" -76°F To + 392°F, -60°C To +200°C Low Temp)

1/4 NPT BRASS CENTER BACK MOUNT (2.5" DIAL)



| PART No. | Dial Diameter | | Range | |
|--------------|---------------|----------|--------|--|
| | (IN.) | (P.S.I.) | (kPa) | |
| PG-15CG25 | 2.5 | 0-15 | 0-100 | |
| PG-30CG25 | 2.5 | 0-30 | 0-200 | |
| PG-60CG25 | 2.5 | 0-60 | 0-400 | |
| PG-100CG25 | 2.5 | 0-100 | 0-700 | |
| PG-100CG25LT | 2.5 | 0-100 | 0-700 | |
| PG-160CG25 | 2.5 | 0-160 | 0-1100 | |
| PG-160CG25LT | 2.5 | 0-160 | 0-1100 | |
| PG-200CG25 | 2.5 | 0-200 | 0-1400 | |
| PG-300CG25 | 2.5 | 0-300 | 0-2100 | |

| PART No. | Dial Diameter | | Range | |
|--------------|---------------|----------|---------|--|
| | (IN.) | (P.S.I.) | (kPa) | |
| PG-400CG25 | 2.5 | 0-400 | 0-2800 | |
| PG-600CG25 | 2.5 | 0-600 | 0-4000 | |
| PG-1000CG25 | 2.5 | 0-1000 | 0-7000 | |
| PG-1500CG25 | 2.5 | 0-1500 | 0-10000 | |
| PG-2000CG25 | 2.5 | 0-2000 | 0-14000 | |
| PG-3000CG25 | 2.5 | 0-3000 | 0-21000 | |
| PG-5000CG25 | 2.5 | 0-5000 | 0-35000 | |
| PG-10000CG25 | 2.5 | 0-10000 | 0-70000 | |

("LT" -76°F To + 392°F, -60°C To +200°C Low Temp)

ALL STAINLESS STEEL LIQUID FILLED PRESSURE GAUGES



- Glycerin Liquid Gauge • All Stainless Steel • 1.5% Full Scale Accuracy
- Ambient-Process Temp: - 4°F To + 150°F, -20°C To +65°C • Meets ASME B40.100 Standards

Liquid Gauge Identification:



Black Plug Signifies Standard



Brown Plug Signifies Low Temp Liquid

After installation lift plunger to vent gauge



1/4 NPT STAINLESS STEEM MOUNT (2.5" DIAL)

| PART No. | Dial Dia. | Range | |
|----------------|-----------|----------|--------|
| | (IN.) | (P.S.I.) | (kPa) |
| PG-30SG25SS | 2.5 | 0-30 | 0-200 |
| PG-60SG25SS | 2.5 | 0-60 | 0-400 |
| PG-100SG25SS | 2.5 | 0-100 | 0-700 |
| PG-100SG25SSLT | 2.5 | 0-100 | 0-700 |
| PG-160SG25SS | 2.5 | 0-160 | 0-1100 |
| PG-160SG25SSLT | 2.5 | 0-160 | 0-1100 |
| PG-200SG25SS | 2.5 | 0-200 | 0-1400 |
| PG-300SG25SS | 2.5 | 0-300 | 0-2100 |

("LT" -76°F To + 392°F, -60°C To +200°C Low Temp)



1/4 NPT STAINLESS STEEM MOUNT (4" DIAL)

| PART No. | Dial Dia. | Range | |
|---------------|-----------|----------|--------|
| | (IN.) | (P.S.I.) | (kPa) |
| PG-30SG4SS | 4 | 0-30 | 0-200 |
| PG-60SG4SS | 4 | 0-60 | 0-400 |
| PG-100SG4SS | 4 | 0-100 | 0-700 |
| PG-160SG4SS | 4 | 0-160 | 0-1100 |
| PG-160SG4SSLT | 4 | 0-160 | 0-1100 |
| PG-200SG4SS | 4 | 0-160 | 0-1400 |
| PG-300SG4SS | 4 | 0-300 | 0-2100 |

("LT" -76°F To + 392°F, -60°C To +200°C Low Temp)

- 1/2" Stem mount available; suffix "-D" to the above Part No.

1/4 NPT STAINLESS CENTER BACK MOUNT (2.5" DIAL)



| PART No. | Dial Dia. | Range | |
|----------------|-----------|----------|--------|
| | (IN.) | (P.S.I.) | (kPa) |
| PG-60CG25SS | 2.5 | 0-60 | 0-400 |
| PG-100CG25SS | 2.5 | 0-100 | 0-700 |
| PG-100CG25SSLT | 2.5 | 0-100 | 0-700 |
| PG-160CG25SS | 2.5 | 0-160 | 0-1100 |
| PG-160CG25SSLT | 2.5 | 0-160 | 0-1100 |
| PG-200CG25SS | 2.5 | 0-200 | 0-1400 |
| PG-300CG25SS | 2.5 | 0-300 | 0-2100 |

("LT" -76°F To + 392°F, -60°C To +200°C Low Temp)

G

LIQUID FILLED PRESSURE GAUGES

- Glycerin Liquid Gauge • #304 Stainless Steel Case • 1.5% Full Scale Accuracy
- Ambient-Process Temp: - 4°F To + 150°F, -20°C To +65°C • Meets ASME B40.100 Standards



After installation lift plunger to vent gauge



("LT" -76°F To + 392°F, -60°C To +200°C Low Temp)

Brown Plug Signifies Low Temp Liquid



PG-MB25
2 SCREW U-CLAMP
(For Use With Center Back Or Stem Mount Gauges.)



PG-PM25
3 HOLE PANEL MOUNT
(Only For Use With Center Back Mount Gauges.)



PG-SNUBBER

- Brass 1/4" Female x 1/4" Male
- Protects gauges from shock.
- Ambient-Process Temp: - 65°F To + 650°F
- 54°C To + 343°C



PG-RC25



WITH FACTORY FLANGE 1/4 NPT BRASS STEM MOUNT (2.5" DIAL)

| PART No. | Dial | Range | |
|--------------|----------------|----------|--------|
| | Diameter (IN.) | (P.S.I.) | (kPa) |
| PG-30SGRF | 4 | 0-30 | 0-200 |
| PG-100SGRF | 4 | 0-100 | 0-700 |
| PG-100SGRFLT | 4 | 0-100 | 0-700 |
| PG-160SGRF | 4 | 0-160 | 0-1100 |

VACUUM SERVICE 1/4 NPT BRASS STEM MOUNT (2.5" DIAL)

| PART No. | For Dial Dia. | Range | |
|--------------|---------------|---------|----------|
| | (IN.) | Vacuum | (P.S.I.) |
| PG-30SGV25 | 2.5 | 30-0 hg | |
| PG-30V30SG25 | 2.5 | 30-0 hg | 0-30 |

VACUUM SERVICE 1/4 NPT BRASS CENTER BACK MOUNT (2.5" DIAL)

| PART No. | For Dial Dia. | Range | |
|--------------|---------------|---------|----------|
| | (IN.) | Vacuum | (P.S.I.) |
| PG-30CGV25 | 2.5 | 30-0 hg | |
| PG-30V30CG25 | 2.5 | 30-0 hg | 0-30 |

MOUNTING BRACKETS

| PART No. | For Dial Dia. | Description |
|----------|---------------|--------------------|
| | (IN.) | |
| PG-MB25 | 2.5 | 2 Screw U-Clamp |
| PG-PM25 | 2.5 | 3 Hole Panel Mount |
| PG-RF4 | 4 | 3 Hole Panel Mount |

BRASS SNUBBER

| PART No. | Range | Service |
|----------------|----------|-----------------------------|
| | (P.S.I.) | |
| PG-SNUBBER * | 0-10000 | Heavy Oils |
| PG-SNUBBER-G | 0-10000 | Air and other Gases |
| PG-SNUBBER-W * | 0-10000 | Gasoline, Water, Light Oils |

*Conforms to requirements of MIL-D-2940A

GAUGE PROTECTOR COVER

| PART No. | For Dial Dia. | Material | Color |
|----------|---------------|----------|-------|
| | (IN.) | | |
| PG-RC25 | 2.5 | Rubber | Blue |
| PG-RC4 | 4.0 | Rubber | Blue |

DRY PRESSURE GAUGES

- Dry Gauge • **Steel Case** • Accuracy: 3% -2% -3% • Connection: Brass • Bourdon Tube
- Ambient-Process Temp: -40°F To +140°F, -40°C To +60°C • Meets ASME B40.100 Standards

1/8 NPT BRASS STEM MOUNT (1.5" DIAL)

| PART No. | Dial Dia. | Range | |
|------------|-----------|----------|-------|
| | (IN.) | (P.S.I.) | (kPa) |
| PG-100SD15 | 1.5 | 0-100 | N/A |
| PG-160SD15 | 1.5 | 0-160 | N/A |



1/4 NPT BRASS STEM MOUNT

| PART No. | Dial Dia. | Range | |
|------------|-----------|----------|--------|
| | (IN.) | (P.S.I.) | (kPa) |
| PG-15SD2 | 2 | 0-15 | N/A |
| PG-30SD2 | 2 | 0-30 | N/A |
| PG-60SD2 | 2 | 0-60 | N/A |
| PG-100SD2 | 2 | 0-100 | N/A |
| PG-160SD2 | 2 | 0-160 | N/A |
| PG-200SD2 | 2 | 0-200 | N/A |
| PG-300SD2 | 2 | 0-300 | N/A |
| PG-15SD25 | 2.5 | 0-15 | 0-100 |
| PG-30SD25 | 2.5 | 0-30 | 0-200 |
| PG-60SD25 | 2.5 | 0-60 | 0-400 |
| PG-100SD25 | 2.5 | 0-100 | 0-700 |
| PG-160SD25 | 2.5 | 0-160 | 0-1100 |
| PG-200SD25 | 2.5 | 0-200 | 0-1400 |
| PG-300SD25 | 2.5 | 0-300 | 0-2100 |

1/8 NPT BRASS CENTER BACK MOUNT (1.5" DIAL)

| PART No. | Dial Dia. | Range | |
|------------|-----------|----------|-------|
| | (IN.) | (P.S.I.) | (kPa) |
| PG-30CD15 | 1.5 | 0-30 | N/A |
| PG-60CD15 | 1.5 | 0-60 | N/A |
| PG-100CD15 | 1.5 | 0-100 | N/A |
| PG-160CD15 | 1.5 | 0-160 | N/A |



1/4 NPT BRASS CENTER BACK MOUNT (2" DIAL)

| PART No. | Dial Dia. | Range | |
|-----------|-----------|----------|-------|
| | (IN.) | (P.S.I.) | (kPa) |
| PG-30CD2 | 2 | 0-30 | N/A |
| PG-60CD2 | 2 | 0-60 | N/A |
| PG-100CD2 | 2 | 0-100 | N/A |
| PG-160CD2 | 2 | 0-160 | N/A |
| PG-200CD2 | 2 | 0-200 | N/A |



G

- Dry Gauge • #304 Stainless Steel Case, Brass Wetted • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -58°F To + 200°F, -50°C To +93°C • Meets ASME B40.100 Standards

The EQVALIZER™ Pressure Gauge Series

These gauges are dry gauges that come with a dampening movement that eliminates pointer flutter caused by vibration and pulsation. This makes pressure reading much easier. No more worries of fill fluid leaking or compatibility issues with the process media. Gauges can be easily serviced without the hassle of draining and refilling the case with fluid.

- Dampens vibration and pulsation
- Eliminates leaks and discoloration
- Can be used at higher temperatures than glycerine filled gauges
- Provides ease in reading
- Reinforced lightweight design



PG-3000ZRSD25

1/4 NPT BRASS STEM MOUNT (2.5" DIAL)



| PART No. | Dial Diameter | | Range | |
|--------------|---------------|----------|--------|--|
| | (IN.) | (P.S.I.) | (kPa) | |
| PG-15ZRSD25 | 2.5 | 0-15 | 0-100 | |
| PG-30ZRSD25 | 2.5 | 0-30 | 0-200 | |
| PG-60ZRSD25 | 2.5 | 0-60 | 0-400 | |
| PG-100ZRSD25 | 2.5 | 0-100 | 0-700 | |
| PG-160ZRSD25 | 2.5 | 0-160 | 0-1100 | |
| PG-200ZRSD25 | 2.5 | 0-200 | 0-1400 | |
| PG-300ZRSD25 | 2.5 | 0-300 | 0-2100 | |

| PART No. | Dial Diameter | | Range | |
|----------------|---------------|----------|---------|--|
| | (IN.) | (P.S.I.) | (kPa) | |
| PG-400ZRSD25 | 2.5 | 0-400 | 0-2800 | |
| PG-600ZRSD25 | 2.5 | 0-600 | 0-4000 | |
| PG-1000ZRSD25 | 2.5 | 0-1000 | 0-7000 | |
| PG-1500ZRSD25 | 2.5 | 0-1500 | 0-10000 | |
| PG-2000ZRSD25 | 2.5 | 0-2000 | 0-14000 | |
| PG-3000ZRSD25 | 2.5 | 0-3000 | 0-21000 | |
| PG-5000ZRSD25 | 2.5 | 0-5000 | 0-35000 | |
| PG-10000ZRSD25 | 2.5 | 0-10000 | 0-70000 | |

1/4 NPT BRASS CENTER BACK MOUNT (2.5" DIAL)



| PART No. | Dial Diameter | | Range | |
|--------------|---------------|----------|--------|--|
| | (IN.) | (P.S.I.) | (kPa) | |
| PG-15ZRCD25 | 2.5 | 0-15 | 0-100 | |
| PG-30ZRCD25 | 2.5 | 0-30 | 0-200 | |
| PG-60ZRCD25 | 2.5 | 0-60 | 0-400 | |
| PG-100ZRCD25 | 2.5 | 0-100 | 0-700 | |
| PG-160ZRCD25 | 2.5 | 0-160 | 0-1100 | |
| PG-200ZRCD25 | 2.5 | 0-200 | 0-1400 | |
| PG-300ZRCD25 | 2.5 | 0-300 | 0-2100 | |

| PART No. | Dial Diameter | | Range | |
|----------------|---------------|----------|---------|--|
| | (IN.) | (P.S.I.) | (kPa) | |
| PG-400ZRCD25 | 2.5 | 0-400 | 0-2800 | |
| PG-600ZRCD25 | 2.5 | 0-600 | 0-4000 | |
| PG-1000ZRCD25 | 2.5 | 0-1000 | 0-7000 | |
| PG-1500ZRCD25 | 2.5 | 0-1500 | 0-10000 | |
| PG-2000ZRCD25 | 2.5 | 0-2000 | 0-14000 | |
| PG-3000ZRCD25 | 2.5 | 0-3000 | 0-21000 | |
| PG-5000ZRCD25 | 2.5 | 0-5000 | 0-35000 | |
| PG-10000ZRCD25 | 2.5 | 0-10000 | 0-70000 | |

1/4 NPT BRASS STEM MOUNT (4" DIAL)



| PART No. | Dial Diameter | | Range | |
|-------------|---------------|----------|--------|--|
| | (IN.) | (P.S.I.) | (kPa) | |
| PG-15ZRSD4 | 4 | 0-15 | 0-100 | |
| PG-30ZRSD4 | 4 | 0-30 | 0-200 | |
| PG-60ZRSD4 | 4 | 0-60 | 0-400 | |
| PG-100ZRSD4 | 4 | 0-100 | 0-700 | |
| PG-160ZRSD4 | 4 | 0-160 | 0-1100 | |
| PG-200ZRSD4 | 4 | 0-200 | 0-1400 | |
| PG-300ZRSD4 | 4 | 0-300 | 0-2100 | |

| PART No. | Dial Diameter | | Range | |
|---------------|---------------|----------|---------|--|
| | (IN.) | (P.S.I.) | (kPa) | |
| PG-400ZRSD4 | 4 | 0-400 | 0-2800 | |
| PG-600ZRSD4 | 4 | 0-600 | 0-4000 | |
| PG-1000ZRSD4 | 4 | 0-1000 | 0-7000 | |
| PG-1500ZRSD4 | 4 | 0-1500 | 0-10000 | |
| PG-2000ZRSD4 | 4 | 0-2000 | 0-14000 | |
| PG-3000ZRSD4 | 4 | 0-3000 | 0-21000 | |
| PG-5000ZRSD4 | 4 | 0-5000 | 0-35000 | |
| PG-10000ZRSD4 | 4 | 0-10000 | 0-70000 | |

1/4 NPT Brass Center Backmount (4" Dial), Panel Mount and Factory Installed Flanges Also Available on Request

- Dry Gauge • **All Stainless Steel** • Accuracy: $\pm 1\%$ ANSI/ASME Grade 1A • Connection: Stainless
- Bourdon Tube • Ambient-Process Temp: -58°F To $+200^{\circ}\text{F}$, -50°C To $+93^{\circ}\text{C}$

PREMIUM STAINLESS STEEL EQUALIZER™ GAUGE



Description & Features:

- Dampened movement minimizes effects of pulsation and vibration without liquid filling
- Restricted orifice standard on dual scale (optional on single scale)
- Stainless steel case
- 316 SS wetted parts
- Back, bottom, or panel mounted
- CRN registered

Applications:

- Ideally suited for process, chemical and petroleum industry
- Where chemical compatibility and contamination is a concern

Specifications:

Dial 4" (100mm) white aluminum with black and red markings (2-1/2" dial available on request)
Case AISI 304 SS (dry)
Lens Polycarbonate

Ring AISI 304 SS bayonet

Socket 316 SS

Bourdon Tube 316 SS

Movement 304 SS, dampened

Pointer Aluminum, anodized black, micrometer adjustable

Over-Pressure Limit

25% for pressures up to 1,450 psi (9,998 kPa),

15% for pressures over 1,500, psi (10,342 kPa)

Socket Gasket 2.5" (63mm): Buna N for two-piece internal socket seal

Fill Plug Buna N

Lens Ring Gasket Silicone rubber

Ambient/Process Temperature

-58°F To $+200^{\circ}\text{F}$, -50°C To $+93^{\circ}\text{C}$

Working Pressure:

Maximum 75% of full scale value Accuracy


Accuracy:

4" (100mm): $\pm 1\%$ ANSI/ASME Grade 1A

1/4 NPT STAINLESS STEM MOUNT (4" DIAL)

| PART No. | Dial Dia. (IN.) | Range (P.S.I.) | Range (kPa) |
|-----------------|-----------------|----------------|-------------|
| PG-30ZRSD4SS | 4 | 0-30 | 0-200 |
| PG-60ZRSD4SS | 4 | 0-60 | 0-400 |
| PG-100ZRSD4SS | 4 | 0-100 | 0-700 |
| PG-160ZRSD4SS | 4 | 0-160 | 0-1100 |
| PG-200ZRSD4SS | 4 | 0-200 | 0-1400 |
| PG-300ZRSD4SS | 4 | 0-300 | 0-2100 |
| PG-600ZRSD4SS | 4 | 0-600 | 0-4200 |
| PG-1000ZRSD4SS | 4 | 0-1000 | 0-7000 |
| PG-1500ZRSD4SS | 4 | 0-1500 | 0-10000 |
| PG-2000ZRSD4SS | 4 | 0-2000 | 0-14000 |
| PG-3000ZRSD4SS | 4 | 0-3000 | 0-21000 |
| PG-5000ZRSD4SS | 4 | 0-5000 | 0-35000 |
| PG-10000ZRSD4SS | 4 | 0-10000 | 0-70000 |
| PG-15000ZRSD4SS | 4 | 0-15000 | 0-100000 |

• 1/2" Stem mount available: see (-D) next page.

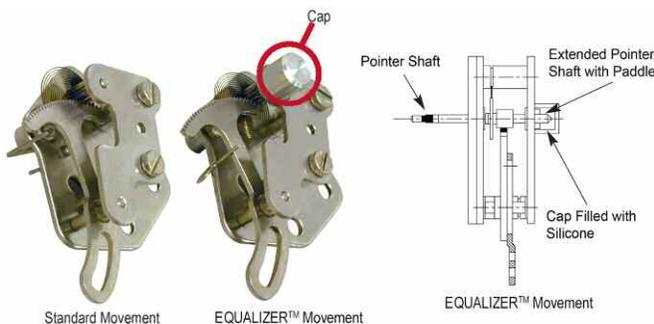

The pressure dampening mechanism of the Equalizer Gauge provides the reliability and accuracy of a liquid gauge without the risk of fogging, discoloring or cold weather gelling.

G

- Dry Gauge • **All Stainless Steel** • 1.5% Full Scale Accuracy
- Ambient-Process Temp: -58°F To + 200°F, -50°C To +93°C • Meets ASME B40.100 Standards

1/2 NPT STAINLESS STEM MOUNT (4" DIAL)



| PART No. | Dial | Range | |
|-----------------|-------------------|----------|--------|
| | Diameter (IN.) | (P.S.I.) | (kPa) |
| PG-30ZRSD4SS-D | 4 | 0-30 | 0-200 |
| PG-60ZRSD4SS-D | 4 | 0-60 | 0-400 |
| PG-100ZRSD4SS-D | 4 | 0-100 | 0-700 |
| PG-160ZRSD4SS-D | 4 | 0-160 | 0-1100 |
| PG-200ZRSD4SS-D | 4 | 0-200 | 0-1400 |
| PG-300ZRSD4SS-D | 4 | 0-300 | 0-2100 |
| PG-600ZRSD4SS-D | 4 | 0-600 | 0-4200 |

| PART No. | Dial | Range | |
|-------------------|-------------------|----------|----------|
| | Diameter (IN.) | (P.S.I.) | (kPa) |
| PG-1000ZRSD4SS-D | 4 | 0-1000 | 0-7000 |
| PG-1500ZRSD4SS-D | 4 | 0-1500 | 0-10000 |
| PG-2000ZRSD4SS-D | 4 | 0-2000 | 0-14000 |
| PG-3000ZRSD4SS-D | 4 | 0-3000 | 0-21000 |
| PG-5000ZRSD4SS-D | 4 | 0-5000 | 0-35000 |
| PG-10000ZRSD4SS-D | 4 | 0-10000 | 0-70000 |
| PG-15000ZRSD4SS-D | 4 | 0-15000 | 0-100000 |

1/2 NPT STAINLESS BACK MOUNT (4" DIAL) ALSO AVAILABLE

1/4 NPT STAINLESS STEM MOUNT (2.5" DIAL)



| PART No. | Dial | Range | |
|----------------|-------------------|----------|--------|
| | Diameter (IN.) | (P.S.I.) | (kPa) |
| PG-15ZRSD25SS | 2.5 | 0-15 | 0-100 |
| PG-30ZRSD25SS | 2.5 | 0-30 | 0-200 |
| PG-60ZRSD25SS | 2.5 | 0-60 | 0-400 |
| PG-100ZRSD25SS | 2.5 | 0-100 | 0-700 |
| PG-160ZRSD25SS | 2.5 | 0-160 | 0-1100 |
| PG-200ZRSD25SS | 2.5 | 0-200 | 0-1400 |
| PG-300ZRSD25SS | 2.5 | 0-300 | 0-2100 |
| PG-400ZRSD25SS | 2.5 | 0-400 | 0-2800 |

| PART No. | Dial | Range | |
|------------------|-------------------|----------|----------|
| | Diameter (IN.) | (P.S.I.) | (kPa) |
| PG-600ZRSD25SS | 2.5 | 0-600 | 0-4000 |
| PG-1000ZRSD25SS | 2.5 | 0-1000 | 0-7000 |
| PG-1500ZRSD25SS | 2.5 | 0-1500 | 0-10000 |
| PG-2000ZRSD25SS | 2.5 | 0-2000 | 0-14000 |
| PG-3000ZRSD25SS | 2.5 | 0-3000 | 0-21000 |
| PG-5000ZRSD25SS | 2.5 | 0-5000 | 0-35000 |
| PG-10000ZRSD25SS | 2.5 | 0-10000 | 0-70000 |
| PG-15000ZRSD25SS | 2.5 | 0-15000 | 0-100000 |

1/4 NPT STAINLESS CENTER BACK MOUNT (2.5" DIAL)



| PART No. | Dial | Range | |
|----------------|-------------------|----------|--------|
| | Diameter (IN.) | (P.S.I.) | (kPa) |
| PG-15ZRCD25SS | 2.5 | 0-15 | 0-100 |
| PG-30ZRCD25SS | 2.5 | 0-30 | 0-200 |
| PG-60ZRCD25SS | 2.5 | 0-60 | 0-400 |
| PG-100ZRCD25SS | 2.5 | 0-100 | 0-700 |
| PG-160ZRCD25SS | 2.5 | 0-160 | 0-1100 |
| PG-200ZRCD25SS | 2.5 | 0-200 | 0-1400 |
| PG-300ZRCD25SS | 2.5 | 0-300 | 0-2100 |

| PART No. | Dial | Range | |
|------------------|-------------------|----------|---------|
| | Diameter (IN.) | (P.S.I.) | (kPa) |
| PG-400ZRCD25SS | 2.5 | 0-400 | 0-2800 |
| PG-600ZRCD25SS | 2.5 | 0-600 | 0-4000 |
| PG-1000ZRCD25SS | 2.5 | 0-1000 | 0-7000 |
| PG-1500ZRCD25SS | 2.5 | 0-1500 | 0-10000 |
| PG-2000ZRCD25SS | 2.5 | 0-2000 | 0-14000 |
| PG-3000ZRCD25SS | 2.5 | 0-3000 | 0-21000 |
| PG-5000ZRCD25SS | 2.5 | 0-5000 | 0-35000 |
| PG-10000ZRCD25SS | 2.5 | 0-10000 | 0-70000 |

STANDARD GEAR CLAMPS



- ALL STAINLESS STEEL
- S.A.E. 1/2 INCH WIDE STAINLESS STEEL BAND AND HOUSING
- S.A.E. STEEL CASE HARDENED PLATED SCREW
- **PACKAGING:** 10 Piece Cartons.
- Sizes 116 and up are Bulk.

| PART No. | Range (IN.) | Range (MM) | PART No. |
|------------|-------------|------------|------------|
| HC5-4TB * | .22 - .63 | 6 - 16 | HC6-4TB * |
| HC5-5TB * | .44 - .69 | 11 - 18 | HC6-5TB * |
| HC5-6TB * | .31 - .88 | 8 - 22 | HC6-6TB * |
| HC5-8TB * | .44 - 1.00 | 11 - 25 | HC6-8TB * |
| HC5-10TB * | .50 - 1.06 | 13 - 27 | HC6-10TB * |
| HC5-12TB * | .56 - 1.25 | 14 - 32 | HC6-12TB * |
| HC5-16TB * | .68 - 1.50 | 18 - 38 | HC6-16TB * |
| HC5-20TB * | .87 - 1.75 | 22 - 44 | HC6-20TB * |
| HC5-24TB * | 1.31 - 2.00 | 33 - 51 | HC6-24TB * |

| | | | |
|---------|---------------|-----------|---------|
| HC5-6 | .37 - .88 | 10 - 22 | HC6-6 |
| HC5-8 | .43 - 1.00 | 11 - 25 | HC6-8 |
| HC5-10 | .56 - 1.06 | 14 - 27 | HC6-10 |
| HC5-12 | .56 - 1.25 | 14 - 32 | HC6-12 |
| HC5-16 | .68 - 1.50 | 17 - 38 | HC6-16 |
| HC5-20 | .75 - 1.75 | 19 - 44 | HC6-20 |
| HC5-24 | 1.06 - 2.00 | 27 - 51 | -- |
| HC5-28 | 1.31 - 2.25 | 33 - 57 | HC6-28 |
| HC5-32 | 1.56 - 2.50 | 40 - 63 | HC6-32 |
| HC5-36 | 1.81 - 2.75 | 46 - 70 | HC6-36 |
| HC5-40 | 2.06 - 3.00 | 52 - 76 | HC6-40 |
| HC5-44 | 2.31 - 3.25 | 59 - 82 | HC6-44 |
| HC5-48 | 2.56 - 3.50 | 65 - 89 | HC6-48 |
| HC5-52 | 2.81 - 3.75 | 71 - 95 | HC6-52 |
| HC5-56 | 3.06 - 4.00 | 78 - 101 | HC6-56 |
| HC5-60 | 3.31 - 4.25 | 84 - 107 | HC6-60 |
| HC5-64 | 2.50 - 4.50 | 64 - 114 | HC6-64 |
| HC5-72 | 3.00 - 5.00 | 76 - 127 | HC6-72 |
| HC5-80 | 3.50 - 5.50 | 89 - 140 | HC6-80 |
| HC5-84 | 3.75 - 5.75 | 95 - 146 | HC6-84 |
| HC5-88 | 4.00 - 6.00 | 102 - 152 | HC6-88 |
| HC5-96 | 4.50 - 6.50 | 114 - 165 | HC6-96 |
| HC5-104 | 5.00 - 7.00 | 127 - 178 | HC6-104 |
| HC5-116 | 5.75 - 7.75 | 146 - 196 | HC6-116 |
| HC5-128 | 6.50 - 8.50 | 165 - 216 | HC6-128 |
| HC5-152 | 8.00 - 10.00 | 203 - 254 | HC6-152 |
| HC5-164 | 8.75 - 10.75 | 222 - 273 | HC6-164 |
| HC5-188 | 10.25 - 12.25 | 260 - 311 | HC6-188 |
| HC5-200 | 11.00 - 13.00 | 280 - 330 | HC6-200 |
| HC5-212 | 11.75 - 13.75 | 299 - 349 | HC6-212 |
| HC5-224 | 12.50 - 14.50 | 318 - 368 | HC6-224 |
| HC5-236 | 13.25 - 15.25 | 337 - 387 | -- |
| HC5-248 | 14.75 - 16.00 | 375 - 406 | -- |
| HC5-270 | 15.37 - 17.38 | 391 - 441 | HC6-270 |
| HC5-312 | 18.00 - 20.00 | 457 - 508 | HC6-312 |
| HC5-390 | 22.87 - 24.88 | 581 - 632 | HC6-390 |

* DENOTES THIN BAND. TB SERIES HAS A 5/16 INCH WIDE BAND.

CLAMP DISPLAY RACKS

Rack & Clamp Packages Are Available See Page:140



T-Bolt Clamp Kit;
Containing a selection of common size clamps together with our **HCR-18-RACK** storage rack.
PART No. HC3-KIT-1

Auto Clamp Kit;
Containing a selection of common size clamps together with our **HCR-10-RACK** storage rack.
PART No. HC6-AUTO-KIT-1

EXTENDED TONGUE CLAMPS



- S.A.E. 1/2 INCH WIDE STAINLESS STEEL BAND HOUSING AND SHIELD
- S.A.E. STEEL CASE HARDENED PLATED SCREW
- EXTENDED TONGUE CLAMPS ARE INTENDED FOR USE WITH SOFT HOSE MATERIAL SUCH AS SILICONE HEATER HOSE AND COOLANT HOSE

THE INNER SHIELD PROTECTS THE HOSE FROM DAMAGE BY PREVENTING IT FROM COMING IN DIRECT CONTACT WITH THE NOTCHED BAND



- **PACKAGING:** 10 Piece Cartons

| PART No. | Range (IN.) | Range (MM) |
|----------|-------------|------------|
| ETM-4* | .31 - .56 | 8 - 14 |
| ETM-6* | .56 - .88 | 14 - 22 |
| ETM-12* | .81 - 1.31 | 21 - 33 |
| ET-8 | .62 - .81 | 16 - 21 |
| ET-10 | .65 - 1.06 | 17 - 27 |
| ET-12 | .68 - 1.51 | 17 - 33 |
| ET-16 | .75 - 1.50 | 19 - 38 |
| ET-20 | 1.37 - 1.81 | 35 - 46 |
| ET-24 | 1.50 - 2.00 | 38 - 51 |
| ET-28 | 1.75 - 2.25 | 44 - 57 |
| ET-32 | 2.00 - 2.50 | 50 - 64 |
| ET-36 | 1.81 - 2.75 | 46 - 70 |
| ET-40 | 2.06 - 3.06 | 52 - 78 |
| ET-44 | 2.31 - 3.25 | 59 - 83 |
| ET-48 | 2.56 - 3.56 | 65 - 91 |
| ET-52 | 2.81 - 3.75 | 71 - 95 |
| ET-56 | 3.12 - 4.06 | 79 - 103 |
| ET-60 | 3.31 - 4.25 | 84 - 108 |
| ET-64 | 3.56 - 4.50 | 91 - 114 |

* NOTE: ETM SERIES HAS A 5/16 INCH WIDE BAND

T-BOLT HOSE CLAMPS

For T-Bolt Clamp Display Rack See Pages 124, 140



ALL STAINLESS STEEL



BAND: Stainless Steel

BRIDGE: Stainless Steel

SHOE: Stainless Steel

STAINLESS STEEL BOLT, TRUNNION AND NUT

APPLICATIONS:

- Heavy Duty hose connections.
- Used on filter bags, pipe, ducting and center joint irrigation equipment.

PACKAGING: 50 and 100 Piece Cartons.

| PART No. | Range (IN.) | Range (MM) |
|----------|----------------|---------------|
| HC2-150 | 1.31 - 1.56 | 33 - 40 |
| HC2-175 | 1.56 - 1.81 | 40 - 46 |
| HC2-188 | 1.69 - 1.94 | 43 - 49 |
| HC2-200 | 1.81 - 2.06 | 46 - 52 |
| HC2-225 | 2.06 - 2.31 | 52 - 59 |
| HC2-238 | 2.19 - 2.50 | 58 - 64 |
| HC2-250 | 2.31 - 2.62 | 59 - 67 |
| HC2-256 | 2.38 - 2.69 | 60 - 68 |
| HC2-263 | 2.44 - 2.75 | 62 - 70 |
| HC2-275 | 2.56 - 2.87 | 65 - 73 |
| HC2-288 | 2.69 - 3.00 | 68 - 76 |
| HC2-300 | 2.81 - 3.12 | 71 - 79 |
| HC2-312 | 2.94 - 3.25 | 75 - 83 |
| HC2-325 | 3.06 - 3.37 | 78 - 86 |
| HC2-350 | 3.31 - 3.62 | 84 - 92 |
| HC2-375 | 3.56 - 3.87 | 90 - 98 |
| HC2-382 | 3.63 - 3.94 | 92 - 100 |
| HC2-400 | 3.81 - 4.12 | 97 - 105 |
| HC2-425 | 4.06 - 4.37 | 103 - 111 |
| HC2-450 | 4.31 - 4.62 | 110 - 117 |
| HC2-475 | 4.56 - 4.87 | 116 - 124 |
| HC2-500 | 4.81 - 5.12 | 122 - 130 |
| HC2-525 | 5.06 - 5.37 | 129 - 137 |
| HC2-550 | 5.31 - 5.62 | 135 - 143 |
| HC2-575 | 5.56 - 5.87 | 141 - 149 |
| HC2-600 | 5.81 - 6.12 | 148 - 156 |
| HC2-650 | 6.31 - 6.62 | 160 - 168 |
| HC2-700 | 6.81 - 7.12 | 173 - 181 |
| HC2-750 | 7.31 - 7.62 | 186 - 194 |
| HC2-825 | 8.06 - 8.37 | 205 - 213 |



STANDARD



BAND: Stainless Steel

BRIDGE: Stainless Steel

PLATED STEEL BOLT, TRUNNION AND NUT

APPLICATIONS:

- Heavy Duty hose connections.
- Used on filter bags, pipe, ducting and center joint irrigation equipment.


PACKAGING: 50 and 100 Piece Cartons.

| PART No. | Range (IN.) | Range (MM) |
|----------|----------------|---------------|
| HC3-150 | 1.31 - 1.56 | 33 - 40 |
| HC3-175 | 1.56 - 1.81 | 40 - 46 |
| HC3-188 | 1.69 - 1.94 | 43 - 49 |
| HC3-200 | 1.81 - 2.06 | 46 - 52 |
| HC3-225 | 2.06 - 2.31 | 52 - 59 |
| HC3-238 | 2.19 - 2.50 | 58 - 64 |
| HC3-250 | 2.31 - 2.62 | 59 - 67 |
| HC3-256 | 2.38 - 2.69 | 60 - 68 |
| HC3-263 | 2.44 - 2.75 | 62 - 70 |
| HC3-275 | 2.56 - 2.87 | 65 - 73 |
| HC3-288 | 2.69 - 3.00 | 68 - 76 |
| HC3-300 | 2.81 - 3.12 | 71 - 79 |
| HC3-312 | 2.94 - 3.25 | 75 - 83 |
| HC3-325 | 3.06 - 3.37 | 78 - 86 |
| HC3-350 | 3.31 - 3.62 | 84 - 92 |
| HC3-375 | 3.56 - 3.87 | 90 - 98 |
| HC3-382 | 3.63 - 3.94 | 92 - 100 |
| HC3-400 | 3.81 - 4.12 | 97 - 105 |
| HC3-425 | 4.06 - 4.37 | 103 - 111 |
| HC3-450 | 4.31 - 4.62 | 110 - 117 |
| HC3-475 | 4.56 - 4.87 | 116 - 124 |
| HC3-500 | 4.81 - 5.12 | 122 - 130 |
| HC3-525 | 5.06 - 5.37 | 129 - 137 |
| HC3-550 | 5.31 - 5.62 | 135 - 143 |
| HC3-575 | 5.56 - 5.87 | 141 - 149 |
| HC3-600 | 5.81 - 6.12 | 148 - 156 |
| HC3-625 | 6.06 - 6.37 | 154 - 162 |
| HC3-650 | 6.31 - 6.62 | 160 - 168 |
| HC3-675 | 6.56 - 6.87 | 167 - 175 |
| HC3-700 | 6.81 - 7.12 | 173 - 181 |
| HC3-750 | 7.31 - 7.62 | 186 - 194 |
| HC3-800 | 7.81 - 8.12 | 192 - 200 |

FLEX SEAL CLAMPS - ACCUTEK™



FLEX SEAL (HEAVY DUTY)

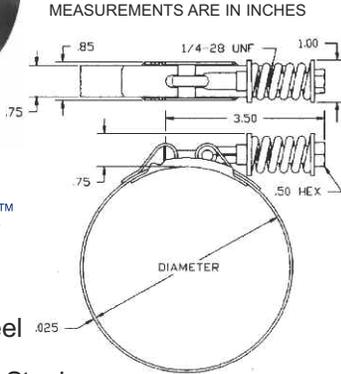

BAND: Stainless Steel
BRIDGE: Stainless Steel
T-BOLT: Carbon Steel
SPRING: High Carbon Steel
FINISH: (T-BOLT): Zinc Plated and Dichromate

APPLICATIONS:


- Designed specifically for silicone hose connections in turbocharged diesel engine air intake and air charge air systems.
- Solves hose “blow-off” failures resulting from cold flow or thermal expansions.

PACKAGING: 50 and 100 Piece Cartons.

| PART No. | Range (IN.) | Range (MM) |
|----------|-------------|------------|
| HC19-225 | 2.06 - 2.31 | 52 - 59 |
| HC19-238 | 2.19 - 2.50 | 58 - 64 |
| HC19-250 | 2.31 - 2.62 | 59 - 67 |
| HC19-263 | 2.38 - 2.69 | 60 - 68 |
| HC19-270 | 2.44 - 2.75 | 62 - 70 |
| HC19-275 | 2.56 - 2.87 | 65 - 73 |
| HC19-288 | 2.69 - 3.00 | 68 - 76 |
| HC19-300 | 2.81 - 3.12 | 71 - 79 |
| HC19-312 | 2.94 - 3.25 | 75 - 83 |
| HC19-325 | 3.06 - 3.37 | 78 - 86 |
| HC19-350 | 3.31 - 3.62 | 84 - 92 |
| HC19-375 | 3.56 - 3.87 | 90 - 98 |
| HC19-382 | 3.63 - 3.94 | 92 - 100 |
| HC19-412 | 3.81 - 4.12 | 97 - 105 |
| HC19-425 | 4.06 - 4.37 | 103 - 111 |
| HC19-450 | 4.31 - 4.62 | 110 - 117 |
| HC19-475 | 4.56 - 4.87 | 116 - 124 |
| HC19-500 | 4.81 - 5.12 | 122 - 130 |
| HC19-525 | 5.06 - 5.37 | 129 - 137 |
| HC19-550 | 5.31 - 5.61 | 135 - 143 |
| HC19-575 | 5.56 - 5.87 | 141 - 149 |
| HC19-600 | 5.81 - 6.12 | 148 - 156 |



MINI FLEX SEAL

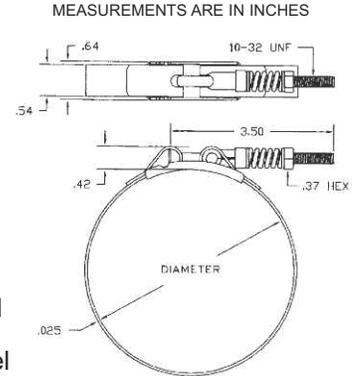

BAND: Stainless Steel
SLEEVE: Brass
BRIDGE: Carbon Steel
T-BOLT: Carbon Steel
SPRING: Carbon Steel
FINISH: (T-BOLT): Zinc Plated and Dichromate

APPLICATIONS:

- Wherever leakage caused by cold flow or thermal expansion is a problem.
- Designed specially for silicone and EPDM hose connections or on radiators and engine blocks / manifolds.
- Solves “blow-off” failures common on air intake /charge-air systems of turbocharged internal combustion engines.

PACKAGING: 50 and 100 Piece Cartons.

| PART No. | Range (IN.) | Range (MM) |
|----------|-------------|------------|
| HC20-150 | 1.31 - 1.56 | 33 - 40 |
| HC20-175 | 1.56 - 1.81 | 40 - 46 |
| HC20-188 | 1.69 - 1.94 | 43 - 49 |
| HC20-200 | 1.81 - 2.06 | 46 - 52 |
| HC20-225 | 2.06 - 2.31 | 52 - 59 |
| HC20-250 | 2.31 - 2.62 | 59 - 67 |
| HC20-263 | 2.38 - 2.69 | 60 - 68 |
| HC20-270 | 2.44 - 2.75 | 62 - 70 |
| HC20-275 | 2.56 - 2.87 | 65 - 73 |
| HC20-288 | 2.69 - 3.00 | 68 - 76 |
| HC20-300 | 2.81 - 3.12 | 71 - 79 |
| HC20-312 | 2.94 - 3.25 | 75 - 83 |
| HC20-325 | 3.06 - 3.37 | 78 - 86 |
| HC20-350 | 3.31 - 3.62 | 84 - 92 |
| HC20-375 | 3.56 - 3.87 | 90 - 98 |
| HC20-400 | 3.81 - 4.12 | 97 - 105 |
| HC20-425 | 4.06 - 4.37 | 103 - 111 |
| HC20-450 | 4.31 - 4.62 | 110 - 117 |
| HC20-550 | 5.31 - 5.61 | 135 - 143 |

QUICK RELEASE CLAMPS



Constructed from Stainless Steel materials for corrosion resistance. These clamps feature a unique quick release design that allows for quick and easy installation in restricted or difficult areas. 5/16 Slotted Hexagon Head and 1/2 wide band.



APPLICATIONS:

For applications where clamp must be opened to be applied. Used extensively in the telecommunications industry on cable enclosures where open air applications demand durability.

PACKAGING: 10 Piece Carton.

| PART No. | Range (IN.) | Range (MM) |
|----------|--------------|------------|
| LAS-36 | 1.00 - 2.39 | 25 - 70 |
| LAS-48 | 1.50 - 3.50 | 38 - 89 |
| LAS-56 | 1.00 - 4.00 | 25 - 101 |
| LAS-72 | 2.00 - 5.00 | 51 - 127 |
| LAS-88 | 2.06 - 6.00 | 52 - 152 |
| LAS-96 | 3.50 - 6.56 | 89 - 166 |
| LAS-104 | 1.75 - 7.00 | 44 - 178 |
| LAS-128 | 1.75 - 8.56 | 44 - 218 |
| LAS-152 | 2.00 - 10.00 | 51 - 254 |
| LAS-188 | 2.06 - 12.31 | 52 - 313 |
| LAS-248 | 1.75 - 16.00 | 44 - 406 |
| LAS-312 | 1.88 - 20.00 | 48 - 508 |

ONE EAR CLAMPS

(With Mechanical Interlock)



Select Nominal Clamp Size nearest to but larger than O.D. on which clamp is to be used.

APPLICATIONS:

1-Ear clamps are intended for low pressure applications such as automotive (not fuel lines), appliances, industrial machinery, underground irrigation systems and beverage dispensing equipment.


SPECIFICATIONS:

The standard HC8 series is manufactured from 1008 carbon steel tube and then zinc plated. Stainless Steel clamps are manufactured from type 304 AISI stainless.

PACKAGING: 25 Piece Bags.

| PART No. | Range (IN.) | Range (MM) |
|----------|---------------|-------------|
| HC8-6 | .350 - .414 | 8.9 - 10.5 |
| HC8-9 | .496 - .571 | 12.6 - 14.5 |
| HC8-11 | .549 - .669 | 15.1 - 17.0 |
| HC8-12 | .669 - .779 | 17.0 - 19.8 |
| HC8-14 | .779 - .890 | 19.8 - 22.6 |
| HC8-15 | .839 - .949 | 21.3 - 24.1 |
| HC8-21 | 1.181 - 1.303 | 30.0 - 33.1 |

ONE EAR CLAMPS



APPLICATIONS:

One Ear Clamps are commonly used where a low profile protrusion and a small, snug clamping range is of the essence.

They are well suited for Original Equipment Manufacturer (OEM) or Maintenance, Repair and Overhaul (MRO). EPDM rubber hose, plastic tube, electrical cable, strain relief, insert molding, welding and heavily vibrating equipment hoses are readily clamped.

SPECIFICATIONS:

Type 304 AISI stainless steel.

PACKAGING: 25 Piece Bags.

| PART No. | Range (IN.) | Range (MM) |
|------------|-------------|-------------|
| HC14-8-1/2 | .476 - .551 | 12.1 - 14.0 |

FUEL INJECTION HOSE CLAMPS



APPLICATIONS:

Clamps are intended for low pressure applications such as automotive fuel injection.

| PART No. | Nominal Clamp Size (IN.) |
|----------|--------------------------|
| HC21-4 | 1/4 |
| HC21-5 | 5/16 |
| HC21-6 | 3/8 |

TWO EAR CLAMPS



For Pincer
Tools See
Page: 146

GREAT HOLDING POWER: Closing the ears builds strength into the clamp which works against the pressure in the hose.

APPLICATIONS: Two Ear Clamps are ideally suited for maintenance and O.E.M. applications, rubber hose, plastic tube, plastic pipe, and coaxial cable are all readily clamped. Uses on air, fluid, gas and steam lines are unlimited.

SPECIFICATIONS: The standard HC9 series is made from 1008 steel tube. They are then zinc plated. Stainless Steel clamps are manufactured from type 304 AISI tube.

PACKAGING: 25 Piece Bags.

Select Nominal Clamp Size nearest to but larger than O.D. on which clamp is to be used.

| Steel PART No. | Range (IN.) | Range (MM) | Stainless Steel PART No. |
|----------------|---------------|-------------|--------------------------|
| HC9-2 | .122 - .161 | 3.1 - 4.1 | -- |
| HC9-3 | .118 - .197 | 3.0 - 5.0 | -- |
| HC9-4 | .197 - .276 | 5.0 - 7.0 | HC9-4SS |
| HC9-5 | .276 - .354 | 7.0 - 9.0 | HC9-5SS |
| HC9-6 | .315 - .433 | 8.0 - 11.0 | HC9-6SS |
| HC9-8 | .433 - .512 | 11.0 - 13.0 | HC9-8SS |
| HC9-9 | .512 - .591 | 13.0 - 15.0 | HC9-9SS |
| HC9-9-1/2 | .544 - .669 | 15.0 - 17.0 | HC9-9-1/2SS |
| HC9-10 | .591 - .708 | 15.0 - 18.0 | HC9-10SS |
| HC9-12 | .669 - .787 | 17.0 - 20.0 | HC9-12SS |
| HC9-13 | .748 - .866 | 19.0 - 22.0 | HC9-13SS |
| HC9-14 | .787 - .905 | 20.0 - 23.0 | HC9-14SS |
| HC9-15 | .866 - .984 | 22.0 - 25.0 | HC9-15SS |
| HC9-16 | .905 - 1.063 | 23.0 - 27.0 | HC9-16SS |
| HC9-17 | .984 - 1.102 | 25.0 - 28.0 | HC9-17SS |
| HC9-18 | 1.063 - 1.220 | 27.0 - 31.0 | HC9-18SS |
| HC9-21 | 1.220 - 1.339 | 31.0 - 34.0 | HC9-21SS |
| HC9-23 | 1.339 - 1.457 | 34.0 - 37.0 | -- |
| HC9-24 | 1.457 - 1.575 | 37.0 - 40.0 | HC9-24SS |
| HC9-26 | 1.575 - 1.693 | 40.0 - 43.0 | HC9-26SS |
| HC9-28 | 1.693 - 1.811 | 43.0 - 46.0 | -- |

TWO EAR CLAMP FIELD KIT



- PLASTIC BOX
- PINCER TOOL.
- 2 EAR CLAMP ASSORTMENT

PART No. OE-SB80

| CONTENTS | | | | | |
|----------|-------|----|--------|----|--------|
| 15 | HC9-5 | 15 | HC9-10 | 12 | HC9-16 |
| 15 | HC9-6 | 12 | HC9-12 | 1 | HC9-R |
| 15 | HC9-8 | 12 | HC9-14 | | |
| 15 | HC9-9 | 12 | HC9-15 | | |

STEPLESS® EAR CLAMPS



STEPLESS®:

The term "Stepless" relates to the absence of gaps or steps on the clamp's inner circumference. The unique tongue-in-groove design provides uniform compression and a 360° seal.

APPLICATIONS:

Standard Series Stepless Ear Clamps were perfected for demanding applications where lighter, thin-walled hose or tube is being used.

SPECIFICATIONS:

The standard HC10 series is made from type 304 AISI stainless steel.

PACKAGING: 25 Piece Bags.

| Stainless Steel PART No. | Range (IN.) | Range (MM) |
|--------------------------|---------------|-------------|
| HC10-6 | .307 - .374 | 7.8 - 9.5 |
| HC10-7 | .378 - .445 | 9.6 - 11.3 |
| HC10-7-1/2 | .398 - .465 | 10.1 - 11.8 |
| HC10-8 | .425 - .524 | 10.8 - 13.3 |
| HC10-9 | .472 - .571 | 12.0 - 14.5 |
| HC10-10 | .520 - .618 | 13.2 - 15.7 |
| HC10-11-1/2 | .602 - .728 | 15.3 - 18.5 |
| HC10-12 | .654 - .779 | 16.6 - 19.8 |
| HC10-13 | .701 - .827 | 17.8 - 21.0 |
| HC10-14 | .764 - .890 | 19.4 - 22.6 |
| HC10-17 | .945 - 1.067 | 23.9 - 27.1 |
| HC10-21 | 1.181 - 1.303 | 29.9 - 33.1 |
| HC10-25 | 1.378 - 1.500 | 34.9 - 38.1 |
| HC10-36 | 2.142 - 2.264 | 54.3 - 57.5 |

TUBE STRAPS AND HANGERS



**RUBBER
CUSHIONED
WRAP AROUND
TUBE STRAPS
(1/4 INCH HOLE)**

Steel – Zinc Plated

| PART No. | Tube O.D. | Band Width |
|----------|-----------|------------|
| TS17R-4 | 1/4 | 1/2 |
| TS17R-5 | 5/16 | 1/2 |
| TS17R-6 | 3/8 | 1/2 |
| TS17R-8 | 1/2 | 1/2 |
| TS17R-10 | 5/8 | 1/2 |
| TS17R-12 | 3/4 | 1/2 |
| TS17R-14 | 7/8 | 1/2 |
| TS17R-16 | 1 | 1/2 |
| TS17R-18 | 1-1/8 | 1/2 |
| TS17R-20 | 1-1/4 | 1/2 |
| TS17R-24 | 1-1/2 | 1/2 |
| TS17R-28 | 1-3/4 | 1/2 |
| TS17R-32 | 2 | 1/2 |
| TS17R-38 | 2-3/8 | 1/2 |
| TS17R-40 | 2-1/2 | 1/2 |
| TS17R-48 | 3 | 1/2 |
| TS17R-56 | 3-1/2 | 1/2 |
| TS17R-64 | 4 | 1/2 |



**RUBBER
CUSHIONED
WRAP AROUND
TUBE STRAPS
(1/4 INCH HOLE)**

Stainless Steel

| PART No. | Tube O.D. | Band Width |
|-----------|-----------|------------|
| TSS17R-4 | 1/4 | 1/2 |
| TSS17R-6 | 3/8 | 1/2 |
| TSS17R-8 | 1/2 | 1/2 |
| TSS17R-10 | 5/8 | 1/2 |
| TSS17R-12 | 3/4 | 1/2 |
| TSS17R-16 | 1 | 1/2 |
| TSS17R-20 | 1-1/4 | 1/2 |
| TSS17R-24 | 1-1/2 | 1/2 |
| TSS17R-32 | 2 | 1/2 |



**RUBBER
CUSHIONED
WRAP AROUND
TUBE STRAPS
(3/8 INCH HOLE)**

Steel – Zinc Plated

| PART No. | Tube O.D. | Band Width |
|----------|-----------|------------|
| TS16R-4 | 1/4 | 5/8 |
| TS16R-5 | 5/16 | 5/8 |
| TS16R-6 | 3/8 | 5/8 |
| TS16R-8 | 1/2 | 5/8 |
| TS16R-10 | 5/8 | 5/8 |
| TS16R-12 | 3/4 | 5/8 |
| TS16R-14 | 7/8 | 5/8 |
| TS16R-16 | 1 | 5/8 |
| TS16R-18 | 1-1/8 | 5/8 |
| TS16R-20 | 1-1/4 | 5/8 |
| TS16R-24 | 1-1/2 | 5/8 |
| TS16R-32 | 2 | 5/8 |
| TS16R-38 | 2-3/8 | 5/8 |
| TS16R-40 | 2-1/2 | 5/8 |



**ONE HOLE
TUBE
STRAPS**

Steel – Zinc Plated Heavy Type

| PART No. | Tube O.D. | Band Width |
|----------|-----------|------------|
| TS20-2 | 1/8 | 1/2 |
| TS20-3 | 3/16 | 1/2 |
| TS20-4 | 1/4 | 1/2 |
| TS20-5 | 5/16 | 1/2 |
| TS20-6 | 3/8 | 5/8 |
| TS20-8 | 1/2 | 5/8 |
| TS20-10 | 5/8 | 3/4 |
| TS20-12 | 3/4 | 3/4 |
| TS20-16 | 1 | 7/8 |



**ONE HOLE
TUBE
STRAPS**

Everdur Copper Heavy Type

| PART No. | Tube O.D. | Band Width |
|----------|-----------|------------|
| TS21-4 | 1/4 | 1/2 |
| TS21-6 | 3/8 | 5/8 |
| TS21-8 | 1/2 | 5/8 |



**“DUPLEX”
DOUBLE
TUBE STRAP**

Steel – Zinc Plated

| PART No. | Tube O.D. | Tube O.D. |
|----------|-----------|-----------|
| TS19-44 | 1/4 | 1/4 |
| TS19-66 | 3/8 | 3/8 |



**TWO HOLE
STRADDLE
TUBE STRAPS**

Steel - Copper Coated

| PART No. | Tube O.D. | Nominal I.D. |
|----------|-----------|--------------|
| TS14-6 | 3/8 | 1/4 |
| TS14-8 | 1/2 | 3/8 |
| TS14-10 | 5/8 | 1/2 |
| TS14-14 | 7/8 | 3/4 |



**TWO HOLE
STRADDLE
TUBE STRAPS**

Solid Copper

| PART No. | Tube O.D. | Nominal I.D. |
|----------|-----------|--------------|
| TS15-6 | 3/8 | 1/4 |
| TS15-8 | 1/2 | 3/8 |



**TWO HOLE
STRADDLE
PIPE STRAPS**

Steel – Zinc Plated

| PART No. | For Pipe Size |
|----------|---------------|
| TS22-D | 1/2 |
| TS22-E | 3/4 |
| TS22-H | 1 |
| TS22-J | 1-1/4 |
| TS22-K | 1-1/2 |
| TS22-M | 2 |
| TS22-N | 2-1/2 |



**HANGER
STRAP
3/4" Wide x
1/32" Thick**

Steel - Copper Coated

| PART No. | Length (FT.) |
|----------|--------------|
| HS11-25 | 25 |

H

AIR BRAKE HOSE SUPPORTS



HOSE SUPPORT
Used in conjunction with hose support spring and truck to trailer air brake line. (Page 7)

PART No.
HAB-SPW-HB

Hose I.D. (IN.)
One Size

HOSE SUPPORT SPRING KIT



Heavy Duty Abrasion Resistant Cover



| (Complete Kit) | Spring Length (IN.) | Description |
|--|---------------------|--|
| PART No. HAB-SPRING-16.4-TKP | 16.4 | Spring, Protective Cover & Hangers with Retail Packaging |
| HAB-SPRING-25-TKP | 25 | |
| HAB-SPRING-16.4-TKP2 | 16.4 | DOUBLE Spring, Protective Cover & Hangers with Retail Packaging |
| HAB-SPRING-25-TKP2 | 25 | |

| (Spring Only) | Spring Length (IN.) | Description |
|----------------------------------|---------------------|---------------------|
| PART No. HAB-SPRING-13 | 13 | Support Spring Only |
| HAB-SPRING-16.4 | 16.4 | |
| HAB-SPRING-25 | 25 | |

AIR BRAKE HOSE SPACERS



Hose I.D. (IN.)

PART No.
HAB-HANGER-6 3/8
HAB-HANGER-8 1/2

AIR BRAKE HOSE SUPPORTS

(1 BOLT) HOSE SUPPORT
Used in conjunction with hose support spring.



Hose I.D. (IN.)

PART No.
HAB-HCE-6 3/8
HAB-HCE-8 1/2

STEEL REINFORCED (2 BOLT) HOSE SUPPORT
Used in conjunction with hose support spring.



PART No.
HAB-HC2E-6

Size
3/8 Hose I.D.

"U" HOSE SUPPORT
Used in conjunction with hose support spring.



PART No.
HAB-HCU-6 3/8 Hose I.D.
HAB-HCU-8 1/2 Tube O.D.

TIE STRAPS



Material: UL94-V-2 Nylon 6/6 (Natural)
Temperature: -40F to 185F
NOTE: Black cable ties and other lengths available on request.

| PART No. | Packaged By | Tie Width | Tie Length | Min. Tensile Strength |
|-----------------|-------------|-----------|------------|-----------------------|
| TIE-20-4 | 100 | .098 | 4.75" | 18 lbs. |
| TIE-50-7-1/2 | 100 | .189 | 7.5" | 50 lbs. |
| TIE-50-14-1/2 | 100 | .189 | 14.5" | 50 lbs. |
| TIE-50-21-11/16 | 100 | .189 | 21.69" | 50 lbs. |

CABINETS, TOOLS & ACCESSORIES

CRIMP - CUT - FLARE - MEASURE - SPRAY - TEST



Fairview[®]

WHAT'S NEW IN THIS SECTION

Split Loom147

| | |
|--|---------------|
| AIR GUNS AND WANDS | 143 |
| BEND PROTECTORS | 147 |
| CABINETS & RACKS | |
| BIN CABINETS (WALL / FLOOR) | 135 |
| BIN - LARGE SLIDER CABINET (FLOOR) | 132 |
| BIN & DRAWER COMBO CABINET (FLOOR) | 133 |
| CABINET PRODUCT ASSORTMENTS (KIT) | 136, 137 |
| CLAMP RACK KITS | 140 |
| DRAWER CABINETS (WALL / FLOOR) | 133 - 134 |
| HOSE ASSEMBLY RACKS | 141, 142 |
| PLASTIC DRAWERS / BINS | 132 - 134 |
| PRESSURE GAUGE DISPLAY | 138 |
| PRODUCT STAND ALONE - GANG HOOK | 138 - 139 |
| CRIMPERS | 150 - 151 |
| CUTTERS | 146, 147, 148 |
| GREASE GUNS, COUPLER | 145 |
| HOSE TOOLS AND ACCESSORIES | 146, 147 |
| LEAK DETECTION FLUID | 149 |
| MEASURING DEVICES | 146 |
| PINCERS (EAR CLAMP) | 146 |
| ROTO-REAL | 146 |
| SPIRAL HOSE GUARD WRAP | 147 |
| SPLIT LOOM WRAP | 147 |
| SPRING GUARD, SLEEVE | 147 |
| STOCK BOXES | 140 |
| THREAD SEALANTS | 149 |
| TUBE WORKING TOOLS | 148 |
| UNIVERSAL SWIVEL | 143 |
| WATER NOZZLES | 144 |



FITTING CABINETS

UP TO 336 BIN SLIDER CABINET

Stand Alone Slider Cabinet

PART No.

QS-305306-52 (Unassembled)

QS-305306-52A (Assembled)

QS-305-40 (Unassembled)

QS-306-56 (Unassembled)


QS-000 (Slider Frame only No bins)

See below for bin configurations.

This system features four individual panels filled with tip out bins of which two are fixed to the back side and two slide easily from left to right allowing free access to all four panels. Manufactured of tough 14 gauge steel with putty powder coat finish.

Overall:

Height 66-1/4 inches
 Width 48 inches
 Depth 16 inches

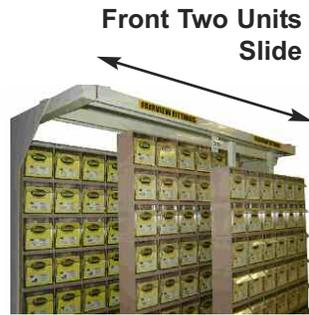

QS-305306-52A

Bin Units Available:



QTB-309
 9 Bin - 2-1/2"L x 23-5/8"W x 3-1/8"H



QTB-306
 6 Bin - 3-5/8"L x 23-5/8"W x 4-1/2"H




QTB-305
 5 Bin - 5-1/4"L x 23-5/8"W x 6-1/2"H



QTB-304
 4 Bin - 6-5/8"L x 23-5/8"W x 8-1/8"H




QTB-303
 3 Bin - 7-3/4"L x 23-5/8"W x 9-1/2"H

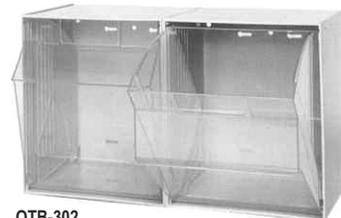

QTB-302
 2 Bin - 11-3/4"L x 23-5/8"W x 13-7/8"H

Cabinet is Supplied as shown with customizable Fairview bin front cards. (2 sizes only; for QTB-305 & QTB-306)

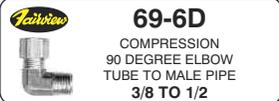

Labels are available...

Slider Cabinet Bin Configuration Chart

(How many of each bin in pre-configured set ups)

| PART No. | Bin Unit QTB-305 | Bin Unit QTB-306 | Total BINS |
|-----------------|------------------|------------------|------------|
| 1. QS-305306-52 | 9 | 43 | 303 |
| 2. QS-305-40 | 40 | 0 | 200 |
| 3. QS-306-56 | 0 | 56 | 336 |

Slider cabinets cataloged use just two bins sizes; QTB-305 and QTB-306, in one of the three configurations shown. (52, 40 or 56). Custom Orders are Available.

70 DRAWER - 10 BIN CABINET

Fairview Fitting Center

PART No. XC80-CA
XB80-CA (No Legs or Shelf)

This all new steel fitting center is the best of both worlds, with 50 single and 20 double size clear plastic sliding drawers. It also has 10 bin compartments for larger items. It is featured in Fairview's red, black and yellow colors.

It's equipped with steel tubular legs that can safely hold this Industrial cabinet. Large open bottom shelf for overstock is also supplied.

Note: Label sets are not included with the cabinet. For suggested product fitting packages see pages 136 - 137.

Overall: Height 61 inches
 Width 31-1/2 inches
 Depth 6 inches



Standard cabinet drawers (PD-110)



Double size cabinet drawers (PD-55)

Standard Drawer Dimensions:
PART No. PD-110
 Size: Width 2-3/4 inches
 Length 5-3/4 inches
 Depth 2-1/2 inches

Double Drawer Dimensions: (Optional)
PART No. PD-55
 Size: Width 5-3/4 inches
 Length 5-3/4 inches
 Depth 2-1/2 inches

• State PD-55 quantity requirements when ordering.

PART No. ZZCOS-PD-110-CARD
(Single)
ZZCOS-PD-55-CARD
(Double)

Blank yellow drawer front cards are available. Printed on heavy duty card stock, just affix the stickers and slide into place.



PART No. PM-PLASTIC INSERT
 Durable plastic inserts for dividing drawers into sections allow you to totally customize your cabinet. Remove the protective blue film, affix the stickers and slide into place.



FAIRVIEW FITTING CABINETS

UP TO 110 DRAWER CABINET

Stand Alone Storage Cabinet

**PART No. XC110-CA
XB110-CA (No Legs or Shelf)**

This steel cabinet has 110 clear plastic sliding drawers, each with the option of dividing into 4 compartments. It is featured in Fairview's red, black and yellow colors.

It's equipped with steel tubular legs that can safely hold this Industrial cabinet. Large open bottom shelf for overstock is also supplied.

Note: Label sets are not included with the cabinet. For suggested product fitting packages see pages 136 - 137.

Overall: Height 61 inches
Width 31-1/2 inches
Depth 6 inches



PD-110

Standard cabinet drawer is the PD-110. <<< Double size cabinet drawers (PD-55) are available.

| | |
|--|--------------|
| Standard Drawer Dimensions: | |
| PART No. PD-110 | |
| Size: Width | 2-3/4 inches |
| Length | 5-3/4 inches |
| Depth | 2-1/2 inches |
| Double Drawer Dimensions:(Optional) | |
| PART No. PD-55 | |
| Size: Width | 5-3/4 inches |
| Length | 5-3/4 inches |
| Depth | 2-1/2 inches |
| • State PD-55 quantity requirements when ordering. | |



UP TO 20 DRAWER CABINET

Counter / Wall Mounting Drawer Cabinet

PART No. XB20-CA

This cabinet has 20 drawers, each one with the capability of dividing into 4 separate compartments. It is featured in Fairview's red, black and yellow colors.

Overall: Height 16 inches
Width 17 inches
Depth 6 inches

Note: Label sets are not included with the cabinet. For suggested product fitting packages see pages 136 - 137. For drawer dimensions see above.



25 COMPARTMENT BIN CABINET

Counter / Wall Mounting Bin Cabinet

PART No. 25-CA

This heavy gauge metal bin cabinet has 25 compartments, with a beveled inner design for easy access. It is featured in Fairview's red, black and yellow colors.

| | | |
|--------|---------------|--------------|
| | Overall: | Bin Size: |
| Height | 34-1/2 inches | 6-1/2 inches |
| Width | 30 inches | 6 inches |
| Depth | 8 inches | |



42 BIN CABINET

Floor / Wall Mounting Storage Cabinet for Fittings or Large Items




PART No. 42-CA

This heavy gauge metal cabinet can be used for floor or wall mounting. It has 42 large compartments for easy access.

| | | |
|--------|---------------|--------------|
| | Overall: | Bin Size: |
| Height | 47-1/2 inches | 6-1/2 inches |
| Width | 36-1/4 inches | 6 inches |
| Depth | 8 inches | |

72 BIN CABINET

Floor / Wall Mounting Storage Cabinet for Fittings or Large Items

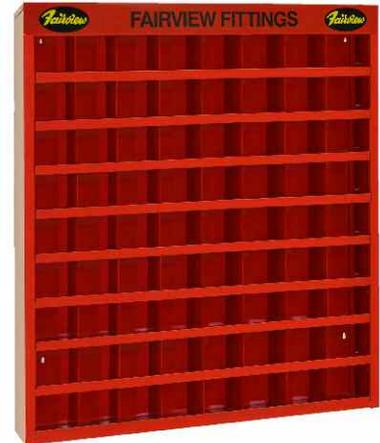


PART No. 72-CA

This heavy gauge metal cabinet can be used for floor or wall mounting. It has 72 large compartments for easy access.



| | | |
|--------|---------------|--------------|
| | Overall: | Bin Size: |
| Height | 47-1/2 inches | 5 inches |
| Width | 36-1/8 inches | 4-1/4 inches |
| Depth | 8 inches | |



START-UP INDUSTRY PRODUCT ASSORTMENTS

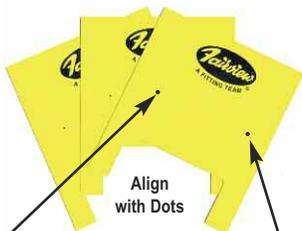

69-6D
COMPRESSION
90 DEGREE ELBOW
TUBE TO MALE PIPE
3/8 TO 1/2

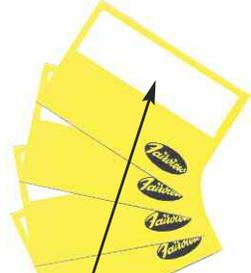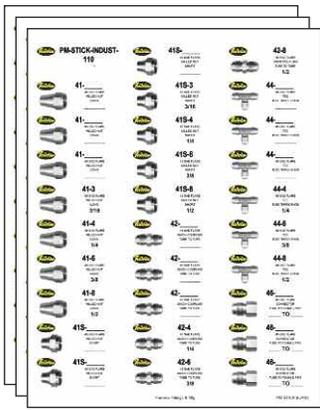

69-6D
COMPRESSION
90 DEGREE ELBOW
TUBE TO MALE PIPE
3/8 TO 1/2

Note: Product selections and suggested drawer quantities in these label sets are based on specified industry or product groups and cabinet space availability. Cabinets & Product Must Be Purchased Separately.

Automotive Assortment for 80 Drawer / Bin Cabinet KIT-AUTO-80

| Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty |
|-------------------|------------|-------------------|------------|-------------------|------------|-------------------|------------|-------------------|------------|-------------------|------------|-------------------|------------|
| 60-2 | 50 | 62-6 | 10 | 110-BA | 20 | 121-D | 5 | 1468-4A | 10 | 1468-4A | 5 | WH-1442 | 2 |
| 60-3 | 50 | 62-8 | 5 | 110-CB | 10 | 122-A | 10 | 240-A | 10 | 1468-6B | 10 | WH-7818 | 5 |
| 60-4 | 50 | 68-4A | 10 | 110-DB | 10 | 122-B | 10 | 240-B | 10 | 1469-6B | 10 | WH-7829 | 5 |
| 60-5 | 50 | 68-4B | 10 | 110-DC | 5 | 122-C | 10 | 481-4 | 10 | 1481-4 | 10 | X101-B | 5 |
| 60-6 | 50 | 68-6B | 10 | 110-ED | 2 | 141-3 | 10 | 481-6 | 10 | 1481-6 | 10 | X115-A | 10 |
| 60-8 | 20 | 103-A | 10 | 112-B | 10 | 141-4 | 10 | 1460-4 | 10 | 1481-8 | 10 | X115-B | 10 |
| 61-4 | 20 | 103-B | 10 | 120-BA | 10 | 142-3 | 10 | 1460-6 | 20 | S141-3 | 20 | X115-C | 5 |
| 61-6 | 10 | 103-C | 5 | 120-CB | 5 | 142-4 | 10 | 1460-8 | 10 | S141-4 | 20 | X124-C | 5 |
| 62-2 | 10 | 109-A | 10 | 120-DC | 5 | 142-5 | 10 | 1461-6 | 10 | S141-5 | 10 | LAB-AUTO-80 | 1 |
| 62-3 | 10 | 109-B | 10 | 121-A | 10 | 142-6 | 5 | 1462-4 | 5 | S141-6 | 20 | | |
| 62-4 | 10 | 109-C | 10 | 121-B | 10 | 144-3 | 10 | 1462-6 | 10 | SL141-3 | 5 | | |
| 62-5 | 10 | 109-D | 5 | 121-C | 5 | 148-3A | 10 | 1462-8 | 5 | SL141-4 | 25 | | |

Truck & Trailer Assortment for 80 Drawer / Bin Cabinet KIT-TRUCK-80

| Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Bin Qty |
|-------------------------|------------|-------------------|------------|-------------------|------------|-------------------|------------|-------------------|------------|-------------------|------------|----------------------|---------|
| Cabinet Drawer Products | | 122-B | 10 | 1468-6A | 10 | 1490-6 | 10 | 1496-DC | 2 | X115-D | 5 | Cabinet Bin Products | |
| 103-A | 10 | 122-C | 10 | 1468-6B | 10 | 1490-8 | 10 | 1497-DB | 2 | X124-B | 10 | 4120R-6C-RK | 2 |
| 103-B | 10 | 122-D | 10 | 1468-6C | 10 | 1491-6 | 10 | 2120-B | 5 | X124-C | 10 | 4120R-6D-RK | 2 |
| 103-C | 10 | 240-B | 10 | 1468-8C | 10 | 1491-8 | 10 | 4134-6B | 10 | X124-D | 5 | 4120R-8C-RK | 2 |
| 103-D | 10 | 1460-4 | 10 | 1468-8D | 10 | 1492-6B | 5 | 4134-6C | 10 | | | BV2101-C | 2 |
| 109-B | 10 | 1460-6 | 10 | 1469-4A | 10 | 1492-6C | 5 | HAB-HANGER-6 | 10 | | | BV2101-D | 2 |
| 109-C | 10 | 1460-8 | 10 | 1469-4B | 10 | 1492-6D | 5 | HAB-HANGER-8 | 10 | | | BV4103-B | 5 |
| 110-BA | 10 | 1460-10 | 10 | 1469-6A | 10 | 1492-6S | 2 | HAB-HCU-6 | 5 | | | BV4103-C | 5 |
| 110-CB | 10 | 1461-4 | 10 | 1469-6B | 10 | 1492-8C | 2 | TS17R-4 | 10 | | | BV4103-D | 5 |
| 110-DB | 10 | 1461-6 | 10 | 1469-6C | 10 | 1492-8D | 2 | TS17R-6 | 10 | | | QD-BTTWC16-16F | 2 |
| 110-DC | 10 | 1461-8 | 10 | 1469-8C | 5 | 1492-8S | 2 | TS17R-8 | 10 | | | QD-BTTWN16-16F | 2 |
| 110-ED | 5 | 1462-4 | 10 | 1471-6B | 10 | 1493-6C | 2 | TS17R-10 | 10 | | | LAB-TRUCK-80 | 1 |
| 120-BA | 10 | 1462-6 | 5 | 1472-6B | 5 | 1493-6D | 2 | TS17R-12 | 10 | | | | |
| 120-CB | 10 | 1462-8 | 5 | 1474-6B | 10 | 1493-8C | 2 | TS17R-16 | 10 | | | | |
| 120-DC | 10 | 1462-10 | 5 | 1474-6C | 10 | 1495-C | 5 | X107-B | 5 | | | | |
| 121-A | 10 | 1464-4 | 10 | 1481-4 | 10 | 1495-L | 5 | X107-C | 10 | | | | |
| 121-B | 10 | 1464-6 | 5 | 1481-6 | 10 | 1495-S | 10 | X115-A | 10 | | | | |
| 121-C | 10 | 1468-4A | 10 | 1481-8 | 10 | 1495B-C | 5 | X115-B | 10 | | | | |
| 121-D | 10 | 1468-4B | 10 | 1481-10 | 10 | 1495B-D | 2 | X115-C | 10 | | | | |

Industrial Distributor Assortment for 80 Drawer / Bin Cabinet KIT-INDUST-80

| Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty | Fairview PART No. | Drawer Qty |
|-------------------|------------|-------------------|------------|-------------------|------------|-------------------|------------|-------------------|------------|-------------------|------------|----------------------|------------|
| 41-4 | 10 | 60-10 | 10 | 103-E | 5 | 113-A2 | 10 | 121-C | 10 | X100-A | 10 | Cabinet Bin Products | |
| 41-5 | 10 | 61-2 | 10 | 109-A | 10 | 113-A3 | 10 | 121-D | 10 | X100-B | 10 | BV2103-B | 5 |
| 41-6 | 10 | 61-3 | 10 | 109-B | 10 | 113-B1-1/2 | 10 | 122-A | 10 | X101-A | 10 | BV2103-C | 4 |
| 48-4A | 10 | 61-4 | 10 | 109-C | 10 | 113-B2 | 10 | 122-B | 10 | X101-B | 10 | BV2103-D | 4 |
| 48-4B | 10 | 61-6 | 10 | 109-D | 10 | 113-B2-1/2 | 10 | 122-C | 10 | X101-C | 5 | BV2103-E | 3 |
| 48-5B | 5 | 61-8 | 10 | 110-BA | 10 | 116-A | 10 | 122-CB | 10 | X101-D | 2 | BV2103-H | 2 |
| 48-6B | 10 | 62-4 | 10 | 110-CA | 10 | 116-B | 10 | 122-D | 5 | X107-A | 10 | BVCS2103-D | 3 |
| 48-6C | 10 | 62-6 | 10 | 110-CB | 10 | 116-C | 5 | 122-DC | 5 | X107-B | 10 | BVCS2103-E | 3 |
| 48-8C | 10 | 62-8 | 5 | 110-DB | 10 | 116-D | 2 | 122-E | 5 | X107-C | 5 | BVSS2203-C | 2 |
| 48-8D | 5 | 62-10 | 5 | 110-DC | 10 | 118-A | 10 | 125-4B | 10 | X115-A | 10 | BVSS2203-D | 2 |
| 48-10D | 5 | 68-4A | 10 | 110-EB | 5 | 118-B | 10 | 125-6B | 10 | X115-B | 10 | BVSS2203-E | 2 |
| 49-4A | 10 | 68-4B | 10 | 110-EC | 5 | 119-BA | 10 | 125-6C | 10 | X115-C | 10 | LAB-INDUST-80 | 1 |
| 49-4B | 10 | 68-6B | 10 | 110-ED | 5 | 119-CB | 10 | 125-8C | 10 | X115-D | 5 | | |
| 49-6B | 10 | 68-6C | 10 | 110-HE | 5 | 119-DC | 5 | 125-8D | 5 | X124-A | 10 | | |
| 49-6C | 10 | 69-4A | 10 | 112-A | 10 | 120-BA | 10 | 125-10D | 5 | X124-B | 10 | | |
| 60-2 | 20 | 69-4B | 10 | 112-B | 10 | 120-CB | 10 | 125-12D | 5 | X124-C | 10 | | |
| 60-3 | 20 | 103-A | 10 | 112-C | 10 | 120-CC | 10 | 125-12E | 5 | X124-D | 5 | | |
| 60-4 | 20 | 103-B | 10 | 112-D | 10 | 120-DC | 10 | 129-4 | 10 | | | | |
| 60-6 | 20 | 103-C | 10 | 112-E | 5 | 121-A | 10 | 129-6 | 10 | | | | |
| 60-8 | 20 | 103-D | 5 | 113-A1-1/2 | 10 | 121-B | 10 | 129-8 | 10 | | | | |



Note: Product selections and suggested drawer quantities in these label sets are based on specified industry or product groups and cabinet space availability. Cabinets & Product Must Be Purchased Separately.

Automotive Assortment for 110 Drawer Cabinet KIT-AUTO-110

| Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. |
|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|
| 41-4 | 10 | 64-6 | 5 | 110-BA | 10 | 121-B | 10 | 149-3A | 10 | 1460-6 | 10 | 1474-6C | 5 | SL141-4 | 10 |
| 41-6 | 10 | 66-4A | 10 | 110-CA | 10 | 121-C | 10 | 149-4A | 10 | 1460-8 | 10 | 1481-4 | 10 | WH-1442 | 10 |
| 42-6 | 10 | 66-6B | 10 | 110-CB | 10 | 121-D | 10 | 149-5A | 5 | 1460-10 | 10 | 1481-6 | 10 | WH-1443 | 5 |
| 48-4A | 10 | 68-2A | 10 | 110-DA | 10 | 121-E | 5 | 240-A | 10 | 1460-12 | 10 | 1481-8 | 10 | WH-1548 | 5 |
| 48-6B | 10 | 68-3A | 10 | 110-DB | 10 | 122-A | 10 | 240-B | 10 | 1461-4 | 10 | 1481-10 | 10 | WH-7818 | 10 |
| 48-6C | 10 | 68-4A | 10 | 110-DC | 10 | 122-B | 10 | 241-B | 2 | 1461-6 | 10 | 1490-6 | 10 | WH-7828 | 10 |
| 48-8C | 5 | 68-4B | 10 | 110-EC | 5 | 122-BA | 10 | 325-3A | 10 | 1461-8 | 10 | 1490-8 | 10 | WH-7829 | 10 |
| 48-8D | 5 | 68-5A | 10 | 110-ED | 5 | 122-C | 10 | 325-4A | 10 | 1462-4 | 10 | 1493-6C | 2 | WH-7911 | 5 |
| 49-4A | 10 | 68-5B | 10 | 112-A | 10 | 122-CB | 10 | 325-4B | 10 | 1462-6 | 5 | 1493-6D | 2 | WH-7936 | 2 |
| 60-2 | 20 | 68-6A | 10 | 112-B | 10 | 122-D | 5 | 325-5A | 10 | 1462-8 | 5 | 2103-A | 2 | X100-A | 10 |
| 60-3 | 20 | 68-6B | 10 | 112-C | 10 | 141-3 | 10 | 325-5B | 10 | 1462-10 | 5 | 2103-B | 2 | X100-B | 10 |
| 60-4 | 20 | 68-6C | 10 | 112-D | 10 | 141-4 | 10 | 325-6A | 10 | 1464-4 | 5 | 2120-A | 2 | X101-A | 5 |
| 60-6 | 20 | 68-8C | 5 | 113-A1-1/2 | 10 | 141-5 | 10 | 325-6B | 10 | 1468-4A | 10 | 2120-B | 2 | X101-B | 5 |
| 60-8 | 20 | 68-8D | 5 | 113-A2 | 10 | 142-3 | 10 | 325-6C | 5 | 1468-4B | 10 | PC1462-4 | 5 | X101-C | 5 |
| 60-10 | 10 | 69-4A | 10 | 113-B1-1/2 | 10 | 142-4 | 10 | 325-10C | 5 | 1468-4C | 10 | PC1462-6 | 5 | X101-D | 2 |
| 61-2 | 10 | 69-6B | 5 | 113-B2 | 10 | 142-5 | 10 | 325-10D | 5 | 1468-6A | 10 | PC1468-4A | 5 | X106-A | 5 |
| 61-3 | 10 | 103-A | 10 | 113-C2 | 10 | 142-6 | 10 | 325-12D | 5 | 1468-6B | 10 | PC1468-4B | 5 | X106-B | 5 |
| 61-4 | 10 | 103-B | 10 | 119-BA | 10 | 142EU-3 | 10 | 335-66 | 5 | 1468-6C | 5 | PC1468-6B | 5 | X107-A | 5 |
| 61-6 | 10 | 103-C | 10 | 119-CB | 10 | 142JA-3 | 5 | 339-4A | 5 | 1468-8C | 5 | PL141-3 | 10 | X107-B | 5 |
| 62-2 | 10 | 103-D | 5 | 119-DC | 5 | 144-3 | 10 | 339-5B | 5 | 1468-8D | 5 | PL141-4 | 10 | X115-A | 10 |
| 62-3 | 10 | 108-A | 10 | 120-AA | 10 | 144-4 | 5 | 339-6B | 5 | 1469-4A | 10 | PL141-5 | 10 | X115-B | 10 |
| 62-4 | 10 | 108-B | 10 | 120-BA | 10 | 148-3A | 10 | 481-4 | 10 | 1469-4B | 10 | PL141-6 | 10 | X115-C | 10 |
| 62-5 | 10 | 108-C | 10 | 120-BB | 10 | 148-4A | 10 | 481-4H | 10 | 1469-6B | 10 | S141-3 | 10 | X115-D | 5 |
| 62-6 | 10 | 109-A | 10 | 120-CB | 10 | 148-4B | 10 | 481-5 | 10 | 1469-6C | 5 | S141-4 | 10 | X124-A | 10 |
| 62-8 | 10 | 109-B | 10 | 120-CC | 10 | 148-5A | 10 | 481-6 | 10 | 1469-8B | 5 | S141-5 | 10 | X124-B | 10 |
| 62-10 | 5 | 109-C | 10 | 120-DC | 10 | 148-5B | 10 | 481-8 | 10 | 1469-8C | 5 | S141-6 | 10 | X124-C | 10 |
| 64-4 | 5 | 109-D | 10 | 121-A | 10 | 148-6B | 10 | 1460-4 | 10 | 1472-4A | 5 | SL141-3 | 25 | LAB-AUTO-110 | 1 |

Truck & Trailer Assortment for 110 Drawer Cabinet KIT-TRUCK-110

| Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. |
|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|
| 103-A | 10 | 120-DC | 10 | 868-2A | 10 | 1468-6A | 10 | 1481-6 | 10 | 1495-L | 5 | PC1468-6B | 5 | TS17R-10 | 10 |
| 103-B | 10 | 121-A | 10 | 868-2-1/2A | 10 | 1468-6B | 10 | 1481-8 | 10 | 1495-S | 10 | PC1468-6C | 5 | TS17R-12 | 10 |
| 103-C | 10 | 121-B | 10 | 869-2A | 10 | 1468-6C | 10 | 1481-10 | 10 | 1495B-C | 5 | PC1469-4A | 5 | TS17R-16 | 10 |
| 103-D | 10 | 121-C | 10 | 869-2-1/2A | 10 | 1468-8C | 10 | 1490-6 | 10 | 1495B-D | 2 | PC1469-4B | 5 | X101-B | 5 |
| 109-A | 10 | 121-D | 10 | 1460-4 | 10 | 1468-8D | 10 | 1490-8 | 10 | 1496-DC | 2 | PC1469-6B | 5 | X101-C | 5 |
| 109-B | 10 | 121-E | 10 | 1460-6 | 10 | 1468-10D | 5 | 1491-6 | 10 | 1497-DB | 2 | PC1469-6C | 5 | X107-B | 5 |
| 109-C | 10 | 122-A | 10 | 1460-8 | 10 | 1469-4A | 10 | 1491-8 | 10 | 2120-B | 5 | PC1469SW-4A | 5 | X107-C | 10 |
| 109-D | 5 | 122-B | 10 | 1460-10 | 10 | 1469-4B | 10 | 1492-6B | 5 | 4134-6B | 10 | PC1469SW-4B | 5 | X115-A | 10 |
| 110-BA | 10 | 122-C | 10 | 1461-4 | 10 | 1469-6A | 10 | 1492-6C | 5 | 4134-6C | 10 | TS16R-6 | 10 | X115-B | 10 |
| 110-CB | 10 | 122-CB | 10 | 1461-6 | 10 | 1469-6B | 10 | 1492-6D | 5 | BV4103-B | 5 | TS16R-8 | 10 | X115-C | 10 |
| 110-DB | 10 | 122-D | 10 | 1461-8 | 10 | 1469-6C | 10 | 1492-6S | 2 | BV4103-C | 5 | TS16R-10 | 10 | X115-D | 5 |
| 110-DC | 10 | 240-B | 10 | 1461-10 | 10 | 1469-8C | 5 | 1492-8C | 2 | BV4103-D | 2 | TS16R-12 | 10 | X124-B | 10 |
| 110-ED | 5 | 241-B | 5 | 1462-4 | 10 | 1469-8D | 5 | 1492-8D | 2 | HAB-HANGER-6 | 10 | TS16R-16 | 10 | X124-C | 10 |
| 112-B | 10 | 860-2 | 10 | 1462-6 | 10 | 1469-10D | 5 | 1492-8S | 2 | HAB-HANGER-8 | 10 | TS16R-20 | 10 | X124-D | 5 |
| 112-C | 10 | 860-2-1/2 | 10 | 1462-8 | 5 | 1471-6B | 5 | 1493-6B | 2 | HAB-HCU-6 | 5 | TS16R-24 | 10 | LAB-TRUCK-110 | 1 |
| 112-D | 10 | 861-2 | 10 | 1462-10 | 5 | 1471-6C | 5 | 1493-6C | 2 | PC1462-4 | 5 | TS16R-32 | 10 | | |
| 120-BA | 10 | 861-2-1/2 | 10 | 1464-4 | 10 | 1472-6B | 5 | 1493-6D | 2 | PC1462-6 | 5 | TS16R-40 | 5 | | |
| 120-BB | 10 | 862-2 | 10 | 1464-6 | 5 | 1474-6B | 10 | 1493-8C | 2 | PC1462-8 | 5 | TS17R-4 | 10 | | |
| 120-CB | 10 | 862-2-1/2 | 5 | 1468-4A | 10 | 1474-6C | 10 | 1493-8D | 2 | PC1468-4A | 5 | TS17R-6 | 10 | | |
| 120-CC | 10 | 868-2-1 | 10 | 1468-4B | 10 | 1481-4 | 10 | 1495-C | 5 | PC1468-4B | 5 | TS17R-8 | 10 | | |

Industrial Distributor Assortment for 110 Drawer Cabinet KIT-INDUST-110

| Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. | Fairview PART No. | Drawer Qty. |
|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|
| 41-4 | 10 | 61-2 | 10 | 103-B | 10 | 112-A | 10 | 120-BA | 10 | 125-4B | 10 | 193-8 | 10 | QD-WHCF | 2 |
| 41-5 | 10 | 61-3 | 10 | 103-C | 10 | 112-B | 10 | 120-BB | 10 | 125-4C | 10 | 193-10 | 10 | QD-WHNM | 2 |
| 41-6 | 10 | 61-4 | 10 | 103-D | 5 | 112-C | 10 | 120-CB | 10 | 125-4D | 5 | 193-12 | 5 | X100-A | 10 |
| 42-4 | 10 | 61-6 | 10 | 103-E | 5 | 112-D | 10 | 120-CC | 10 | 125-5B | 10 | 194-D | 5 | X100-B | 10 |
| 42-6 | 10 | 61-8 | 10 | 108-A | 10 | 112-E | 5 | 120-DB | 5 | 125-6A | 10 | 195-8 | 10 | X101-A | 10 |
| 42-8 | 10 | 62-3 | 10 | 108-B | 10 | 113-A1-1/2 | 10 | 120-DC | 10 | 125-6B | 10 | 195-10 | 10 | X101-B | 10 |
| 48-4A | 10 | 62-4 | 10 | 108-C | 10 | 113-A2 | 10 | 120-ED | 5 | 125-6C | 10 | 195-12 | 5 | X101-C | 5 |
| 48-4B | 10 | 62-5 | 10 | 108-D | 5 | 113-A3 | 10 | 121-A | 10 | 125-6D | 5 | 196-D | 5 | X101-D | 2 |
| 48-5B | 5 | 62-6 | 10 | 108-E | 5 | 113-B1-1/2 | 10 | 121-B | 10 | 125-8B | 10 | 196-E | 5 | X107-A | 10 |
| 48-6B | 10 | 62-8 | 5 | 109-A | 10 | 113-B2 | 10 | 121-C | 10 | 125-8C | 10 | 196-W | 5 | X107-B | 10 |
| 48-6C | 10 | 62-10 | 5 | 109-B | 10 | 113-B2-1/2 | 10 | 121-D | 10 | 125-8D | 5 | 197-D | 5 | X107-C | 5 |
| 48-8C | 10 | 66-4A | 10 | 109-C | 10 | 116-A | 10 | 121-E | 5 | 125-10C | 5 | 197-E | 5 | X115-A | 10 |
| 48-8D | 5 | 66-4B | 10 | 109-D | 10 | 116-B | 10 | 122-A | 10 | 125-10D | 5 | 199S-D | 5 | X115-B | 10 |
| 48-10D | 5 | 68-3A | 10 | 109-E | 5 | 116-C | 5 | 122-B | 10 | 125-12D | 5 | 199S-E | 5 | X115-C | 10 |
| 49-4A | 10 | 68-4A | 10 | 110-BA | 10 | 116-D | 2 | 122-BA | 10 | 125-12E | 5 | 200-HKC | 5 | X115-D | 5 |
| 49-4B | 10 | 68-4B | 10 | 110-CA | 10 | 118-A | 10 | 122-C | 10 | 125-16E | 2 | 200-W | 10 | X124-A | 10 |
| 49-6B | 10 | 68-6B | 10 | 110-CB | 10 | 118-B | 10 | 122-CB | 10 | 125-16H | 2 | 480-4 | 20 | X124-B | 10 |
| 49-6C | 10 | 68-6C | 10 | 110-DA | 10 | 118-C | 10 | 122-D | 5 | 129-3 | 10 | 480-6 | 20 | X124-C | 10 |
| 60-2 | 20 | 68-6D | 5 | 110-DB | 10 | 118-D | 10 | 122-DB | 5 | 129-4 | 10 | 480-8 | 20 | X124-D | 5 |
| 60-3 | 20 | 68-8D | 5 | 110-DC | 10 | 119-BA | 10 | 122-DC | 5 | 129-5 | 10 | 481-4 | 20 | LAB-INDUST-110 | 1 |
| 60-4 | 20 | 69-4A | 10 | 110-EB | 5 | 119-CB | 10 | 122-E | 5 | 129-6 | 10 | 481-4H | 10 | | |
| 60-6 | 20 | 69-4B | 10 | 110-EC | 5 | 119-DB | 5 | 125-2A | 10 | 129-8 | 10 | 481-6 | 10 | | |
| 60-8 | 20 | 69-6B | 10 | 110-ED | 5 | 119-DC | 5 | 125-3B | 10 | 129-10 | 5 | 481-8 | 20 | | |
| 60-10 | 10 | 103-A | 10 | 110-HE | 5 | 120-AA | 10 | 125-4A | 10 | 129-12 | 5 | GHW | 10 | | |





FAIRVIEW PACKAGED PRODUCT

Featured in Fairview's Black and Yellow colors; Fairview carries a wide assortment of packaged / bar coded items. Suitable for use on our Fairview Display Rack or your Pegboard System. Hose assemblies are supplied bagged with one hole punched header cards. Selected items on bubble packed heat sealed cards.



Grease Products Available with Fairview Retail Product Packaging (Many other items available on request)

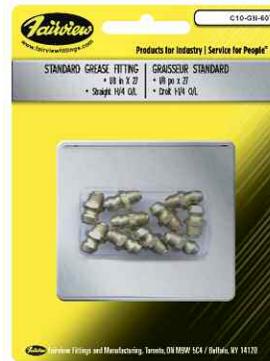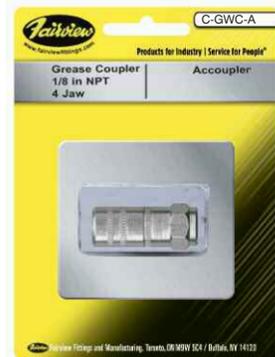

*** ITEMS CAN BE PURCHASED SEPARATELY Please Contact Your Local Fairview Fittings**

| PART No. | Rack Qty. | Total Pcs. | Description |
|------------|-----------|------------|---|
| C10-GN-608 | 3 | 30 | 5/16 Drive Fit Grease Fitting x 10 |
| C10-GN-610 | 3 | 30 | 1/8 x 27 Straight Grease Fitting x 10 |
| C10-GN-612 | 3 | 30 | 1/8 x 27 65° Angle Grease Fitting x 10 |
| C10-GN-613 | 3 | 30 | 1/8 x 27 90° Angle Grease Fitting x 10 |
| C10-GN-627 | 3 | 30 | 1/4 x 18 Straight Grease Fitting x 10 |
| C10-GN-629 | 3 | 30 | 1/4 x 18 65° Angle Grease Fitting x 10 |
| C10-GN-637 | 3 | 30 | 1/4 x 28 45° Angle Grease Fitting x 10 |
| C10-GN-641 | 3 | 30 | 1/4 x 28 Straight Grease Fitting x 10 |
| C10-GN-652 | 3 | 30 | 1/4 x 28 Straight 11/16 O/L Grease Fitting x 10 |
| C10-GN-680 | 3 | 30 | 1/4 x 28 Straight 15/16 O/L Grease Fitting x 10 |
| C10-GN-688 | 3 | 30 | 1/8 x 27 45° Angle Grease Fitting x 10 |
| C10-GN-728 | 3 | 30 | 3/16 Drive Fit Grease Fitting x 10 |
| C10-GN-743 | 3 | 30 | 1/4 Drive Fit Grease Fitting x 10 |

| PART No. | Rack Qty. | Total Pcs. | Description |
|-------------|-----------|------------|---|
| C10-GN-911 | 3 | 30 | 1/4 x 28 90° Angle Grease Fitting x 10 |
| C10-GNM-045 | 3 | 30 | M6 x 1 45° Angle Metric Grease Fitting x 10 |
| C10-GNM-090 | 3 | 30 | M6 x 1 90° Angle Metric Grease Fitting x 10 |
| C10-GNM-301 | 3 | 30 | M10 x 1 Straight Metric Grease Fitting x 10 |
| C10-GNM-601 | 3 | 30 | M6 x 1 Straight Metric Grease Fitting x 10 |
| C10-GNM-901 | 3 | 30 | M8 x 1 Straight Metric Grease Fitting x 10 |
| C-GWC-A | 3 | 3 | 1/8 NPT 4 - Jaw Grease Coupler |
| GG-SDL | 1 | 1 | Standard Duty Lever Grease Gun |
| GG-SDPG | 1 | 1 | Standard Duty Pistol Grip Grease Gun |
| GWR-3-12P | 2 | 2 | Grease Whip Assy, 12 OAL |
| GWR-3-18P | 2 | 2 | Grease Whip Assy, 18 OAL |
| GWR-3-24P | 2 | 2 | Grease Whip Assy, 24 OAL |


PRESSURE GAUGE COUNTER DISPLAY

Counter Display

PART No. PGD-RACK

It is featured in Accutek's red, blue and yellow colors. Holds up to 10 Accutek™ pressure gauges and documentation.

Overall: Height 14.25 inches
Width 14.5 inches
Depth 7.75 inches

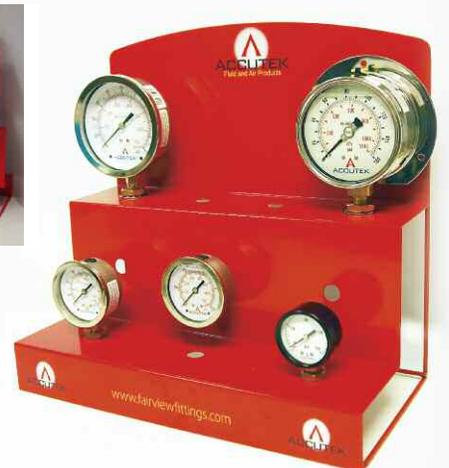



OVERALL DIMENSIONS:
Height 67 inches
Depth 24 inches
Width 18 inches
 Product Not Included.



Accutek™



Fairview



Gas-Flo

FEATURES:

Fairview display racks stand on their own and have the ability to present products in a variety of configurations. Featured in one of three Fairview color schemes. The display racks come complete with frame, legs, back-board panel and shelf for displaying up to 42 individually bubble-packed, bar-coded products. Easy to assemble. (Gang Hooks Selection Below)

Stand Alone Display Racks

BASIC UNIT: Frame, Legs, Shelf & (Back-Board see below)

| PART No. | Description |
|----------|-----------------------|
| 25-DR | Standing Display Rack |

BACK-BOARDS (select - 1 per unit)

| PART No. | Description |
|-------------------|----------------------------------|
| 25-DR-PANEL-A | Accutek™ Backboard (English) |
| 25-DR-PANEL-AF | Accutek™ Backboard (French) |
| 25-DR-PANEL-G | Fairview Backboard (General Use) |
| 25-DR-PANEL-GAS | Gas-Flo® Backboard (English) |
| 25-DR-PANEL-GAS-F | Gas-Flo® Backboard (French) |

GANG HOOKS (See gang hook requirements below)

| PART No. | Description |
|----------|---------------------------|
| DR-3GH | Gang Hook - for 3 Product |
| DR-4GH | Gang Hook - for 4 Product |
| DR-5GH | Gang Hook - for 5 Product |
| DR-6GH | Gang Hook - for 6 Product |

LEGS AND SHELF

| PART No. | Description |
|-------------|--|
| 25-DR-LEGS | Set of Rack Legs, complete with leveling screw feet. |
| 25-DR-SHELF | Shelf |

Shelf Dimensions: Width 24 inches, Length 18 inches

| KIT | 3 Hook | 4 Hook | 5 Hook | 6 Hook |
|----------|--------|--------|--------|--------|
| GAS-GG | 0 | 2 | 1 | 1 |
| GAS-RV | 0 | 2 | 0 | 2 |
| GAS-RVGG | 2 | 0 | 0 | 2 |



PART No. HCR-10-RACK
(Rack & sign only)
Rack Size H: 13.375" W: 20" D: 7"

Accutek™ Auto Clamp Kit. Containing a selection of Common Size Clamps together with a Storage Rack.

PART No. HC6-AUTO-KIT-1

*Thin Band Gear Clamps

| PART No. | Quantity in Kit | Range (IN.) | Range (MM) |
|-------------|-----------------|--------------|------------|
| HC6-4TB * | 50 | .22 - .63 | 6 - 16 |
| HC6-6TB * | 30 | .31 - .88 | 8 - 22 |
| HC6-8 | 20 | .43 - 1.00 | 11 - 25 |
| HC6-10 | 40 | .56 - 1.06 | 14 - 27 |
| HC6-12 | 20 | .56 - 1.25 | 14 - 32 |
| HC6-16 | 10 | .68 - 1.50 | 17 - 38 |
| HC6-20 | 20 | .75 - 1.75 | 19 - 44 |
| HC6-24 | 20 | 1.06 - 2.00 | 27 - 51 |
| HC6-28 | 20 | 1.31 - 2.25 | 33 - 57 |
| HCR-10-RACK | 1 | Storage Rack | |

(Heavy Gauge Steel Wire Rack for Wall / Counter Top)



PART No. HCR-18-RACK
(Rack & sign only)
Rack Size H: 24" W: 24" D: 7"

Accutek™ T-Bolt Clamp Kit. Containing a selection of Common Size Clamps together with a Storage Rack.

PART No. HC3-KIT-1

Contains: T-Bolt Style Clamps

| PART No. | Quantity in Kit | Range (IN.) | Range (MM) |
|-------------|-----------------|--------------|------------|
| HC3-150 | 5 | 1.31 - 1.56 | 33 - 40 |
| HC3-175 | 5 | 1.56 - 1.81 | 40 - 46 |
| HC3-188 | 5 | 1.69 - 1.94 | 43 - 49 |
| HC3-200 | 5 | 1.81 - 2.06 | 46 - 52 |
| HC3-225 | 5 | 2.06 - 2.31 | 52 - 59 |
| HC3-238 | 5 | 2.19 - 2.50 | 58 - 64 |
| HC3-250 | 4 | 2.31 - 2.62 | 59 - 67 |
| HC3-275 | 4 | 2.56 - 2.87 | 65 - 73 |
| HC3-288 | 4 | 2.69 - 3.00 | 68 - 76 |
| HC3-300 | 4 | 2.81 - 3.12 | 71 - 79 |
| HC3-325 | 4 | 3.06 - 3.37 | 78 - 86 |
| HC3-350 | 3 | 3.31 - 3.62 | 84 - 92 |
| HC3-375 | 3 | 3.56 - 3.87 | 90 - 98 |
| HC3-400 | 3 | 3.81 - 4.12 | 97 - 105 |
| HC3-425 | 3 | 4.06 - 4.37 | 103 - 111 |
| HC3-450 | 2 | 4.31 - 4.62 | 110 - 117 |
| HC3-475 | 2 | 4.56 - 4.87 | 116 - 124 |
| HC3-500 | 2 | 4.81 - 5.12 | 122 - 130 |
| HCR-18-RACK | 1 | Storage Rack | |

(Heavy Gauge Steel Wire Rack for Wall / Counter Top)

CARDBOARD STOCK BOXES

Sectional for multi-product storage...



PART No. GS-STOCK BOX
Description STANDARD

- Dimensions:** 5" W X 11" L X 4" D
- Supplied Flat For Easy Storage (Folding required)
 - Label sets available.

For bulk or large item storage...



PART No. GS-STOCK BOX-2
Description DOUBLE

- Dimensions:** 10" W X 11" L X 4" D
- Supplied Flat For Easy Storage (Folding required)
 - Label sets available.

Non-sectional for one product storage...



PART No. GS-STOCK BOX-1
Description SMALL

- Dimensions:** 2 3/4" W X 11" L X 4" D
- Supplied Flat For Easy Storage (Folding required)
 - Label sets available.

HOSE ASSEMBLY WALL DISPLAY RACK



Color
RED



Dimensions
4-3/4" H X 24-3/4" W X 6-1/2" D

AIR BRAKE HOSE ASSEMBLY DISPLAY RACK

PART No. HAR-15

- 15 fixed slots 27/32" wide to display hoses.
- Specifically designed for Fairview HAB Air Brake assemblies.
- Keeps assemblies organized, handy and ready to use.
- Mounts to the wall. (Bolts Not Included)
- Capable of displaying up to 75 hoses, 3/8 O.D. or 1/2 O.D.

STAND ALONE HOSE ASSEMBLY DISPLAY RACKS

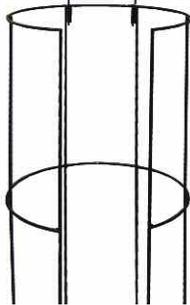

With
Support
Base

ACCUTEK™ AIR HOSE ASSEMBLY DISPLAY RACK (For Assemblies See Page 23 - 25)


PART No. AHDR-RACK

Stack-Em-Up to save space. This stand alone rack is constructed from 1/4" steel wire. Accommodates a variety of assemblies. Comes boxed complete with base and signage (AHDR-RACK-SIGN). Holds approximately 15 assemblies. (Sold Separately)

For Pneumatic (Air) Hose Assembly Kits see page 142

Color
BLACK

Dimensions
14.5" in Dia.
With detachable base
(18" Dia.) 52" High,
36" High (less sign).

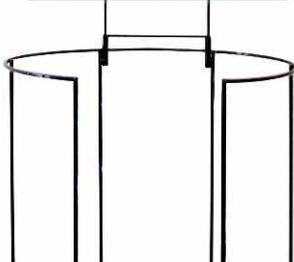

INDUSTRIAL WATER HOSE ASSEMBLY DISPLAY RACK (For Water Hose Assemblies see page 27)

PART No. WHDR-8

Rack-Em-Up to save space. This rack is similar in construction to the AHDR above. (Without a Base) It's larger diameter accommodates water assemblies. Comes boxed complete with signage, (WHDR-SIGN) Holds approximately 8 water hose assemblies. (Sold Separately)

For Industrial Water Hose Assembly Kits; see page 142

Color
BLACK

Dimensions
17" in Dia. 52" High,
36" High (less sign).



HOSE ASSEMBLY DISPLAY RACK KITS

ACCUTEK™ (AIR) HOSE ASSEMBLY KITS

Each kit comes boxed complete with Assemblies, Rack, Base & Signage.

EPDM Quality, PVC Quality or Ultra-Flexible 'Superflex' Brand Assemblies.



RED EPDM RUBBER AIR HOSE KITS

| PART No. | Quantity | Description |
|---------------------|----------|-----------------------------------|
| AHDR-RG4RED-25B-KIT | 15 | 1/4" I.D. X 25 Ft. Red Assemblies |
| AHDR-RG4RED-50B-KIT | 10 | 1/4" I.D. X 50 Ft. Red Assemblies |
| AHDR-RG6RED-25B-KIT | 12 | 3/8" I.D. X 25 Ft. Red Assemblies |
| AHDR-RG6RED-50B-KIT | 9 | 3/8" I.D. X 50 Ft. Red Assemblies |

SUPERFLEX YELLOW AIR HOSE KITS

| PART No. | Quantity | Description |
|---------------------|----------|--------------------------------------|
| AHDR-GL4YEL-25B-KIT | 15 | 1/4" I.D. X 25 Ft. Yellow Assemblies |
| AHDR-GL4YEL-50B-KIT | 10 | 1/4" I.D. X 50 Ft. Yellow Assemblies |
| AHDR-GL6YEL-25B-KIT | 12 | 3/8" I.D. X 25 Ft. Yellow Assemblies |
| AHDR-GL6YEL-50B-KIT | 9 | 3/8" I.D. X 50 Ft. Yellow Assemblies |

RED P.V.C. AIR HOSE KITS

| PART No. | Quantity | Description |
|---------------------|----------|-----------------------------------|
| AHDR-RV4RED-25B-KIT | 15 | 1/4" I.D. X 25 Ft. Red Assemblies |
| AHDR-RV4RED-50B-KIT | 10 | 1/4" I.D. X 50 Ft. Red Assemblies |
| AHDR-RV6RED-25B-KIT | 12 | 3/8" I.D. X 25 Ft. Red Assemblies |
| AHDR-RV6RED-50B-KIT | 9 | 3/8" I.D. X 50 Ft. Red Assemblies |

• See page 23 - 25 for Hose Assembly Specifications.

INDUSTRIAL WATER HOSE ASSEMBLY KITS

Each kit comes boxed complete with Assemblies, Sample Hose, Rack & Signage.

Choose from Fairview's heavy-duty Rubber 'Contractor's Choice' brand, Non-Marking 'Blue Star' brand or Ultra-Flexible 'Superflex' brand.

Rack Measures: 17" in Dia. (Minimal Floor Space Required)



| PART No. | Quantity | BLUE STAR WATER HOSE KITS |
|--------------|----------|---|
| WHDR-BLU-KIT | 8 | 1/2" I.D. X 50 Ft. Non-Marking Blue Star Assemblies. (PART No. WHRV8BLU-50H) 1 16" Hose Assembly Sample. 1 Hose Display Rack. 1 Display Sign. |

| PART No. | Quantity | BLACK STAR WATER HOSE KITS |
|--------------|----------|--|
| WHDR-BLK-KIT | 7 | 5/8" I.D. X 50 Ft. Black Rubber Contractors Choice Assemblies. (PART No. WH10BLK-50H) 1 16" Hose Assembly Sample. 1 Hose Display Rack. 1 Display Sign. |

| PART No. | Quantity | SUPERFLEX GREEN WATER HOSE KITS |
|--------------|----------|---|
| WHDR-GRN-KIT | 8 | 1/2" I.D. X 50 Ft. Low Temperature Superflex Assemblies. (PART No. WHGL8GRN-50H) 1 16" Hose Assembly Sample. 1 Hose Display Rack. 1 Display Sign. |

• See page 27 for Hose Assembly Specifications.



LEVER HANDLE TYPE WITH HOOK (O.S.H.A.)

PART No. Female Pipe
AG411E 1/4

- Meets O.S.H.A. Standards.
- Plastic Thumb Grip.
- Die Cast Construction.
- Individually Carded.

MAXIMUM PRESSURE IS 145 P.S.I.



TWO IN ONE AIR GUN

PART No. Female Pipe Wand Length
AG411EW 1/4 6"

- Meets O.S.H.A. Standards.
- Removable Copper Wand for Optional Metal Tip Replacement.
- Die Cast Construction.
- Individually Bagged With Instructions.



METAL TIP

MAXIMUM PRESSURE IS 145 P.S.I.



LEVER HANDLE TYPE WITH HOOK (RUBBER TIPPED)

PART No. Female Pipe
AG410R 1/4

- Heavy Duty Construction.
- Provides A Leak Proof Seal Between Gun and Air Line.
- Excellent For Blowing Out Cavities or Surfaces That Could Be Damaged or Scratched By Metal Tips.
- Die Cast Construction.
- Individually Carded.

MAXIMUM PRESSURE IS 145 P.S.I.



PART No. Female Pipe
FA154SN 1/4

- This Soft Nose is Especially Designed for Use In Both Light and Medium Bench Work.
- It Is Super Sensitive, Easily Flexed, Quick To Respond To Finger Pressure and Has a Soft Cushion Tip Which Prevents Damaging of Delicate Surfaces; Also Avoiding Static Sparks.
- Full Impact of Air, If Needed For Production, Can Change Immediately to a Breath of Air For Close Up Work Depending Upon Finger Pressure Applied by Operator.
- Packaged Individually.

PISTOL GRIP WITH HOOK



PART No. Female Pipe Wand Length
AG166 1/4 4-1/4"

- Provides Narrow, High Velocity Jet of Air Into Blind Holes as Small as .200 and Hard to Reach Areas.
- Slender 4 1/4" Long Aluminum Nozzle.
- Infinitely Variable Output.
- Spark Proof.
- Meets O.S.H.A.
- Sound Level: 86
- Brass Inlet and Valve.
- Flow: 11 CFM
- 150 P.S.I. Inlet

PISTOL GRIP TYPE WITH LOOP (ALL METAL CONSTRUCTION)



PART No. Description
AG164 1/4 Pipe

- Aluminum Construction For Heavy Duty Services - Garages, Machine Shops and General Industry.
- Venturi Type Nozzle Increases Air Output By 10 Times.
- Cone Shaped Air Jet Minimizes Chip Blow Back.
- Brass Nozzle and Valve.
- Flow: 11CFM

360° UNIVERSAL SWIVEL



The universal swivel connects portable air tools to an air line. It improves maneuverability, minimizes operator fatigue and extends hose life.

Features:

- Swivels 360° at two pivot points allowing the air hose to drop directly to the floor while providing superb tool handling.
- New Lightweight, non-marking composite construction, industrial quality.

NOTE: Do Not Exceed 150 P.S.I. (10.3 Bar)



PART No. Pipe Air Flow Range
DS-B 1/4 Up to 33 C.F.M.

INDUSTRIAL WATER NOZZLES



Removable Thread Protector

PART No. GHN

Zinc Pistol Grip Nozzle with metal lever, Zinc body. Threaded front for accessory attachment. Brass pull rod and nut. Sprays from a fine mist to heavy stream. Steel handle: Chrome plated. Tie on card / 10 pcs. per inner box. 100pcs. per outer carton.



PART No. GHNE

Zinc Pistol Grip Nozzle. Zinc body. Threaded front for accessory attachment. Chrome plated. Plastic outer case. Brass pull rod and nut. Tie on card / 10pcs. per inner box. 100pcs. per outer carton.

ADJUSTABLE WATER NOZZLES



PART No. GHN6

7 Pattern Zinc Turret Pistol Nozzle. Zinc body. Seven pattern spray turret. Brass pull rod and nut. Chrome plated. Tie on card / 12pcs. per inner box. 48pcs. per outer carton.



PART No. GHN10

Heavy Duty 10-Pattern Spray Gun. Zinc body. Aluminum spray head. Anodized. Built-in water shut-off and flow control. Ten pattern spray turret. Large handle controls spray. 6 1/2" W X 7" H. Tie on card / 6 pcs. per inner box. 12pcs. per outer carton.



PART No. GHN-BN

Zinc body. Adjustable brass plated aluminum tip. Insulated soft pistol grip steel handle. Brass pull rod and nut. Tie on card / 12pcs. per inner box. 48pcs. per outer carton.



PART No. GHFN

3 1/2" Mini Fireman's Nozzle Metal construction Spray adjusts from extra-wide to blasting flow Small rubberized spray head. Anodized. Tie on card / 12 pcs. per carton.



PART No. GHTN-RG

6" Adjustable Spray Nozzle with Brass Tip. Zinc body *Brass spray nozzle. Natural brasscolor. Tie on card / 10pcs. per inner box. 100pcs. per outer carton.

Water Hose Quick Disconnect
See Page: 100

BRASS INDUSTRIAL WATER NOZZLES



PART No. GHTN

4" Brass Adjustable Twist Nozzle. Adjustable from mist to jet stream. Solid brass construction. Natural brass color. Tie on card / 12 pcs. per inner box. 48 pcs. per outer carton.



PART No. GHPS

2" Brass Hose Power Sprayer. Solid brass construction. Natural brass color. Tie on card, 12 pcs. per inner box. 48 pcs. per outer carton.

* Water Nozzle Models Change From Time To Time. May Not Be Exactly As Shown.

LEVER ACTION GREASE GUNS



GG-PROL

| PART No. | Description | Maximum Pressure (PSI) | Loading | Delivery |
|----------|---------------|------------------------|-------------------------------|---------------------|
| GG-SDL | Standard Duty | 6,000 | 14 oz. cartridge | 1.0 oz / 40 strokes |
| GG-INDL | Industrial | 10,000 | 14 oz. cart., bulk or suction | 1.8 oz / 40 strokes |
| GG-PROL | Professional | 10,000 | 14 oz. cart., bulk or suction | 1.8 oz / 40 strokes |

PISTOL GRIP GREASE GUNS



GG-PROPG

| PART No. | Description | Maximum Pressure (PSI) | Loading | Delivery |
|----------|-----------------------------------|------------------------|-------------------------------|-------------------|
| GG-PROPG | Professional (with 18" Flex Hose) | 7,000 | 14 oz. cart., bulk or suction | 1 oz / 40 strokes |



GG-SDPG

| PART No. | Description | Maximum Pressure (PSI) | Loading | Delivery |
|----------|------------------------------|------------------------|--------------------------|-------------------|
| GG-SDPG | Standard Duty (with 5" Pipe) | 5,000 | 14 oz. cartridge or bulk | 1 oz / 40 strokes |

GREASE WHIP COUPLER

4-Jaw steel coupler for use with rubber or nylon grease whip hose assemblies page: 26



| PART No. | Size |
|----------|--------|
| GWC-A | 1/8" |
| C-GWC-A | Carded |

For grease fittings and kits see page: 73



MULTI-CUTTER



ALL METAL CONSTRUCTION

PART No. O.D. Capacity
 MC-1 1-1/8
 MCB-1 Replacement Blade

P.V.C. Coated Handles

WILL CUT: • RUBBER HOSE & PLASTIC TUBE

HAND-HELD HOSE CUTTER



PART No. O.D. Capacity
 SY-4523-04006 1/2

SY-4523-04005 Replacement Blade

A handy tool for cutting hose 1/8 inch to 1/2 inch in diameter hose. Blades are replaceable. Vinyl cushioned grips.

JOHN GUEST TOOLS



Tube Cutter / Blades

PART No.
 TSNIP Tube Cutter
 BLADES (Blades only)

CSST SOFT JAW PLIERS



PART No.
 HCCSST-RT

A handy adjustable style tool, with padded jaws, ideally suited for crimping the full range of CSST Brass Split Rings. Vinyl cushioned grips.



Collet Locking / Release Tool

PART No. Size
 ICLT/2 3/16 TO 1/2
 TSPITool 1/4, 3/8

PINCERS



PART No.
 HC9-R (Regular)
 HC9-S (Side Jaw)

One of these handy tools is all that is needed to apply or remove O-Clamps. Side jaw pincer is recommended for work in confined areas, since it allows O-Clamp to be closed while holding pincer parallel to hose.

See page 127 - 128 for O-Clamps.

ROTO REEL




PART No. RR12

Features:

- The easy way to reel off hose.
- Nominal load capacity is 1,000 LBS.
- Rotates on precision ground ball bearings.
- Made of metal for durability.
- Plated for rust resistance.
- Shipped pre-assembled.

MEASURING DEVICES

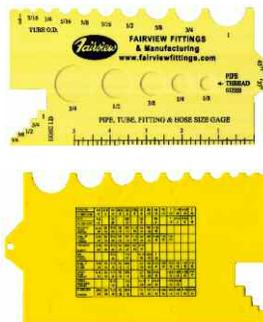

PLASTIC PIPE, TUBE, FITTING & HOSE SIZE GAGE

PART No. Range
 PIPE PG/1 1/8 TO 1 IN.

Includes Fairview Size Codes on Back

SPIRAL HOSE GUARD WRAP



Designed for use with Hydraulic hose, Air Brake hose and tubing, Propane / Natural Gas hose and electrical wire bundles, Fairview's tough and flexible spiral wrap is available in custom lengths up to 164 FT. (50 Meters)

| PART No. | I.D (IN.) | Wall (IN.) | Pitch (IN.) |
|-----------|-----------|------------|-------------|
| SPW-8BLK | 0.38" | 0.05" | 0.4" |
| SPW-10BLK | 0.53" | 0.05" | 0.5" |
| SPW-12BLK | 0.63" | 0.08" | 0.6" |
| SPW-16BLK | 0.81" | 0.09" | 0.8" |
| SPW-20BLK | 1.06" | 0.10" | 0.9" |
| SPW-24BLK | 1.36" | 0.11" | 1.0" |
| SPW-32BLK | 1.69" | 0.14" | 1.2" |
| SPW-40BLK | 2.19" | 0.15" | 1.2" |
| SPW-48BLK | 2.61" | 0.17" | 1.7" |
| SPW-56BLK | 3.16" | 0.19" | 1.8" |
| SPW-64BLK | 3.90" | 0.22" | 2.0" |
| SPW-72BLK | 4.46" | 0.23" | 2.2" |

NYLON SLEEVE HOSE PROTECTOR



Reduces abrasions, increases hose life. Protects against UV, physical abrasion and deterioration. Meets ISO 6945 abrasion standard
MSHA approved
Color - black

| PART No. | Sleeve I.D. (IN.) | PART No. | Sleeve I.D. (IN.) |
|----------|-------------------|----------|-------------------|
| NS-10 | .71 | NS-24 | 1.53 |
| NS-14 | .90 | NS-28 | 1.85 |
| NS-15 | 1.00 | NS-32 | 2.25 |
| NS-16 | 1.14 | NS-46 | 2.96 |
| NS-20 | 1.25 | | |

SPLIT LOOM



Designed To Hold & Protect cables, harnesses, and hoses
Quick & Easy To Install slit automatically closes after installation
.013 Heavy Duty Wall Thickness provides greater resistance to abrasions and vibrations UV Black provides excellent outdoor ultraviolet light protection

| PART No. | I.D. (IN.) (MM) | Roll Length (FT.) |
|-----------|-----------------|-------------------|
| SPL-4BLK | .288 / 7.31 | 100 |
| SPL-6BLK | .415 / 10.54 | 100 |
| SPL-8BLK | .511 / 12.97 | 100 |
| SPL-12BLK | .790 / 20.06 | 100 |
| SPL-16BLK | .917 / 23.29 | 100 |

HOSE CUT-OFF BLADES



BEVELED



SCALLOPED

| PART No. | Arbor Hole Diameter | Blade Diameter | Blade Type |
|----------|---------------------|----------------|----------------|
| HCB-7 | 5/8" | 7" | Beveled Edge |
| HCB-8 | 5/8" | 8" | Beveled Edge |
| HCB-10 | 3/4" | 10" | Beveled Edge |
| HCBS-7 | 5/8" | 7" | Scalloped Edge |
| HCBS-8 | 5/8" | 8" | Scalloped Edge |
| HCBS-10 | 3/4" | 10" | Scalloped Edge |

BEND PROTECTORS



MATERIAL: POLY VINYL CHLORIDE
TEMPERATURE: -40°F to +200°F (-40°C to +93°C)

Smooth finish, friction fit, bend protector reduces bending stress near hose end for longer, trouble free hose life. STYLES MAY VARY.

| PART No. | I.D. (IN.) | Length (IN.) |
|----------------|------------|--------------|
| MP-BP-4 | .625 | 5.50 |
| MP-BP-6 | .735 | 6.38 |
| MP-BP-8 | .835 | 7.00 |
| STEEL MP-SBP-6 | .672 | 5.00 |

Note: Other sizes available upon request.

SPRING GUARD



- Prevents kinking.
- Reduces abrasions, increases hose life.
- Covers entire length of hose.

| PART No. | Spring I.D. (IN.) | PART No. | Spring I.D. (IN.) |
|----------|-------------------|----------|-------------------|
| SG-650 | .650 | SG-990 | .990 |
| SG-686 | .686 | SG-1240 | 1.240 |
| SG-835 | .835 | SG-1300 | 1.300 |

TUBE CUTTERS

TELESCOPIC TUBE CUTTER



| | |
|-----------------|---------------------|
| PART No. | Capacity In. |
| TC-218 | 1/4 TO 1-3/8 O.D. |
| TC-218-CSST | (SS For CSST) |
| TCW-218 | CUTTER WHEEL |

- Professional quick-adjusting tube cutter and deburring tool for copper, brass, aluminum, and stainless steel tube.
- Easily retracting deburring tool stored in frame.
- Grooved rollers for close-to-flare cuts.
- Contoured knob stores spare cutter wheel.

STANDARD TUBE CUTTER



| | |
|-----------------|---------------------|
| PART No. | Capacity In. |
| TC-412 | 1/4 TO 1-1/8 O.D. |

- For accurate cutting of copper, brass, aluminum tube and thin wall conduit.
- Aluminum alloy body and sliding block.
- Groove rollers for close-to-flare cuts.
- Fold away reamer.
- Contoured knob stores spare cutter wheel.

MINI TUBE CUTTER



| | |
|-----------------|---------------------|
| PART No. | Capacity In. |
| TC-413 | 1/8 TO 5/8 O.D. |

- For accurate cutting of copper, brass, aluminum tube and thin wall conduit.
- Aluminum alloy body.
- Groove rollers for close-to-flare cuts.
- Fold away reamer.
- Contoured knob stores spare cutter wheel.

MECHANICAL TUBE BENDER



| | |
|-----------------|------------------|
| PART No. | Tube O.D. |
| T9-456 * | 1/4, 5/16, 3/8 |
| T9-8 | 1/2 |
| T9-10 | 5/8 |

- * Will bend a combination of 3 sizes.
- Styles may vary depending on size.

Special design to bend soft copper, brass, aluminum and thin wall steel tube. A light and easy to handle bending tool which will permit bends on all planes.

NOTE: Tube must be in annealed state:
Will not bend hard-drawn material.

SPRING TYPE TUBE BENDER



| | |
|-----------------|---------------------|
| PART No. | Capacity In. |
| T10-8 | 1/2 |

This spring bender is used to bend soft copper tube by hand to avoid collapsing the tube.

TUBE REAMER

INTERNAL - EXTERNAL TUBE REAMER



| | |
|-----------------|------------------------|
| PART No. | Range |
| TR-1 | 1/4 I.D. TO 1-3/8 O.D. |

Designed for use with metallic and non-metallic tube.

FLARING TOOLS

MANUAL ROTARY FLARING TOOL



| | | |
|-----------------|--------------|----------------------|
| PART No. | Flare | Capacity In. |
| FT-645 | 45° S.A.E | 1/8 O.D. TO 3/4 O.D. |

- For aluminum and soft copper tube.
- Precision burnished 45° Flare with an easy turn of the handle.
- Depth gauge allows proper positioning of tube for correct flaring.

QUICK-OPENING FLARING TOOL



| | | |
|-----------------|--------------|-----------------------|
| PART No. | Flare | Capacity In. |
| FT-411 | 45° S.A.E. | 3/16 O.D. TO 5/8 O.D. |
| FT-412 | 45° S.A.E. | 3/16 O.D. TO 3/4 O.D. |

- For aluminum and soft copper tube.
- Bar has Quick-Opening feature with large wing nuts.
- Self Centering Yoke.
- Long bar for gripping in vise.

THREAD SEALANTS



U.L. & U.L.C. LISTED PTFE THREAD SEALANT TAPE



The ideal sealant for pipe thread connections. It is non-toxic and will not contaminate fluids or gases. Chemically inert, it resists corrosive action of acids, alkalis and solvents. U.L. and U.L.C. listed for Natural Gas (TO 1000 P.S.I.) and Propane installations.

- **TEMPERATURE RANGE:** -450°F to +500°F, -268°C to +260°C

| PART No. |
|-----------|
| 121-M8UL |
| 121-M12UL |

| Tape Width | Length/Roll (IN.) |
|------------|-------------------|
| 1/2" | 236 |
| 3/4" | 236 |

PTFE THREAD SEALANT TAPE



The ideal sealant for pipe thread connections. It is non-toxic and will not contaminate fluids or gases. Chemically inert, it resists corrosive action of acids, alkalis and solvents.

- **TEMPERATURE RANGE:** -450°F to +500°F, -268°C to +260°C

INDUSTRIAL SEALANT TAPE

| PART No. | Tape Width | Tape Thickness | Length/Roll (IN.) |
|----------|------------|----------------|-------------------|
| 121-M8 | 1/2" | .003 | 480 |
| 121-M12 | 3/4" | .003 | 480 |
| 121-M16 | 1" | .003 | 480 |

HIGH DENSITY INDUSTRIAL SEALANT TAPE

| PART No. | Tape Width | Tape Thickness | Length/Roll (IN.) |
|-------------|------------|----------------|-------------------|
| 121-M8PINK | 1/2" | .004 | 540 |
| 121-M12PINK | 3/4" | .004 | 540 |
| 121-M16PINK | 1" | .004 | 540 |

METALLIC PTFE THREAD SEALANT



BRUSH TOP TIN



Masters Metallic Compound is a heavy duty pipe thread sealant of proven quality for use on both metal and plastic thread connections. This all-weather product: Lubricates during assembly - Never sets up hard - Can be easily disassembled even after years of service. Masters Metallic Compound is non-corrosive and prevents galling and seizing. It will not dry out or harden in the container. Available in plain and brush-top. Masters Metallic Compound effectively seals most liquids and gases against leakage up to 6000 p.s.i. and +700°F, +371°C.

| PART No. |
|----------|
| TTSM-8 |
| TTSM-32 |

| Size |
|------------|
| 8 oz. Tin |
| 32 oz. Tin |

| Carton Qty. |
|-------------|
| 25 |
| 6 |

PTFE THREAD SEALANT COMPOUND



BRUSH TOP TIN

- **TEMPERATURE RANGES:** -100°F to +500°F, -73°C to +260°C
- **BRUSHABLE TO:** -50°F, -46°C
- **PRESSURE RANGES:** GASES TO 2000 P.S.I. LIQUIDS TO 8000 P.S.I.
- **MATERIAL USE:** Copper, Brass, All Steel, Aluminum, ABS, PVC, and Fiberglass Piping
- **NOTE:** NOT SUITABLE FOR OXYGEN



TUBE

| PART No. | Size | Carton Qty. |
|----------|------------|-------------|
| TTS-2 | 2 oz. Tube | 72 |
| TTS-4 | 4 oz. Tin | 24 |
| TTS-8 | 8 oz. Tin | 24 |
| TTS-16 | 16 oz. Tin | 12 |

CSA CERTIFIED THREAD SEALANT COMPOUND



BRUSH TOP TIN

- **TEMPERATURE RANGES:** -50°F to +400°F, -45°C to +204°C
- **BRUSHABLE TO:** -50°F, -46°C
- **PRESSURE RANGES:** GASES TO 3000 P.S.I. LIQUIDS TO 6000 P.S.I.
- **MATERIAL USE:** all metal, plastic, PVC or Fiberglass, CPVC, and NYLON threads.
- **NOTE:** NOT SUITABLE FOR OXYGEN OR ABS THREADS. CERTIFIED TO CSA NO. 4-90 US AND CAN/ULC-S642-M87 METAL THREADS ONLY FOR USE WITH NATURAL, PROPANE & BUTANE GASES ONLY.

TUBE



| PART No. | Size | Carton Qty. |
|----------|------------|-------------|
| TTSG-2 | 2 oz. Tube | 72 |
| TTSG-4 | 4 oz. Tin | 24 |
| TTSG-8 | 8 oz. Tin | 24 |

LEAK DETECTION FLUID (LOW - TEMP)



Test It Before You Use It. A low cost method of testing gas connections for leaks prior to use. Non-Corrosive. Halogen and Chloride Free.

GOOD FOR USE IN TEMPERATURES DOWN TO -40°C / -40°F.

| PART No. | DESCRIPTION |
|-------------------------|---------------------|
| LD-8LT | 8 OZ. Squirt Bottle |
| Meets ASME Requirements | |

HYDRAULIC CRIMPERS



Die stand sold separately



PART No.
FF105

MAX. CYLINDER FORCE 35 Ton
MAX. HOSE DIAMETER (2 Wire) 1
MAX. HOSE DIAMETER (4 Wire) 3/4"
MAX. HOSE (DA Tool-6 Wire) n/a
CRIMPER DEPTH 20"
CRIMPER WIDTH 12 1/2"
CRIMPER HEIGHT 19"
WEIGHT 125 Lb
PUMP Electric
PUMP HP 1 HP
POWER REQUIREMENT 110V-15A
APPROX. CRIMPS/Hr (3) 450



Shown with optional light

Die stand sold separately

PART No.
FF165

MAX. CYLINDER FORCE 60 Ton
MAX. HOSE DIAMETER (2 Wire) 1 1/4"
MAX. HOSE DIAMETER (4 Wire) 1 1/4"
MAX. HOSE (DA Tool-6 Wire) 1"
CRIMPER DEPTH 22"
CRIMPER WIDTH 12 1/2"
CRIMPER HEIGHT 22 1/4"
WEIGHT 140 Lb
PUMP Electric
PUMP HP 1 HP
POWER REQUIREMENT 110V-15A
APPROX. CRIMPS/Hr (3) 300

Comes complete with 8 Standard Numbered Die Sets

| Die Set PART No. | Die Closed | | Crimp Face | |
|---------------------|------------|---------|------------|-----------|
| | Dia. IN. | Dia. MM | Length IN. | Length MM |
| P100D-14 | 0.551 | 14 | 1.73 | 44 |
| P100D-16 | 0.669 | 16 | 1.73 | 44 |
| P100D-20 | 0.787 | 20 | 1.73 | 44 |
| P100D-24 | 0.945 | 24 | 1.73 | 44 |
| P100D-27 | 1.060 | 27 | 2.24 | 57 |
| P100D-31 | 1.270 | 31 | 2.24 | 57 |
| P100D-34 | 1.339 | 34 | 2.24 | 57 |
| P100D-38 | 1.496 | 38 | 2.52 | 64 |

J660 BRASS FERRULE CRIMPER (FBL, FBS FERRULES)



PART No.
J660 Crimper

DIE SETS SOLD SEPARATELY
 TO ORDER STANDARD OR RIBBED DIES
 PREFIX THE REQUIRED CRIMP SIZE
 WITH:
 "D" FOR STANDARD DIE OR
 "R" FOR RIBBED DIE.

EXAMPLE: R-400, .400 RIBBED DIE SET

FERRULES ARE LISTED ON PAGE 43

THIS MANUALLY OPERATED CRIMPING TOOL CRIMPS FBL AND FBS FERRULES.



Crimps up to 1-1/2 In. Outside Dia. Hose.

- BASE – 8"
- BODY – 7-3/8"
- HEIGHT – 27"
- WEIGHT – 29 LBS

HYDRAULIC CRIMPER COMPATIBILITY CHART




| Fairview PART No. | WeatherHead | Parker | Dayco | Imperial | Gates | OmniCrimp | Aeroquip |
|-------------------|--|---|-------------------------|---|-------|-----------|----------|
| SC600 Series | T-400 T-407 T-410 T-420 T-440 T-450 T-460 T-462 | | NP-30 NP-60 | K-201 K-202 K-401 K-501 K-601 K-24 K-16 K-20 | PC707 | 3000B | FT1380 |
| SCTGW600 Series | T-400 T-407 T-410 T-420 T-440 T-450 T-460 T-462 | | NP-30 NP-60 | K-201 K-202 K-401 K-501 K-601 K-24 K-16 K-20 | PC707 | 3000B | FT1380 |
| SC900 Series | | Minicrimp Karrykrimp 1 & 2 Parkrimp 1 & 2 PHastkrimp | NP-30 NP-60 | K-201 K-202 K-401 K-501 K-601 K-24 K-16 K-20 | PC707 | 3000B | FT1380 |
| SCT900MS Series | | Karrykrimp 2 Parkrimp 2 PHastkrimp | NP-30 NP-60 | K-201 K-202 K-401 K-501 K-601 K-24 K-16 K-20 | PC707 | 3000B | FT1380 |
| SCTBW00 Series | | | NP-30 NP-60 K-401 | K-201 K-202 K-501 K-601 K-24 K-16 K-20 | PC707 | 3000B | FT1380 |

Any other adjustable crimper not shown.




SIZE CHARTS

ACTUAL OUTSIDE DIAMETERS OF PIPE THREADS

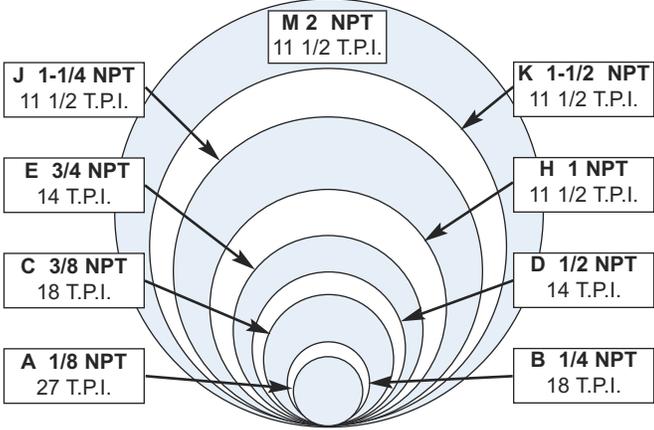

ACTUAL OUTSIDE DIAMETERS OF TUBING

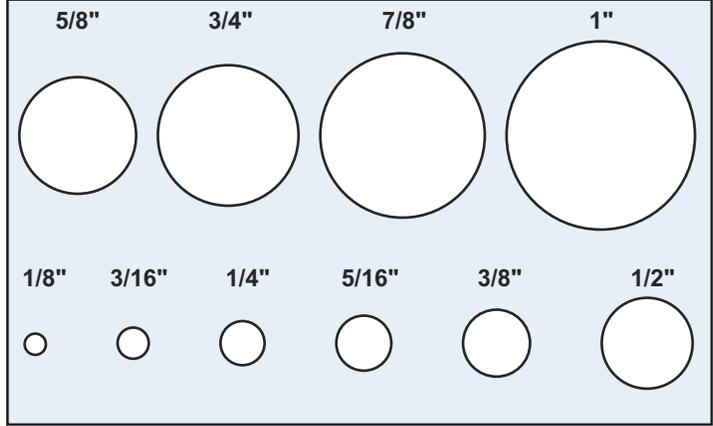

FRACTIONAL SIZE CODES

Used with all Part Numbers to designate Tube and Pipe Fractional Sizes.

Tube Size Code -- 1/16ths

| | | | | | | | | | | | | | | | | |
|-----|------|-----|------|-----|------|-----|-----|-----|-----|----|-------|-------|----|-------|----|----|
| 1/8 | 3/16 | 1/4 | 5/16 | 3/8 | 7/16 | 1/2 | 5/8 | 3/4 | 7/8 | 1 | 1-1/4 | 1-1/2 | 2 | 2-1/2 | 3 | 4 |
| 2 | 3 | 4 | 5 | 6 | 7 | 8 | 10 | 12 | 14 | 16 | 20 | 24 | 32 | 40 | 48 | 64 |

Pipe Size Code

| | | | | | | | | | | | | |
|------|-----|-----|-----|-----|-----|---|-------|-------|---|-------|---|---|
| 1/16 | 1/8 | 1/4 | 3/8 | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 | 2 | 2-1/2 | 3 | 4 |
| 1 | A | B | C | D | E | H | J | K | M | N | P | S |

METRIC THREAD STANDARDS

| TUBE SIZE MM | DIN METRIC (LIGHT) | DIN METRIC (HEAVY) |
|--------------|--------------------|--------------------|
| 6 | M12x1.5 | M14x1.5 |
| 8 | M14x1.5 | M16x1.5 |
| 10 | M16x1.5 | M18x1.5 |
| 12 | M18x1.5 | M20x1.5 |
| 14 | -- | M22x1.5 |
| 15 | M22x1.5 | -- |
| 16 | -- | M24x1.5 |
| 18 | M26x1.5 | -- |
| 20 | -- | M30x2.0 |
| 22 | M30x2.0 | -- |
| 25 | -- | M36x2.0 |
| 28 | M36x2.0 | -- |
| 30 | -- | M42x2.0 |
| 35 | M45x2.0 | -- |
| 38 | -- | M52x2.0 |
| 42 | M52x2.0 | -- |

TUBE FITTING SIZE AND THREAD STANDARDS

| DASH SIZE | O.D. TUBE SIZE | 45° S.A.E. FLARE | | 37° J.I.C. FLARE | | COMPRESSION | | 45° INVERTED FLARE | | THREADED SLEEVE | |
|-----------|----------------|------------------|--------|------------------|--------|-------------|--------|--------------------|--------|-----------------|--------|
| | | O.D. | THREAD | O.D. | THREAD | O.D. | THREAD | O.D. | THREAD | O.D. | THREAD |
| -2 | 1/8 | 5/16 | 24 | 5/16 | 24 | 5/16 | 24 | 5/16 | 28 | 5/16 | 24 |
| -3 | 3/16 | 3/8 | 24 | 3/8 | 24 | 3/8 | 24 | 3/8 | 24 | 3/8 | 24 |
| -4 | 1/4 | 7/16 | 20 | 7/16 | 20 | 7/16 | 24 | 7/16 | 24 | 7/16 | 24 |
| -5 | 5/16 | 1/2 | 20 | 1/2 | 20 | 1/2 | 24 | 1/2 | 20 | 1/2 | 20 |
| -6 | 3/8 | 5/8 | 18 | 9/16 | 18 | 9/16 | 24 | 5/8 | 18 | 9/16 | 20 |
| -8 | 1/2 | 3/4 | 16 | 3/4 | 16 | 5/8 | 24 | 11/16 | 18 | 5/8 | 18 |
| -10 | 5/8 | 7/8 | 14 | 7/8 | 14 | 11/16 | 20 | 3/4 | 18 | 11/16 | 16 |
| -12 | 3/4 | 1-1/16 | 14 | 1-1/16 | 12 | 13/16 | 18 | 7/8 | 18 | -- | -- |
| -14 | 7/8 | 1-1/4 | 12 | 1-3/16 | 12 | 1 | 18 | 1-1/16 | 16 | -- | -- |
| -16 | 1 | 1-3/8 | 12 | 1-5/16 | 12 | 1-1/8 | 18 | 1-3/16 | 16 | -- | -- |
| -20 | 1-1/4 | -- | -- | 1-5/8 | 12 | 1-1/4 | 16 | -- | -- | -- | -- |
| -24 | 1-1/2 | -- | -- | 1-7/8 | 12 | -- | -- | -- | -- | -- | -- |
| -32 | 2 | -- | -- | 2-1/2 | 12 | -- | -- | -- | -- | -- | -- |

TUBE FITTING SIZE AND THREAD STANDARDS

| DASH SIZE | O.D. TUBE SIZE | O.D. | | O.D. | | O.D. | | O.D. | | O.D. | |
|-----------|----------------|--------|--------|--------|--------|---------|--------|--------|--------|--------|----|
| | | THREAD | THREAD | THREAD | THREAD | THREAD | THREAD | THREAD | THREAD | THREAD | |
| -2 | 1/8 | 5/16 | 24 | 5/16 | 24 | -- | -- | -- | -- | -- | -- |
| -3 | 3/16 | 3/8 | 24 | 3/8 | 24 | -- | -- | -- | -- | -- | -- |
| -4 | 1/4 | 7/16 | 20 | 7/16 | 20 | 9/16 | 18 | 1/4 | 19 | 1/4 | 19 |
| -5 | 5/16 | 1/2 | 20 | 1/2 | 20 | -- | -- | -- | -- | -- | -- |
| -6 | 3/8 | 9/16 | 18 | 9/16 | 18 | 11/16 | 16 | 3/8 | 19 | 3/8 | 19 |
| -8 | 1/2 | 3/4 | 16 | 3/4 | 16 | 13/16 | 16 | 1/2 | 14 | 1/2 | 14 |
| -10 | 5/8 | 7/8 | 14 | 7/8 | 14 | 1 | 14 | 5/8 | 14 | 5/8 | 14 |
| -12 | 3/4 | 1-1/16 | 12 | 1-1/16 | 12 | 1-3/16 | 12 | 3/4 | 14 | 3/4 | 14 |
| -14 | 7/8 | 1-3/16 | 12 | 1-3/16 | 12 | -- | -- | -- | -- | -- | -- |
| -16 | 1 | 1-5/16 | 12 | 1-5/16 | 12 | 1-7/16 | 12 | 1 | 11 | 1 | 11 |
| -20 | 1-1/4 | 1-5/8 | 12 | 1-5/8 | 12 | 1-11/16 | 12 | -- | -- | -- | -- |
| -24 | 1-1/2 | 1-7/8 | 12 | 1-7/8 | 12 | 2 | 12 | -- | -- | -- | -- |
| -32 | 2 | 2-1/2 | 12 | 2-1/2 | 12 | -- | -- | -- | -- | -- | -- |

INDEX



| SERIES | PAGE | SERIES | PAGE | SERIES | PAGE | SERIES | PAGE | SERIES | PAGE |
|-------------------|--------|--------|---------|-----------|----------|------------------|--------------|----------------|--------------|
| 14DV | 113 | 119 | 64 | 1139 | 106 | BI-110MC | 85 | GN | 73 |
| 25-CA | 135 | LF-119 | 64 | 1160 | 51, 60 | BI-111 | 68 | GNM | 73 |
| 25-DR | 139 | 120 | 64 | 1161 | 51, 60 | BI-112 | 67 | GS-STOCK BOX | 140 |
| 30 | 70 | LF-120 | 64 | 1162 | 60 | BI-113 | 67 | GWC | 73, 138, 145 |
| 31 | 69 | 121 | 65 | 1164 | 60 | BI-114 | 69 | GWN | 26 |
| 32 | 69 | LF-121 | 65 | 1168 | 60 | BI-116 | 68 | GWR | 26 |
| 33 | 70 | 121S | 65 | 1169 | 60 | BI-119 | 67 | HAB3 | 7 |
| 34 | 70 | 121-M8 | 58, 149 | 1170 | 60 | BI-124 | 68 | HAB4 | 7 |
| 34R | 70 | 122 | 63 | 1171 | 60 | BI-125 | 43 | HAB-4 | 5 |
| 35 | 70 | LF-122 | 63 | 1174 | 60 | BI-129 | 43 | HAB-6 | 2 - 5 |
| 36 | 71 | 123 | 42 | 1460 | 59 | BL | 33 | HAB-8 | 2 - 4 |
| 39 | 69 | 123Y | 42 | 1461 | 59 | BLA | 33 | HAB-HANGER | 130 |
| 40 | 69 | 124 | 65 | 1462 | 59 | BLADES | 146 | HAB-HC | 130 |
| 40R | 69 | LF-124 | 65 | 1464 | 59 | BLE | 33 | HAB-NOSE | 4 |
| 41 | 69 | X124 | 65 | 1465 | 59 | BLJ | 33 | HAB-SPRING | 130 |
| 41S | 69 | 125 | 41 | 1466 | 59 | BLP | 33 | HAB-SPW | 130 |
| 42-CA | 135 | 125CA | 41 | 1468 | 59 | BLPE | 33 | HABA-4 | 5 |
| 42 | 70 | 126 | 41 | 1469 | 59 | BLT | 32 | HABA-6 | 2 - 5, 7 |
| 42R | 70 | 127 | 41 | 1470 | 59 | BSCM | 112 | HABA-8 | 2 - 5 |
| 44 | 71 | 128 | 41 | 1471 | 59 | BTV | 113 | HABABLU | 7 |
| 44R | 71 | 129 | 42 | 1472 | 59 | BV2062 | 103 | HABARED | 7 |
| 45 | 71 | 130 | 41 | 1474 | 59 | LF-BV2062 | 103 | HABR-KIT | 39 |
| 46 | 70 | 131 | 41 | 1476 | 59 | BV2101 | 103 | HABBLU | 7 |
| 47 | 70 | 134 | 41 | 1477 | 59 | BV2101T | 103 | HABRED | 7 |
| 48 | 70 | 139 | 41 | 1481 | 59 | BV2103 | 102 | HABSPW | 7 |
| 49 | 70 | 140 | 41 | 1485 | 34, 36 | BV3103 | 103 | HAR | 2, 141 |
| 50 | 70 | 217 | 106 | 1486L | 7 | BV3120 | 103 | HC2 | 125 |
| 51 | 71 | 224 | 106 | 1486S | 26 | BV4103 | 102 | HC3 | 125, 140 |
| 52 | 71 | 225 | 106 | 1490 | 38 | LF-BV4103 | 102 | HC3-KIT-1 | 140 |
| 53 | 71 | 239 | 108 | 1491 | 38 | BVC4103 | 102 | HC5 | 124 |
| 54 | 71 | 240 | 108 | 1492 | 38 | BVSS2003 | 104 | HC6 | 124, 140 |
| 55 | 71 | 241 | 108 | 1492SW | 38 | BVCS2103 | 104 | HC6-AUTO-KIT-1 | 140 |
| 55R | 71 | 241HP | 108 | 1493 | 38 | BVSS2103 | 104 | HC8 | 127 |
| 56 | 71 | 242 | 108 | 1493SW | 38 | BVCS2203 | 105 | HC9 | 128, 146 |
| 56HP | 71 | 243 | 108 | 1494 | 38 | BVCS2303 | 105 | HC9-R | 146 |
| 58 | 71 | 244 | 108 | 1495 | 38 | BVCS2403 | 105 | HC9-S | 146 |
| 59 | 71 | 245 | 108 | 1495B | 38 | BVCS2434 | 105 | HC10 | 128 |
| 72CA | 135 | 245 | 108 | 1495N | 38 | BVSE2103 | 102 | HC14 | 127 |
| 99 | 65 | 293 | 109 | 1496 | 38 | BVSS2203 | 105 | HC19 | 126 |
| 99HB | 42 | 298 | 109 | 1497 | 38 | BVSS2403 | 105 | HC20 | 126 |
| 100 | 65 | 325 | 43 | 1498 | 38 | C-BC | 113 | HC21 | 127 |
| 100CA | 65 | 335 | 43 | 1498N | 38 | C-GWC | 73, 138, 145 | HCB | 147 |
| LF-100 | 65 | 339 | 43 | 1499 | 38 | C2- | 138 | HCBS | 147 |
| X100 (X Extruded) | 65 | 359 | 36 | 1499N | 38 | C10- | 73, 138 | HCCSST-RT | 146 |
| 101 | 66 | 360 | 36 | 1925 | 41 | CHS | 21 | HCR-10 | 124, 140 |
| 101CA | 66 | 525 | 42 | 1936 | 25 | CTG | 32 | HCR-18 | 124, 140 |
| LF-101 | 66 | 526 | 42 | 2042 | 107 | CTR | 32 | HH | 20 |
| X101 | 66 | 529 | 42 | 2048 | 107 | CV1 | 109 | HHP | 20 |
| 101M | 66 | 539 | 42 | 2068 | 107 | DS-B | 143 | HHR | 20 |
| 102 | 66 | 539F | 42 | 2101 | 106 | DR | 139 | HHS | 21 |
| X102 | 66 | 555 | 42 | 2102 | 106 | ET | 124 | HR4 | 11 |
| 103 | 63, 64 | 544 | 42 | 2103 | 107 | ETM | 124 | HR5 | 12 |
| 103CA | 64 | 678 | 66 | 2120 | 107 | FA154SN | 143 | HR5HT | 12 |
| LF-103 | 63 | 725 | 40 | 2122 | 107 | FBL | 43 | HR7 | 13, 14 |
| 103CV | 109 | 725SW | 40 | 2800 | 26 | FBS | 43 | HR7LT | 13 |
| 104 | 64 | 726 | 40 | 4120R | 39 | FF105 | 150 | HR7TW | 13, 14 |
| 105 | 66 | 727 | 40 | 4129R | 39 | FF165 | 150 | HR8 | 15 |
| X105 | 66 | 728 | 40 | 4134 | 38, 58 | FLH | 22 | HR8TW | 16 |
| 106 | 66 | 729 | 40 | 5103 | 107 | FLT | 35 | HRA12 | 16 |
| X106 | 66 | 730 | 40 | 5120 | 107 | FO41S | 69 | HR16 | 18 |
| 107 | 66 | 731 | 40 | ABFR | 58 | FT | 148 | HR17 | 18 |
| LF-107 | 66 | 732 | 40 | AG164 | 143 | FW-CYLINDER | 114 | HR17LT | 19 |
| X107 | 66 | 735 | 40 | AG166 | 143 | FWSK | 26 | HR18 | 19 |
| 108 | 65 | 736 | 40 | AG410R | 143 | GAS | 139 | HS11 | 129 |
| 108CA | 65 | 737 | 40 | AG411E | 143 | GG (Grease Guns) | 145 | HT | 17 |
| 109 | 64 | 738 | 40 | AG411EW | 143 | GH (Gladhands) | 110, 111 | HT6C | 17 |
| LF-109 | 64 | 739 | 40 | AHDR | 141, 142 | GH-BRACKET | 111 | HV1139 | 106 |
| 110 | 64 | 750 | 44 | ASGK | 26 | GH-DUMMY | 111 | ICLT | 146 |
| 110CA | 64 | 751 | 44 | ASTM | 72 | GH-GRIP | 111 | J660 | 150 |
| LF-110 | 64 | 752 | 44 | B1120 | 100 | GH-LOCK | 111 | JFT | 35 |
| 111 | 64 | 761 | 22 | B1492 | 38 | GHE | 110 | JFTA | 35 |
| 112 | 63 | 860 | 72 | BBV | 112 | GHFN | 144 | KIT-AUTO | 136, 137 |
| LF-112 | 63 | 861 | 72 | BC | 113 | GHM | 110 | KIT-INDUST | 136, 137 |
| 112RED | 63 | 862 | 72 | BEM | 112 | GHN | 144 | KIT-TRUCK | 136, 137 |
| 113 | 63 | 868 | 72 | BI-100 | 68 | GHN6 | 144 | LAB | 136, 137 |
| LF-113 | 63 | 869 | 72 | BI-101 | 68, 69 | GHN10 | 144 | LAS | 127 |
| 113RED | 63 | 962 | 44 | BI-102 | 69 | GHNE | 144 | LD | 149 |
| 114 | 66 | 964 | 44 | BI-103 | 67 | GHPS | 144 | MC | 146 |
| X115 | 65 | 965 | 44 | BI-103HMC | 85 | GHS | 110 | MCB | 146 |
| LF-X115 | 65 | 966 | 44 | BI-103MC | 85 | GHTN | 144 | MP-BP | 147 |
| 116 | 65 | 968 | 44 | BI-104 | 67 | GHU | 110 | MP-SBP | 147 |
| 116CA | 65 | 969 | 44 | BI-105 | 68 | GHV | 7, 110 | NS | 147 |
| LF-116 | 65 | 977 | 44 | BI-108 | 69 | GI-125 | 43 | OE | 128 |
| 116H | 65 | 1049 | 106 | BI-109 | 68 | GI-129 | 43 | P100D | 150 |
| 117 | 64 | 1054 | 106 | BI-109MC | 85 | GL6RED | 25 | PAR6BLU | 25 |
| 118 | 64 | 1115 | 106 | BI-110 | 68 | GL6YEL | 25, 142 | PAR6RED | 25 |



INDEX

| SERIES | PAGE | SERIES | PAGE | SERIES | PAGE | SERIES | PAGE | SERIES | PAGE |
|------------|------------|----------|------|-----------|------|-------------|------|-----------|----------|
| PAR6YEL | 25 | QD-TFMC | 97 | S3642 | 79 | SC643 | 45 | SR439 | 51 |
| PC1400 | 62 | QD-TFN | 97 | S3645 | 80 | SC643SW | 45 | SR440 | 51 |
| PC1462 | 61 | QD-UNIAC | 98 | S3648 | 79 | SC650 | 46 | SR462 | 51 |
| PC1464 | 61 | QD-WHCF | 100 | S3648L | 79 | SC653 | 45 | SR468 | 51 |
| PC1465 | 61 | QD-WHNM | 100 | S3649 | 80 | SC658 | 45 | SR4S | 51 |
| PC1466 | 61 | QD-WHVCF | 100 | S3649EL | 80 | SC659 | 46 | SR525 | 53 |
| PC1468 | 61 | QS-000 | 132 | S3651 | 80 | SC667 | 46 | SR527 | 53 |
| PC1469 | 61 | QS-305 | 132 | S3654 | 80 | SC725 | 49 | SR528 | 53 |
| PC1469SW | 61 | QS-306 | 132 | S3655 | 80 | SC725SW | 49 | SR535 | 53 |
| PC1470 | 61 | QTB | 132 | S3699 | 80 | SC738 | 49 | SR537 | 53 |
| PC1471 | 62 | RGP | 23 | S3700BT | 78 | SC916SW | 48 | SR538 | 53 |
| PC1471SW | 62 | RG4RED | 23 | S3700BT62 | 78 | SC925 | 47 | SR539 | 53 |
| PC1472 | 62 | RG4YEL | 23 | S3721 | 75 | SC925SW | 47 | SR539L | 53 |
| PC1472SW | 62 | RG4/2RED | 23 | S3720 | 75 | SC926 | 47 | SR540 | 53 |
| PC1474 | 61 | RG6RED | 23 | S3735 | 75 | SC926GT | 47 | SR541 | 53 |
| PC1474SW | 61 | RG6YEL | 23 | S3736 | 76 | SC926SW | 47 | SR595 | 53 |
| PC1477 | 61 | RG6/2RED | 23 | S3740BT | 78 | SC929 | 47 | SR725SW | 49 |
| PC1478 | 62 | RG8BLK | 23 | S3742 | 75 | SC931 | 48 | SR738 | 49 |
| PC1478SW | 62 | RG8RED | 23 | S3744 | 77 | SC931BSP | 48 | SRT125 | 50 |
| PC1483 | 61 | RG8/2RED | 23 | S3745 | 77 | SC931JIS | 48 | SRT138 | 50 |
| PC1486 | 61 | RVH | 24 | S3746 | 75 | SC931LM | 48 | SRT225 | 50 |
| PD-55 | 133, 134 | RV4RED | 24 | S3748 | 75 | SC931LM | 48 | SRT238 | 50 |
| PD-110 | 133, 134 | RV4YEL | 24 | S3748BSPP | 75 | SC935 | 47 | SV | 114 |
| PG | 116 - 122 | RV6BLU | 24 | S3749 | 76 | SC936 | 48 | SY CUTTER | 146 |
| PGD-RACK | 138 | RV6RED | 24 | S3749L | 76 | SC937 | 47 | T1 | 10 |
| PIPE-PG-1 | 146 | R16 | 114 | S3749EL | 76 | SC938 | 47 | T2 | 10 |
| PPV | 113 | RR12 | 146 | S3749EEL | 76 | SC939 | 48 | T1SN | 9 |
| PPV90PC | 113 | S1000 | 84 | S3749BSPP | 76 | SC939BSP | 48 | T2SN | 9 |
| PW2 | 28 | S1001 | 84 | S3750 | 76 | SC939L | 48 | T9 | 148 |
| PW2A | 29 | S1001M | 84 | S3751 | 77 | SC940 | 48 | T10 | 148 |
| PW2K | 30 | S1002 | 84 | S3752 | 77 | SC940BSP | 48 | T241 | 108 |
| PW3 | 28 | S1003 | 83 | S3754 | 76 | SC941 | 48 | TC | 148 |
| PW3A | 29 | S1004 | 84 | S3755 | 76 | SC943 | 47 | TCW | 148 |
| PW3K | 30 | S1005 | 84 | S3756 | 76 | SC943SW | 47 | TCS2 | 21 |
| PW4 | 28 | S1005M | 84 | S3758 | 75 | SC950 | 48 | TCS3 | 21 |
| PW4A | 29 | S1006 | 84 | S3790BT | 78 | SC953 | 47 | TIE | 130 |
| PW5 | 28 | S1006M | 84 | S3790BT62 | 78 | SC958 | 47 | TK-1 | 58 |
| PW5A | 30 | S1007 | 84 | S3831N | 77 | SC959 | 48 | TPG | 114 |
| PW6 | 28 | S1008 | 84 | S3842 | 77 | SC967 | 47 | TR-1 | 148 |
| PW6A | 30 | S1009 | 83 | S3845 | 77 | SCK631BSP | 46 | TS14 | 129 |
| QD-71-3C | 93 | S1010 | 83 | S3846 | 77 | SCK639BSP | 46 | TS15 | 129 |
| QD-71-3N | 93 | S1012 | 83 | S3848 | 77 | SCT425 | 50 | TS16R | 129 |
| QD-75C | 89 | S1013 | 83 | S3854 | 77 | SCT438 | 50 | TS17R | 129 |
| QD-75N | 89 | S1016 | 84 | S3855 | 77 | SCT900MS | 55 | TS19 | 129 |
| QD-AGC | 90 | S1016SW | 84 | S3931N | 82 | SCT925MS | 55 | TS20 | 129 |
| QD-AGN | 90 | S1018 | 83 | S3931R | 82 | SCT931BSPMS | 55 | TS21 | 129 |
| QD-AROCAC | 97 | S1020 | 83 | S3935 | 81 | SCT937MS | 55 | TS22 | 129 |
| QD-ARON | 97 | S1021 | 83 | S3936 | 82 | SCT938MS | 55 | TSS17R | 129 |
| QD-BISOBC | 91 | S1022 | 83 | S3937 | 81 | SCT939MS | 55 | TSNIP | 146 |
| QD-BISOBN | 91 | S1024 | 84 | S3937F | 81 | SCT939BSPMS | 55 | TSPITool | 146 |
| QD-BSTC | 100 | S1099 | 84 | S3942 | 81 | SCT940MS | 55 | TTS | 149 |
| QD-BSTN | 100 | S1100 | 86 | S3942BH | 81 | SCT945MS | 55 | TTSG | 149 |
| QD-BTTWDC | 89 | S1103 | 86 | S3947 | 81 | SCT950MS | 55 | TTSM | 149 |
| QD-BTTWDP | 89 | S1101 | 86 | S3948 | 81 | SCT958MS | 55 | WETLINE | 11 |
| QD-BTTWC | 89 | S1105 | 86 | S3951F | 82 | SCT959MS | 55 | WH-705 | 112 |
| QD-BTTWN | 89 | S1106 | 86 | S3956 | 81 | SCT990MS | 55 | WH8BLK | 27 |
| QD-CEJNN | 99 | S1111 | 86 | S3958 | 81 | SCTP25 | 54 | WH8BLU | 27 |
| QD-HTMAC | 93 | S1116 | 86 | S3968 | 81 | SCTP25SW | 54 | WH8GRN | 27 |
| QD-HTMAN | 93 | S1116L | 86 | S3969 | 81 | SCTP26SW | 54 | WH8YEL | 27 |
| QD-INDAC | 96 | S1120 | 86 | S3974 | 82 | SCTP37 | 54 | WH10BLK | 27 |
| QD-INDN | 95, 96, 99 | S1124 | 86 | S6760 | 82 | SCTP38 | 54 | WH10BLU | 27 |
| QD-INDMC | 95 | S1125 | 49 | S6761 | 82 | SCTP39 | 54 | WH12BLK | 27 |
| QD-ISOAC | 92 | S1139 | 49 | S6762 | 82 | SCTP40 | 54 | WH12BLU | 27 |
| QD-ISOAN | 92 | S1140 | 49 | S6764 | 82 | SCTP58 | 54 | WHDR | 141, 142 |
| QD-ISOBC | 91 | S3516 | 74 | S6765 | 82 | SCV1003 | 109 | WHGL8GRN | 27 |
| QD-ISOBN | 91 | S3520 | 74 | S6766 | 82 | SCW525 | 52 | WHGL10GRN | 27 |
| QD-KARCHER | 100 | S3522 | 74 | S6768 | 82 | SCW528 | 52 | WHRV8BLU | 27 |
| QD-KARN | 100 | S3526 | 74 | S6769 | 82 | SCW538 | 52 | XB20-CA | 134 |
| QD-LINMC | 98 | S3536 | 74 | SC616SW | 46 | SCW539 | 52 | XC80-CA | 133 |
| QD-LINN | 98 | S3542 | 74 | SC625 | 45 | SCW540 | 52 | XC110-CA | 134 |
| QD-MINIAC2 | 98 | S3545 | 74 | SC625SW | 45 | SCW541 | 52 | ZZCOS | 133 |
| QD-MININ2 | 98 | S3548 | 74 | SC626 | 45 | SFK61 | 78 | | |
| QD-PDC | 90 - 92 | S3549 | 74 | SC626GT | 45 | SFK62 | 78 | | |
| QD-PDP | 90 - 92 | S3549BT | 74 | SC626SW | 45 | SFO | 78 | | |
| QD-SCAROMC | 99 | S3549LBT | 74 | SC628 | 45 | SFPK2661 | 78 | | |
| QD-SCINDMC | 99 | S3551 | 74 | SC629 | 46 | SG | 147 | | |
| QD-SCCEJNC | 99 | S3554 | 74 | SC631 | 46 | SO1116 | 85 | | |
| QD-SISOBC | 91 | S3599 | 74 | SC632 | 46 | SO1120 | 85 | | |
| QD-SISOBN | 91 | S3616 | 80 | SC635 | 45 | SO1124 | 85 | | |
| QD-SP90 | 90 | S3618 | 79 | SC636 | 46 | SO1125 | 49 | | |
| QD-SSTC | 100 | S3620 | 79 | SC637 | 45 | SO1139 | 49 | | |
| QD-SSTN | 100 | S3621 | 79 | SC638 | 45 | SO1140 | 49 | | |
| QD-STFN | 97 | S3622 | 79 | SC639 | 46 | SPW | 147 | | |
| QD-STN | 100 | S3622F | 79 | SC639L | 46 | SR425 | 51 | | |
| QD-TCC | 92 | S3623 | 79 | SC640 | 46 | SR428 | 51 | | |
| QD-TCN | 92 | S3631R | 80 | SC641 | 46 | SR438 | 51 | | |

Fractions - Decimals - Millimeters

| FRACTION | DECIMAL | mm | FRACTION | DECIMAL | mm |
|-----------------|---------|--------|-----------------|---------|--------|
| $\frac{1}{64}$ | .0156 | 0.396 | $\frac{33}{64}$ | .5156 | 13.096 |
| $\frac{1}{32}$ | .0312 | 0.793 | $\frac{17}{32}$ | .5312 | 13.493 |
| $\frac{3}{64}$ | .0468 | 1.190 | $\frac{35}{64}$ | .5468 | 13.890 |
| $\frac{1}{16}$ | .0625 | 1.587 | $\frac{9}{16}$ | .5625 | 14.287 |
| $\frac{5}{64}$ | .0781 | 1.984 | $\frac{37}{64}$ | .5781 | 14.684 |
| $\frac{3}{32}$ | .0937 | 2.381 | $\frac{19}{32}$ | .5937 | 15.081 |
| $\frac{7}{64}$ | .1093 | 2.778 | $\frac{39}{64}$ | .6093 | 15.478 |
| $\frac{1}{8}$ | .1250 | 3.175 | $\frac{5}{8}$ | .6250 | 15.875 |
| $\frac{9}{64}$ | .1406 | 3.571 | $\frac{41}{64}$ | .6406 | 16.271 |
| $\frac{5}{32}$ | .1562 | 3.968 | $\frac{21}{32}$ | .6562 | 16.668 |
| $\frac{11}{64}$ | .1718 | 4.365 | $\frac{43}{64}$ | .6718 | 17.065 |
| $\frac{3}{16}$ | .1875 | 4.762 | $\frac{11}{16}$ | .6875 | 17.462 |
| $\frac{13}{64}$ | .2031 | 5.159 | $\frac{45}{64}$ | .7031 | 17.859 |
| $\frac{7}{32}$ | .2187 | 5.556 | $\frac{23}{32}$ | .7187 | 18.256 |
| $\frac{15}{64}$ | .2343 | 5.953 | $\frac{47}{64}$ | .7343 | 18.653 |
| $\frac{1}{4}$ | .2500 | 6.350 | $\frac{3}{4}$ | .7500 | 19.050 |
| $\frac{17}{64}$ | .2656 | 6.746 | $\frac{49}{64}$ | .7656 | 19.446 |
| $\frac{9}{32}$ | .2812 | 7.143 | $\frac{25}{32}$ | .7812 | 19.843 |
| $\frac{19}{64}$ | .2968 | 7.540 | $\frac{51}{64}$ | .7968 | 20.240 |
| $\frac{5}{16}$ | .3125 | 7.937 | $\frac{13}{16}$ | .8125 | 20.637 |
| $\frac{21}{64}$ | .3281 | 8.334 | $\frac{53}{64}$ | .8281 | 21.034 |
| $\frac{11}{32}$ | .3437 | 8.731 | $\frac{27}{32}$ | .8437 | 21.431 |
| $\frac{23}{64}$ | .3593 | 9.128 | $\frac{55}{64}$ | .8593 | 21.828 |
| $\frac{3}{8}$ | .3750 | 9.525 | $\frac{7}{8}$ | .8750 | 22.225 |
| $\frac{25}{64}$ | .3906 | 9.921 | $\frac{57}{64}$ | .8906 | 22.621 |
| $\frac{13}{32}$ | .4062 | 10.318 | $\frac{29}{32}$ | .9062 | 23.018 |
| $\frac{27}{64}$ | .4218 | 10.715 | $\frac{59}{64}$ | .9218 | 23.415 |
| $\frac{7}{16}$ | .4375 | 11.112 | $\frac{15}{16}$ | .9375 | 23.812 |
| $\frac{29}{64}$ | .4531 | 11.509 | $\frac{61}{64}$ | .9531 | 24.209 |
| $\frac{15}{32}$ | .4687 | 11.906 | $\frac{31}{32}$ | .9687 | 24.606 |
| $\frac{31}{64}$ | .4843 | 12.303 | $\frac{63}{64}$ | .9843 | 25.003 |
| $\frac{1}{2}$ | .5000 | 12.700 | 1 | 1.0000 | 25.400 |



Fairview Canada

Head Office: 1170 Invicta Drive,
Oakville, Ontario L6H 6G1
Telephone: (905) 338-0800
Fax: (905) 338-0060
E-Mail: service@fairviewfittings.com
www.fairviewfittings.com

Since
69

Fairview USA

Head Office: 3777 Commerce Court,
Wheatfield, New York 14120 U.S.A.
Telephone: (716) 614-0320
CONTINENTAL USA: (800) 688-4088
Sales Fax: (716) 614-0329 Admin. Fax: (716) 614-0327
E-Mail: ussales@fairviewfittings.com

WAREHOUSE / SALES LOCATIONS

Canadian

- 206-3765 E. 1st AVENUE
BURNABY, B.C. V5C 3V6
PHONE: (604) 294-4427 FAX: (604) 294-9922
TOLL FREE: (888) 294-7104 FAX: (888) 294-7105
EMAIL: sales@vancouver.fairviewfittings.com
- 3327 LAMBERT CRESCENT, UNIT 1
SASKATOON, SASKATCHEWAN S7K 1K4
PHONE: (306) 978-1800 FAX: (306) 978-1898
TOLL FREE: (866) 866-9198 FAX: (866) 978-1898
EMAIL: sales@saskatoon.fairviewfittings.com
- 2955 RUE LUCIEN-L'ALLIER
LAVAL, QUEBEC H7P 0A1
PHONE: (450) 978-3341 FAX: (450) 686-9533
TOLL FREE: (800) 663-3341 FAX: (800) 499-3035
EMAIL: sales@montreal.fairviewfittings.com
- UNIT 13 - 4069 112th AVENUE S.E.
CALGARY, ALBERTA T2C 0J4
PHONE: (403) 255-1524 FAX: (403) 259-6994
TOLL FREE (888) 832-0550 FAX: (888) 832-0551
EMAIL: sales@calgary.fairviewfittings.com
- 145 ENGLISH DRIVE, UNIT 4
MONCTON, NEW BRUNSWICK E1E 3X3
PHONE: (506) 857-1115 FAX: (506) 857-9206
TOLL FREE: (800) 561-8551 FAX: (800) 862-4374
EMAIL: sales@moncton.fairviewfittings.com
- 9811 - 12th AVENUE S.W.
EDMONTON, ALBERTA T6X 0E3
PHONE: (780) 438-2177 FAX: (780) 437-0691
TOLL FREE: (888) 441-9883 FAX: (888) 441-9884
EMAIL: sales@edmonton.fairviewfittings.com
- 310 KEEWATIN STREET
WINNIPEG, MANITOBA R2X 2R9
PHONE: (204) 633-9304 FAX: (204) 632-9656
TOLL FREE: (888) 290-3821 FAX: (888) 373-0913
EMAIL: sales@winnipeg.fairviewfittings.com
- EXPORT SALES
MISSISSAUGA, ONTARIO L5T 1S8
PHONE: (905) 564-7416 FAX: (905) 564-6703
TOLL FREE: (800) 800-4018 FAX: (888) 419-3965
EMAIL: torontosales@fairviewfittings.com

U.S.A.

- 3777 COMMERCE COURT
WHEATFIELD, NEW YORK 14120
PHONE: (716) 614-0320
FAX: (716) 614-0329
CONTINENTAL U.S.A.: (800) 688-4088
- 22 PROSPECT STREET, UNITS 3 & 4
WOBURN, MASSACHUSETTS 01801
PHONE: (781) 932-1392
FAX: (781) 932-8148
CONTINENTAL U.S.A.: (800) 695-3101
- 3412 COUNTY RD. 6 E, UNIT 2
ELKHART, IN 46514
PHONE: (574) 206-8884
FAX: (574) 206-8444
CONTINENTAL U.S.A.: (877) 459-0700

Gas-Flo® & Accutek™ Are trademarks of Fairview

