


RM 80

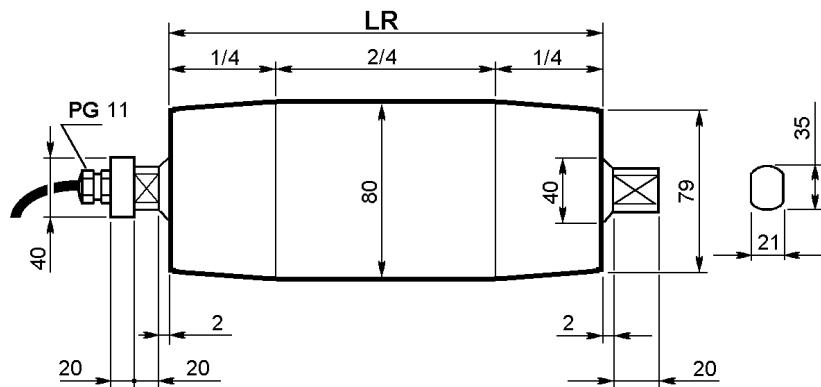

kW HP	Pol Poles n.	V m/s	M Nm	F N	L min. mm	Peso/Weight [kg]										
						LR [mm]										
						312	362	412	462	512	562	612	662	712	762	
Motore trifase / Threephase motor																
0.05 0.07	2	0.16	11.6	280	312	3.9	4.3	4.6	4.9	5.2	5.5	5.8	6.2	6.5	6.9	
		0.58	3.2	80	312	3.9	4.3	4.6	4.9	5.2	5.5	5.8	6.2	6.5	6.9	
	4	0.09	20.7	516	327	4.2	4.7	4.9	5.2	5.5	5.8	6.2	6.5	6.8	7.7	
		0.19	9.8	245	312	3.9	4.3	4.6	4.9	5.2	5.5	5.8	6.2	6.5	6.9	
Motore monofase / Single-phase motor																
0.05 0.07	2	0.16	11.6	290	312	3.9	4.3	4.6	4.9	5.2	5.5	5.8	6.2	6.5	6.9	
		0.58	5.2	80	312	3.9	4.3	4.6	4.9	5.2	5.5	5.8	6.2	6.5	6.9	
	4	0.09	20.7	516	327	4.2	4.7	4.9	5.2	5.5	5.8	6.2	6.5	6.8	7.7	
		0.19	9.8	245	312	3.9	4.3	4.6	4.9	5.2	5.5	5.8	6.2	6.5	6.9	

V = Velocità del nastro m/s
 M = Coppia all'asse del motorullo Nm
 F = Trazione del nastro N
 L = Larghezza minima del mantello mm

V = Belt speed m/s
 M = Drummotor axis torque Nm
 F = Belt pull N
 L = Min. face width mm