



JUN PACK

QUALITY ASSURANCE
质量第一

TRUSTED BRAND
信誉第一

CUSTOMER PRIORITY
顾客至上



JUN PACK PACKAGING SDN BHD

www.junpack.com.my

JUN PACK manufacturer & importer of all range of self adhesive , tapes in commercial & industrial usage ,special sizes & length can be done according to your requirements.

各种胶带，商业及工业用途，特殊尺寸的磁带范围JUN PACK
为您的制造商和进口商长度可根据您的要求进行。

ABOUT US

Jun Pack Packaging Sdn Bhd has forged ahead as the leading manufacturer specializing in the expertise of wide range of Self Adhesive Tapes, Packaging Materials and Machinery. Our company main focus in marketing and supplying a wide range of diversification packaging materials to its client in Malaysia, since the company was first established in the year 2003. Jun Pack Packaging Sdn Bhd has steadily grown and continue to strive to provide our customers the best quality Service, competitiveness edge and innovative solutions. Jun Pack Packaging Sdn Bhd has built relationships with clients which represent all fields of business from food corporation to electronic fields. With our commitment staying ahead, we enhance, upgrade on research and development to meet our competitiveness edge in developing customer need and requirement. Our technical support and technology transferred will ensure stringent quality standards control throughout the production process. Jun Pack Packaging Sdn Bhd distributes packaging materials include bubble wrap, dispensers, stretch film specialty tape, from, strapping bands, labels etc. All our products are constantly tested and improve by the R&D by specific product analysis.

Jun Pack aim and objective is to create a true working partnership with all of its customer. Our expertise and support are there for you to use as standard. Combine this with an experienced sales and customer services team that understands and practises the philosophy of "Quality Assurance, Trusted Brand, Customer Priority" during every stage of the procedure. We hope that our product, we will be able to meet your packaging needs and develop a mutually profitable relationship.


Through team work achievement our commitment in the pursuit of excellence quality fulfil us to accomplish the award certification of QUALITY MANAGEMENT SYSTEM recognition conformity to BS EN ISO9001 – 2008 over the years.



LLDPE Stretch Films

THICKNESS FILMS can be make to your specification

- Standard Thickness for Hand Roll: 0.023mm
- Standard Thickness for Machine Roll:
0.012mm, 0.017mm, 0.020mm, 0.023mm

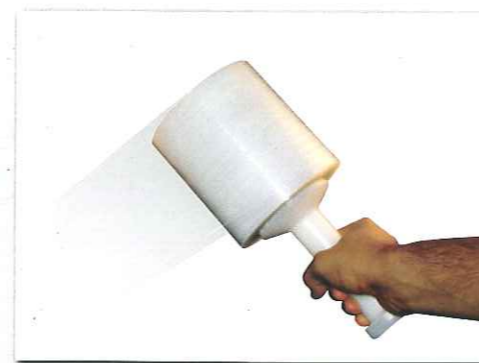

SPECIFICATION

	Width	Weight	Micron	Grade	Core (Inch)	Carton	Pallet
Jumbo Roll Stretch Film	500mm	30kg	8 ~ 50	Hand & Machine grade	I.D 3"	-	36 RLS
Hand Roll Stretch Film	500mm	1.4 ~ 3 kg	20, 23, 25	Normal Film	I.D 2"	6 RLS	50 CTN
Machine Roll Stretch Film	500mm	13 ~ 14 kg	20, 23, 25	Machine Grade Film	I.D 2"	6 RLS	50 CTN
Recycle Roll Stretch Film	500mm	2.2, 2.4, 3, 13 kg	25	Recycle Film	I.D 2", 3"	6 RLS	50 CTN
Baby Roll Stretch Film	100mm	0.28 & 0.32 kg	25	Normal Film	I.D 1", 1.5", 2", 3"	30 RLS	50 CTN
Color Roll Stretch Film	500mm	2.4 kg	20, 23, 25	Normal Film	I.D 2"	6 RLS	50 CTN
Super Elite Stretch Film	500mm	2.5 kg	12	Elite Film	I.D 2"	6 RLS	50 CTN

** Color : Black & Transparent

** Special size can be processed as per order.



OPP TAPE



FEATURES

High tensile strength film with strong acrylic emulsion adhesive.
Standard thickness : 45, 50, 70 & 90 micron.

APPLICATION

- A. OPP NORMAL TAPE - Transparent/Brown Colour.
 - B. OPP COLOUR TAPE - Yellow, Green, Blue, Red, Black and White Colour.
 - C. OPP PRINTED TAPE
- Carton sealing, packing closure.
 - Colour Tape are used for differentiation puff product packed,
 - Production and other identifications. Printed tape are used as security seal which will show if the carton is tempered or open.

* Base colour - Transparent, White & Brown not consider as one colour for printed tape.

SPECIFICATION

Item	Description	Packing	
OPP TAPE MACHINE ROLL	72MM X 1000M	4 RLS	CTN
	60MM X 1000M	5 RLS	CTN
	48MM X 1000M	6 RLS	CTN
OPP TAPE TRANSPARENT / BROWN	72MM X 90M	64 RLS	CTN
	60MM X 90M	80 RLS	CTN
	48MM X 90M	96 RLS	CTN
	48MM X 50M	120 RLS	CTN
	48MM X 40Y	120 RLS	CTN
	36MM X 90M	128 RLS	CTN
	24MM X 50M	240 RLS	CTN
	18MM X 40Y	192 RLS	CTN
	12MM X 40Y	288 RLS	CTN

** Special size can be processed as per order.

MASKING TAPE

FEATURES

- Heat resistant with clean removal.
 - Excellent paint holdout sharper line.
 - Can stand temperature of 120 Celsius for 1hour.
- Crepe paper coated with solvent rubber adhesives. Exhibit excellent finger tack, good adhesion and cohesion strength.

APPLICATION

Good masking performance at high temperature. Most suitable for automotive spraying industry and electronic such as in electroplating and soldering usage.

* Wooden windows manufacturing / Boat Manufacturing

Premium quality carton sealing specially for general packing.
General household binding tapes, building assembly components.

SPECIFICATION

Item	Description	Packing	
MASKING TAPE HIGH TEMPERATURE	60MM X 18Y	60RLS	CTN
	48MM X 18Y	72RLS	CTN
	36MM X 18Y	96RLS	CTN
	24MM X 18Y	144RLS	CTN
	18MM X 18Y	192RLS	CTN
	12MM X 18Y	288RLS	CTN
Item	Description	Packing	
MASKING TAPE GENERAL PURPOSE	60MM X 18Y	60RLS	CTN
	48MM X 18Y	72RLS	CTN
	36MM X 18Y	96RLS	CTN
	24MM X 18Y	144RLS	CTN
	18MM X 18Y	192RLS	CTN
	12MM X 18Y	288RLS	CTN

** Special size can be processed as per order.



ALUMINIUM FOIL TAPE



FEATURES

Temperature resistant and can be applied at low temperatures, the nature of dead soft aluminium foil can be used on irregular and curved surface, superior bond to metal, UV resistant and ideal for industrial like air conditioner, fridge and cold storage.

APPLICATION

Gap mending and decoration, lamination of air conditioning and ducting system. Cold storage insulation, temporary sealing of gaps.

SPECIFICATION

Item	Description	Packing	
ALUMINUM FOIL TAPE	24 MM X 30M	144 RLS	CTN
	36 MM X 30M	96 RLS	
	48 MM X 30M	72 RLS	
	72 MM X 30M	48 RLS	

** Special size can be processed as per order.

BLACK PVC PROTECTION TAPE




Protection of profiles such as windows, doors, metal plates, stainless steel, aluminium plates/sheets etc, to prevent an object from being contaminated, scratched during machining or transportation. Improves workability of the object during fabrication. No adhesive residue after removal.

SPECIFICATION

Item	Description	Packing	
BLACK PVC PROTECTION TAPE	1200mm X 55M 1200mm X 50M	LOG	LOG

Brand : TECO

FILAMENT TAPE

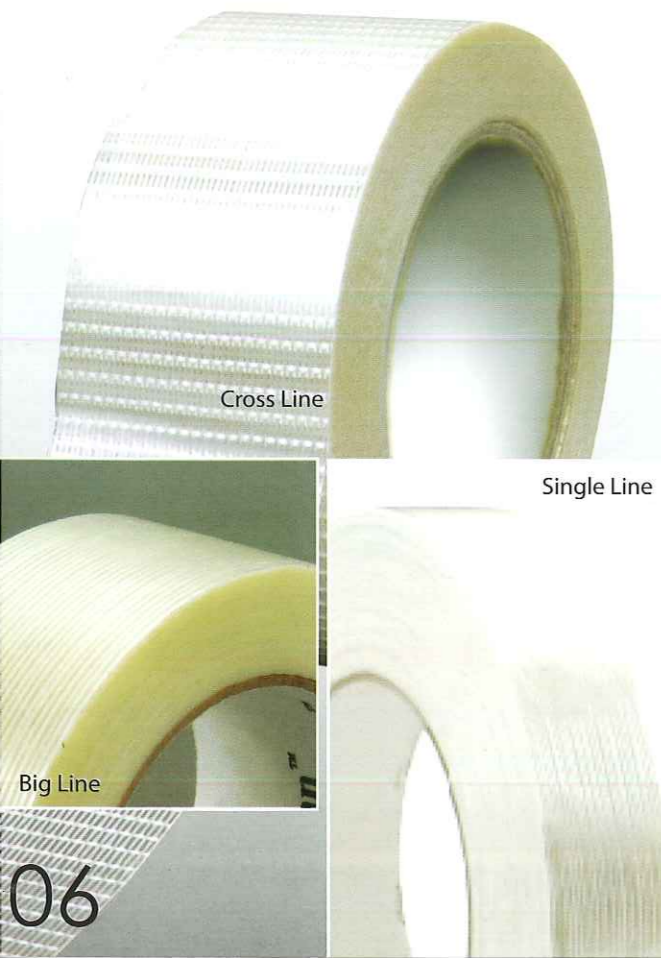

FEATURES

Polyester film backing reinforced with continuous fibreglass yarn filaments, very conformable, moisture resistant, abrasion resistant, exceptional adhesion to almost any surface, reinforcing fibreglass filament have a very strong tensile strength.

APPLICATION

Metal Rambo tabbing, bunding, heavy packaging, metal sheets palletising, reinforcing and strapping, holding metal coils, stamping

SPECIFICATION

Item	Description	Packing	
FILAMENT TAPE - CROSS LINK	24MM x 50M	-	RLS
	48MM x 50M	-	RLS
FILAMENT TAPE - SINGLE LINK	24MM x 50M	-	RLS
	48MM x 50M	-	RLS

** Special size can be processed as per order.

CARPET TAPE



FEATURES

Double side cloth tape is coated with a natural rubber, calendared adhesive on both sided.

APPLICATION

Specially designed as a carpet tape for exhibition hall and easy residue free removal.

SPECIFICATION

Item	Description	Packing	
CARPET TAPE	18mm X 20M	-	RLS
	24mm X 20M	-	RLS
	36mm X 20M	-	RLS

CELLULOES TAPE



FEATURES

Cellulose tape is supported by Natural Rubber based.

APPLICATION

This tape is use to seal packages in the home, shops, office paper, plastic bags, metal, hamper wrapping and etc. Temperature resistance up to 130c for short life span.

SPECIFICATION

Item	Description	Packing	
CELLULOES TAPE	12MM x 30Y	144 RLS	CTN
	18MM x 30Y	96 RLS	CTN
	24MM x 30Y	72 RLS	CTN

CLOTH TAPE



FEATURES

This poly-coated tape with a very aggressive rubber adhesive, bonds to almost any surface and has good resistance to tear and moisture.

APPLICATION

Especially for nameplate industry to die cutting to prevent side stick, book binding, floor and heavy duty packaging

SPECIFICATION

Item	Description	Packing	
CLOTH TAPE	10MM x 20M	72 RLS	CTN

** Special size can be processed as per order.

DOUBLE SIDED TISSUE TAPE (Solvent / Hotmelt / Polyester)



FEATURES

Double Sided Tissue Tape is manufactured with strong adhesive on both sides. It is backed by either white, yellow, brown kraft silicone liner.

APPLICATION

- Sealing all kinds of packages
- Reinforcing seems or edges of handbags, wallets, belts cloths during sewing operation
- Mending tears.
- Holding and mounting of posters, signs.
- Suitable for industrial, commercial and general application

SPECIFICATION

Item	Description	Packing	
DOUBLE SIDED TISSUE TAPE (Solvent / Hotmelt / Polyester)	12mm X 50M	144 RLS	CTN
	18mm X 50M	96 RLS	
	24mm X 50M	72 RLS	
	48mm X 50M	36 RLS	

** Special size can be processed as per order.

POLYESTER TAPE



FEATURES

Splice, insulate, reinforce, protect, and seal with high-strength polyester tape featuring tough, thin backing that resists slivering

APPLICATION

These tapes offer excellent thermal, abrasion, and chemical resistance while maintaining their flexibility. These tapes are recommended for demanding applications in graphic arts, photography, metal finishing, and electronics.

SPECIFICATION

Item	Description	Packing	
Polyester Tape	12MM x 50M	-	RLS
	18MM x 50M	-	RLS
	24MM x 50M	-	RLS

** Special size can be processed as per order.

DOUBLE SIDED FOAM TAPE

FEATURES

- Eva is specially designed for indoor purpose, good holding power with strong adhesive.
- PE foam backing plus an extremely aggressive tack, makes this a perfect tape for indoor and outdoor mounting purposes.
- Automotive foam is designed for better performance industrial application. For indoor/outdoor use. Good weather resistance and cohesion.

APPLICATION

Eva - This product is specially designed for indoor mounting purposes, good holding power with strong adhesion.

PE - Useful for mounting mirror tiles, Mounting plastic and metal trim, Automotive accessories and parts, Name plate and wall hangers, Mounting advertising boards, Bonding harness clips, Mounting plastic reflectors, Telephone connector box, Perfume holder and Cushioning.

SPECIFICATION

Item	Description	Packing	
DOUBLE SIDED FOAM TAPE	12MM X 10Y	144 RLS	CTN
	18MM X 10Y	96 RLS	CTN
	24MM X 10Y	72 RLS	CTN



Special size can be processed as per order.

ACRYLIC SUPER CLEAR / GREY FOAM

FEATURES

Excellent stress relief & stress absorption with uniform stress distribution. Strong adhesion (initial & final). Perform under extreme temperature. Excellent weather resistance, outstanding performance and most suitable for majority os outdoor usage.

APPLICATION

Car wheather shield and car accessories

SPECIFICATION

Item	Description	Packing	
ACRYLIC CLEAR / GREY FOAM	10MM X 10Y	144 RLS	CTN



FLOOR MARKING TAPE

FEATURES

These tape consists of a stabilized and plasticized PVC film coated with non corrosion pressure sensitive adhesive.


Flexible and widely used in lane marking, colour coating, sealing, bundling and identification, excellent abrasion resistance to acid, alkali and oil.

APPLICATION

Lane marking, colour coating, sealing, bundling, packaging and factory identification, designed for exhibition/hall.

SPECIFICATION

Item	Description	Packing	
FLOOR MARKING TAPE	24mm X 30M	-	RLS
	36mm X 30M	-	RLS
	48mm X 30M	-	RLS

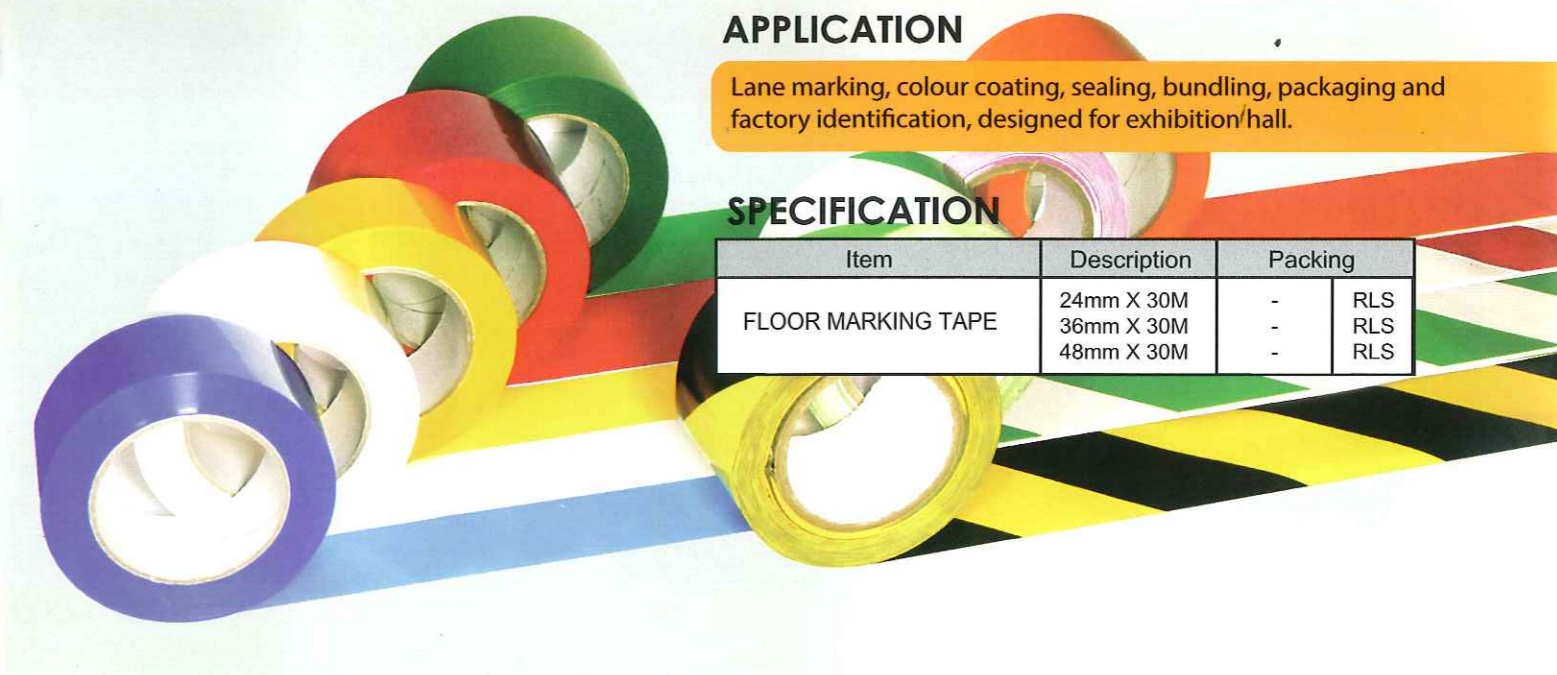

HAZARD TAPE (WARNING FILM)

FEATURES

Provides outstanding identification of hazards and safety area.

APPLICATION

Application in contraction area, fire and any

SPECIFICATION

Item	Description	Packing	
HAZARD TAPE (WARNING FILM)	72MM X 50M	48 RLS	CTN
	48MM X 50M	36 RLS	

** Special size can be processed as per order.



HARD PVC TAPE (BAKERY TAPE)

FEATURES

Hard PVC Tape is pressure sensitive tape produced from Poly Vinyl Chloride Film and coated with a specially formulated rubber base adhesive. Exellent eventual bond. Instantaneous tack. High tensile strength of PVC film provide excellent impact resistance.

APPLICATION

Colour Marking, vegetable bunling, coding and decorative purpose, sealing of grocery or bakery plastic bag, security sealing.

SPECIFICATION

Item	Description	Packing	
HARD PVC TAPE (BAKERY TAPE)	9 MM X 40Y	192 RLS	CTN



KAPTON TAPE / GREEN PLATING TAPE

FEATURES

- Protection for high temperature usage.
- Excellent insulation and flame retardant.
- Excellent heat, cold, solvent and voltage resistance.

APPLICATION

It has an excellent electical and thermalproperties. It may be used in other hightemperature and electrical insulation applications such as coils, capaciton, motors, transformes and pcb circuit board. It can also be used to mask and hold many parts during high temperature application.

SPECIFICATION

Item	Description	Packing	
KAPTON TAPE	12MM X 33M	-	RLS
	18MM X 33M	-	RLS
	24MM X 33M	-	RLS



MERCURY TAPE

FEATURES

Mercury Tape is a decorative metallic film coatedwith adhesive, it is widely used for decoration purposes.

APPLICATION

- Ideal decoration for gifts and presents.
- Decorating postal and photographs etc.
- Suitable for commercial and general purposes
- Sealing, decoration and protection for small and big containers

SPECIFICATION

Item	Description	Packing	
MECURY TAPE (Gold & Silver)	12 MM X 50Y	144 RLS	CTN

** Special size can be processed as per order.



NICHIBAN TAPE

FEATURES

NICHIBAN particular adhesive tape is used to make light of package, outside casing, agricultural product, vehicle, building, electricity, union material, machine and detecying aspect broadly. Be used for electroplating liquid test especially, be peeled off a test waiting for aspect. Quality is good, price tangible benefit, depths accept customer's consistent favourable comment application.

SPECIFICATION

Item	Description	Packing	
NICHIBAN TAPE 405B	18MM X 40Y	-	CTN
	24MM X 40Y	-	CTN



PAPER GUM TAPE

* WITH PRINTING OPTION

FEATURES

Gummed paper tape of water based glue with Kraft paper packing is the most popular and economical carton sealing tape in the industrial sector. Reinforced gummed paper tape of Kraft paper packing with reinforced fibre is specially designed for heavy duty carton sealing.

APPLICATION

Carton sealing and also available in printed from security against, advertising, handling instruction.

SPECIFICATION

Item	Description	Packing	
PAPER GUM TAPE	72mm X 60Y	20 RLS	CTN
	60mm X 60Y	24 RLS	CTN
	48mm X 60Y	30 RLS	CTN
	36mm X 60Y	40 RLS	CTN
	24mm X 60Y	60 RLS	CTN

PE PROTECTION TAPE

FEATURES

- High Tack (More Glue)
- Medium Tack
- Low Tack (Less Glue)
- Surface Protection Tape
- Black & White

This tape is used for the protection of pre-coated sheet metal, which has an exceptional resistance to ultraviolet rays & the specific adhesion allows the protection of surfaces having a greatly corrugated finish.

APPLICATION

Nameplate, metal and plastic surface, automotive parts. High tackiness for sandblasted & deflated metal and rough surface such as embossed steel plate and PVC sheet.

SPECIFICATION

Item	Description	Packing
PE PROTECTION TAPE - EMBOSES	1250MM X 200M	LOG
PE PROTECTION TAPE - EVA	1250MM X 200M	LOG
PE PROTECTION TAPE - BLUE	1250MM X 200M	LOG

PVC INSULATION TAPE

FEATURES

PVC film that is plasticised and stabilised and coated with a rubber based adhesive. Design for electrical insulation & wire harness. Excellent flexibility on bends and contours, abrasion and weather resistant.

APPLICATION

- Electrical insulation and binding of electrical tools.
- Airtight sealing of can lids in confectionery and chemical industries.

SPECIFICATION

Item	Description	Packing	
PVC INSULATION TAPE	18MM x 6Y	500 RLS	CTN

SILICONE KRAFT PAPER TAPE

FEATURES

Good adhesion, on slippery, recyclable for carton sealing & packaging. The silicone coating on the tape surface makes it moisture resistant. Good adhesion to various substrates and has cold temperature performance.

APPLICATION

It is recommended for cold storage packaging, bundling and general sealing application

SPECIFICATION

Item	Description	Packing	
SILICONE KRAFT PAPER TAPE	24MM x 50Y	180RLS	CTN
	48MM x 50Y	90RLS	CTN

** Special size can be processed as per order.

SINGLE SIDE FOAM TAPE



FEATURES

Medium density foam tape with permanent adhesive on one surface. The tape comes with a silicones release paper for easy un-roll and application. Resistance to abrasion, corrosion and moisture. Coated on one side with a high quality pressure sensitilve acrylic adhesive. Very good Ultra violet (UV) Light esistant.

APPLICATION

This high qualiy form tape is ideal for use as protection against dust, air condition, weather and air ingress and has superb general gap filling capabilities. Suitable for indoor and outdoor environments. Service temperature -30°C to + 70°C. Minimum 30% compression required to effect a water sea.

SPECIFICATION

Item	Description	Packing	
SINGLE SIDED FOAM TAPE	24MM x 2 M	72 RLS	CTN
	48MM x 2 M	36 RLS	CTN

** Special size can be processed as per order.

STATIONERY TAPE



FEATURES

This type of tape utilize blorlented polypropylene (BOPP)as the backing material with acrylic adhesive. They are light transparent, with a thin adhesive coating. The cutters are offered with the tape.

APPLICATION

Ideal for school and office use, light packaging, mending and reinforcing document which can be equipped with dispenser.

SPECIFICATION

Item	Description	Packing	
STATIONERY TAPE	12MM x 40Y	144RLS	CTN
	18MM x 40Y	96 RLS	CTN
	24MM x 40Y	72 RLS	CTN

TEFLON TAPE



FEATURES

- Superior chemical resistance.
- Excellent break and tear strength.
- Exceptional dielectric properties.

APPLICATION

Packaging & heat sealing, aircraft/ aerospace bundling shop, thermal insulation for high temperature gaskets and seals used harsh chemical enviroment, conveyor belts, heat sealing and high temperature insulation

SPECIFICATION

Item	Description	Packing	
TEFLON TAPE	12mm x 10M	-	RLS
	24mm x 10M	-	RLS
	48mm x 10M	-	RLS

OTHERS




PET / P.P
TENSION & SEALER



STRETCH FILM & OPP
TAPE DISPENSER



LDPE & HDPE
BAG / ROLL



RAFFIA STRING



AIR BUBBLE PACK



PLAIN PE FOAM ROLL



CORRUGATED SINGLE FACE



PET / P.P STRAPPING BAND



SEMI-AUTO
STRAPPING MACHINE
(HIGH TABLE)



SEMI-AUTO
STRAPPING MACHINE
(LOW TABLE)



FULLY AUTO
STRAPPING MACHINE



SKIN PACKING
MACHINE



FULLY AUTO CARTON
SEALER MACHINE



AUTO FOLDING CARTON
SEALER MACHINE



SEMI-AUTO CARTON
SEALER MACHINE



STRETCH
WRAPPING MACHINE



PE SHRINK
PACKING MACHINE



SHRINK PACKING
MACHINE



SHRINK WRAPPING MACHINE
(CHAMBER TYPE)



HEAVY DUTY SHRINK
PACKING MACHINE
C/W AUTO SLEEVE
WRAPPING MACHINE



TABLE TOP L-BAR
SEALER



SEMI-AUTO VERTICAL
IMPUSE SEALER



CONTINUOUS SEALING
MACHINE (HEAVY DUTY)



TABLE TOP CONTINUOUS
SEALING MACHINE



VACUUM
MACHINE



PNEUMATIC STEEL
STRAPPING TOOLS



FLEXIBLE
HAND TOOL



PET STRAP RUBBING
& BINDING MACHINE




PET STRAP
RUBBING


Method of Choosing Tape

Please refer to the points below when choosing a suitable tape for your adhesive needs.

- 1 Do you want a permanent adhesive, a one time adhesive, or a removable one?
• Choose an adhesive to meet your needs.



- 2 How much and what kind of strength must the tape have, and how long must it hold?
• Match it with your elasticity needs.




- 3 Investigate the production environment (application by hand/machine, production area, production time, production employees!)
• Choose tape that will make your packaging go smoothly.




- 4 What are your shipping conditions (shipping method, storage conditions, package opening method, etc.)?
• Choose a product to meet your environmental needs.



- 5 What are the environmental conditions (inside/outside, temperature, humidity, solvent, medicine, etc.)?
• Choose tape that makes opening packages easy upon arrival at their destination.

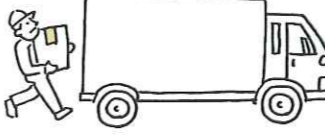

- 6 What other functions do you need (protection, masking, indication, etc.)?
• Match each use and aim

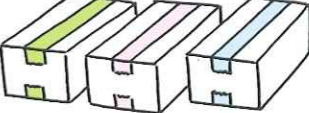

Cautions for Use


- Packaging tape is for sealing cardboard boxes, home delivery, light wrapping, and other packaging uses. It is not to be used for anything else.
- Do not adhere it to the body.
- Do not use it for electrical insulation.
- Adhere it after wiping the adhesive surface well, so it is free of dust and oil.
- Press down hard when adhering it.
- It is best to store the rolls on their sides in low temperature and low humidity places.
- Be sure to check each product's "Cautions for Use" before use.

Tape Capacity Indicators

Tape capacity indicators are an estimate of the conditions of the tested products. Please use this as a reference for the purposes and the conditions of your applications.


Tape's Thickness /Base Material's Thickness

The tape's thickness is the thickness of the base material and the self-adhesive. In product comparisons, the thicker products have stronger stretchability.

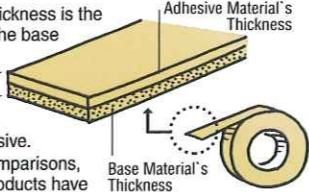


Adhesive Strength

When the tape is adhered to stainless steel and it is pulled back at a 180 degree angle, the peeling strength is measured. When the figure is big, the adhesive strength is strong.

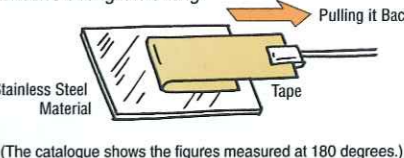


Tensile Strength

This is a measurement of the pulling strength needed to tear the tape. When the figure is big, the strength of the film's base is strong.

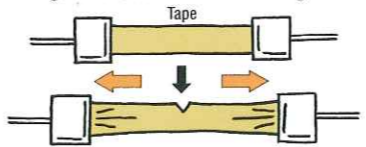


Extension/Stretching

This evaluates the tape's capacity to adjust to rounded surfaces when its length is stretched. The figure is indicated as a %. For example, in the case of 150%, 1 m. of tape extends to 1.5 m.

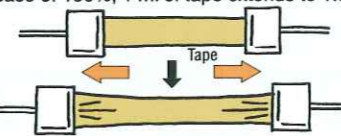


Tack

This tests the strength of the self-adhesive when weight is added. Steel balls, ranging from 1/32 - 2 inches in size, are rolled down a ramp placed at a 30 degree angle. The biggest steel ball to stop indicates the tape's adhesive strength.

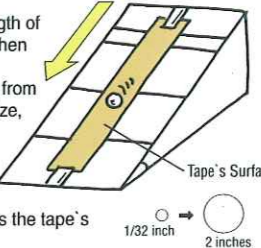


Unwinding Strength

When the tape is unwound for 1 minute at a speed of 60 m., the pulling load is shown. The lower the figures, the easier the tape is to unwind.



Holding Strength

The tape is adhered to stainless steel material and a weight is hung from it. After 2 hours, the tape's change in position is measured. The smaller the figures, the stronger the tape resists change in position, and it can really seal cardboard boxes.



■ The capacities indicated in our catalogue are based on international standards (SI). The figures in () indicate the capacities up until now.
■ The measurements are based on these measuring methods and experiments performed on JISZ0237 adhesive tape.



JUN PACK

JUN PACK PACKAGING SDN BHD (968044-V)

No. 35, Jalan TPK 1/9, Taman Perindustrian Kinrara,
Sek. 1, 47180 Puchong, Selangor Darul Ehsan.

Tel : +603 8076 7668/60

Fax : +603 8070 8667/62

H/P : +6012 388 3563

Email : junpack@junpack.com.my

GST Register No. : 001845919744

Packaging Materials

OPP Tape
OPP Printed Tape
OPP Wrapping Film
Stretch Film
Die Cut P.E. & EVA Foam
Air Bubble & White Foam
P.P. Strapping Band
Pet Strapping Band
Masking Tape
Kraft Tape
Teflon Tape
Filament Tape
High Temperature Tape
High Temperature P.E.
P.V.C Shrink Film
P.V.C Food Wrap Film
Hand P.V.C Tape
P.V.C Insulation Tape
Double Sided Foam Tape
Double Sided Tissue Tape
Double Acrylic Tape
Aluminum Foil Tape
Floor Marking Tape
Surface Protection Tape
Polyester Tape
Cellulose Tape
Caption Tape
Cloth Tape
Carpet Tape
H.D.P.E. & L.D.P.E. Sheet Rolls
Fancy Ribbon
Industrial & Automotic Tape

Special Tape

3M
Nitto
Ichiban
Tesa

Others

Woven Glove
Examination Glove
Label Stickers

Accessories

Decoratives Tape Dispenser
P.P Strapping Machine