


Outline dry electric installation & maintenance instructions

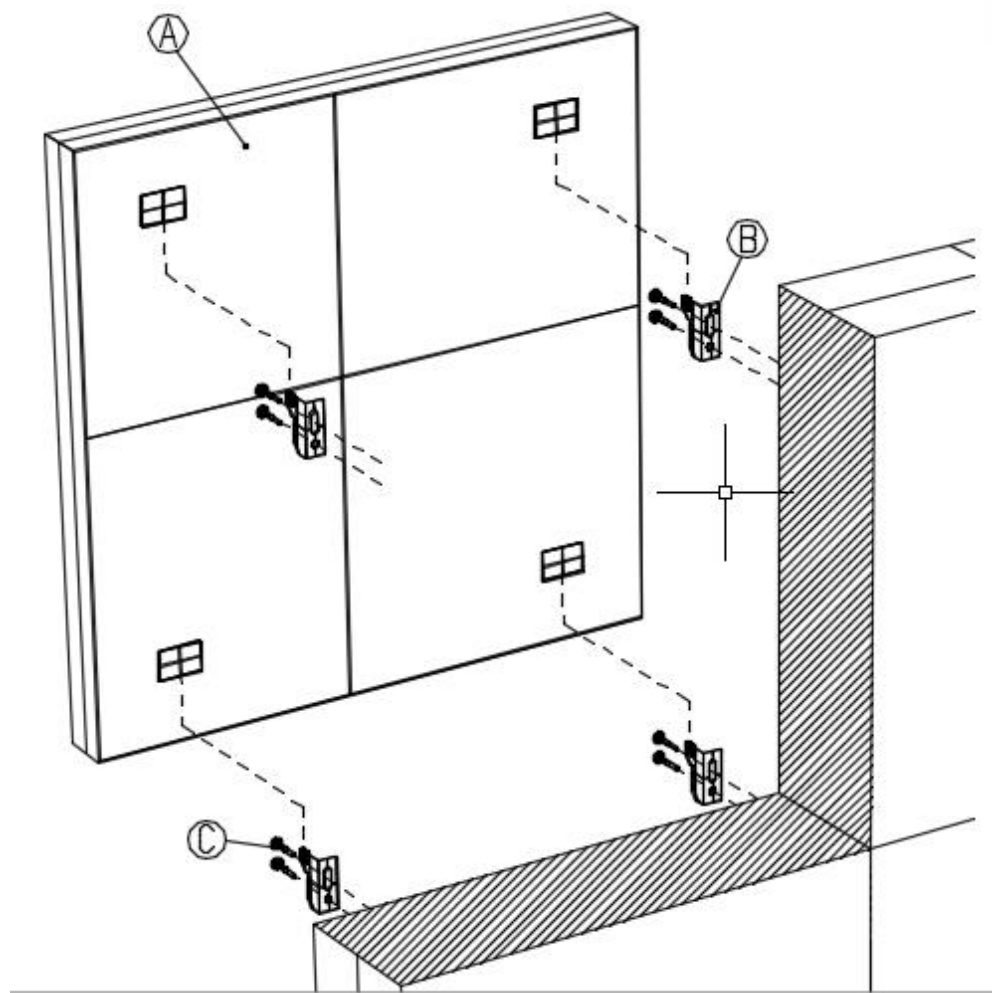

Key


Component	Qty
A Radiator	1
B Wall mounting brackets	2 (these are attached to radiator manifold with ties for transit)
C Screws*	8 required in total
D Radiator bottom holding bracket	1 (attached to radiator)
E M6 x 12mm capscrew	1
F Wall holding bracket	1 off

* Screws and wall plugs are not supplied with radiator. Screws must be selected according to wall material and construction, i.e. brickwork, plasterboard, wood panelling etc. The maximum design loading per fixing is 8kg.

Tools required

Tape measure
 Spirit Level
 Electric Drill
 Masonry drill bit to suit wall plug or screw size (Brackets will take screws up to 7mm in diameter)
 Screws & Wall plugs as required
 Screwdriver

Installation Instructions

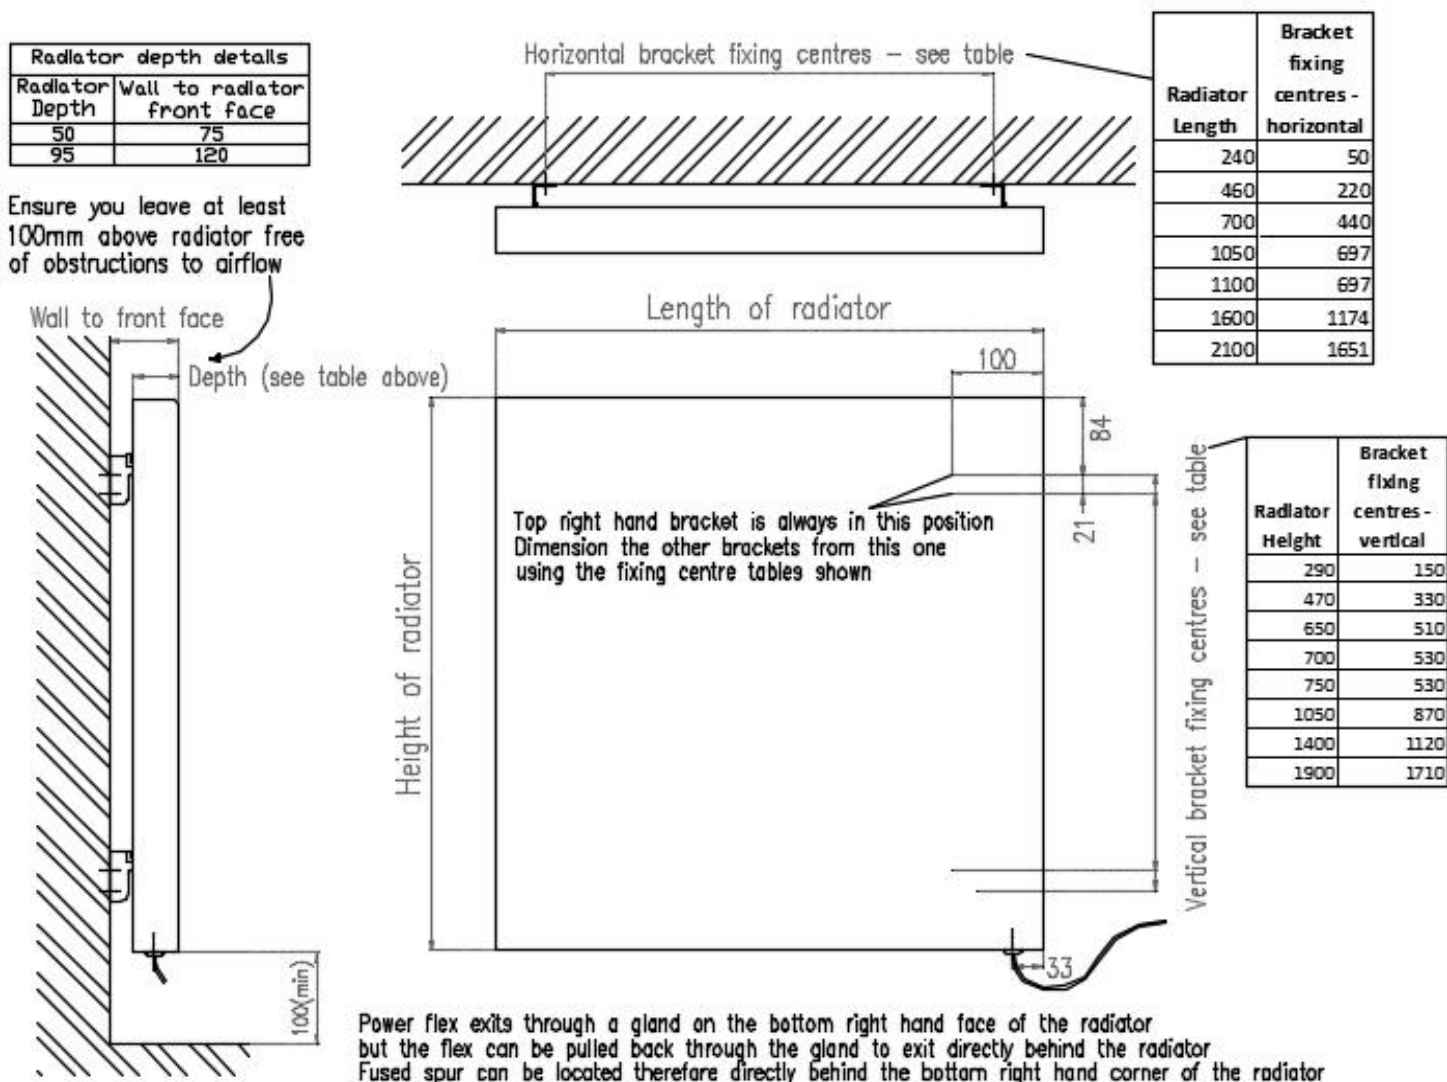

1. Before starting work, ensure working area is free of obstructions and objects that could cause harm to you or the radiator. Unpack radiator carefully but **peel off protective plastic film if inspection is required then reapply until installation is complete**. If laying the radiator onto the floor place it with the back (aluminium heat exchanger) face to the floor, unless you can ensure that there is nothing underneath that could cause damage to the flat panel face – grit or foreign objects can scratch the flat panel through the protective film.
2. Bracket fixing positions are shown on the drawing above. Accurately mark out hole positions on wall using a spirit level and tape measure.
3. Drill holes *for slotted bracket hole only* in wall as required by screws and wall plugs used.
4. Attach wall mounting brackets (B) to wall initially with one screw only through slotted hole ensuring the hook is at the top.
5. Check brackets for alignment using spirit level, and adjust as necessary, then drill and screw second bracket hole. **It is essential that all brackets align correctly with their corresponding mounting positions on the radiator.**
6. Hang the radiator onto the brackets (B) ensuring both brackets are fully engaged. **Radiators are a heavy item, and many of the radiators in our range require more than 1 person to lift them safely. Never attempt to mount a radiator that you cannot comfortably lift.**
7. Wire radiator into a fused spur providing a means of isolation in accordance with current ISO standards.
8. **Remove protective plastic film before subjecting radiator to heat.**
9. If installation problems arise, please refer to the contact our technical department – the number is shown at the top of this page.
10. Brushed stainless steel can be cleaned with baby oil, mirror stainless steel with a mirror cleaner. **Abrasive cleaners should never be used on our products.**