




## Commercial and Domestic Guttering Solutions

### Installing the Gutter

Once all the brackets are in place, you can install the main guttering.


Push the first gutter length into the outlet and then clip it into its fascia brackets. This is done most easily by tilting the gutter to fit under the back clip and then straightening it under the front clip. To allow for expansion in hot weather, care should be taken to ensure the gutter end is in line with the insertion depth mark(5).



All fittings provide for expansion and contraction of the gutter. When installing the gutter, make sure it does not go past the insertion depth mark in the fitting.

Use a union clip to join the first and second lengths. The joint is made by clipping the two ends into the union clip, which is also secured to the fascia with a single gutter screw(5).

At a corner, hold a 90° angle (or 45 ° angles for a bay) in place to mark where the gutter is to be cut before you fit the angle (6).

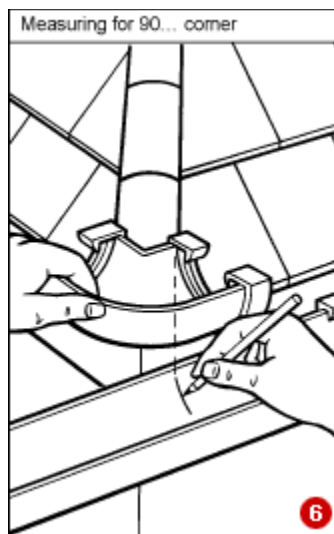

Cut the last length of gutter to the correct size. At the end of the gutter run, fit an external stop end, clipped in place in the same way as outlets, angles and unions. If the new guttering has to join up with an existing gutter, fit the appropriate ogee or half-round adaptor.