

SITE REQUIREMENTS

TCA34



Shown with optional wheel lift.


TCA34	
Power Requirements	208-230V, 15A, 60Hz, 1 ph NEMA 20 amp plug, L6-20P
Air Supply Requirements	115-175 psi (8-12 bar)
Shipping Weight	1,039 lbs (471 kg)
Shipping Weight with Wheel Lift	1,128 lbs (511 kg)
Width (W)	43 in. (1,092 mm)
Height (H)	72 in. (1,829 mm)
Depth (D)	60 in. (1,524 mm) 78 in. (1,981 mm) with wheel lift

KEY SPECIFICATIONS

TCA34	
Mount / Demount Tool	Polymer Self Inserting Leverless
Clamping Type	Center w/Quick Clamp and Cam Plate
Bead Loosening Type	Upper / Lower Roller
Match Mounting Capable	Yes
Adjustable Clamping Height	Yes
Rim Diameter Range	10-30 / 12-32 / 14-34 in.
Maximum Tire Diameter	50 / 52 / 54 in.
Maximum Wheel Width	19 in.
Drive	Variable up to 14 rpm CW 7 rpm CCW Torque: 867 ft-lbs (1175 Nm)



TCA34

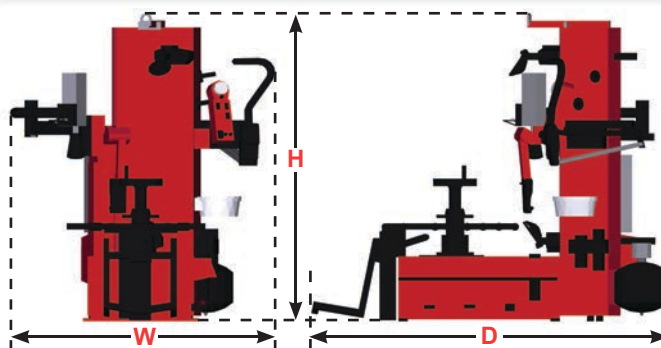

For tire changer information visit:
www.hunter.com/tirechanger

For local contact visit:
www.hunter.com/company/findrep.cfm

For general inquiries visit:
www.hunter.com or call **800-448-6848**