

### SITE REQUIREMENTS

#### TCR1


#### HUNTER REVOLUTION™ TIRE CHANGER



TCR1	
Power Requirements	208-230V, 1 phase, 50/60Hz, 24A, NEMA 30 amp plug, L6-30P, 5,520 watts
Air Supply Requirements	125 ± 25 psi (8.6 ± 1.7 bar)
Air Consumption	1 SCFM (27 L/Min)
Shipping Weight	1,800 lbs (816 kg)
Width (W)	72 in. (1,829 mm) - With Paste Bucket 62.5 in. (1,588 mm) - Without Paste Bucket
Height (H)	78.5 in. (1,994 mm)
Depth (D)	67 in. (1,702 mm) - Wheel Lift Up 78 in. (1,981 mm) - Wheel Lift Down

### KEY SPECIFICATIONS

TCR1	
Mount / Demount Tool	Polymer Self Inserting Leverless
Clamping Type	Center w/Quick Clamp and Cam Plate
Bead Loosening Type	Upper / Lower Roller
Match Mounting Capable	Yes
Rim Diameter Range	12 in. - 30 in. (305 mm - 762 mm)
Maximum Tire Diameter	50 in. (1,270 mm)
Maximum Wheel Width	15 in. (381 mm)
Drive	Variable up to 15 rpm CW / CCW Torque: 875 ft-lbs (1186 Nm)

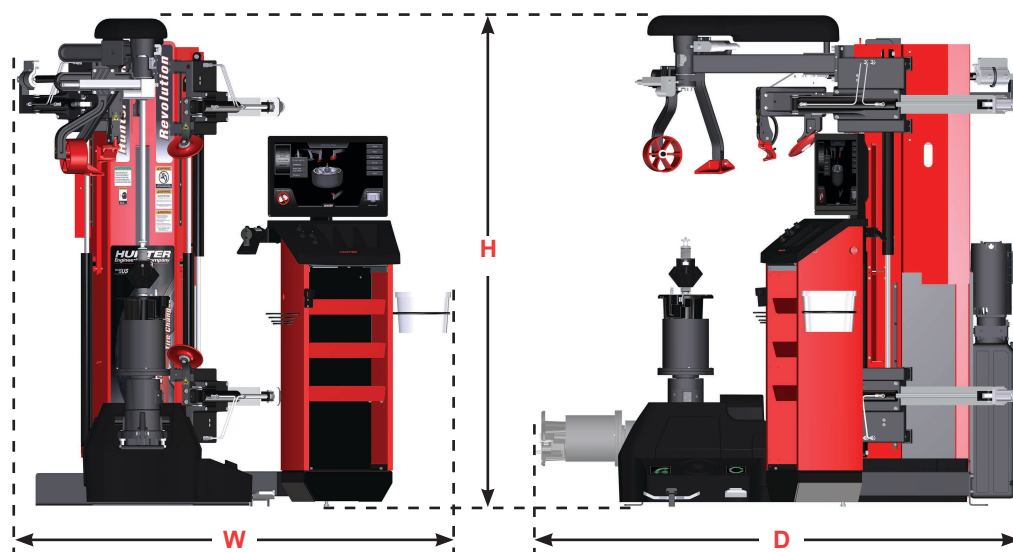

For tire changer information visit:  
[www.hunter.com/tirechanger](http://www.hunter.com/tirechanger)

For local contact visit:  
[www.hunter.com/company/findrep.cfm](http://www.hunter.com/company/findrep.cfm)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com) or call 800-448-6848