

SITE REQUIREMENTS




	TC39 Family	TC37 Family
Power Requirements	208-230V, 15A, 60Hz, 1 ph NEMA 20 amp plug, L6-20P	208-230V, 15A, 60Hz, 1 ph NEMA 20 amp plug, L6-20P
Air Supply Requirements	115-145 psi (8-10 bar)	115-145 psi (8-10 bar)
Shipping Weight	730 lbs (331 kg)	725 lbs (329 kg)
Shipping Weight with Wheel Lift	875 lbs (397 kg)	850 lbs (386 kg)
Width (W)	40 in. (1,016 mm) *	40 in. (1,016 mm) *
Height (H)	72 in. (1,829 mm)	72 in. (1,829 mm)
Depth (D)	57 in. (1,448 mm)	57 in. (1,448 mm)

* Add 8 in. (203 mm) to width for wheel lift. Add 10 in. (254 mm) for side shovel.

KEY SPECIFICATIONS

	TC39 Family	TC37 Family
Mount / Demount Tool	Polymer Self-inserting leverless	Polymer Mount Head
Clamping Type	Center w/ Quick Clamp and Cam Plate	Center w/ Quick Clamp and Cam Plate
Bead Loosening Type	Rollers or Shovel (optional)	Rollers or Shovel (optional)
Match Mounting Capable	Yes	Yes
Adjustable Clamping Height	Yes	Yes
Rim Diameter Range	10-26 in.	10-26 in.
Maximum Tire Diameter	46 in.	46 in.
Maximum Wheel Width	19 in.	19 in.
Drive	Variable CW 15 rpm CCW	Variable CW 15 rpm CCW

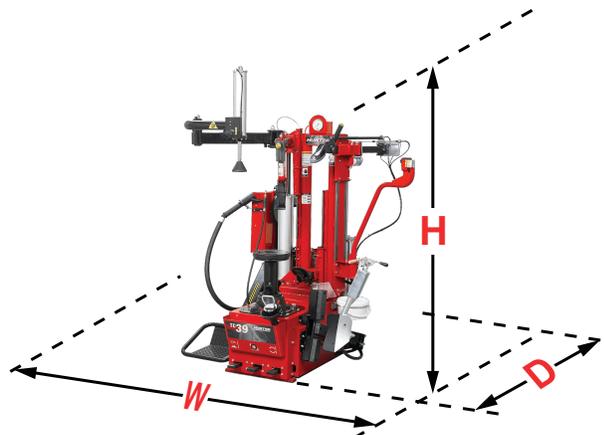

For tire changer information visit:
www.hunter.com/tire-changers

For local contact visit:
www.hunter.com/contact-hunter

For general inquiries visit:
www.hunter.com
or call
800-448-6848