

# Bespoke Reception Hatches

[www.allglasssystems.co.uk](http://www.allglasssystems.co.uk)

**AGS**  
ALLGLASS SYSTEMS LTD  
SLIDING GLASS  
HATCH SYSTEMS

ALLGLASS SYSTEMS LTD  
Unit F8, Halesfield 23, Telford  
Shropshire, TF7 4NY

Tel: 01952 588884

Fax: 01952 680496

[www.allglasssystems.co.uk](http://www.allglasssystems.co.uk)

E-mail: [sales@allglasssystems.co.uk](mailto:sales@allglasssystems.co.uk)




We reserve the right to make changes to the product specification as technical developments dictate and without prior notice.

Pictures shown in this brochure are for illustrative purposes and are not binding in detail, colour or specification.



**AGS**  
ALLGLASS SYSTEMS LTD  
SLIDING GLASS  
HATCH SYSTEMS

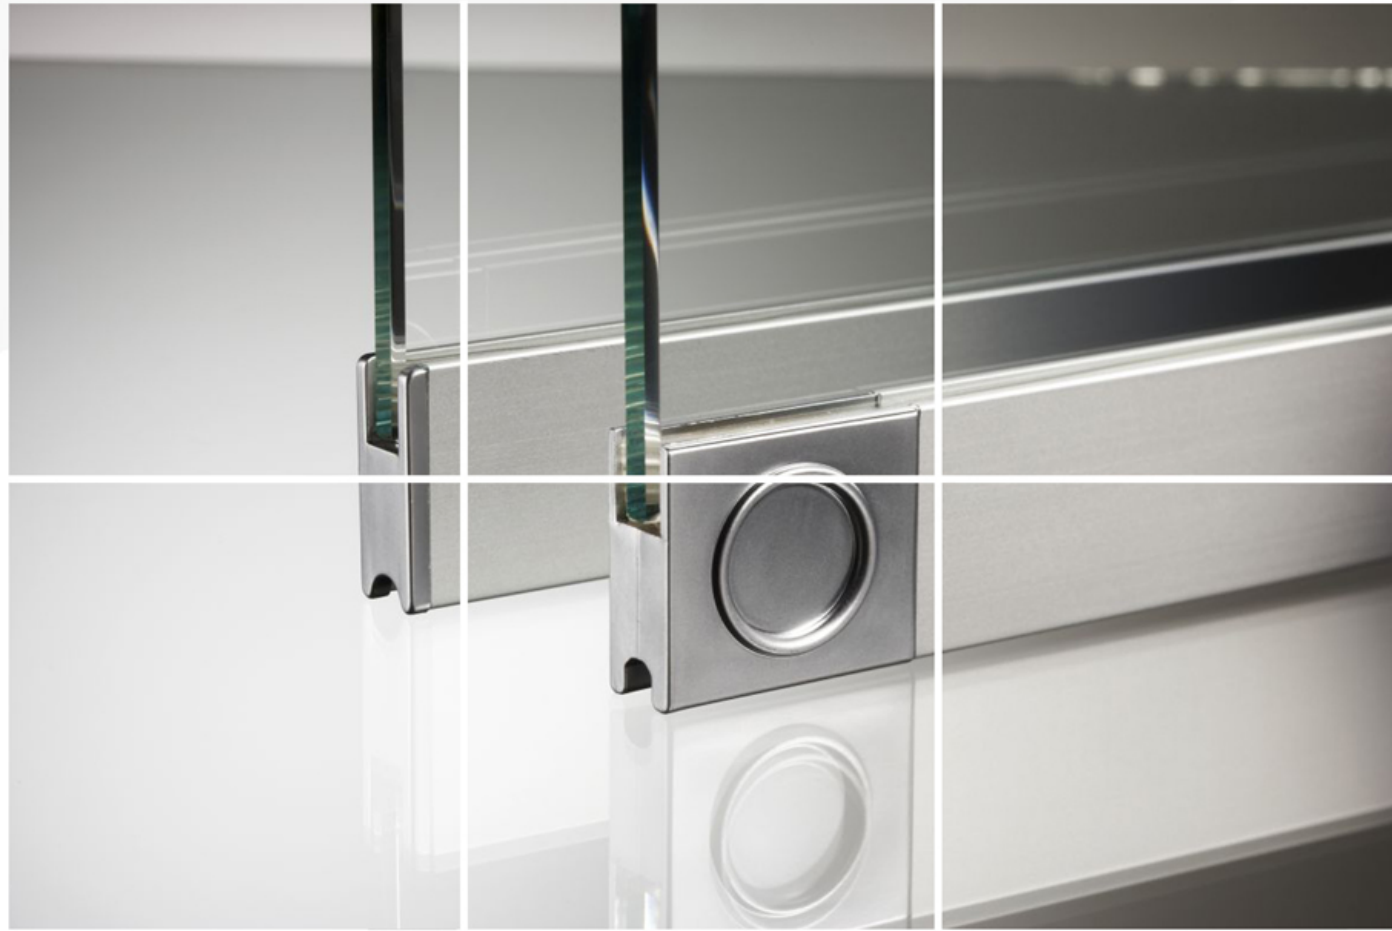

## Aluminium Horizontal Sliding Glass Hatch Systems

- All our horizontal sliding glass hatches are made to order.
- They are available in kit form to suit an existing lining frame or alternatively we can manufacture a hardwood lining frame with integral shelf to your specification.
- Our hatch systems are ideal for existing or new reception counters.
- They are also an ideal solution for servery counters.
- Suitable for internal applications only.
- Our hatch systems are NOT fire rated.




### 2 Panel Configuration

- Available up to a maximum height of 1500mm
- Maximum recommended height to width ratio of each door – 2:1
- Glass type - 6mm toughened safety glass (clear/obscure), all edges polished
- Standard finish – Satin anodised
- Non standard finish – Powder coated to a standard RAL colour


### Standard Kit Includes:

- Double Bottom Track
- Double Top Track (Flock lined to prevent glass contact with aluminium track)
- Side track with transparent damper profile
- 4no. Stop Ends
- 2no. Runners
- Bedding Strip – Transparent plastic
- Draught excluder with brush pile insert
- 4no. Roller Wheels (concealed)
- 2no. Finger Grips - Polished aluminium finish
- 1no. Security plunger lock - Polished aluminium finish

AGS 6mm Double System

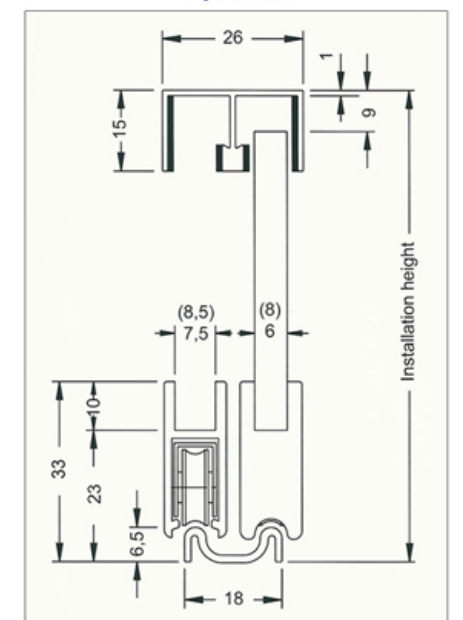



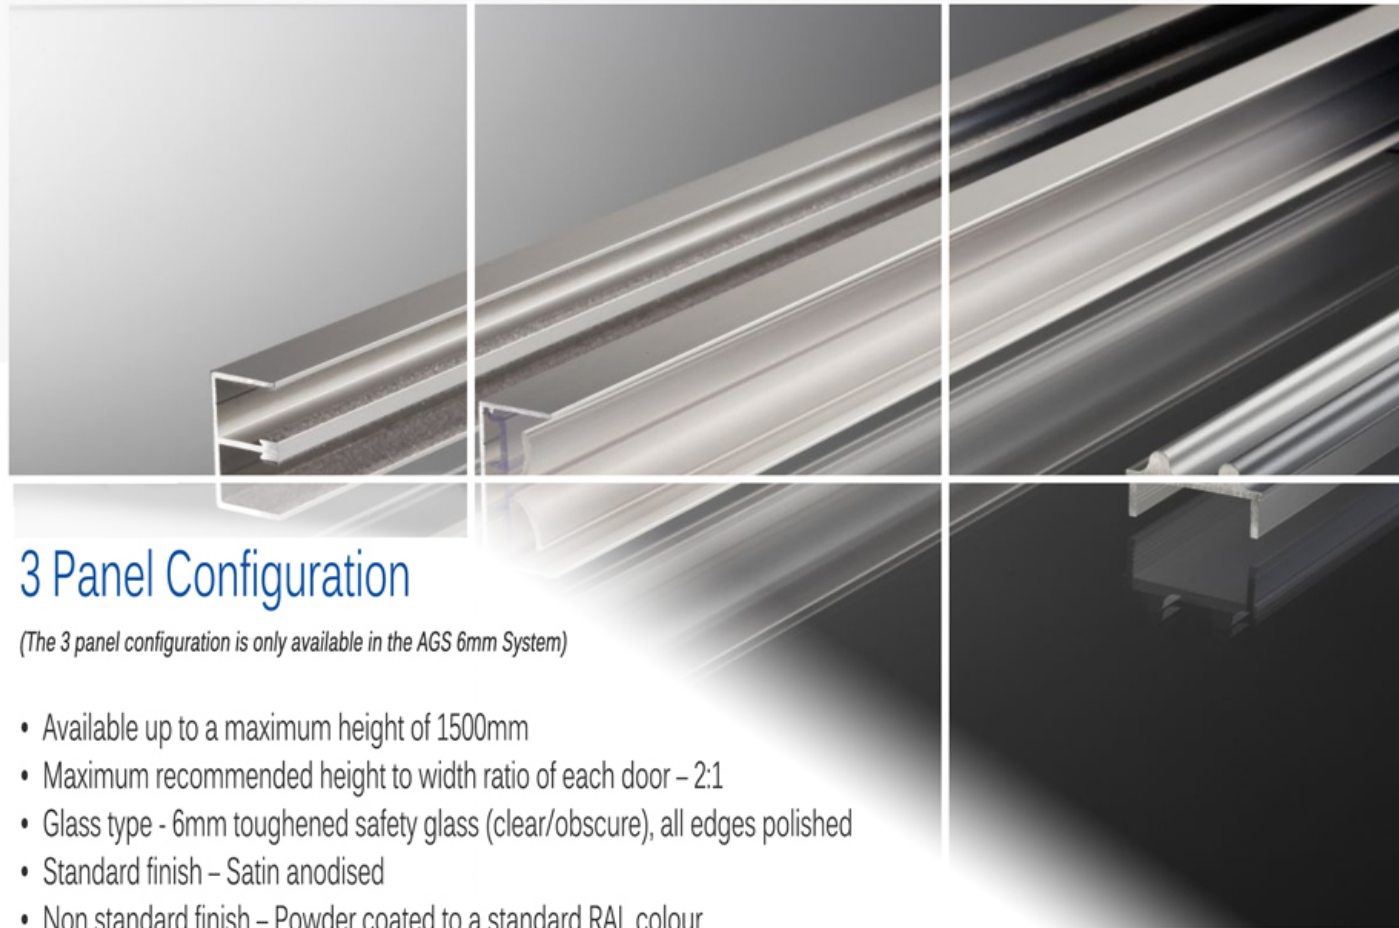

### 3 Panel Configuration


(The 3 panel configuration is only available in the AGS 6mm System)

- Available up to a maximum height of 1500mm
- Maximum recommended height to width ratio of each door – 2:1
- Glass type - 6mm toughened safety glass (clear/obscure), all edges polished
- Standard finish – Satin anodised
- Non standard finish – Powder coated to a standard RAL colour

### Standard Kit Includes:

- Triple Bottom Track
- Triple Top Track (Flock lined to prevent glass contact with aluminium track)
- Triple side track (Flock lined to prevent glass contact with aluminium track)
- 6no. Stop Ends
- 3no. Runners
- Bedding Strip – Transparent plastic
- 2no. Draught excluders with brush pile insert
- 6no. Roller Wheels (concealed)
- 2no. Finger Grips - Polished aluminium finish
- 2no. Security plunger locks - Polished aluminium finish

AGS 6mm  
Triple System

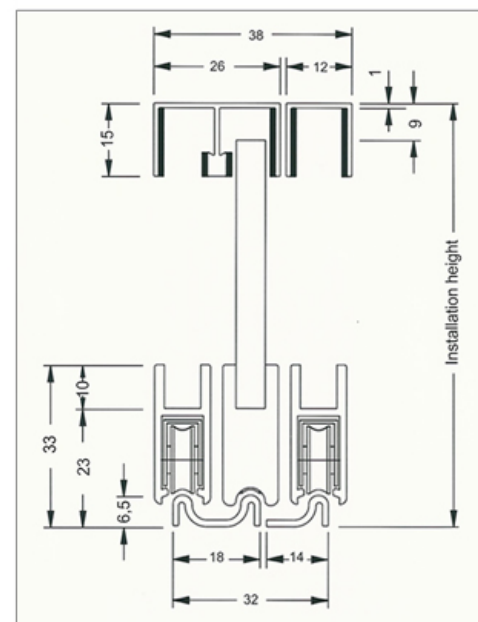

### 2 Panel Configuration

- Available up to a maximum height of 2500mm
- Maximum recommended height to width ratio of each door – 2:1
- Glass type - 10mm toughened safety glass (clear/obscure), all edges polished
- Standard finish – Satin anodised
- Non standard finish – Powder coated to a standard RAL colour

### Standard Kit Includes:

- Double Bottom Track
- Double Top Track (Flock lined to prevent glass contact with aluminium track)
- Side track with transparent damper profile
- 4no. Stop Ends
- 2no. Runners
- Bedding Strip – Transparent plastic
- Draught excluder with brush pile insert
- 4no. Roller Wheels (concealed)
- 2no. Finger Grips - Polished aluminium finish
- 1no. Security plunger lock - Polished aluminium finish

AGS 10mm  
System

