

SERIE 4500 addolcitori a doppio corpo


4510/28 . 4510/35 . 4512/42 . 4512/57 . 4517/85 . 4517/115

CONSUMI DI SALE (in grammi/m³)



**fino al
47%
risparmio
sale**

CONSUMI D'ACQUA (in litri)




**fino al
50%
risparmio
acqua**



CARATTERISTICHE TECNICHE	4510/28	4510/35	4512/42	4512/57	4517/85	4517/115
Codice modello da selezionare	A-30	A-40	A-50	A-68	A-90	A-120
Capacità di scambio @ consumo sale (°Fm³@kg)	93@1,35	116@1,68	150@2,04	200@2,72	280@4,13	369@5,44
	141@2,28	175@2,84	196@3,74	322@4,99	458@8,03	611@10,70
	220@6,12	275@7,63	332@6,94	443@9,25	583@12,38	777@16,51
Contenuto resina (litri)	28	35	42	57	85	113
Quarzo fine (kg)	4,5	4,5	7,7	7,7	15,4	15,4
Portata Nominale (l/min)	32	38	49	57	76	81
Perdita di carico@portata nominale (bar)	0,6	0,8	0,8	1	0,9	1
Portata breve di punta (l/min@1bar)	51	46	61	57	82	81
Dimensioni bombola (pollici)	10"x 47"	10"x 47"	12"x 54"	12"x 54"	14" x 52"	16" x 52"
Attacchi (pollici)	1" ¼	1" ¼	1" ¼	1" ¼	1" ¼	1" ¼
Capacità tino sale (kg)	140	140	140	140	340	340

DIMENSIONI

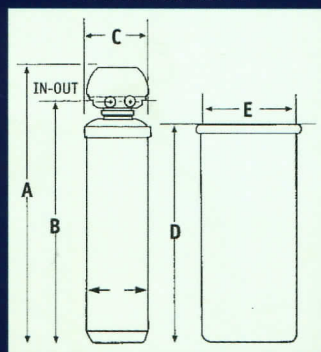

	4510/28	4510/35	4512/42	4512/57	4517/85	4517/115
A	1480 mm	1480 mm	1630 mm	1630 mm	1620 mm	1620 mm
B	1260 mm	1260 mm	1410 mm	1410 mm	1400 mm	1400 mm
C	355 mm	355 mm	355 mm	355 mm	355 mm	355 mm
D	990 mm	990 mm	990 mm	990 mm	1180 mm	1180 mm
E	460 mm	460 mm	460 mm	460 mm	742 mm	742 mm

N.B. considerare la profondità del by-pass: + 10 cm



by pass 1" 1/4 con miscelatore durezza acqua

SERIE 4500