

## Signature SERIES

Our Signature Series, 250w Poly-crystalline panels run at a high efficiency and perform well in extreme temperatures. This suits the harsh conditions of the Australian climate.



### Anti-reflective glass

Reduces loss of light, which means you get a greater return on your output, even at low light.



### Power Tolerance

Industry leading 0 to plus 5W, ensuring a greater return on your investment



### Long Service Life

23 year old modules still operating at 90% of installed capacity.




### Bypass Diodes

Increase tolerance to shade. Maximising output



### Dual Wall Frame

Designed with 45 years experience, Sun-Earth's framing increase's strength against wind and hail.

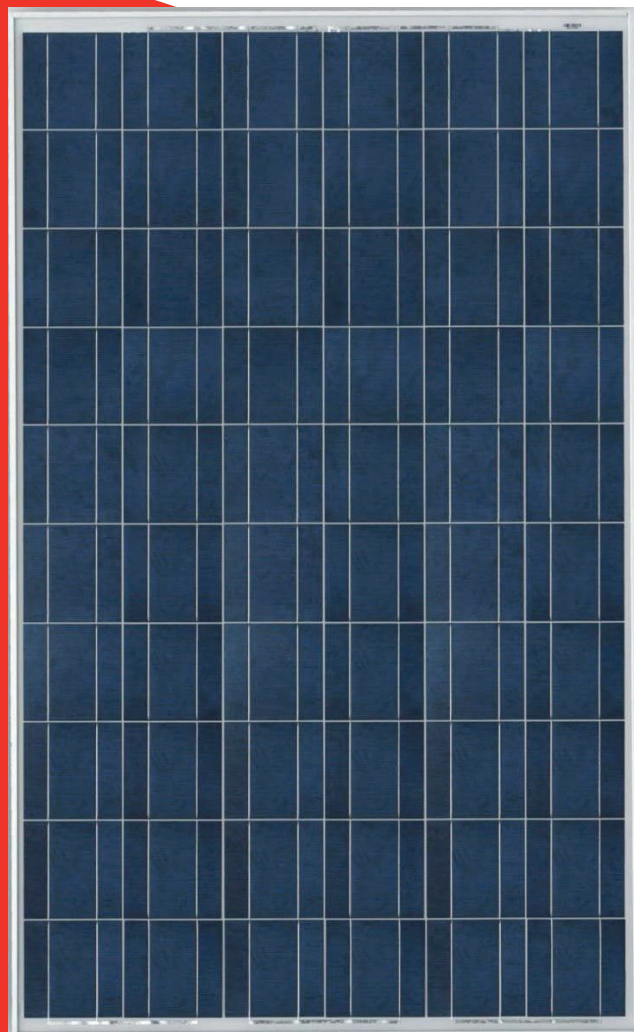


## WARRANTY

- 10 Years For Product Defects In Materials & Workmanship
- 10 Years @ 90% Of Warranted Minimum Power
- 25 Years @ 80% Of Warranted Minimum Power



# 250W

POLY-CRYSTALLINE  
TPB156×156-60-P

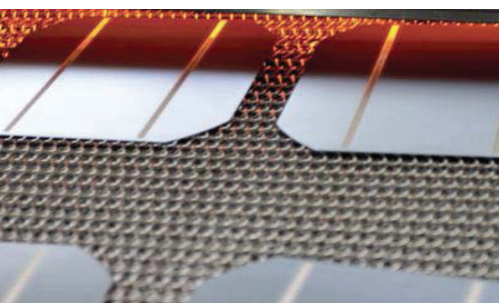

ELECTRICAL CHARACTERISTICS

	250Wp
Maximum Power ( Pmax)	250W
Power Tolerance (%)	0/+5
Maximum Power Voltage (Vmp)	29.5
Maximum Power Current (Imp)	8.47
Open circuit Voltage (Voc)	37.0
Short circuit Current (Isc)	8.78
Module Efficiency	15.4
Maximum System Voltage (VDC)	600
Temp coefficient Voc	-0.35% / 0 °C
Temp coefficient Isc	+0.05% / 0 °C
Temp coefficient Power	-0.45% / 0 °C
Nominal Operating Cell Temp. (NOCT)	45.5°C

MECHANICAL CHARACTERISTICS

Weight(kg)	20 kg
Frame structure (Material, Corners)	Anodised Aluminium
Front side	Glass
Front glass thickness	3.2mm
Encapsulant	EVA
Back side	TPT
Junction Box / Connector Type	Sun-Earth Ip65 / MC-4

CELLS

Brand Name of Solar Cells	Sun-Earth
Cell Type	Poly-Crystalline
Cell Size	156 x156 mm
Cell Shape	Square
Number Cells	60 in series

ABSOLUTE MAXIMUM RATINGS

Operating Temperature	-40°C~+85°C
Storage Temperature	-40°C~+85°C
Maximum Load Capacity	200 Kg/m2
Maximum Hail Diameter @ 80Km/h	25mm


STANDARD TEST CONDITIONS

AM	1.5
Irradiation	1000 W/m2
Tc	25°C


ORDERING

Quantity	Pallet or Container
Pallet	20 pieces per box/1 box
Container	28 Pallets / 560 Pieces


Temperature Dependence of Isc, Voc, Pmax

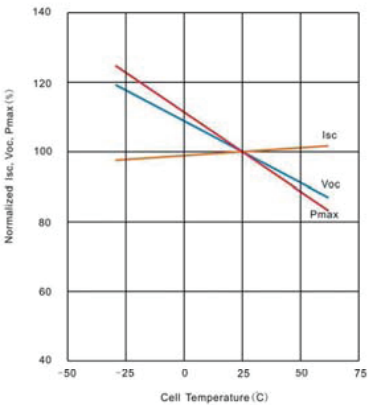



I-V Curves (250W)

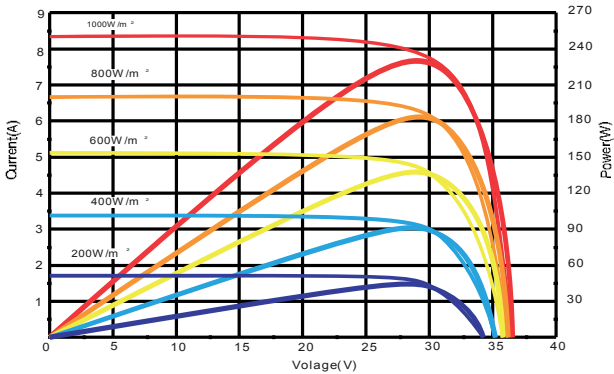

Dimensions (tolerance±2mm)

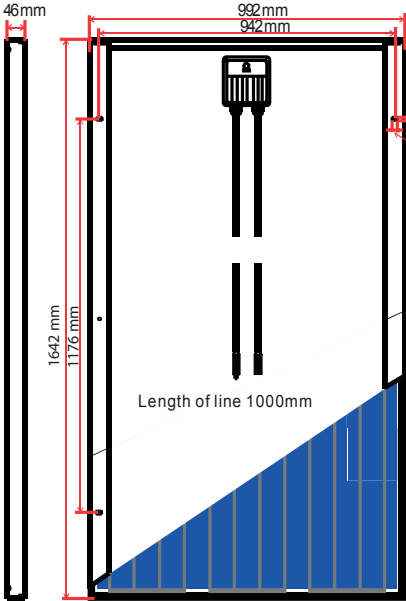

Module Frame Design (250W)

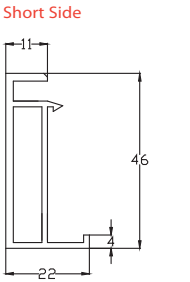

WARRANTY

Manufacturing	10 Years
Performance 90%	10 Years
Performance 80%	25 Years