


Master Deck 2 1/2" +

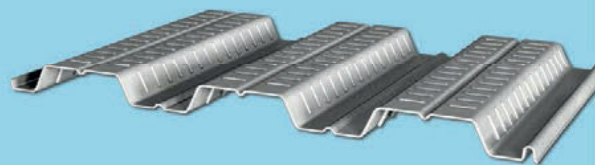

Altura	Espesor	Peso	Peso Lineal	Y+	Y-	I+	I-	S+	S-
m m .	m m .	Kg/m ²	Kg/m	m m .	m m .	cm ⁴ /m	cm ⁴ /m	cm ³ /m	cm ³ /m
65	0,75	8,50	7,31	36,81	28,19	69,06	57,12	17,72	23,14
	0,90	10,05	8,64	36,77	28,23	88,11	67,18	17,74	23,1

Espesor de placa	Altura de Losa sobre cresta	SOBRE CARGAS ADMISIBLES (kg/m ²) HORMIGÓN												
		Separación entre apoyos (m)												
mm	cm	1,6	1,8	2,0	2,2	2,4	2,6	2,8	3,0	3,2	3,4	3,6	3,8	4,0
0,75	5	2668	2108	1708	1411	1186	1010	871	759	667	591	527	473	427
	6	2776	2193	1776	1468	1234	1051	906	790	694	615	548	492	444
	8	3139	2481	2009	1661	1395	1189	1025	893	785	695	620	557	502
	10	3626	2865	2321	1918	1612	1373	1184	1031	906	803	716	643	580
	12	4200	3319	2688	2222	1867	1591	1372	1195	1050	930	830	745	672
0,9	5	2813	2222	1800	1488	1250	1065	918	800	703	623	556	499	450
	6	2914	2302	1865	1541	1295	1103	951	829	728	645	576	517	466
	8	3275	2588	2096	1732	1456	1240	1070	932	819	725	647	581	524
	10	3767	2977	2411	1993	1674	1427	1230	1072	942	834	744	668	603
	12	4351	3438	2785	2302	1934	1648	1421	1238	1088	964	860	771	696

Espesor de placa	LONGITUD MÁXIMA SIN APUNTALAMIENTO (m)					
	Tramo	Altura del hormigón sobre la cresta (cm)				
mm		5	6	8	10	12
0,75	Simple	2,73	2,66	2,55	2,45	2,37
	Doble	3,39	3,31	3,16	3,04	2,95
	Triple	2,33	2,27	2,17	2,09	2,02
0,9	Simple	2,84	2,77	2,65	2,55	2,47
	Doble	3,53	3,44	3,29	3,17	3,06
	Triple	2,42	2,36	2,26	2,17	2,10