



GIOTTO

- Linea arrotondata priva di spigoli e facile da pulire.
- Perno di scorrimento, cromato rettificato e lappato.
- Boccole di scorrimento autolubrificante.
- Paracolpo su carrello in gomma vulcanizzata.
- Coperchio supporto vela smontabile.
- Parafetta rimovibile in acciaio inox con incastro rapido a baionetta.
- Tutte le minuterie acciaio inox.
- Copertura inferiore con accesso diretto ai componenti elettrici.
- Scheda elettromeccanica commutabile 110-220-380 V monofase e trifase.
- Affilatoio con vaschetta inferiore di protezione.
- Sistema di tenuta stagna su puleggia.
- 41 mm di distanza fra la lama e il corpo macchina.

GIOTTO

- Manopole in plastica.
- Piedini in gomma.
- Interruttore isolato IP 44

GIOTTO TOP


- Manopole in alluminio.
- Piedini in alluminio telescopici con base in gomma.
- Pulsanti IP 67 in acciaio inox

GIOTTO BS

- Braccio stringi salumi con staffa in alluminio

GIOTTO VCO

- Particolarmente richieste nei mercati nordici.
- Piatto a vasca per tagliare ogni tipo di prodotto.
- Staffa blocca prodotto in alluminio smontabile con chiodi in acciaio e denti fresati sul lato lama.

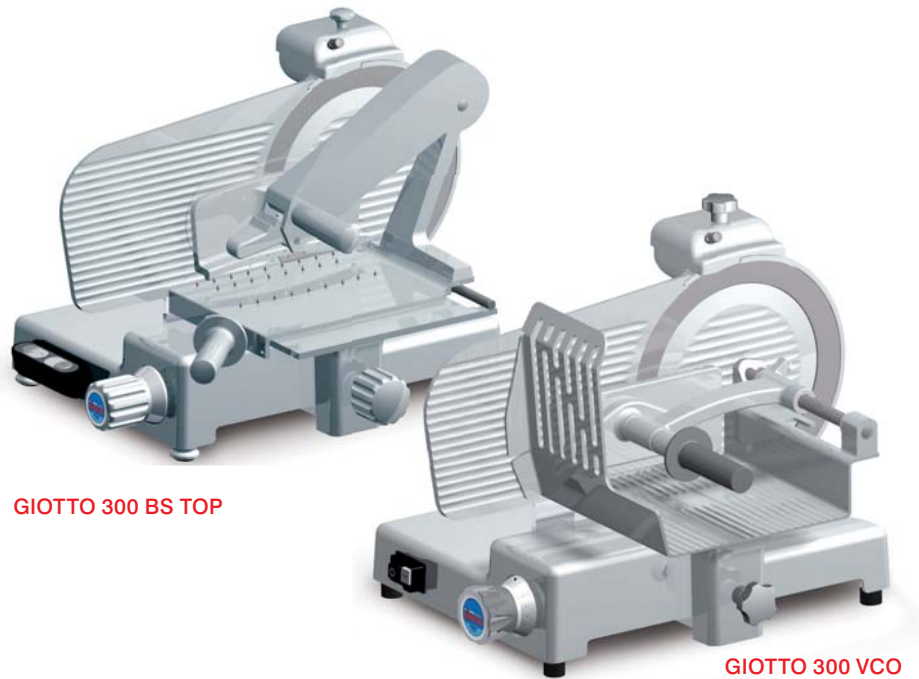

GIOTTO 300 BS TOP

GIOTTO 300 VCO

- Innovative rounded design and no sharp edges or visible screws.
- Chrome plated ground and lapped slide rod.
- Lapped cast iron slide rod bushing.
- Vulcanised rubber stops on carriage.
- Removable support cover for thickness gauge plate.
- Stainless steel slice deflector with snap-on bayonet fitting.
- Stainless steel screws and fittings.
- Bottom cover for accessing electrical components.
- Changeover electronic circuit 110-220-380 V single and three-phase
- Built-in sharpening tool with bottom protection
- Enclosed and sealed belt pulley
- 41 mm distance between blade and motor

GIOTTO

- Plastic knobs.
- Rubber feet.
- Switch with IP44 protection rating.

GIOTTO TOP




- Aluminium knobs.
- Aluminium telescopic feet with rubber base.
- S/steel pushbuttons with IP67 protection rating.

GIOTTO BS

- Easy to remove stainless steel meat grip arm.

GIOTTO VCO

- Specially required by the Northern European marketplace.
- Product table designed to slice all types of products.
- Removable aluminum end weight.
- Designed with grooves: nails underneath.



Ø Lama
Ø Blade
Ø Messer
Ø Lame
Motore
Motor
Moteur
Spessore taglio
Cut thickness
Schnittbreite
Epaisseur de coupe
Corso carrello
Run of carriage
Wagenschub
Course du chariot
Piatto
Hopper
Wagen grosse
Plateau

Peso netto
Net weight
Nettogewicht
Poids net
Dimensioni imballo
Shipping
Verpack. abmessungen
Dim. emballage
Peso lordo
Gross weight
Bruttogewicht
Poids brut

	A	B	C	D	E	F	G	L	X	Y	H	W	kg	mm	kg					
Giotto 250 BS / Top	250/10"	210/0,29	30	275	275x260	425	320	550	540	435	790	550	620	255	190	190	190	-	-	-
Giotto 300 BS / Top	300/12"	210/0,29	30	275	275x260	425	320	580	540	460	790	570	620	255	220	220	220	-	-	-
Giotto 250 VCO / Top	250/10"	210/0,29	30	365	250x240	425	320	550	590	435	640	475	540	240	190	190	190	-	-	-
Giotto 300 VCO / Top	300/12"	210/0,29	30	365	250x240	425	320	580	590	460	640	495	540	240	220	220	220	-	-	-

Ø Cuchilla
Ø Lámnia
Ø Messer
Ø 刀片
Motor
Двигатель
电机
Espesor corte
Еспесура соте
Толщина нарезки
切削厚度
Desplazamiento del carro
Есдвигание сарнино
Ход каретки
滑车行程
Piatto
Лоток
料斗

Peso neto
Peso líquido
Вес нетто
淨重
Dimensiones embalaje
Размеры упаковки
包裝尺寸
Peso bruto
Peso bruto
Вес брутто
毛重