

ABA MACHINE & MANUFACTURING LTD.

PRODUCT CATALOGUE

**FOR
PRODUCTS
THAT
BEAR THE
LOAD**



PROPER PROCEDURE

- Procedure when using Collapsible Pipe Stands, Solid Pipe Stands, Superstands and Sawhorse.
 1. Suspend pipe in desired location with appropriate equipment.
 2. Place Collapsible, Solid, Superstand, or Sawhorse underneath suspended pipe with desired V-Head/Rollerhead in equipment.
 3. (If using Pipe Stand not Sawhorse) Raise inner sleeve as high as it can go with the safety pin installed and cotter pin in place.
 4. With the Handled Jack Nut, raise the V-Head/Rollerhead until it is tight against the underside of the pipe.

WARRANTY/SAFETY

- ABA Machine & Manufacturing offers a limited three-year warranty for our pipe handling equipment (Collapsible Pipe Stands, Solid Pipe Stands, Superstands, all V-Heads and all Rollerheads).
- Do not damage or modify any product ie. cut, grind, hammer, remove safety tack, as doing so will render any safety ratings/warranty null and void. Any products that fit this description should be removed from service.

FOR WARRANTY TO APPLY YOU **MUST:**



- Have the piece of equipment placed on a flat, level, and a stable surface.
- Have the ABA PROVIDED safety pin installed in the Pipe Stand and secured into position with the cotter pin engaged for any weight/pipe size ratings stated to apply.
- All loads must be kept vertical at all times. Lateral loading is not permitted.
- In any setup, the component with the lowest weight rating must be used as the maximum weight rating for that setup.

FOR WARRANTY TO APPLY YOU **MUST NOT:**

- Wedge Pipe Stand/Head/Sawhorse under at an angle, and hammer or force into position.
- Use any product that does not have an ABA Rating sticker that states the maximum weight rating and maximum pipe size.
- Drop pipe onto equipment when setting position. Please refer to the proper procedure above when using ABA Machine's pipe handling equipment.
- Use the T-Handle set screw to secure the inner sleeve into position. This bolt is for lateral stability only and should not be used in lieu of the safety pin and cotter pin. Please refer to the proper procedure above.
- Exceed the maximum pipe diameter and/or weight ratings stated on the Pipe Stand/Head/Sawhorse. As doing so will void both ratings and warranty. If the Pipe Stand/Sawhorse head has a different rating than the supporting equipment, the lowest rating in the overall setup is to be applied.
- Roll pipe on any V-Head. V-heads are not designed or engineered to roll pipe under any circumstances. Doing so will damage the V-Head and Pipe Stand. Pipe must always remain stationary when placed on any V-Head. When rolling pipe is necessary refer to the appropriate rollerhead.

DISCLAIMER

Products may not be exactly as shown. We reserve the right to modify, revise, suspend, or discontinue a product in whole or in part without notice. Specifications subject to change; consult factory for all specifications.

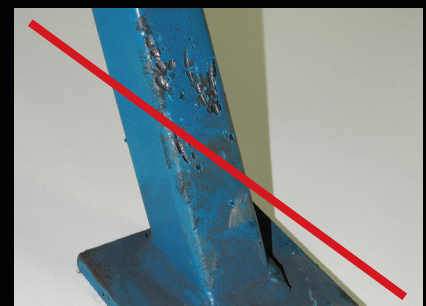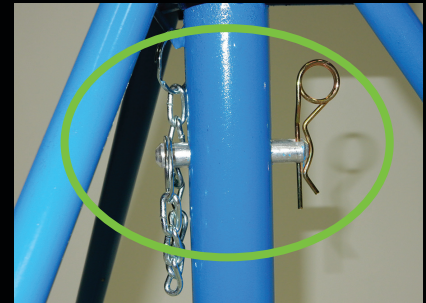

WE RENT!

For more information on a full line of rental items, call or email us today.



PROBLEM SOLVED

Authorized distributor of CanTorque Inc.

SERVICES


Our services include custom and production machining, welding, plasma cutting, painting, design, and engineering.

TABLE OF CONTENTS

PINS	2	WEDGES	13
BULL PINS	2	CARBON STEEL WEDGES	13
DRIFT PINS	3	CARBON STEEL FITTERS WEDGES (SPACE TOOLS).....	13
FLANGE ALIGNMENT PINS.....	3	STAINLESS STEEL FITTERS WEDGES (SPACE TOOLS)...	14
FLANGE ALIGNMENT BOLTS.....	4	HI-LOW WEDGES.....	14
WELDING DOGS	5	WELDING ACCESSORIES	15
CARBON STEEL.....	5	WELDING TABLE.....	15
STAINLESS STEEL.....	5	WELDING SCREEN AND FRAMES	15
PIPE STANDS	5	WELDING REPLACEMENT SCREENS.....	15
COLLAPSIBLE PIPE STANDS	5	MISCELLANEOUS	16
SOLID PIPE STANDS	6	HEAVYDUTY PIPE DOLLY.....	16
SUPERSTANDS.....	6	GRINDER HOLDER (MAGNETIC).....	16
V-HEADS	7	SNIPE HANDLES.....	17
ROLLERHEADS	7-8	UMBRELLA HOLDER (MAGNETIC).....	17
SAWHORSES	9	WHIP CHECKS	18
ACCESSORIES	9	CUSTOM FABRICATION	18
SUPERSTAND BASE / EXTENTIONS.....	9	BOTTLE RACK	18
STAINLESS STEEL V-HEAD COVER.....	10	WORK BENCH.....	19
PARTS	10	CHAIN HOIST CART.....	19
HANDLED JACK NUTS.....	10	INVERTER CART.....	20
POSITIVE LOCK PINS	11	CABLE REEL STAND.....	20
ROLLERHEAD WHEELS	11	CUSTOM MACHINING	20
SOLID AND COLLAPSIBLE INNER SLEEVE	12	ALUMINUM TORCH HOLDER.....	20
SUPER STAND INNER SLEEVE.....	12	CUSTOM PLASMA CUTTING	21
T-HANDLE SET SCREW.....	12	MISCELLANEOUS PLASMA CUTTING	21



PINS
BULL PINS



BROADHEAD BULL PIN SPECIFICATIONS		
Part Number Prefix	Size & Part Number	Length
BHBP	1/2"	6-3/4"
BHBP	9/16"	7-3/4"
BHBP	5/8"	7-3/4"
BHBP	11/16"	8-3/4"
BHBP	3/4"	8-3/4"
BHBP	13/16"	9-3/4"
BHBP	7/8"	9-3/4"
BHBP	15/16"	10-3/4"
BHBP	1"	10-3/4"
BHBP	1-1/16"	11-3/4"
BHBP	1-1/8"	11-3/4"
BHBP	1-3/16"	12-3/4"
BHBP	1-1/4"	12-3/4"
BHBP	1-5/16"	13-3/4"
BHBP	1-3/8"	13-3/4"
BHBP	1-7/16"	14-3/4"
BHBP	1-1/2"	14-3/4"
BHBP	1-9/16"	15-3/4"
BHBP	1-5/8"	15-3/4"
BHBP	1-11/16"	16-3/4"
BHBP	1-3/4"	16-3/4"
BHBP	1-13/16"	17-3/4"
BHBP	1-7/8"	17-3/4"
BHBP	1-15/16"	18-3/4"
BHBP	2"	18-3/4"

All sizes and/or lengths available through custom order.

STANDARD BULL PIN SPECIFICATIONS		
Part Number PRefix	Size & Part Number	Length
STBP	1/2"	6"
STBP	9/16"	7"
STBP	5/8"	7"
STBP	11/16"	8"
STBP	3/4"	8"
STBP	13/16"	9"
STBP	7/8"	9"
STBP	15/16"	10"
STBP	1"	10"
STBP	1-1/16"	10-5/8"
STBP	1-1/8"	10-5/8"
STBP	1-3/16"	11-5/8"
STBP	1-1/4"	11-5/8"
STBP	1-5/16"	12-5/8"
STBP	1-3/8"	12-5/8"
STBP	1-7/16"	13-1/2"
STBP	1-1/2"	13-1/2"
STBP	1-9/16"	14-1/2"
STBP	1-5/8"	14-1/2"
STBP	1-11/16"	15-1/2"
STBP	1-3/4"	15-1/2"
STBP	1-13/16"	16-1/2"
STBP	1-7/8"	16-1/2"
STBP	1-15/16"	17-1/2"
STBP	2"	17-1/2"

All sizes and/or lengths available through custom order.

All Bull Pins are custom order only.
Minimum order of 10.

Note* all Drift Pins, Bull Pins, and Flange Alignment Bolts are machined from commercially heat treated 4140 steel.

DRIFT PINS

DRIFT PINS SPECIFICATIONS			
(Stock size only)			
Part Number Prefix	Size & Part Number	Length	Shipping Weight (LBS)
DP	7/16"	6"	0.20
DP	1/2"	6"	0.25
DP	9/16"	7"	0.42
DP	5/8"	7"	0.50
DP	11/16"	8"	0.75
DP	3/4"	8"	0.80
DP	13/16"	9"	1.05
DP	7/8"	9"	1.20
DP	15/16"	9"	1.35
DP	1"	9"	1.55
DP	1-1/16"	10"	1.92
DP	1-1/8"	10"	2.12
DP	1-3/16"	11"	2.50
DP	1-1/4"	11"	2.75
DP	1-5/16"	11"	3.13
DP	1-3/8"	11"	3.38
DP	1-7/16"	12"	3.88
DP	1-1/2"	12"	4.50
DP	1-9/16"	13"	5.25
DP	1-5/8"	13"	5.63
DP	1-11/16"	14"	6.50
DP	1-3/4"	14"	7.00
DP	1-13/16"	14"	7.33
DP	1-7/8"	14"	7.83
DP	1-15/16"	15"	9.00
DP	2"	15"	10.00

All other sizes and/or lengths available through custom order.



Note* all Drift Pins, Bull Pins, and Flange Alignment Bolts are machined from commercially heat treated 4140 steel.

FLANGE ALIGNMENT PINS



FLANGE ALIGNMENT PINS SPECIFICATIONS		
Part Number	Description	Shipping Weight (LBS)
FAP1	3/8" to 1-1/2" hole.	2.50
FAP2	1/2" to 2" hole.	3.50
FAP3	1/2" to 2-1/2" hole.	5.00

Comes equipped with speed nut.
Sold as a set of two.

FLANGE ALIGNMENT BOLTS

FLANGE ALIGNMENT BOLTS SPECIFICATIONS		
(Stock size only)		
Part Number Prefix	Bolt Hole Size & Part Number	Length
FAB	3/4"	3.937"
FAB	7/8"	4.594"
FAB	1"	5.25"
FAB	1-1/8"	5.907"
FAB	1-1/4"	6.563"
FAB	1-3/8"	7.219"
FAB	1-1/2"	7.875"
FAB	1-5/8"	8.532"
FAB	1-3/4"	9.188"
FAB	1-7/8"	9.844"
FAB	2"	10.5"
FAB	2-1/8"	11.157"

All other sizes and/or lengths available through custom order



Note* all Drift Pins, Bull Pins, and Flange Alignment Bolts are machined from commercially heat treated 4140 steel.

WELDING DOGS

CARBON STEEL

CARBON STEEL DOG SPECIFICATIONS		
Part Number	Description	Shipping Weight (LBS)
WDCS1	1/2" thick x 3" high x 5" long 1/2" stud.	1.75
WDCS2	3/4" thick x 3" high x 5" long 3/4" stud.	3.00

STAINLESS STEEL

STAINLESS STEEL DOG SPECIFICATIONS		
Part Number	Description	Shipping Weight (LBS)
WDSS1	1/2" thick x 3" high x 5" long 1/2" stud.	2.00
WDSS2	3/4" thick x 3" high x 5" long 3/4" stud.	3.50

Made from solid 304 stainless steel.


PIPE STANDS

COLLAPSIBLE PIPE STANDS

COLLAPSIBLE PIPE STANDS SPECIFICATIONS					
Part Number	Description	Height Range	Dimensions (LxWxH)	Max Weight (LBS)	Shipping Weight (LBS)
HCPS-15	15" Collapsible Pipe Stand.	14-1/2" to 28" tall.	10" x 10" x 15"	4,000	14.50
HCPS-22	22" Collapsible Pipe Stand.	22" to 31-1/2" tall.	10" x 10" x 26"	4,000	19.50
HCPS-30	30" Collapsible Pipe Stand.	33" to 55" tall.	10" x 10" x 36"	4,000	23.50
HCPS-36	36" Collapsible Pipe Stand.	39" to 65" tall.	10" x 10" x 42"	4,000	25.50



HCPS-30



IMPORTANT NOTE

All pipe must be supported with center of gravity directly above center of Pipe Stands for given ratings to apply.

1. T-Bolt removes lateral movement.
2. Positive locking pin system secures sleeve into place.
3. Refer to the inside front cover for proper procedure.

SOLID PIPE STANDS

SOLID PIPE STANDS SPECIFICATIONS					
Part Number	Description	Height Range	Dimensions (LxWxH)	Max Weight (LBS)	Shipping Weight (LBS)
HSPS-15	15" Solid Pipe Stand.	17-1/2" to 25" tall.	21" x 21" x 15"	4,000	12.00
HSPS-24	24" Solid Pipe Stand.	27" to 39" tall.	26" x 26" x 23"	4,000	17.50
HSPS-30	30" Solid Pipe Stand.	34" to 56" tall.	30" x 30" x 31"	4,000	22.00
HSPS-36	36" Solid Pipe Stand.	39" to 65" tall.	30" x 30" x 36"	4,000	24.00
HSPS-84	84" Solid Pipe Stand.	64" to 87" tall.	48" x 48" x 68"	1,500	61.00

All Solid/Collapsible Pipe Stands c/w Positive Lock Pin rated for max. load of 4000 lbs. with appropriate head.

Pipe Stand safety information can be found inside front cover. NOTE: All measurements from ground to lowest point of V-Head.



SUPERSTANDS

SUPERSTANDS SPECIFICATIONS				
Part Number	Description	Height Range	Dimensions (LxWxH)	Shipping Weight (LBS)
SS12	12" heavy duty Superstand.	16-1/2" to 28" tall.	24" x 24" x 13"	23.50
SS22	22" heavy duty Superstand.	26-1/2" to 45-1/2" tall.	30" x 30" x 24"	34.00
SS30	30" heavy duty Superstand.	33" to 58" tall.	31" x 31" x 30"	40.00

All Superstands have a max weight rating of 10,000 lbs.



V-HEADS

V-HEADS SPECIFICATIONS				
Part Number	Pipe Size	Dimensions (LxWxH)	Shipping Weight (LBS)	Max Weight (LBS)
Compatible with all Collapsible and Solid Stands.				
VH-6-G	1/2" to 6"	DISCONTINUED	6.00	4,000
VH-10	1/2" to 10"	9" x 3" x 15"	8.00	4,000
VH-20	2" to 20"	13" x 3-1/2" x 15"	9.00	4,000
VH-36	2" to 36"	20-1/4" x 3-1/2" x 17-1/2"	11.00	4,000
Compatible with Superstands.				
SSVH-32	2" to 32"	DISCONTINUED	14.00	10,000
SSVH-36	2" to 36"	21" x 3-1/2" x 17-1/2"	15.00	10,000



NEW PRODUCT VH-36



SSVH-36



VH-10

ROLLERHEADS

ROLLERHEADS SPECIFICATIONS					
Part Number	Description	Dimensions (LxWxH)	Pipe Size	Max Weight (LBS)	Shipping Weight (LBS)
The following Rollerheads are compatible with all Collapsible and Solid Stands.					
RH-4/ST	4 wheeled Rollerhead with 3" steel wheels.	12" x 3" x 18"	1" to 12"	1,500	13.00
RH-4/UR	4 wheeled Rollerhead with 3" urethane wheels.	12" x 3" x 18"	1" to 12"	1,500	13.00
RH-12/ST	2 wheeled Rollerhead with 3" steel wheels.	11" x 3" x 16"	1/2" to 12"	1,500	18.50
RH-12/UR	2 wheeled Rollerhead with 3" urethane wheels.	11" x 3" x 16"	1/2" to 12"	1,500	18.50
RH-24/ST	2 wheeled Rollerhead with 4" steel wheels.	14" x 3" x 17"	1" to 24"	2,500	16.00
RH-24/UR	2 wheeled Rollerhead with 4" urethane wheels.	14" x 3" x 17"	1" to 24"	1,600	16.00

ROLLERHEADS SPECIFICATIONS CONTINUED NEXT PAGE.

ROLLERHEADS SPECIFICATIONS CONTINUED

Part Number	Description	Dimensions (LxWxH)	Pipe Size	Max Weight (LBS)	Shipping Weight (LBS)
The following Rollerheads are compatible with all Collapsible and Solid Stands, and SH-36/GT (36" Sawhorse with guide tubes).					
RH-36/ST	2 wheeled Rollerhead with 6" steel wheels.	28" x 4" x 8"	2" to 36"	5,000	57.00
RH-36/UR	2 wheeled Rollerhead with 6" urethane wheels.	28" x 4" x 8"	2" to 36"	4,000	57.00
The following Rollerheads are compatible with all Superstands and SH-48/GT (48" Sawhorse with guide tubes).					
RH-48/ST	2 wheeled Rollerhead with 6" steel wheels.	36" x 5" x 9"	2" to 48"	5,000	118.00
RH-48/UR	2 wheeled Rollerhead with 6" urethane wheels.	36" x 5" x 9"	2" to 48"	4,000	118.00
SSRH/ST	2 wheeled Rollerhead with 6" steel wheels.	24" x 5" x 19"	2" to 32"	5,000	43.00
SSRH/UR	2 wheeled Rollerhead with 6" urethane wheels.	24" x 5" x 19"	2" to 32"	4,000	43.00

Heavy duty steel wheels are available by custom order to raise max weight rating to 10,000 lbs when:
 - RH-48 is used in TWO Superstands instead of a Sawhorse.



RH-4



RH-36



RH-36 UNASSEMBLED FOR SHIPPING.



RH-24



RH-36 AND SH-36 ASSEMBLED.



SSRH

SAWHORSES

SAWHORSES SPECIFICATIONS

Part Number	Description	Shipping Dimensions (LxWxH)	Max Weight (LBS)	Shipping Weight (LBS)
SH-36	36" long Sawhorse.	42" x 22" x 28"	5,000	60.00
SH-36/GT	36" long Sawhorse with guide tubes to accommodate RH-36.	42" x 22" x 31"	Refer to Rollerhead for rating.	63.00
SH-48	48" long Sawhorse.	54" x 22" x 29"	5,000	77.00
SH-48/GT	48" long Sawhorse with guide tubes to accommodate RH-48.	54" x 22" x 31"	Refer to Rollerhead for rating.	75.00



SH-36



SH-36/GT

SH-36/GT
STACKED



ACCESSORIES

SUPERSTAND BASE / EXTENTIONS

SUPERSTAND BASE / EXTENTIONS SPECIFICATIONS

Part Number	Description	Dimensions (LxWxH)	Shipping Weight (LBS)
SSB	Superstand base.	5' x 5' x 6"	84.50
SSES24	24" extension sleeve. Increases height range of any Superstand by 24".	N/A	19.00
SSES36	36" extension sleeve. Increases height range of any Superstand by 36".	N/A	28.50
SSES60	60" extension sleeve. Increases height range of any Superstand by 60".	N/A	42.00

Superstand Extension Sleeves must be used with a Superstand Base for safety ratings/warranty to apply. With this accessory, lowers weight rating to 5,000 lbs.



SUPERSTAND BASE



SUPERSTAND EXTENSION SLEEVE



SUPERSTAND
ASSEMBLED
WITH BASE,
EXTENSION
SLEEVE AND
V-HEAD.

STAINLESS STEEL V-HEAD COVER

STAINLESS STEEL V-HEAD COVER SPECIFICATIONS				
Part Number	Description	Products Compatible With	Dimensions (LxWxH)	Shipping Weight (LBS)
SSC6	Stainless Steel Covers for V-Heads when using stainless steel pipe and coated pipe.	VH-10	4" x 1-1/4" x 1/2"	1.25
SSC20		VH-20	7" x 3-3/4" x 1/2"	1.5
SSC32		VH-36	11" x 3-3/4" x 3/4"	1.65
SSC36		SSVH-36	11" x 3-3/4" x 3/4"	1.65



Made from solid 304 stainless steel.

PARTS HANDLED JACK NUTS

HANDLED JACK NUTS SPECIFICATIONS				
Part Number	Description	Products Compatible With	Dimensions (LxWxH)	Shipping Weight (LBS)
HJN-1	Handled Jack Nut for 1" acme rod.	VH-10, VH-20, VH-36 RH-4, RH-12, RH-24 RH-36	10" x 2" x 1"	1.20
HJN-2	Handled Jack Nut for 1-1/2" acme rod.	SSVH-36, RH-48, SSRH	11" x 2.5" x 1.5"	2.10



POSITIVE LOCK PINS

POSITIVE LOCK PINS SPECIFICATIONS		
Part Number	Description	Shipping Weight (LBS)
PLPRS	1/2" Positive Locking Pin for all Collapsible and Solid Stands.	0.27
PLPSS	3/4" Positive Locking Pin for all Superstand.	0.46

Positive Locking Pins must be engaged at all times when the stand is in use for any safety ratings/warranty to apply.
Refer to inside front cover for proper use.



ROLLERHEAD WHEELS

ROLLERHEAD WHEELS SPECIFICATIONS			
Part Number	Size	Products Compatible With	Shipping Weight (LBS)
SWH-3	3" Dia. x 2" W	RH-12, RH-4	2.50
SWH-4	4" Dia. x 2" W	RH-24	4.75
SWH-6	6" Dia. x 3" W	RH-36, RH-48, SSRH	10.25
UWH-3	3" Dia. x 2" W	RH-12, RH-4	1.50
UWH-4	4" Dia. x 2" W	RH-24	2.50
UWH-6	6" Dia. x 3" W	RH-36, RH-48, SSRH	9.75



For weight ratings, refer to the rollerhead specifications on pages 7 and 8.

SOLID AND COLLAPSIBLE INNER SLEEVE

SOLID AND COLLAPSIBLE INNER SLEEVE SPECIFICATIONS				
Part Number	Description	Products Compatible With	Dimensions (LxWxH)	Shipping Weight (LBS)
SIS	11" long round Inner Sleeve.	HCPS-15, HSPS-15	2" x 2" x 11"	1.50
MIS	17-1/2" long round Inner Sleeve.	HCPS-22, HSPS-24	2" x 2" x 18"	2.50
LIS	25-1/2" long round Inner Sleeve.	HCPS-30, HSPS-30	2" x 2" x 26"	2.50
XLIS	31" long round Inner Sleeve.	HCPS-36, HSPS-36	2" x 2" x 31"	3.00



SUPER STAND INNER SLEEVE

SUPER STAND INNER SLEEVE SPECIFICATIONS				
Part Number	Description	Products Compatible With	Dimensions (LxWxH)	Shipping Weight (LBS)
SSINS	11-1/2" long square Inner Sleeve.	SS12	11" x 5" x 6"	5.00
SSINM	17-1/2" long square Inner Sleeve.	SS22	18" x 5" x 6"	8.50
SSINL	24" long square Inner Sleeve.	SS30	24" x 5" x 6"	11.00



T-HANDLE SET SCREW

T-HANDLE SET SCREW SPECIFICATIONS		
Part Number	Description	Shipping Weight (LBS)
THSS	T-Handle Set Screw	0.30

T-Handle Set Screw is for Collapsible and Solid Stands only and is cadmium plated for rust protection. Please refer to inside front cover for proper use.



WEDGES

CARBON STEEL WEDGES

CARBON STEEL SPECIFICATIONS		
(Stock Size Only)		
Part Number	Size (L x W x H)	Shipping Weight (LBS)
CSW1	3" x 1" x 1/4"	0.10
CSW2	6" x 1" x 1/2"	0.035
CSW3	6" x 1" x 3/4"	0.53
CSW4	6" x 1" x 1"	0.08
CSW5	10" x 1-1/2" x 1-1/2"	6.00



Carbon Steel Wedges are made from commercially hardened QT100 wear plate.

CARBON STEEL FITTERS WEDGES (SPACE TOOLS)

CARBON STEEL SPECIFICATIONS		
(Stock Size Only)		
Part Number	Size (L x W x H)	Shipping Weight (LBS)
03-0225	4"L x 1-1/2"W x 1/4"H c/w tether hole.	0.33
03-0221	8"L x 3/4"W x 1/4"H c/w tether hole.	0.33
03-0223	8"L x 1-1/2"W x 1/4"H c/w tether hole.	0.65



Carbon Steel Fitters Wedges are through hardened to 46-48 RC and cadmium plated for rust protection.

STAINLESS STEEL FITTERS WEDGES (SPACE TOOLS)

STAINLESS STEEL SPECIFICATIONS		
(Stock Size Only)		
Part Number	Size (L x W x H)	Shipping Weight (LBS)
03-0244	4"L x 1-1/2"W x 1/4"H no tether hole.	0.43
03-0245	4"L x 1-1/2"W x 1/4"H c/w tether hole.	0.43
03-0240	6"L x 3/4"W x 1/4"H no tether hole.	0.33
03-0241	6"L x 3/4"W x 1/4"H c/w tether hole.	0.33
03-0242	6"L x 1-1/2"W x 1/4"H no tether hole.	0.65
03-0243	6"L x 1-1/2"W x 1/4"H no tether hole.	0.65



Stainless Steel Fitters Wedges are made from solid 304 stainless steel.

HI-LOW WEDGES

The Hi-Low Wedges can be used with all external cage clamps. These wedges are placed between the pipe and the clamp and driven into place to eliminate hi-low. The Hi-Low Wedges come in 2 sizes to accommodate all major manufacturer's cage clamps. These wedges are precision cut for accuracy and made from hot rolled QT100 plate for durability.

- Available in 2 sizes for clamps 16"-28" and 30" - 48"
- 1" and 1 1/4" to fit all major manufacturer's cage clamps.
- Precision cut for accuracy
- Heat treated for durability
- Simple solution to hi-low



WELDING ACCESSORIES

WELDING TABLE

WELDING TABLE SPECIFICATIONS		
Part Number	Description	Shipping Weight (LBS)
WTAB	48" x 48" x 36"	375
WTAB/6V	48" x 48" x 48" with 6" bench vice.	410
WTAB/8V	48" x 48" x 48" with 8" bench vice.	420

3/8" thick table top with heavy duty angle iron legs.
Folding table available upon request.



WELDING SCREEN AND FRAMES

WELDING SCREEN AND FRAMES SPECIFICATIONS		
Part Number	Description	Shipping Weight (LBS)
WF1	ABA Made - 6'L x 8'H or 8'L x 6'H Reversible Welding Shield, Frame Only	62
WSF1	ABA Made - 6'L x 8'H or 8'L x 6'H Reversible Welding Shield c/w Curtain	68
WF2	ABA Made - 6'L x 6'H Welding Frame, Frame Only	58
WSF2	ABA Made - 6'L x 6'H Welding Shield, c/w Curtain	64

Custom sizes available upon request.
All replacement parts available upon request.

WELDING REPLACEMENT SCREENS

WELDING SCREENS (SCREEN ONLY) SPECIFICATIONS		
Part Number	Description	Shipping Weight (LBS)
WS6	6' x 6' Replacement Welding Screens, Screen only.	5.5
WS8	6' x 8' Replacement Welding Screens, Screen only.	6



Product in picture is not to scale.

MISCELLANEOUS

HEAVYDUTY PIPE DOLLY

HEAVY DUTY PIPE DOLLY SPECIFICATIONS			
Part Number	Description	Dimensions (LxWxH)	Shipping Weight (LBS)
PD2000	Heavy pipe dolly can hold pipe up to 24' long, up to 2' in diameter with a weight up to 2,000 lbs (907 kg).	12' 6" x 3' 9" x 3' 5"	200



GRINDER HOLDER (MAGNETIC)

GRINDER HOLDER (MAGNETIC) SPECIFICATIONS			
Part Number	Description	Dimensions (LxWxH)	Shipping Weight (LBS)
MGS	Magnetically attaches to 2" or larger pipe, or to a flat surface that is vertical, horizontal or any degree in between. Mounting plate has a 360° turning radius and can hold multiple 5" grinders.	22" x 10" x 4"	8.50



SNIPE HANDLES

SNIPE HANDLES SPECIFICATIONS		
Part Number	Description	Shipping Weight (LBS)
SNH24	24" long wrench extension for wrenches 1-1/16" to 1-5/8".	3.50
SNH36	36" long wrench extension for wrenches 1-1/16" to 1-5/8".	7.50

COMPATIBLE WITH:
 Gray Tools: Handle for strike free wrench.
 Snap On: Handle for heavy duty tubular wrench.



UMBRELLA HOLDER (MAGNETIC)

UMBRELLA HOLDER (MAGNETIC) SPECIFICATIONS			
Part Number	Description	Dimensions (LxWxH)	Shipping Weight (LBS)
MUS	Magnetically attaches to 2" or larger pipe, or to a flat surface that is vertical, horizontal or any degree in between. Can hold an umbrella with a handle diameter up to 1-1/4"	12" x 8" x 6"	6.50




WHIP CHECKS

WHIP CHECKS SPECIFICATIONS		
Part Number	Description	Shipping Weight (LBS)
WCH1	1/2" to 1" hose.	0.23
WCH3	1" to 3" hose.	0.88
WCH5	Up to 10" hose, max 200 PSI	6.50

Custom sizes are available upon request.



WCH1 & WCH3

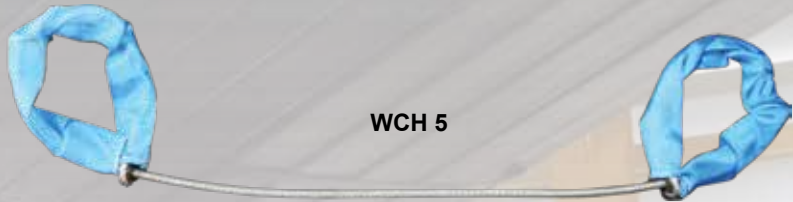

WCH 5

CUSTOM FABRICATION
BOTTLE RACK

Rack holds twelve 12" diameter bottles, shown with grating and forklift/pallet jack accessible base. Also available in custom configuration including number of bottles, checker plate base, or no base.

Custom order only. Contact ABA for price and availability.



WORK BENCH

WORK BENCH SPECIFICATIONS		
Part Number	Description	Dimensions (LxWxH)
AA-0018	<p>Features include: 6" back splash pre-drilled holes for 6" or 8" Record Vice (can be provided upon request)</p> <p>Two rigid urethane wheels and two swivel urethane wheels with pedal lock brakes.</p> <p>Finish is to customer specifications.</p>	48"L x 24"W x 32"H



CHAIN HOIST CART

72"L x 35"W x 64"H, Can hold approximately 20 chain hoists. Comes equipped with two stationary wheels and two swivel wheels with pedal lock brakes. Cart can be custom designed for customer needs.



INVERTER CART

For easy movement of power inverter units.
Unit is sized for each customers equipment

CABLE REEL

Heavy duty steel cable reel / spooler.
Collapsible design for easy removal of spooled cable.
Stand sold separately



CUSTOM MACHINING

ALUMINIUM TORCH HOLDER

2" H X 2.628 diameter, made from aluminium.



CUSTOM PLASMA CUTTING

MISCELLANEOUS PLASMA CUTTING

5' X 10' plasma cutting table can cut up to 1" thick mild steel for both production cutting and ornamental design.



DISCLAIMER

Products may not be exactly as shown. We reserve the right to modify, revise, suspend, or discontinue a product in whole or in part without notice. Specifications subject to change; consult factory for all specifications.

- Ken Watkins** - Manager / Sales, [email: ken@aba-machine.com](mailto:ken@aba-machine.com)
- Shaun Watkins** - Manager / Shop Foreman, [email: shaun@aba-machine.com](mailto:shaun@aba-machine.com)
- Cathy Watkins** - Reception / Accounts, [email: admin@aba-machine.com](mailto:admin@aba-machine.com)
Payable & Receivable
- Ryan Watkins** - Shipping & Receiving / Sales, [email: ryan@aba-machine.com](mailto:ryan@aba-machine.com)

P - 780.485.5966

ABA MACHINE & MANUFACTURING LTD.



3936 - 101 Street
Edmonton, AB T6E-0A5
P. 780-485-5966
W. aba-machine.com