


DYNAMIC TEST: PILE HEAD PREPARATION

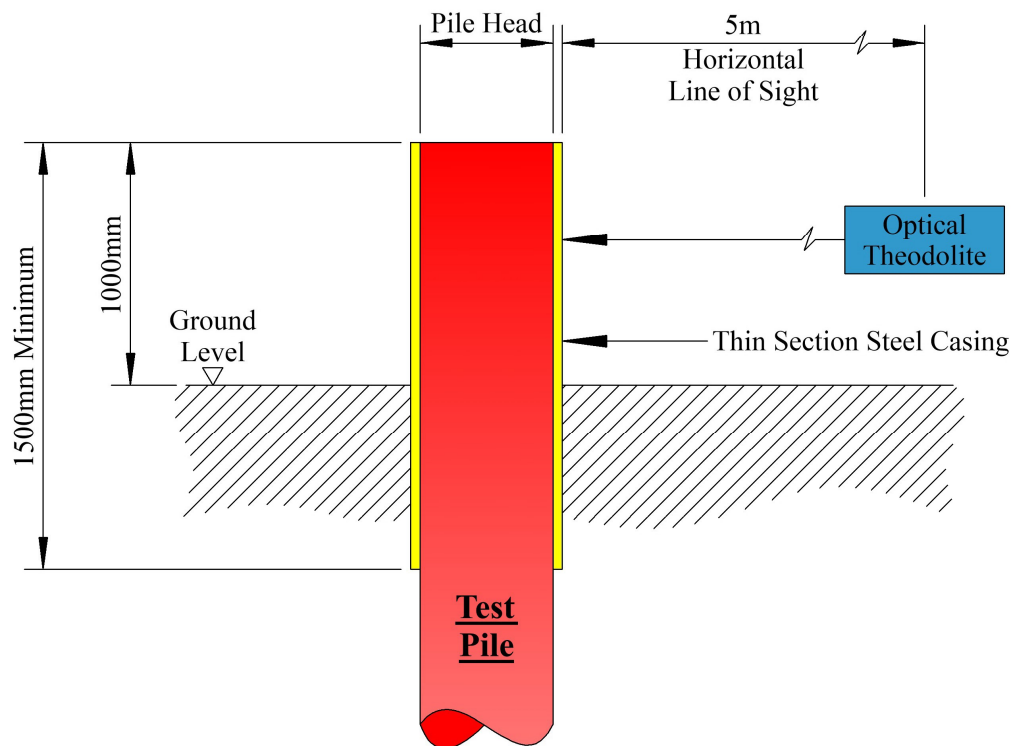

Method of capping pile for SIMBAT dynamic test method

1. Excavate pile to sound concrete / grout.
2. Prepare pile head by scabbling surface.
3. Place steel casing over pile.
4. Back fill around pile ensuring that the casing remains vertical.
5. Fill casing with normal grade concrete /grout.
6. Float off concrete so that it is flat and level.
7. Trim top casing to level concrete.

NOTE: Pile casing must be similar diameter to pile. Any rebars must be cut off flush.



012

D	27/03/19	DP	AM	JP
C	19/01/18	DP	AM	JP
B	15/09/15	DP	AM	JP
A	26/03/14	DP	AM	JP
REV	DATE	DRN	CHK	APP

Woodland Lodge, Longhedge Lane,
Orston, Nottingham NG13 9PL
Tel: 01949 851820
Mobile: 07860 742479
E-mail: info@ndt-piletesting.com

Non Destructive Testing Services Ltd



Title: DYNAMIC TEST:
PILE HEAD PREPARATION

Client: GENERIC

Drg No. NDT00103

Sheet 1 of 1

Revision **D**