



Safe Gauge Thermometer



Note

When ordering specify

- 1.Type No.
- 2.Case Dial.
- 3.Temperature Range.
- 4.Connection.
- 5.Stem Dial.
- 6.Stem Length.

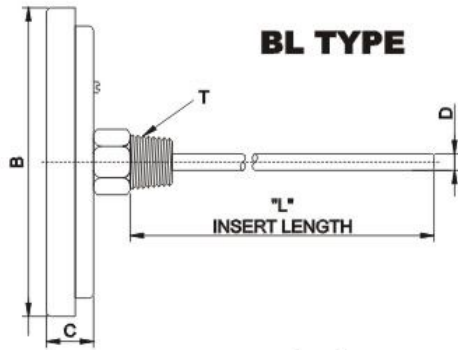

BL TYPE


(mm)

Type No. Symbol	A	B	C	D	L	T
BL2	49	58	14	6	By order	1/4"PT
BL3	70	84	17	6.35		3/8"PT
BL4	100	119	18	8		1/2"PT
BL5	125	141	18	10		3/4"PT
BL6	150	166	18	12		

Case Material	3 0 4 S S 、 3 1 6 S S
Case Dial	3"φ、 4"φ、 5"φ、 6"φ
Stem Material	3 0 4 S S 、 3 1 6 S S
Temperature Range	- 5 0 ~ 6 0 0 °C
Window	G l a s s
Connection	1 / 4 " P T 、 3 / 8 " P T 、 1 / 2 " P T 、 3 / 4 " P T 、 1 " P T (N P T 、 B S P)
Stem Length	B y O r d e r
Accuracy	+/- 1 % F . S .
Stem Dial	6 m m 、 6 . 3 5 m m 、 8 m m
Type	B L
Applications	Transformer、 petrochemicals、 driers、 foods、 air conditioning equip、 boilers & other general industrial uses.

Thermowell


Threaded Configuration

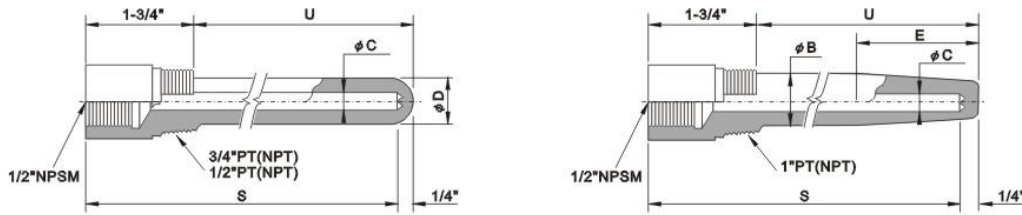

牙口	1/2"	3/4"	1/2"	3/4"	1/2"	3/4"	1/2"	3/4"	1/2"	3/4"	1/2"	3/4"	1/2"	3/4"	1/2"	3/4"
S	2-1/2"	4"	6"	9"	12"	15"	18"	24"								
U	1-5/8"	2-1/2"	4-1/2"	7-1/2"	10-1/2"	13-1/2"	16-1/2"	22-1/2"								
D	φ 12.7	φ 15	φ 12.7	φ 15	φ 12.7	φ 15	φ 12.7	φ 15	φ 12.7	φ 15	φ 12.7	φ 15	φ 12.7	φ 15	φ 12.7	φ 15
C	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7

牙口	1"	1"	1"	1"	1"	1"	1"	1"
S	2-1/2"	4"	6"	9"	12"	15"	18"	24"
U	1-5/8"	2-1/2"	4-1/2"	7-1/2"	10-1/2"	13-1/2"	16-1/2"	22-1/2"
D	φ 15	φ 15	φ 15	φ 15	φ 15	φ 15	φ 15	φ 15
C	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7	φ 7
B	φ 20	φ 22	φ 22	φ 22	φ 22	φ 22	φ 22	φ 22
E	1-5/8"	2-1/2"	3"	3"	3"	3"	3"	3"

Flanged Configuration(ANSI FLANGE 150#,300#,600#)

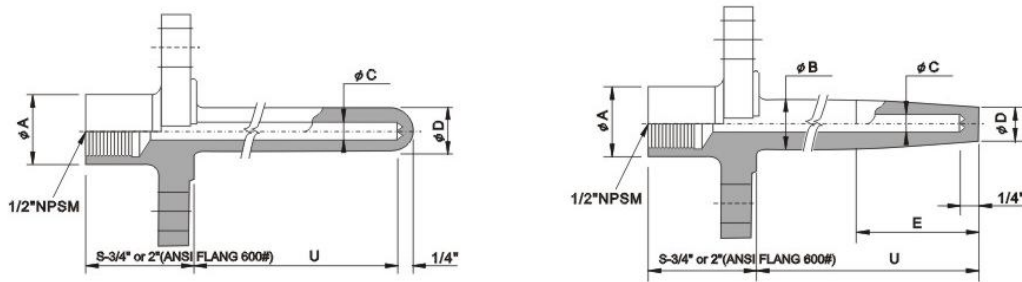

F	A	B	C	D	E
3/4"	φ 30	φ 15	φ 7	φ 15	
1"	φ 30	φ 19	φ 7	φ 19	
1-1/2"	φ 30	φ 22	φ 7	φ 15	3"
2"	φ 30	φ 22	φ 7	φ 15	3"

Malaysia Distributor: WinFan (M) Sdn Bhd

Tel: +604 502 1335 Email: winfansales@gmail.com

Fax : +604 502 3991 Address: No 3383, MK 14, Bukit Minyak, 14000 Bukit Mertajam, Penang, Malaysia.