

# 1.16 Foundation (trench) blocks 7.3N/mm<sup>2</sup> to BS EN 771-3

Our foundation blocks have a 300mm wide dimension which allows for a 100mm inside and 100mm outside skin of blockwork or brickwork to be built, leaving a 100mm cavity.

Wider cavities or thicker block widths can be accommodated by using the F350 foundation block laid with the 350mm dimension across the wall.



Foundation blocks are available in Stowlite medium dense 7.3 N/mm<sup>2</sup>.

When F350 Foundation blocks are laid 300mm wide there are 26 per m<sup>2</sup>.

Where they are laid 350mm wide there are 29 per m<sup>2</sup>.

When F440 Foundation blocks are laid 300mm wide there are 20 per m<sup>2</sup>.

7.3N/mm <sup>2</sup> Foundation blocks	Size mm nominal (L x W x H)	approx oven-dry density kg/m <sup>3</sup>	approx weight kg	no. per tonne	multiples of	no.per pack
Stowlite	300 × 350 × 100	1500	16	63	33	99
Stowlite	350 × 300 × 100	1500	16	63	33	99
Stowlite	440 × 300 × 100	1500	20	50	33	66

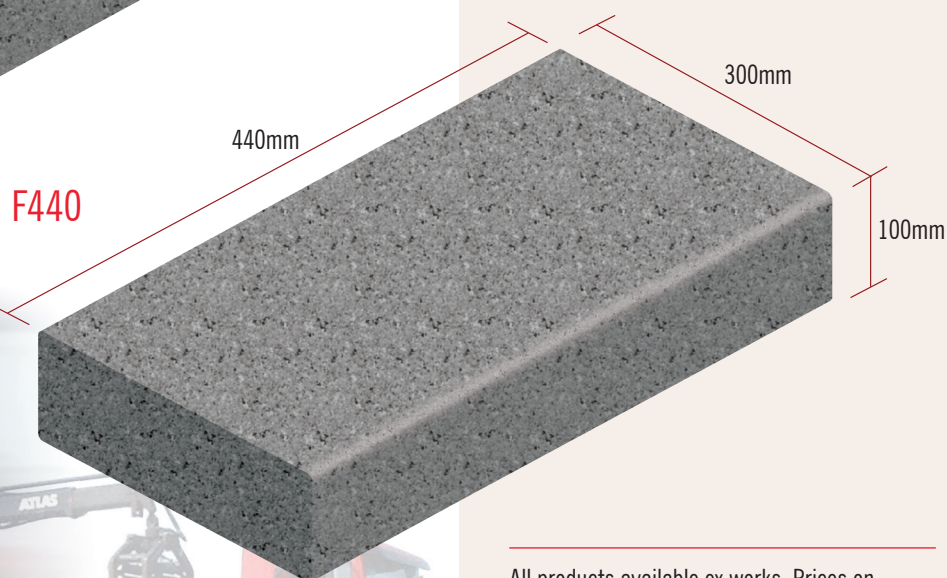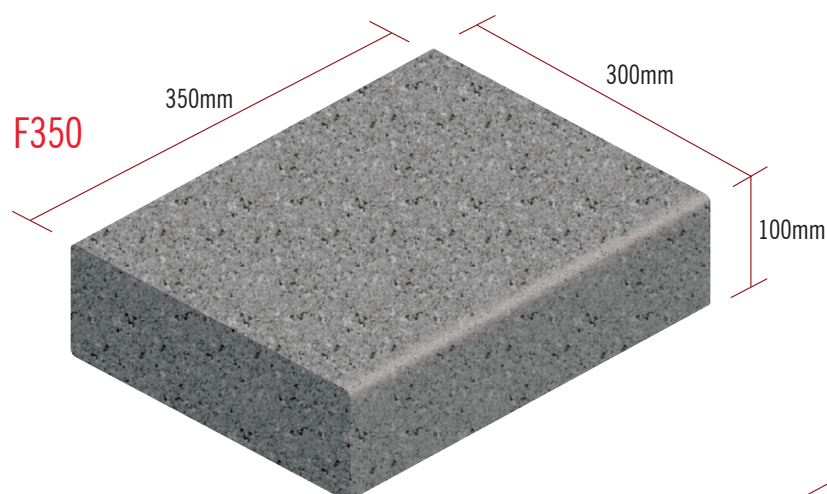

All products available ex works. Prices on application. Telephone the sales office for further information and a quotation.

**STOWELL**  
CONCRETE LIMITED

Tel: 01934 834000 Fax: 01934 835474

[www.stowellconcrete.co.uk](http://www.stowellconcrete.co.uk)

COPINGS CONCRETE BLOCKS T BEAMS PAVING KERBS CHANNELS PADSTONES