


Engineer of Record for the Structure Structural Systems of N. Fl, Inc. Derek Bergener, PE 58552 1634 SE 47th Street #3 Cape Coral, FL 33904

This document has been reviewed for conformance with the design intent of the structure and specified design criteria.

structure and specified design criteria.

Accepted Accepted Revise and As-Is As Noted Resubmit

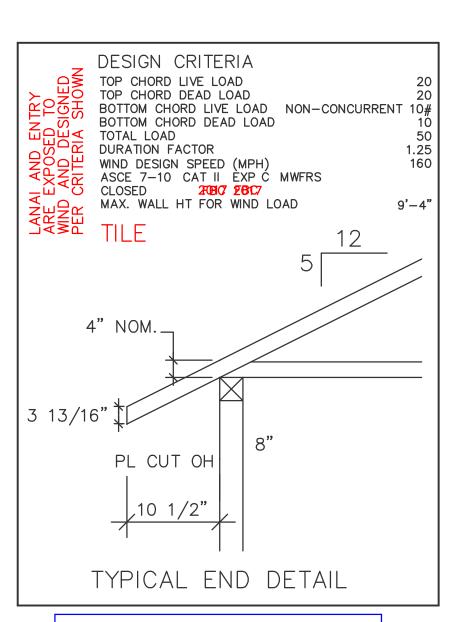

\*\*UNLESS NOTED\*\*

REACTION VALUES ARE UNDER 5000#

UPLIFT VALUES ARE UNDER 1000#

DO NOT ATTEMPT TO ERECT TRUSSES WITH-OUT REFERRING TO THE ENGINEERING DWGS.

IT IS NECESSARY TO REFER TO THE ENGINEERING DRAWINGS FOR NUMBER OF MEMBERS, BEARING LOCATION, ORIENTATION AND WEB BRACING

REFER TO WTCA/TPI BSCI-B1 SUMMARY SHEET FOR HANDLING METHODS & TEMPORARY BRACING, WHICH IS ALWAYS REQUIRED

BEARING HEIGHTS BASED ON PLANS PROVIDED TO SCOSTA CORP. "+/-" BEARING DIFFERENCES SHOWN ARE CRITICAL. IF ANY HEIGHTS DEVIATE — INFORM SCOSTA CORP.

BEARING WALL & BEAM HEIGHTS

9'-4" A.F.F. \_\_\_\_\_\_ 0'-0" ELEV.

RAKED BEAM \_\_\_\_\_\_\_ ELEV.

ELEV.

ELEV.

ELEV.

ELEV.

ELEV. ELEV.

TYPICAL HANGER SCHEDULE

C SIMPSON HUS 26 M SIMPSON HGUS 28-3

F SIMPSON HUS 28 N SIMPSON HHUS 48

H SIMPSON HGUS 28 P SIMPSON LUS 24

I SIMPSON HGUS 28-2 B SIMPSON THA 422

W SIMPSON THJA26 X

HANGER VALUES HAVE BEEN BASED ON 16D
COMMON NAILS EXCEPT THE FOLLOWING
LUS24 - 10D COMMON THJA26 - 10D x 1-1/2

\*\*\*\*\*\*\*ATTENTION\*\*\*\*\*\*\*


APPROVAL OF THIS TRUSS LAYOUT IS NECESSARY BEFORE FABRICATION CAN BEGIN. VERIFY DIMENSIONS, PITCHES, OVERHANGS, ELEVATIONS, CEILING & BEARING CONDITIONS. SCOSTA CORPORATION IS RESPONSIBLE FOR ACCURACY IN ACCORDANCE WITH PLANS AND/OR INFORMATION PROVIDED BY CUSTOMER, WITH ANY DEVIATIONS NOTED HEREIN. CUSTOMER IS RESPONSIBLE TO VERIFY ACCURACY OF INFORMATION AND PLANTS PROVIDED TO SCORTA


INFORMATION AND PLANS PROVIDED TO SCOSTA CORPORATION, AND TO VERIFY CONFORMANCE TO FIELD CONDITIONS, AND/OR OWNER CHANGES. TRUSSES WILL BE BUILT IN ACCORDANCE WITH THE APPROVED LAYOUT.


APPROVED BY: \_\_\_\_\_\_ REQUESTED DELIVERY DATE: \_\_\_\_\_


JOBSITE CONTACT NAME: \_\_\_\_\_\_
PHONE #: \_\_\_\_\_


# SCOSTA CORP.

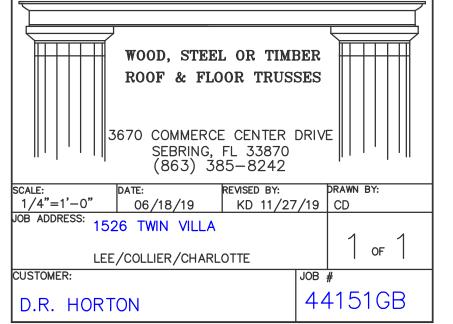


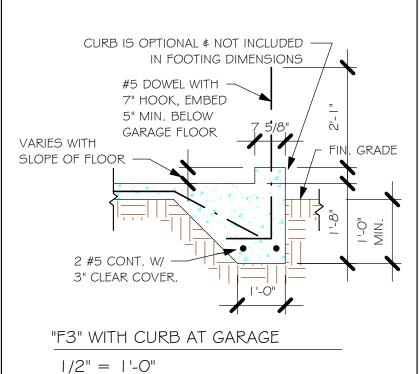

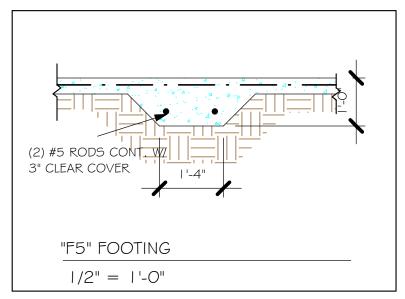

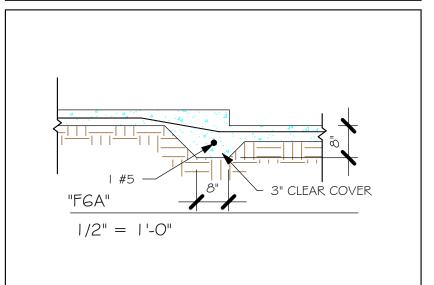


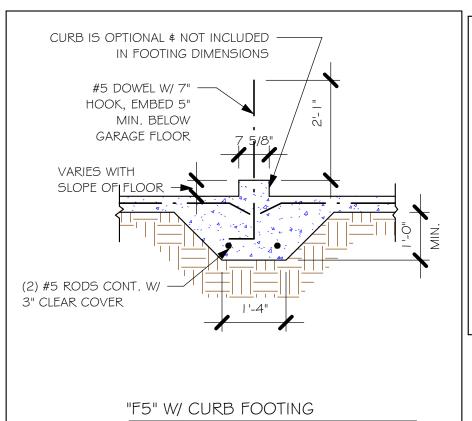

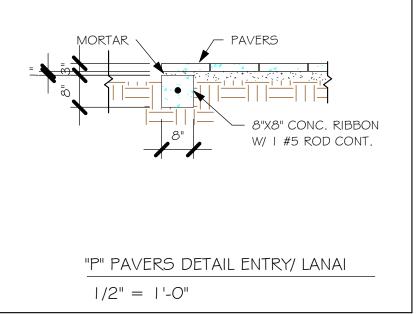

6-#5

6-#5

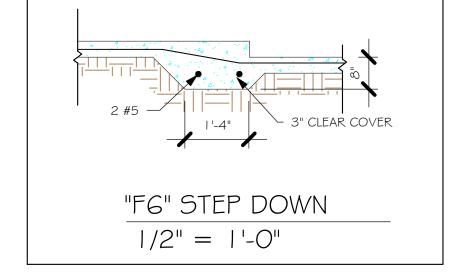

	WALL FOOTING SCHEDULE							
USED	TYPE	LENGTH	WIDTH	DEPTH	BOTTOM REINFORCING	SHAPE		
	F1	CONT.	1'-4"	0'-8"	2-#5			
	F2	CONT.	1'-8"	0'-10"	2-#5		ADD CUDD TO	
X	F3	CONT.	1'-0"	1'-8"	2-#5	₩	ADD CURB TO GARAGE, SEE DETAIL	
	F4	CONT.	1'-4"	1'-8"	2-#5			
$\setminus$	F5	CONT.	1'-4"	1'-0"	2-#5			
$\setminus$	F6	CONT.	1'-4"	1'-0"	2-#5	<b>F</b>		
$\setminus$	F6A	CONT.	0'-8"	0'-8"	1-#5			
	TE	CONT.	0'-8"	0'-8"	1-#5			

PROVIDE CORNER BARS PER 6/S-1

| 〈E〉 | 5'-0" | 5'-0" | 1'-2" |

# **FOUNDATION PLAN**

### SCALE: 3/16" = 1'-0" PLAN NOTES:

1. TOP OF GROUND FLOOR SLAB DATUM ELEVATION 0'-0"

"F#" DENOTES CONTINUOUS WALL FOOTING TYPE PER SCHEDULE THIS SHEET.


(#) DENOTES PAD FOOTING AT CONCENTRATED LOADS PER SCHEDULE THIS SHEET.

4. PROVIDE #5 VERTICAL REINFORCING AT DOT LOCATIONS SHOWN ON PLAN FROM FOOTING TO BOND BEAM.

5. ALL DIMENSIONS ARE TO OUTSIDE FACE OF MASONRY WALLS. SOME SLAB EDGES MAY EXTEND BEYOND FACE OF WALL.

FOR DIMENSIONS OF ROUGH OPENINGS IN MASONRY WALLS, COORDINATE WITH WINDOW/

PROVIDE PRESSURE TREATED BUCKS AT WINDOWS/ DOORS PER DETAIL 7/S-1.

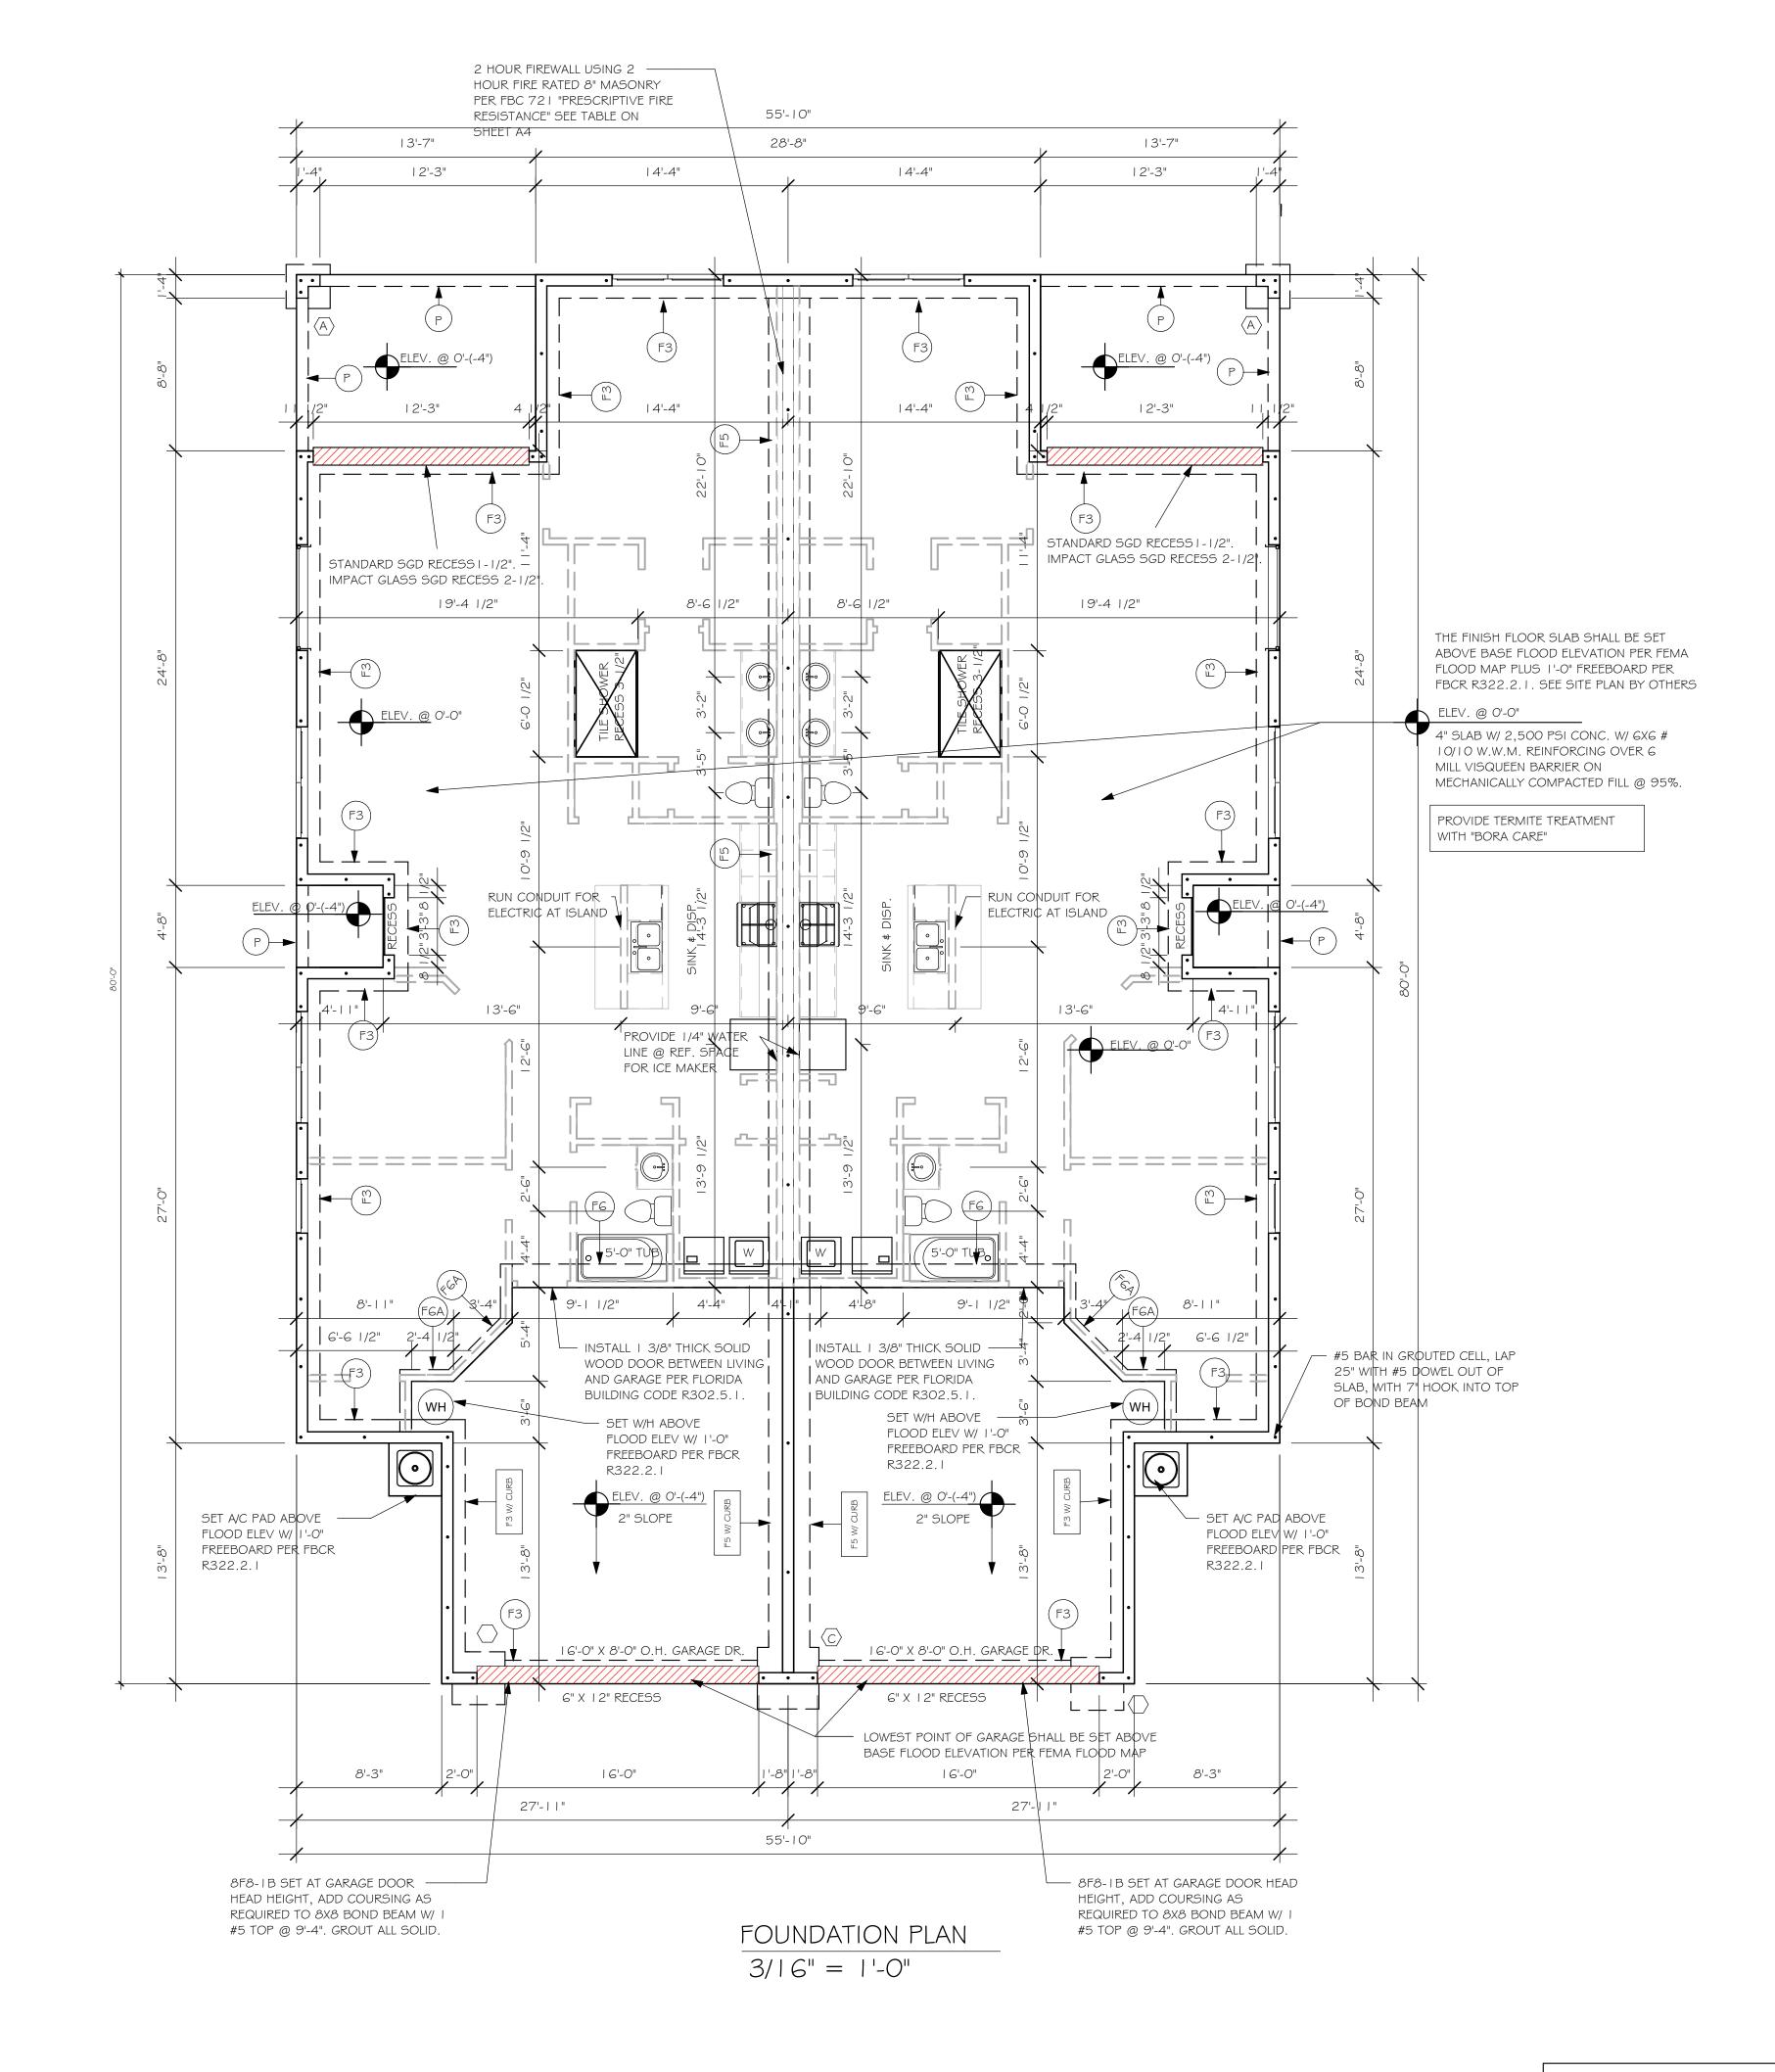

4193 BLOOI

DATE:

DRAWN BY:

CHECKED BY:

REVISED:

SCALE:

07/13/20

JWC

FOUNDATION

As indicated

	DOOR SCHEDULE								
TYPE MARK									
1	1 6080 OHGD	GARAGE DOOR	8'-0"	16'-0"	+28.2/-31.5	+28.2/-31.5	2		
2	3080 ENTRY	DISTINCTION	8'-0"	3'-0"	+33.5/-36.3	+33.5/-44.8	2		
3	(3)-4080 SL. GL. DR.	DISTINCTION	8'-0"	12'-0"	+29.4/-33.3	+29.4/-33.3	2		

WIND PRESSURES PER ASCE7-10, 160 MPH, EXPOSURE C, AND CONVERTED TO ALLOWABLE STRESS DESIGN PRESSURES USING

O.6W LOAD FACTOR. Vasd=124 MPH

GARAGE DOOR ASSUMES 2' IN ZONE 5.

	WINDOW SCHEDULE								
MARK DESCRIPTION MANUFACTURER HEIGHT WIDTH ZONE 4 ZONE 5 Q1									
							•		
Α	25 SH		5'-3"	3'-2"	+33.5/-36.3	+33.5/-44.8	2		
В	2-25 SH		5'-3"	6'-4"	+33.5/-36.3	+33.5/-44.8	6		
С	24"X72" FIXED GLASS		2'-0"	6'-0"	+33.5/-36.3	+33.5/-44.8	2		

WIND PRESSURES PER ASCE7-10, 160 MPH, EXPOSURE C, AND CONVERTED TO ALLOWABLE STRESS DESIGN PRESSURES USING 0.6W LOAD FACTOR. Vasd=124 MPH

D	OOR HEADERS				
6'-8" BI-FOLD	HEADER HEIGHT	82" A.F.F.			
6'-8" SWING	HEADER HEIGHT	82 I/2" A.F.F.			
8'-0" SWING	HEADER HEIGHT	98 I/2" A.F.F.			

## PLAN NOTES

- I) VERIFY ALL ROUGH OPENING DIMENSIONS FOR ALL WINDOWS AND DOORS
- 2) PROVIDE SAFETY GLAZING WITHIN 24" FROM EXIT PER FLORIDA BUILDING CODE R 308.4.2.
- 3) PROVIDE SAFETY GLAZING AT BATH/ SHOWER
- 4) NON BEARING INTERIOR FRAME WALLS SHALL BE FRAMED W/ WOOD OR METAL STUDS. SPACING SHALL NOT EXCEED 24" O.C. (NON BEARING WALLS ONLY)

PER FLORIDA BUILDING CODE R 308.4.5.

- 5) PROVIDE DEAD WOOD IN ATTIC FOR OVERHEAD GARAGE DOOR HARDWARE
- 6) KITCHEN KNEE WALL TO BE FRAMED W/ TOP @ 34 1/2" A.F.F.
- 7) INSTALL SMOOTH WALLS IN KITCHEN AND ALL
- 8) WHERE DRYWALL CEILING IS APPLIED TO TRUSSES
  @ 24" O.C. USE 5/8" DRYWALL OR 1/2" SAG
  RESISTANT PER SEC. 702.3.5
- THE GARAGE SHALL BE SEPARATED FROM THE
  RESIDENCE & ATTIC BY NOT LESS THEN 1/2" GYPSUM
  BOARD APPLIED TO THE GARAGE SIDE. GARAGES
  BENEATH HABITABLE ROOMS SHALL BE SEPARATED
  WITH NOT LESS THAN 5/8" TYPE "X" GYPSUM BOARD
  OR EQUIVALENT. WHERE THE SEPARATIION IS A
  FLOOR CEILING ASSEMBLY, THE STRUCTURE
  SUPPORTING THE SEPARTION SHALL ALSO BE
  PROTECTED BY NOT LESS THAN 1/2" GYPSOM BOARD
  OR EQUIVALENT
- IO) INSTALL I 3/8" THICK SOLID WOOD DOOR BETWEEN LIVING AND GARAGE PER FLORIDA BUILDING CODE
- 1) ALL WINDOWS INSTALLED 72" ABOVE GRADE MUST COMPLY WITH R612.2 MIN 24" SILL HEIGHT OR PROVIDED WITH AN APPROVED WINDOW FALL PRVENTION DEVICE
- 12) ALL CLOSET SHELVES TO BE 12". ALL PANTRY & LINEN TO BE (4)-16" SHELVES 18" O.F.F. W/ 15"
- 13) ALL MECHANICAL AND ELECTRICAL EQUIPMENT TO BE INSTALLED AT OR ABOVE FLOOD PLUS 1'-0" FREEBOARD.

# CABINET BACKING

KITCHEN	UPPER TOP @ 84"	BASE TOP @ 35"
MASTER BATH	UPPER	BASE TOP @ 35"
GUEST BATH	UPPER	BASE TOP @ 31"
LAUNDRY ROOM	UPPFR TOP @ 84"	BASE


IN.	INTERIOR DOOR SCHEDULE						
MARK	DOOR WIDTH	NOTES					
	3'-0"	P.K. = POCKET DOOR					
2	2'-8"	B.F. = BI-FOLD DOOR					
3	2'-6"	D.1 DI-1 OLD DOOK					
4	2'-4"	B.P. = BI-PASS DOOR					
5	2'-0"	L.V. = LOUVERED DOOR					
6	1'-8"						
7	1'-6"						
8	2'-11"						


SQUARE FOOTAGE UNIT	
	•

LIVING AREA	1,513
GARAGE AREA	433
LANAI AREA	146
FRONT PORCH/ ENTRY AREA	29
TOTAL SQUARE FOOTAGE	2,121


SQUARE FOOTAGE UNIT 2
-----------------------

LIVING AREA	1,513
GARAGE AREA	433
LANAI AREA	146
FRONT PORCH/ ENTRY AREA	29
TOTAL SQUARE FOOTAGE	2,121

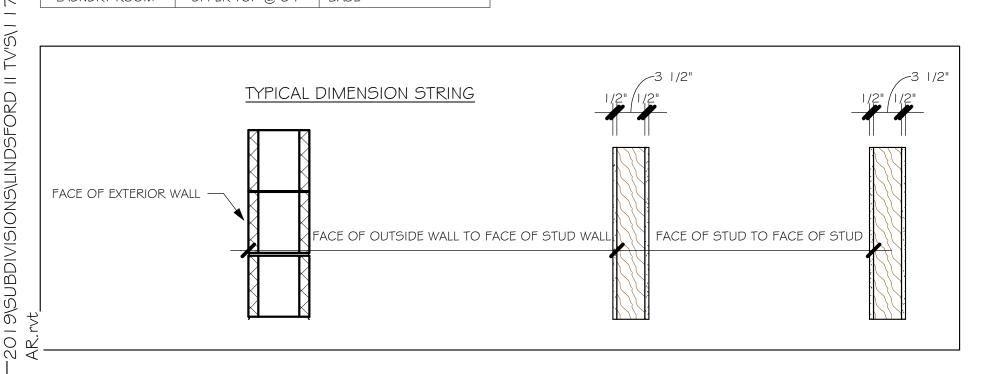

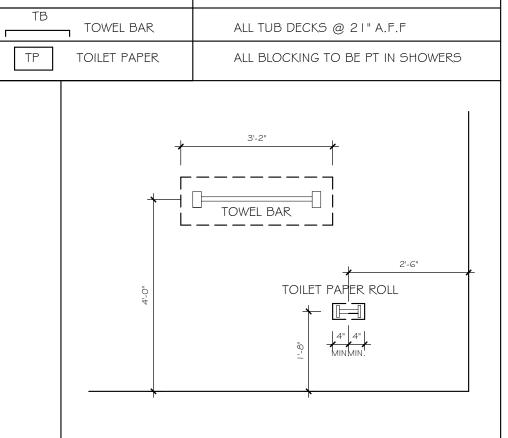

BATHROOM NOTES

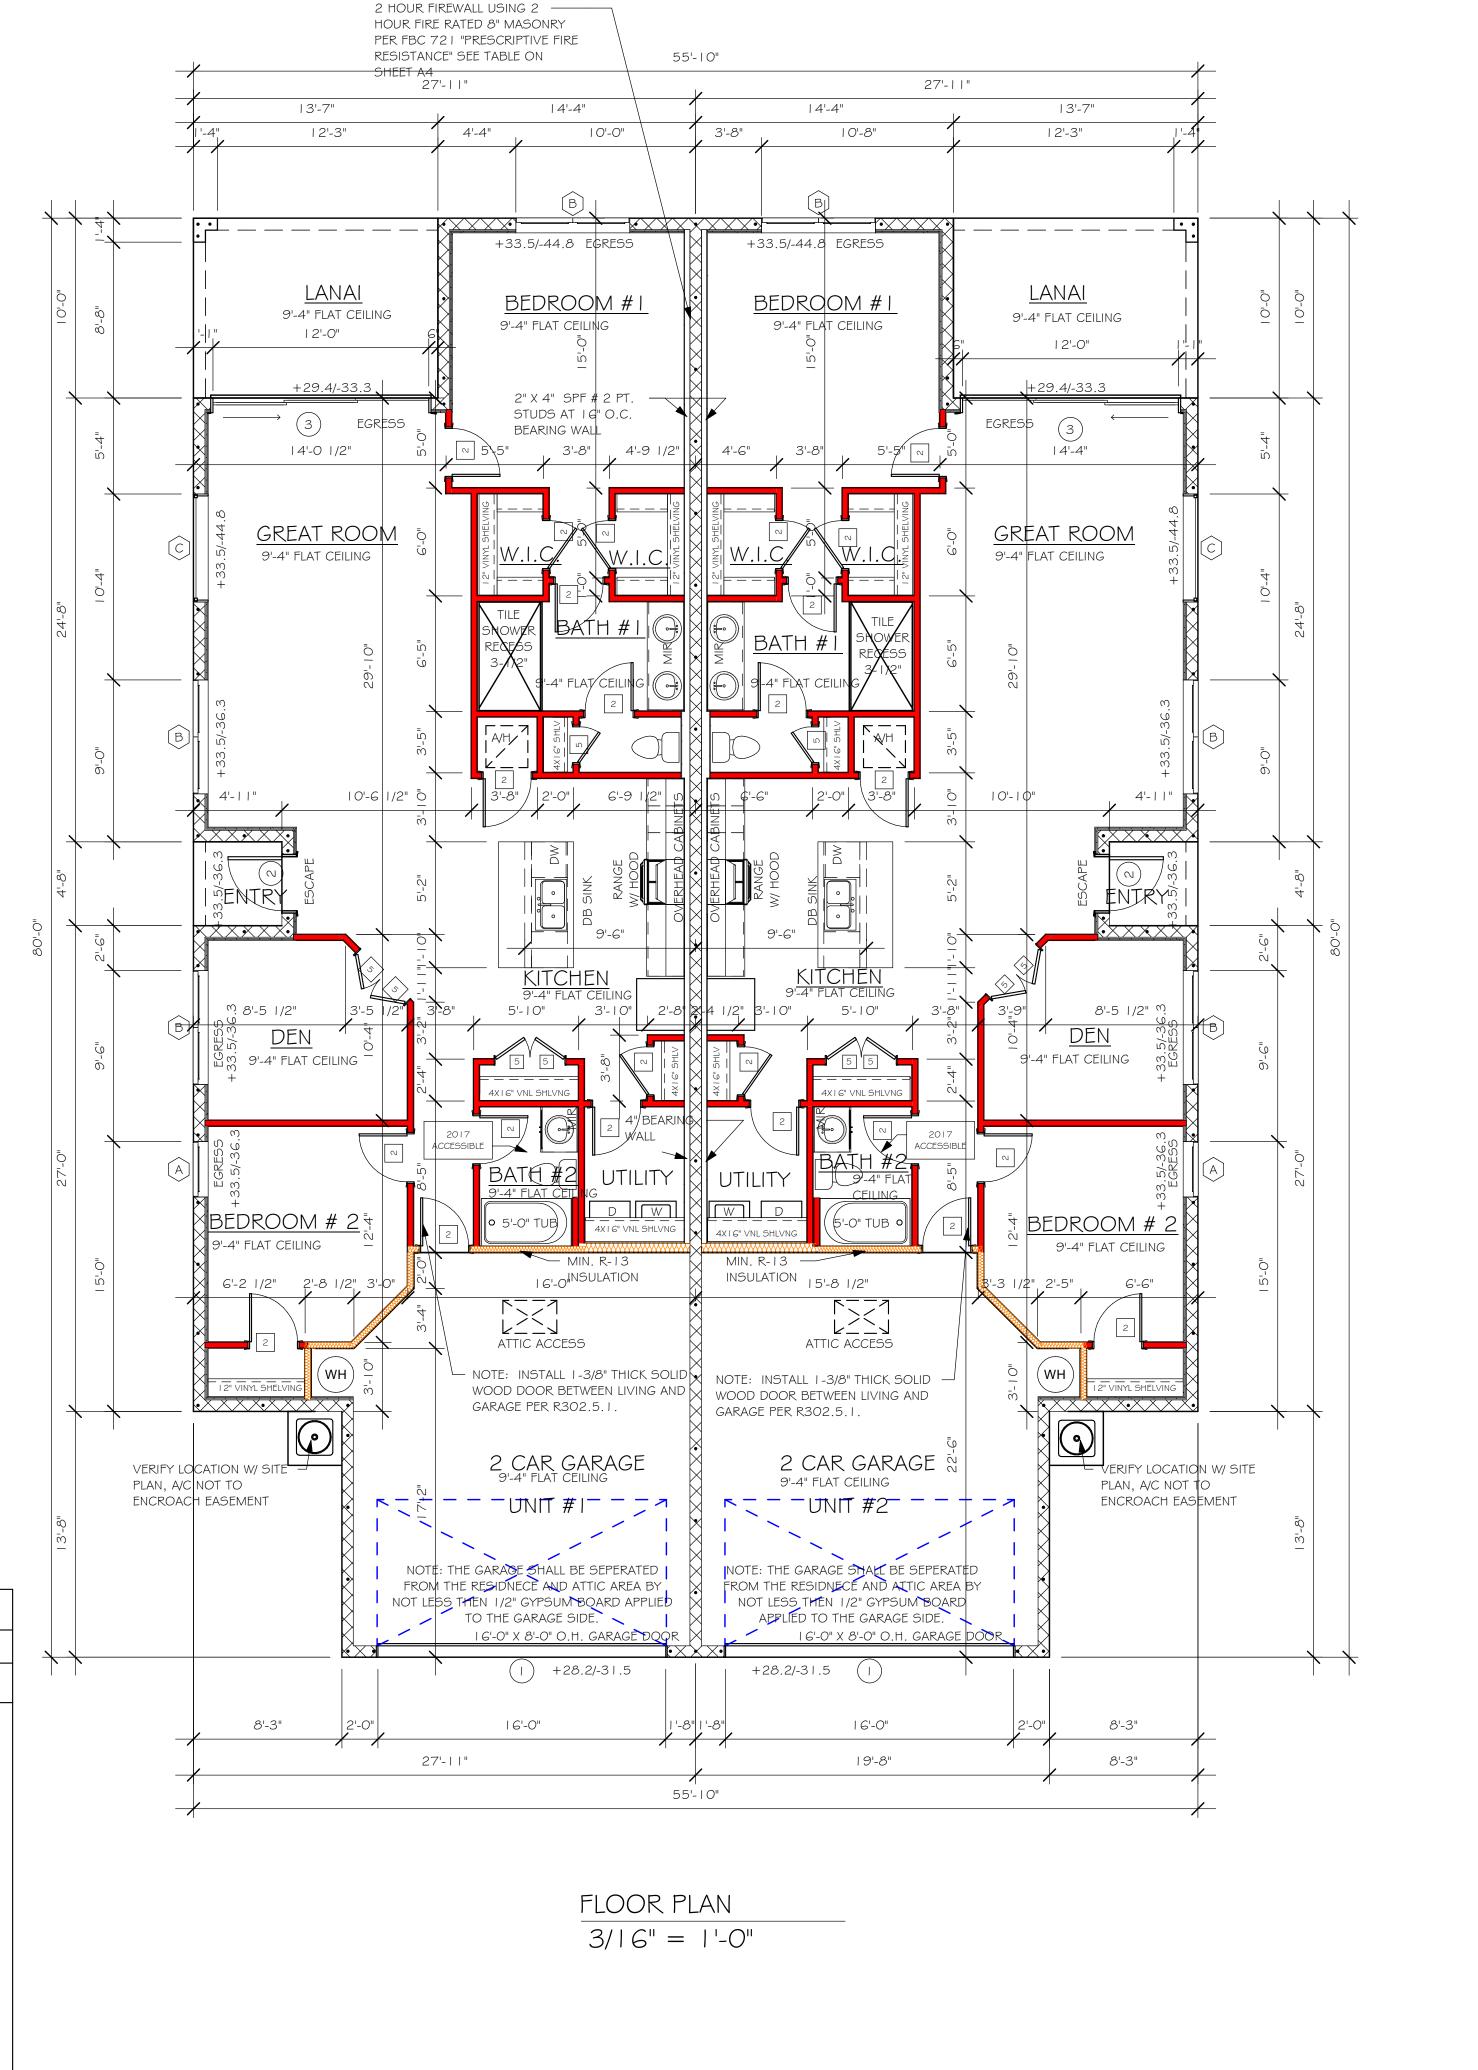

America's Builder

EMAIL: PLANS@GULFCOASTDRAFTING.COM
PHONE: 239-540-1822

This signature and seal is for work performed by the Structural Engineer of Record (SER) related to Structural Engineering only. No work was performed by the SER in other disciplines such as architectural, nechanical, plumbing, electrical, fire, life safety, accessibility, energy, site work, civil, or geotechnical.

SF:

SF:

STRUCTURAL ENGINEERING

STRUCTURAL

SYSTEM

OF NORTH FLORIDA

OF NORTH FLORIDA

CAPE CIRAL, FL 3390-

IVISION: LINDSFORD II TVS

MODEL 526 VILLA

DATE:

07/13/20

DRAWN BY:

JSL

CHECKED BY:

JWC

REVISED:

PLAN:

FLOOR

SCALE:

DESIGN IN ACCORDANCE WITH THE RESIDENTIAL
FLORIDA BUILDING CODE 2017 - 6TH EDITION

As indicated

A-3

	TRUSS STRAPPING TO MA	ASONRY	
	MAX TRUSS UPLIFT @ 24" OC (LBS)	CONNECTOR	FASTENER
METALL — METALG AT ALL TRUSSES TO 1450 Ib UPLIFT. FOR HIGHER UPLIFTS, SEE NOTES ON PLAN.	1450 1810 2120 1875 (1 PLY) 1795 (2 PLY) 2365 (2 PLY) 2365 (2 PLY) 3965/SYP 3330/SPF 4235/SYP 3640/SPF 4670/SYP 4015/SPF 5445/SYP 5360/SPF 10690/SYP 10690/SPF	(1) META 16 TO 40 (1) HETA 16 TO 40 (1) HHETA 16 TO 40 (2) META 16 TO 40 (2) META 16 TO 40 (2) HETA 16 TO 40 (2) HHETA 12 TO 40 MGT (2 PLY) HTT4 HTT5 HTT5KT (1) HGT - 2	(8) 0.148x1 <sup>1/2</sup> ", EMBED 4" (9) 0.148x1 <sup>1/2</sup> ", EMBED 4" (10) 0.148x1 <sup>1/2</sup> ", EMBED 4" (10) 0.148x1 <sup>1/2</sup> ", EMBED 4" (14) 0.162x3 <sup>1/2</sup> ", EMBED 4" (12) 0.162x3 <sup>1/2</sup> ", EMBED 4" (12) 0.162x3 <sup>1/2</sup> " EMBED 4" (22) 0148x3" ATR, EPOXY 12" (18) 0.162x2 <sup>1/2</sup> ", <sup>5/8</sup> " ATR, EPOXY 12" (26) 0.148x3", <sup>5/8</sup> ", ATR, EPOXY 12" (26) 5D#10x2 <sup>1/2</sup> , <sup>5/8</sup> , "ATR, EPOXY (26) 0.148x3" TO GIRDER (2) 3/4" Ø ATR, EPOXY 12" (16) 0.148x3" TO GIRGER,

TRUSS STRAPPING TO STUDWALL/ WOOD BEAM INSTALL AT AL MAX TRUSS UPLIFT | CONNECTOR TRUSSES TO **FASTENER** @ 24" OC (LBS) 840 lb UPLIFT. FOR HIGHER **№**850 (1)MTS16 TO 20 (14) 10dx1-1/2" UPLIFTS, SEE 1700 (2) MTS 16 TO 20 (14) 10dx1-1/2" NOTES ON 2550 (3) MTS 16 TO 20 (14) 10dx1-1/2" 1125 (1) HTS20 TO 30 (24) | Odx | - 1/2" 2250 (2) HTS20 TO 30 (24) | Odx | - 1/2" 3375 (3) HTS20 TO 30 (24) | Odx | - 1/2" 4500 (4) HTS20 TO 30 (24) | Odx|-1/2"

0.97 SQ. FT. FREE AIR

PROVIDE A STRAP FROM THE ABOVE LIST AT EACH ROOF TRUSS BEARING POINT, BASED ON THE TRUSS UPLIFT VALUES IN THE SIGNED AND SEALED

TRUSS DESIGN PACKAGE. CONNECTORS ARE SIMPSON SRTONG TIE. ALL CONNECTORS SHALL BE INSTALLED IN STRICT ACCORDANCE WITH SIMPSON PRINTED INSTUCTIONS.

PROVIDE A STRAP FROM THE ABOVE LIST AT EACH ROOF TRUSS BEARING POINT, BASED ON THE TRUSS UPLIFT VALUES IN THE SIGNED AND SEALED TRUSS DESIGN PACKAGE AND SUITABLE FOR THE GEOMETRY. EMBED STRAP ON -C OF WALL

CONNECTORS ARE SIMPSON STRUCTURAL CONNECTORS. ALL CONNECTORS SHALL BE INSTALLED IN STRICT ACCORDANCE WITH SIMPSON PRINTED INSTUCTIONS. SUBSTITUTIONS MUST BE APPROVED IN WRITING BY THE ENGINEER OF RECORD.

WHERE EMBEDDED STRAPS ARE MISSING, OR MIS-LOCATED, INSTALL RETROFIT STRAP PER

R4-021020

# MODEL 1526 VILLA (EACH UNIT): ATTIC VENTILATION FBCR R806


	COORDINATE VENTING REQUIREMENTS WITH ENERGY CALCULATIONS							
				SOFFIT ONLY ( I,		WI	TH ROOF VE (R.V.	NTS (1/300)
AREAS (SQ. FT.)		AT	ATTIC VENTILATION REQUIRED		ATTIC	ATTIC VENTILATION REQUIRED		
MARK ATTIC SOFFIT		ATTIC AREA/150	REQ'D AIR FLOW OF SOFFIT	QUAD 4 SOFFIT HAS	ATTIC AREA/300	QUANTITY OF ROOF VENTS	MIN AIR FLOW OF SOFFIT	
Ist STORY	2100.0 SQ. FT.	137.3 SQ. FT.	14.0 SQ.FT.	10.20%	8.15%	7.0 SQ. FT.	3	2.98%
			"SOF	FIT ONLY" DOES	5 NOT QUALIFY	ROO	F VENTS ARI	E REQUIRED
		NA.	SOFFIT MODEL CM QUAD 4, FUL ARROW PATTERN 15% FREE AIR F	LL VENT,	22-3/8" BASE	32" BA	SE	


FBC 72 I "PRESCRIPTIVE FIRE RESISTANCE"						
F.B.C. TABLE 722.3.2						
MINIMUM EQUIVALENT THICKNESS (IN) BEARING OR NON-BEARING CONCRETE MASONRY WALLS						
TYPE OF AGGREGATE	FIRE - RESISTANCE RATING (HOURS)					
THE OF AGGREGATE			2 HR			
I . PUMICE OR EXPANDED SLAG			3.2"			
2. EXPANDED SHALE, CLAY OR SLATE			3.6"			
3. LIMESTONE, CINDERS, OR UNEXPANDED SLAG			4.0"			
4. CALCAREOUS OR SILICEOUS GRAVEL			4.2"			

FOR THE 2 HOUR FIREWALL, PURCHASE ONLY BLOCK WITH 2 HOUR FIRE

RATED MARKING, LABEL OR DOCUMENTATION.

2 HOUR FIREWALL USING 8" MASONRY PER

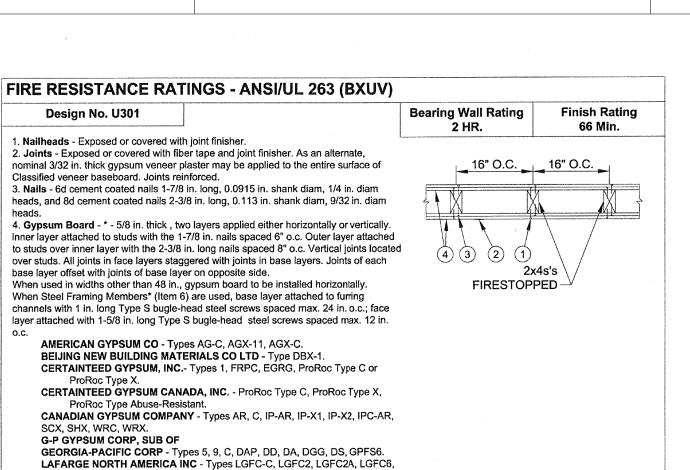

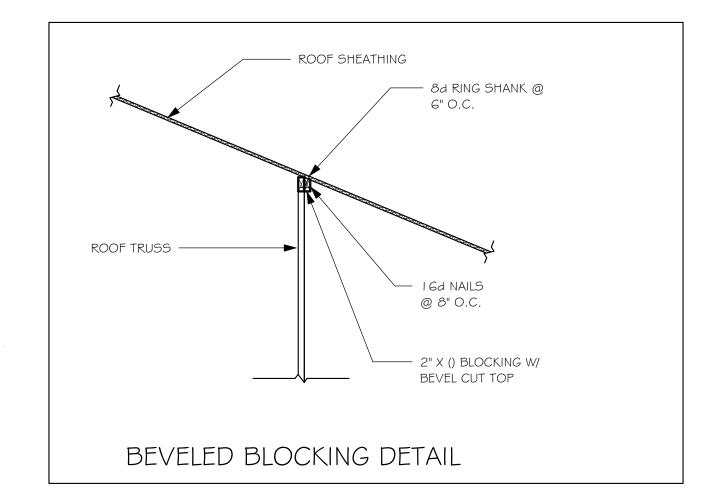

R2

THE GARAGE SHALL BE SEPARATED FROM THE RESIDENCE \$ ATTIC BY NOT LESS THEN 1/2" GYPSUM BOARD APPLIED TO THE GARAGE SIDE. GARAGES BENEATH HABITABLE ROOMS SHALL BE SEPARATED WITH NOT LESS THAN 5/8" TYPE "X" GYPSUM BOARD OR EQUIVALENT. WHERE THE SEPERATION IS A FLOOR-CEILING ASSEMBLY THE STRUCTURE SUPPORTING THE SEPERATION SHALL ALSO BE PROTECTED BY NOT LESS THAN 1/2" GYPSUM BOARD OR EQUIVALENT

I-METAI6

PER 2/S-1

TYPICAL

I-METAI6,

#5 BARS

EXTERIOR CEILING

SEE DETAIL 9/S-I WHERE

INTERSECTS MAIN WALL,

LINTEL AT LANAI/ENTRY

8" X 8" CONTINUOUS

MASONRY BOND BEAM

AT TOP OF WALL WITH I

EXTERIOR CEILING

PER 2/S-I

2-2X12 HEADER

W/ I-MSTAM 18

#5 VERTICAL @ DOT ·

LOCATION (48" O.C. MAX)

IN GROUTED CELL W/ 7"

HOOK INTO BOND BEAM

CORNER BARS IN

BOND BEAM PER 8/S-1

EACH END

I-METAI6

@ A20

@ A I

# BEARING HEIGHT = BEARING @ 9'-4" = FULL HEIGHT WALL PER 6/S-2

## PLAN NOTES:


TRUSS BEARING CONDITIONS AND

DATED: 06/18/19 REVISED: 11/27/19

STRAPPING BASED ON TRUSS LAYOUT

PREPARED BY SCOSTA JOB#: 44151GB

- ROOF AND FLOOR TRUSS BEARING ELEVATION VARIES, SEE LEGEND.
- ROOF AND FLOOR FRAMING SHALL BE WOOD TRUSSES DESIGNED BYA DELEGATED TRUSS ENGINEER PER DESIGN CRITERIA ON SHEET S-I.
- PROVIDE STRAPPING AT TRUSSES PER NOTES ON THIS FOR NAILING OF ROOF AND FLOOR DECK, SEE I AND 2
- ON S-1. 8F8-IB etc., DENOTES PRECAST LINTEL ABOVE DOOR, WINDOW OPENING PER SCHEDULE THIS SHEET AT TRUSS BEARING, PROVIDE 8x8 MASONRY BOND BEAM W/ I #5 CONTINUOUS, SEE DETAIL I I/S-I.

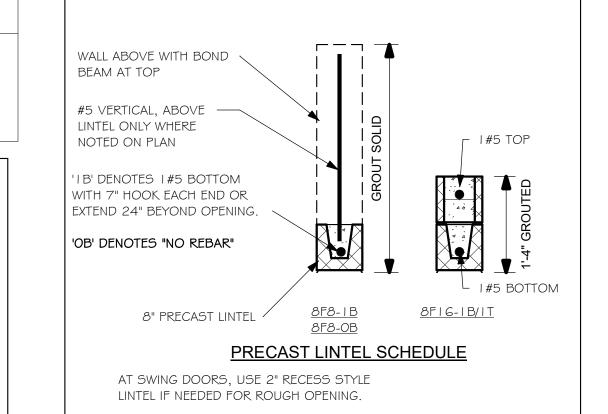

LINTELS BEAR 4" MIN. EACH END

8F8-1B 8F8-1B - I-METAIG I-META I 6 SEE DETAIL 9/S-I WHERE **A4** LINTEL AT LANAI/ENTRY INTERSECTS MAIN WALL. 1-META16 ----/ └─ I-METAI6 A5 TYPICAL 9'-4" FLAT CEILING 9'-4" FLAT CEILING — I-META16, A9 8" X 8" CONTINUOUS MASONRY BOND BEAM AT TOP OF WALL WITH I #5 ✓┛ OR 2X6 SPF#2 @ 16" O.0 → I-MTS16 @ SOFFITS DO NOT MEET A/150 BLOCKING AT MID HEIGHT. RULE FOR ATTIC VENTILATION. THERFORE, RIDGE VENTS ARE BOTTOM @ 16" O.C. PT REQUIRED SEE TABLE. EXPANSION BOLTS @ 32" 9'-4" FLAT CEILING 9'-4" FLAT CEILING 2X6 SPF#2 @ 16" O.C., SPF#2 @ 16" O.C., BLOCKING AT OR SPH6 TOP & BOTTOM @ 16 BOTTOM @ 16" O.C. PT SILL PLATE O.C. PT SILL PLATE W/ 1/2" X G 12" X 6" EXPANSION BOLTS @ <del>16-</del> 2-2XI2 HEADER EXPANSION BOLTS @ 32" OC. W/ I-MSTAM 18 A17 EACH END  $| = | \Box$ 1-H**T**S20 ORD @ B/12 - I-META 16 @ A20 BEDROOM # - #5 VERTICAL @ DOT LOCATION (48" O.C. MAX) IN 7-618 SION: 1 4193 GROUTED CELL W/ 7" HOOK INTO BOND BEAM J1 CORNER BARS IN BOND BEAM PER 2 CARI GARAGE HE GARAGE SHALL BE SEPARATED FROM THE RESIDENCE  $\sharp$ ATTIC BY NOT LESS THEN 1/2" GYPSUM BOARD APPLIED TO HE GARAGE SIDE. GARAGES BENEATH HABITABLE ROOMS SHALL BE SEPARATED WITH NOT LESS THAN 5/8" TYPE "X" GYPSUM BOARD OR EQUIVALENT. WHERE THE SEPERATION NO GABLE BRACE REQUIRED IS A FLOOR-CEILING ASSEMBLY THE STRUCTURE SUPPORTING THE SEPERATION SHALL ALSO BE PROTECTED BY NOT LESS THAN 1/2" GYPSUM BOARD OR EQUIVALENT I-META 16 @ 32" O.C DATE: OUTLOOKER @ INSIDE FACE OF I-META16 ---PROVIDE UL #30 I PER 12/5-1 **GABLE** @ B I DETAIL WITHIN EAVE I-METAI6 DRAWN BY: @ B12 OUTLOOKERS PER 13/5-1 8F8-1B SET AT GARAGE DOOR HEAD CHECKED BY: HEIGHT, ADD COURSING AS REQUIRED TO 8X8 BOND BEAM W/ I #5 TOP @ 9'-4". ROOF FRAMING PLAN GROUT ALL SOLID. 3/16" = 1'-0" REVISED: SCALE: DESIGN IN ACCORDANCE WITH THE RESIDENTIAL FLORIDA BUILDING CODE 2017 - 6TH EDITION

- ROOF SHEATHING SHALL BE FIRE

WITHIN 4'-O" OF EACH SIDE OF

PROVIDE UL #30 I DETAIL WITHIN

RETARDANT TREATED PLYWOOD

DIVIDING WALL PER FBC 706.4.1.1

- SEE DETAIL 9/S-I WHERE LINTEL

WHERE ROOF SHEATHING CONTACTS

STRUCTURAL SYSTEMS OF NORTH FLORIDA 1634 SE. 47th ST SUITE #3 CAPE CIRAL, FL 33904 <239> 549-4554

07/13/20

JSL

JWC

ROOF

As indicated

A-4

ONLY THE EDGE OF ROOF TRUSSES, INSTALL BEVELED BLOCKING PER DETAIL THIS SHEET (DR HORTON

COMPANY REQUIREMENT)

- EXTERIOR CEILING

PER 2/S-1

AT LANAI/ENTRY INTERSECTS

MAIN WALL, TYPICAL

2 HOUR FIREWALL USING 2 ---

HOUR FIRE RATED 8" MASONRY

RESISTANCE" SEE TABLE ON

SHEET A4

SEE DETAIL 9/S-I WHERE LINTEL ----

AT LANAI/ENTRY INTERSECTS

MAIN WALL, TYPICAL

PER FBC 72 | "PRESCRIPTIVE FIRE

2. Joints - Exposed or covered with fiber tape and joint finisher. As an alternate, nominal 3/32 in. thick gypsum veneer plaster may be applied to the entire surface of Classified veneer baseboard. Joints reinforced. 3. Nails - 6d cement coated nails 1-7/8 in. long, 0.0915 in. shank diam, 1/4 in. diam heads, and 8d cement coated nails 2-3/8 in. long, 0.113 in. shank diam, 9/32 in. diam 4. **Gypsum Board** -  $\star$  - 5/8 in. thick , two layers applied either horizontally or vertically. Inner layer attached to studs with the 1-7/8 in. nails spaced 6" o.c. Outer layer attached to studs over inner layer with the 2-3/8 in. long nails spaced 8" o.c. Vertical joints located over studs. All joints in face layers staggered with joints in base layers. Joints of each base layer offset with joints of base layer on opposite side. When used in widths other than 48 in., gypsum board to be installed horizontally. When Steel Framing Members\* (Item 6) are used, base layer attached to furring channels with 1 in. long Type S bugle-head steel screws spaced max. 24 in. o.c.; face layer attached with 1-5/8 in. long Type S bugle-head steel screws spaced max. 12 in. LGFC6A, LGFC-C/A, NATIONAL GYPSUM CO - Types FSK, FSK-C, FSK-G, FSW, FSW-3, FSW-C, PABCO GYPSUM, DIV OF PACIFIC COAST BUILDING PRODUCTS INC - Types C, PG-2, PG-3, PG-3W, PG-4, PG-5, PG-5W, PG-5WS, PG-9 or PG-C. TEMPLE-INLAND FOREST PRODUCTS CORP - Type TG-C. SIAM GYPSUM INDUSTRY (SARABURI) CO LTD - Type EX-1 STANDARD GYPSUM L L C - Types SGC, SG-C or SGC-G. UNITED STATES GYPSUM CO - Types AR, C, FRX-G, IP-AR, IP-X1, IP-X2, IPC-AR, SCX, SHX, WRC, WRX. USG MEXICO S A DE C V - Types AR, C, IP-AR, IP-X1, IP-X2, IPC-AR, SCX, SHX. WRC. WRX. 4A.  $\mathbf{Gypsum\ Board^*}$  - (As an alternate to Item 4) - Nom. 3/4 in. thick , installed as described in Item 4. CANADIAN GYPSUM COMPANY - Types AR, IP-AR. UNITED STATES GYPSUM CO - Types AR, IP-AR. USG MEXICO S A DEV C V - Types AR, IP-AR. 4B. Gypsum Board\* - (As an alternate to Items 4 and 4A) - 5/8 in. thick, 2 ft. wide, tongue and groove edge, applied horizontally as the outer layer to one side of the assembly. Secured as described in Item 4. Joint covering (Item 2) not required. CANADIAN GYPSUM COMPANY - Types SHX. UNITED STATES GYPSUM CO - Types SHX. USG MEXICO S A DEV C V - Types SHX. . Molded Plastic\* - Not shown, Optional - Solid vinyl siding mechanically secured over the outer layer to framing members in accordance with manufacturer's recommended installation details. ASSOCIATED MATERIALS INC ALSIDE, DIV OF **GENTEK BUILDING PRODUCTS LTD HEARTLAND BUILDING PRODUCTS INC NEBRASKA PLASTICS INC** 6. Steel Framing Members - (Optional, Not shown)\* - Furring channels and resilient sound isolation clip as described below: A. Furring Channels - Formed of No. 25 MSG galv. steel. 2-3/8 in. wide by 7/8 in. deep, spaced 24 in. o.c. perpendicular to studs. Channels secured to studs as described in Item B. Ends of adjoining channels are overlapped 6 in. and tied together with double strand of No. 18 SWG galv. steel wire near each end of overlap. As an alternate, ends of adjoining channels may be overlapped 6 in. and secured together with two self-tapping #6 framing screws, min. 7/16 in. long at the midpoint of the overlap, with one screw on each flange of the channel. Wallboard attached to furring channels as described in Item 4. B. Steel Framing Members\* - Resilient sound isolation clip used to attach furring channels (Item 6A) to studs. Clips spaced 48 in. o.c. and secured to studs with No. 8 x 2-1/2 in. coarse drywall screw through the center grommet. Furring channels are friction fitted into clips. PAC INTERNATIONAL INC - Type RSIC-1. \*Bearing the UL Classification Mark

DATE:

07/13/20 DRAWN BY: CHECKED BY: JWC


REVISED: PLAN:

ELECTRICAL SCALE: As indicated

DESIGN IN ACCORDANCE WITH THE RESIDENTIAL FLORIDA BUILDING CODE 2017 - 6TH EDITION

► A/C DISCONNECT

\_ ELECTRIC METER

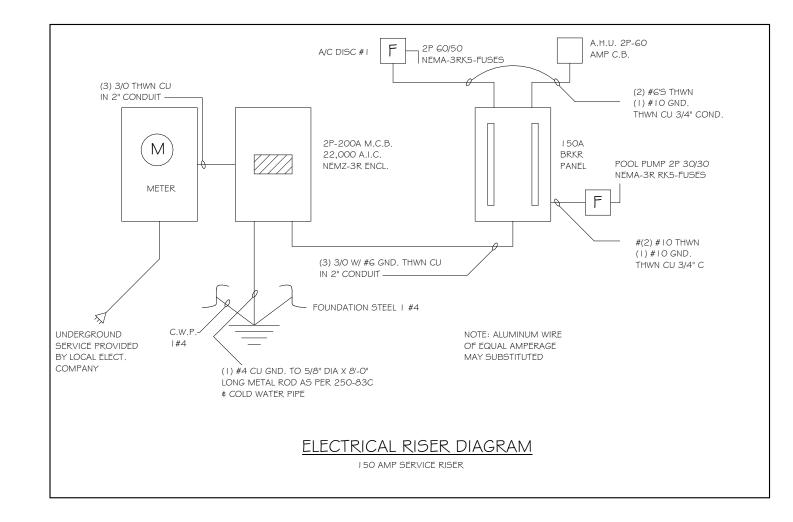

AIR CONDITIONING COORDINATION REQUIRED.
PRIOR TO ORDERING ROOF TRUSSES, THE CONTRACTOR SHALL WORK WITH THE AIR CONDITIONING SUB CONTRACTOR TO DESIGN/PLAN AND LAYOUT THE LOCATION OF AIR HANDLING EQUIPMENT, AIR DUCT SIZE AND LOCATION AND COORDINATE THAT DESIGN WITH THE TRUSSES FOR SPACE, CONNECTIVITY, AND POSITION REQUIREMENTS. THE CONTRACTOR MUST ADVISE THE TRUSS COMPANY PRIOR TO ANY CONSTRUCTION OF TRUSSES OF THE AIR CONDITIONING/HANDLING EQUIPMENTS SIZES AND WEIGHT AND DUCT LAYOUT CONCERNS OR REQUIREMENTS THAT MAY HAVE THE POTENTIAL TO CHANGE OR MODIFY THE TRUSSES TO ACCOMODATE THE SAME. THE CONTRACTOR SHALL COORDINATE CONDENSATION DISCHARGE LINE LOCATION, AND ELECTRICAL SERVICE TO AIR EQUIPMENT, AND PROVIDE ANY LOCAL DISCONNECTS, LIGHTS AND SERVICE PLATFORMS THAT MAY BE REQUIRED.

ELECTRICAL PLAN			
200 AMP SERVICE			
TAG	QUANTITY	PRODUCT	
Α	(26)	(FLUSH MOUNTED LT)	
В	(4)	(VAPORS)	
С	(4)	(PENDANT LIGHT	
D	(8)	(10" MUSHROOMS)	
E	(2)	(24" AVALON 3 LT)	
F	(4)	(36" AVALON 4 LT)	
G	(X)	(NOT USED)	
Н	(2)	(COACH LIGHTS)	
	(X)	(COACH LIGHTS)	
J	(1)	(J BOX)	
K	(2)	(4' FLUORESCENT)	
L	(X)	(2' FLUORESCENT)	
М	(X)	(5LT CHANDELIER)	
N	(X)	(3 LT AVALON)	
0	(X)	(PENDANT/ NOOK)	
Р	(X)	(X)	
Q	(X)	(X)	

11			
J	I 20 V JUNCTION BOX		
$\ominus$	SINGLE RECEPTACLE OUTLET		
$\Rightarrow$	220 V RECEPTACLE OUTLET		
<b>—</b>	4-PLEX RECEPTACLE OUTLET		
$\ominus$	DUPLEX RECEPTACLE OUTLET		
$\rightleftharpoons$	I/2 SWITCHED DUPLEX OUTLET		
AFF	DUPLEX RECEPTACLE AT ELEV. A.F.F.		
$\overline{\bigcirc}$	DUPLEX RECEPTACLE - ABOVE COUNTER		
$\Theta$	SINGLE POLE SWITCH		
<del>()</del> 3	3 WAY SWITCH		
<del>()</del> □	DIMMER SWITCH		
√ MS	MOTION SENSOR SWITCH		
⊗ <sub>SD</sub>	AC/DC SMOKE DETECTOR TO BE INTERCONNECTED ANY RESIDENT HAVING A FOSSIL-BURNING HEATER OR APPLIANCE, A FIREPLACE, OR AN ATTACHED GARAGE SHALL HAVE AN OPERATIONAL CARBON MONOXIDE ALARM INSTALLED WITHIN 10 FEET OF EACH ROOM USED FOR SLEEPING PERPOSES. PER RULE 9B-3.04.72 SD (SMOKE DETECTOR) SCD (CARBON MONOXIDE/ SMOKE DETECTOR)		
-T	TELEPHONE OUTLET		
-[TV]	TELEVISION RECEPTION OUTLET		
<del>-</del>	SURFACE MOUNTED CEILING LIGHT		
0	FLUSH MOUNTED LIGHT		
Ю	WALL MTD. BRACKET LIGHT		
46	DUPLEX FLOOD LIGHT		
	EXHAUST FAN		
	TRACK MTD. LIGHTS		
	A/C DISCONNECT		
Ю	PUSH BUTTON (PB) / DOOR BELL (DB)		
(10)	INTERCOM		
P	KEYPAD		
	4' FLUORESCENT LIGHT		
<u> </u>	2' UNDER COUNTER LIGHT		
NOTE: NO	DT ALL SYMBOLS ARE USED FOR THIS		

ELECTRICAL LEGEND

| ELECTRICAL METER

ELECTRICAL PANEL

NOTE: NOT ALL SYMBOLS ARE USED FOR THIS

ARC-FAULT CIRCUIT-INTERRUPTERS AND TAMPER RESISTANT RECEPTACLES SHALL BE INSTALLED

IN DWELLING UNITS PER N.E.C 210.12 AND 406.11 ALL ELECTRIC, ELECTRICAL EQUIPMENT AND APPLIANCES TO BE SET AT OR ABOVE BASE FLOOD ELEVATIONS PLUS 1'-0" FREEBOARD.

ALL OUTLETS IN WET AREAS AND ALL EXTERIOR OUTLETS TO BE GFI'S.

INSTALL PHONE AND T.V PER CONTRACT.

# ELECTRICAL NOTES FOR FIRE RATED WALLS

ELECTRICAL OUTLETS PLACED IN FIRE RATED WALLS SHALL BE IN CONFORMANCE WITH THE UNDERWRITERS LABORATORIES, INC. FIRE RESISTANCE DIRECTORY, CURRENT EDITION. THESE REQUIREMENTS INCLUDE, BUT ARE NOT LIMITED TO, THE

B) AGGREGATE AREA OF OUTLET/SWITCH BOXES SHALL NOT EXCEED (100) SQUARE INCHES WITHIN (100) SUARE FEET OF

WALL AREA.

C) OUTLET/SWITCH BOXES LOCATED ON OPPOSITE SIDE OF THE SAME WALL SHALL BE SEPERATED BY A MINIMUM OF (24)

O) ALL OUTLET/SWITCH BOXES SHALL BE SECURELY ATTACHED TO THE STUDS AND THE OPENING IN THE WALL BOARD FACING SHALL BE CUT SO THAT THE CLEARANCE BETWEEN THE BOX AND THE WALLBOARD DOES NOT EXCEED 1/8 INCH.

LECTRICAL PLAN					
SERVICE					
JANTITY	PRODUCT				
6)	(FLUSH MOUNTED LT)				
)	(VAPORS)				
)	(PENDANT LIGHT				
)	(10" MUSHROOMS)				
)	(24" AVALON 3 LT)				
)	(36" AVALON 4 LT)				

PROJECT.

ELECTRICAL NOTES:

INSTALL ALL ELECTRICAL PER NEC 2014

FOLLOWING SPECIFIC ITEMS: A) INDIVIDUAL OUTLET/SWITCH BOXES SHALL OT EXCEED (16) SQUARE INCHES IN AREA.

**Y**GFI @ 42"

ATTIC ACCESS

STUB OUT FOR GARAGE

A.F.F.

ATTIC ACCESS

STUB OUT FOR GARAGE

 $\frac{\text{ELECTRICAL PLAN}}{3/16" = 1'-0"}$ 

DOOR OPENER

A/C DISCONNECT -

ELECTRIC METER —

## GENERAL NOTES

- THE CONTRACTOR SHALL VERIFY ALL CONDITIONS AND DIMENSIONS AT THE JOB SITE PRIOR TO COMMENCING WORK, THE CONTRACTOR SHALL REPORT ALL DISCREPENCIES BETWEEN THE DRAWINGS AND EXISTING CONDITIONS TO THE DESIGNER PRIOR TO COMMENCING WORK.
- THE CONTRACTOR SHALL SUPPLY, LOCATE AND BUILD INTO THE WORK ALL INSERTS, ANCHORS, ANGLES, PLATES, OPENINGS, SLEEVES, HANGERS, SLAB DEPRESSIONS AND PITCHES AS MAY BE REQUIRED TO ATTACH AND ACCOMMODATE OTHER WORK.
- ALL DETAILS AND SECTIONS SHOWN ON THE DRAWINGS ARE INTENDED TO BE TYPICAL AND SHALL BE CONSTRUCTED TO APPLY TO ANY SIMILAR SITUATION ELSEWHERE IN THE WORK EXCEPT WHERE A DIFFERENT DETAIL IS SHOWN.
- SUBSURFACE SOIL CONDITION INFORMATION IS NOT AVAILABLE FOUNDATIONS ARE DESIGNED FOR A SOIL BEARING CAPACITY OF 2,000 PSF. THE CONTRACTOR SHALL REPORT ANY DIFFERING CONDITIONS TO THE DESIGNER PRIOR TO COMMENCING WORK.
- STRUCTURAL DRAWINGS SHALL BE USED IN CONJUCTION WITH JOB SPECIFICATION AND HOUSE PLANS, MECHANICAL, ELECTRICAL, PLUMBING, AND SITE DRAWINGS, CONSULT THESE DRAWINGS FOR SLEEVES, DEPRESSIONS AND OTHER DETAILS NOT SHOWN ON STRUCTURAL DRAWINGS.
- ALL SPECIFIED FASTENERS MAY ONLY BE SUBSTITUTED IF APPROVED BY THE ENGINEER IN WRITING, THE INSTALLATION OF THE FASTENERS SHALL BE IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS. SIMPSON FASTENERS SPECIFIED MAY BE SUBSTITUTED WITH THE SAME QUANTITY AND EQUIVALENT STRENGTH PRODUCT.
  - ALL BOLTS, NUTS, WASHERS, STRAPS AND FASTENERS INCLUDING NAILS, SHALL BE HOT MOPED DIPPED GALVANIZED OR STAINLESS STEEL CONTINUOUS ANCHORAGE SHALL BE PROVIDED BETWEEN ALL TRUSSES. WALL SECTIONS, BEAMS, POSTS AND FOOTINGS WITH USE OF STRAPS AND CONNECTORS AS SPECIFIED HEREIN.
- TREATED WOOD REQUIREMENTS:-

GENERAL ROOF ASSEMBLY

ROUND HEAD, 2" NAIL LENGTH.

ALL TREATED WOOD EXPOSED TO WEATHER SHALL BE PROTECTED, PRESSURE TREATED, OR NATURALLY RESISTANT TO DECAY. ALL WOOD TOUCHING MASONRY OR CONCRETE SHALL BE ISOLATED, OR

TO DETERMINE ERECTION PROCEDURES AND SEQUENCES TO ENSURE SAFETY OF

THE BUILDING AND ITS COMPONENTS DURING ERECTION. THIS INCLUDES THE

NECESSARY SHORING, SHEETING, TEMPORARY BRACING, GUYS, OR TIE DOWNS.

- PRESSURE TREATED. THE STRUCTURE IS DESIGNED TO BE SELF SUPPORTING AND STABLE AFTER THE BUILDING IS COMPLETE. IT IS THE CONTRACTOR'S SOLE RESPONSIBILTY
- CEILING DRYWALL INSTALLED WITHIN THE HOUSE TO TRUSSES SPACED 24" O.C. SHALL BE 5/8" DRYWALL OR 1/2" SAG RESISTANT PER SEC. 702.3.5
- LANAI CEILINGS & COVERED ENTRY CEILINGS IX4 STRIPPING @ 16" O.C. FASTENED WITH 2-8d NAILS TO EACH TRUSS. 5/8" EXTERIOR GYP. BOARD CEILING FASTENED WITH 8d NAILS OR 1-5/8" DRYWALL SCREWS @ 6" O.C. EDGE AND FIELD.

SHALL BE APA RATED SHEATHING, EXPOSURE 1, SPAN RATING 24/16 OR BETTER

INSTALL PANELS WITH LONG DIMENSION PLACED PERPENDICULAR TO TRUSSES.

A 1/8" SPACE BETWEEN ADJACENT SHEETS SHALL BE MAINTAINED . INSTALL "H"

OVER SHANK DIAMETER, 16 TO 20 RINGS PER INCH, 0.280" DIAMETER FULL

FLASHING SHALL BE ALUMINUM, ALUMINUM ZINC COATED STEEL 0.0179" THICK,

26 GAUGE AZ50 ALUM ZINC, OR GALVANIZED STEEL 0.0 | 79" THICK, 26 GAUGE

ZINC COATED G90. FLASHING SHALL BE INSTALLED IN ACCORDANCE WITH THE ZIP SYSTEM ROOF SHEATHING MANUFACTURES PUBLISHED REQUIREMENTS. ALL FLASHING AND INSTALLATION SHALL CONFORM TO SECTION R905.2.8 (1 TO 5).

DRIP EDGE SHALL BE PROVIDED AT ALL EAVES AND GABLES OF SHINGLES ROOFS,

LAPPED A MINIMUM OF 3" @ JOINTS. THE OUTSIDE EDGE SHALL EXTEND A MINIMUM

OF 1/2" BELOW SHEATHING AND THE INSIDE EDGE SHALL EXTEND BACK A MINMUM

OF 2". DRIP EDGE SHALL BE FASTENED AT NO MORE THAN 4" CENTERS. THERE SHALL

BE A MINIMUM OF 4" WIDTH OF ROOF CEMENT INSTALLED OVER THE DRIP EDGE FLANGE.

CLIPS AT UNSUPPORTED PANEL EDGES. THE ROOF SHEATHING SHALL BE NAILED WITH

PENETRATE THE TOP CHORD OF THE TRUSSES WITHOUT SPLITTING. RING SHANK NAILS PER R803.2.3.1 - 0.113" NOMINAL SHANK DIAMETER, RING DIAMETER OF 0.012"

8d RING SHANK NAILS @ 6" O.C. EDGE AND 6" O.C. FIELD. ENSURE THAT ALL NAILS

ASPHALT SHINGLE ROOF SPEC'S

15# FELT SHALL BE INSTALLED UNDER ASPHALT SHINGLES. ALL ASPHALT SHINGLES SHALL HAVE SELD-SEALING STRIPS OR BE INTERLOCKING AND COMPLY WITH ASTM D 225 OR D 3462, AND SHALL BE SECURED TO THE ROOF WITH NO LESS THAN 6 FASTENERS PER SHINGLE STRIP, OR A MINIMUM OF 2 FASTENERS PER SHNGLE TAB, AND SHALL IN NO CASSE BE FASTENED WITH LESS FASTENERS THAN THAT REQUIRED BY THE MANUFACTURE. INSTALLATION SHALL COMPLY WITH MANUFACTURES REQUIREMENTS FOR INSTALLATION IN THE GIVEN FLORIDA WIND ZONE, AS DETERMINED BY ASTM D 3161.

FASTENERS FOR ASPHALT SHINGLES SHALL COMPLY WITH ASTM F 1667, AND SHALL BE MADE WITH GALVANIZED STEEL, STAINLESS STEEL OR ALUMINUM WITH A MINIMUM SHANK SIZE OF 12 GAUGE (O. 105") WITH A MINIMUM 3/8" DIAMETER HEAD SHANK AND SHALL BE A LENGTH TO PENTRATE THE SHEATHING

THE NAIL COMPONENT OF PLASTIC CAP NAILS SHALL MEET OR EXCEED THE REQUIREMENTS OF ASTM A 641, CLASS 1, OR EQUAL, AND SHALL BE CORROSION RESTITANT BY ELECTRO GALVANIZATION, MECHANICAL GALVANIZATION, HOT DIPPED GALVANIZATION OR SHALL BE MADE OF STAINLESS STEEL, NON-FERROUS METAL


## CLAY AND CONCRETE ROOF TILE SPECS

INSTALL PEEL AND STICK UNDERLAYMENT APPROVED FOR SINGLE LAYER APPLICATION UNDER TILE ROOF. THE INSTALLATION OF CLAY AND CONCRETE TILE SHALL COMPLY

- WITH THE PROVISIONS OF R905.3 F.B.C. MARKING: EACH ROOF TILE SHALL HAVE A PERMANENT MANUFACTURER'S IDENTIFICATION MARK. APPLICATION SPECIFICATIONS: THE TILE MANUFACTURER'S WRITTEN
- APPLICATION SPECIFICATIONS SHALL BE AVAILABLE AND SHALL INCLUDED BUT NOT BE LIMITED TO THE FOLLLOWING: I. TILE PLACEMENT AND SPACING,
- 2. ATTACHMENT SYSTEM NECESSARY TO COMPLY WITH CURRENT WIND CODE,
- A. AMOUNT AND PLACEMENT OF MORTART B. AMOUNT AND PLACEMENT OF ADHESIVE C. TYPE, NUMBER, SIZE AND LENGTH OF FASTENERS AND CLIPS.
- 3. UNDERLAYMENT 4. SLOPE REQUIREMENT

## FLOOR SHEATHNG AT 2ND FLOOR

A.P.A. RATED STURDI-FLOOR, EXPOSURE 1, TONGUE & GROOVE EDGES SPAN RATING 48/24 OR BETTER, GLUED AND NAILED

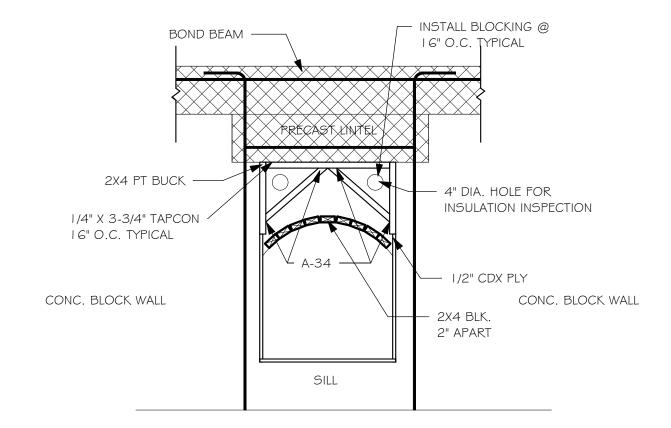


# WINDOW OR DOOR ARCH SPACE FRAMING ABOVE

## SPECIAL NOTE:

FRAMING OF DECORATIVE ARCHES AT - 4" DIA. HOLE FOR WINDOW AND DOOR OPENINGS SHALL INSULATION INSPECTION COMPLY WITH THE FOLLOWING: - ATTACH IX4 OR IX8 PT W/ (2) 8d NAILS STAGGERED 8" O.C. FOR FRAME APPLICATIONS OR 1-1/2" O. I I 3" CASE HARDENED PNEUMATIC I X 4 MIN. BLOCKING — DRIVEN NAILS STAGGERED @ 8" O.C. ATTACH W/ (2) 8d NAILS TYPICAL EACH END 15/32" C-D PLYWOOD, BOTH SIDES. ATTACH W/ 8d NAILS 6" O.C.

# FILL IN FRAMING

# 5.7 SQ. FT. CLEAR OPENING '-8" MIN. FINISH FLOOR

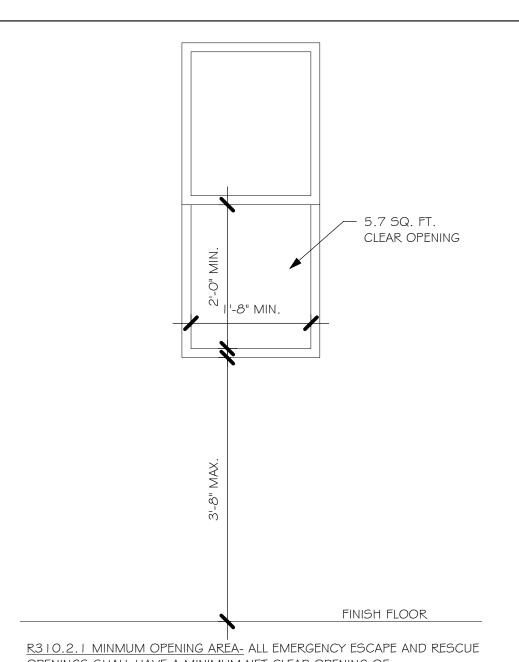

OPENINGS SHALL HAVE A MINIMUM NET CLEAR OPENING OF 5.7 SQUARE FEET (0.530 m<sup>2</sup>).

EXCEPTION- GRADE FLOOR OPENINGS SHALL HAVE A MINIMUM NET CLEAR OPENING OF 5 SQUARE FEET (0.465 m<sup>2</sup>).

WIDTH SHALL BE 20 INCHES (508mm).


WITHOUT THE USE OF KEYS OR TOOLS.


R3 1 O. 2. 1 MINMUM OPENING HEIGHT- THE MINIMUM NET CLEAR OPENING HEIGHT SHALL BE 24 INCHES (610mm). R3 | O.2. | MINMUM OPENING WIDTH- THE MINIMUM NET CLEAR OPENING

R310.1.1 OPERATIONAL CONSTRAINTS- EMERGENCY ESCAPE AND RESCUE OPENINGS SHALL BE OPERATIONAL FROM THE INSIDE OF THE ROOM

R310.2.3 WINDOW WELLS- THE MINIMUM HORIZONTAL AREA OF THE WINDOW WELL SHALL BE 9 SQUARE FEET (0.84 m2), WITH A MINIMUM HORIZONTAL PROJECTION AND WIDTH OF 36 INCHES (914mm). THE AREA OF THE WINDOW WELL SHALL ALLOW THE EMERGENCY ESCAPE AND RESCUE OPENING TO BE FULLY OPENED.

MINIMUM EGRESS WINDOW DETAIL

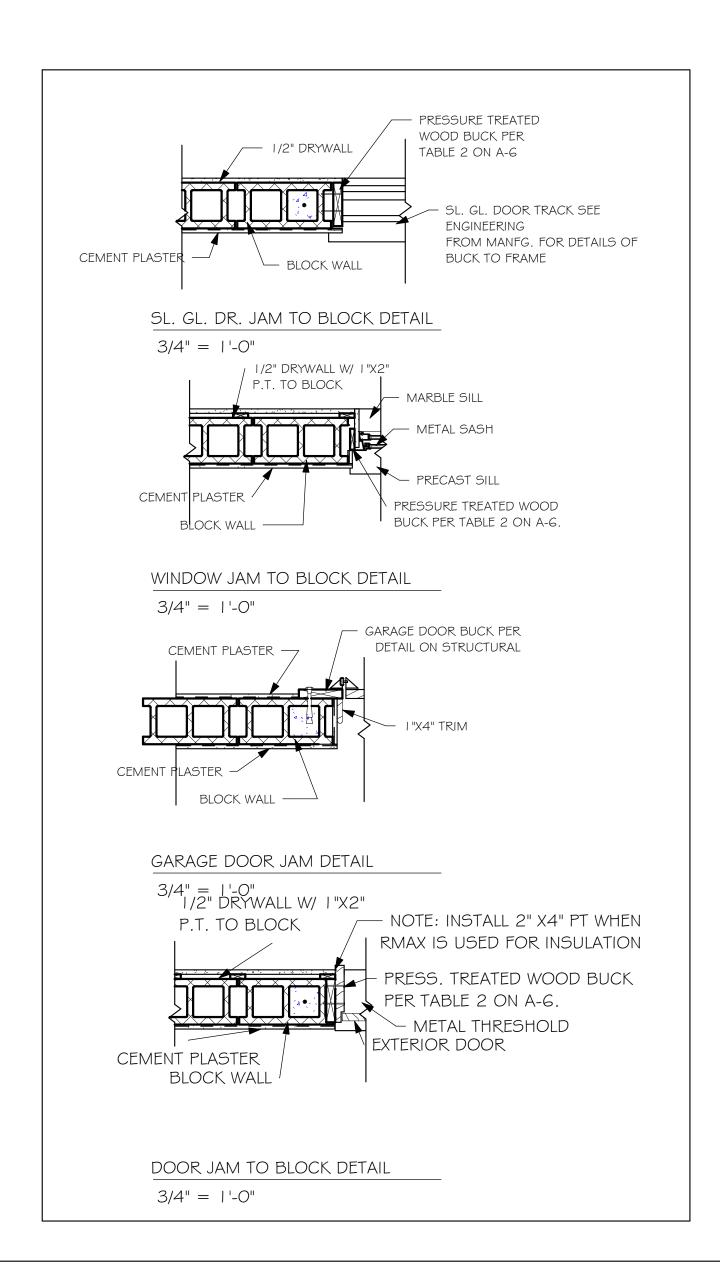

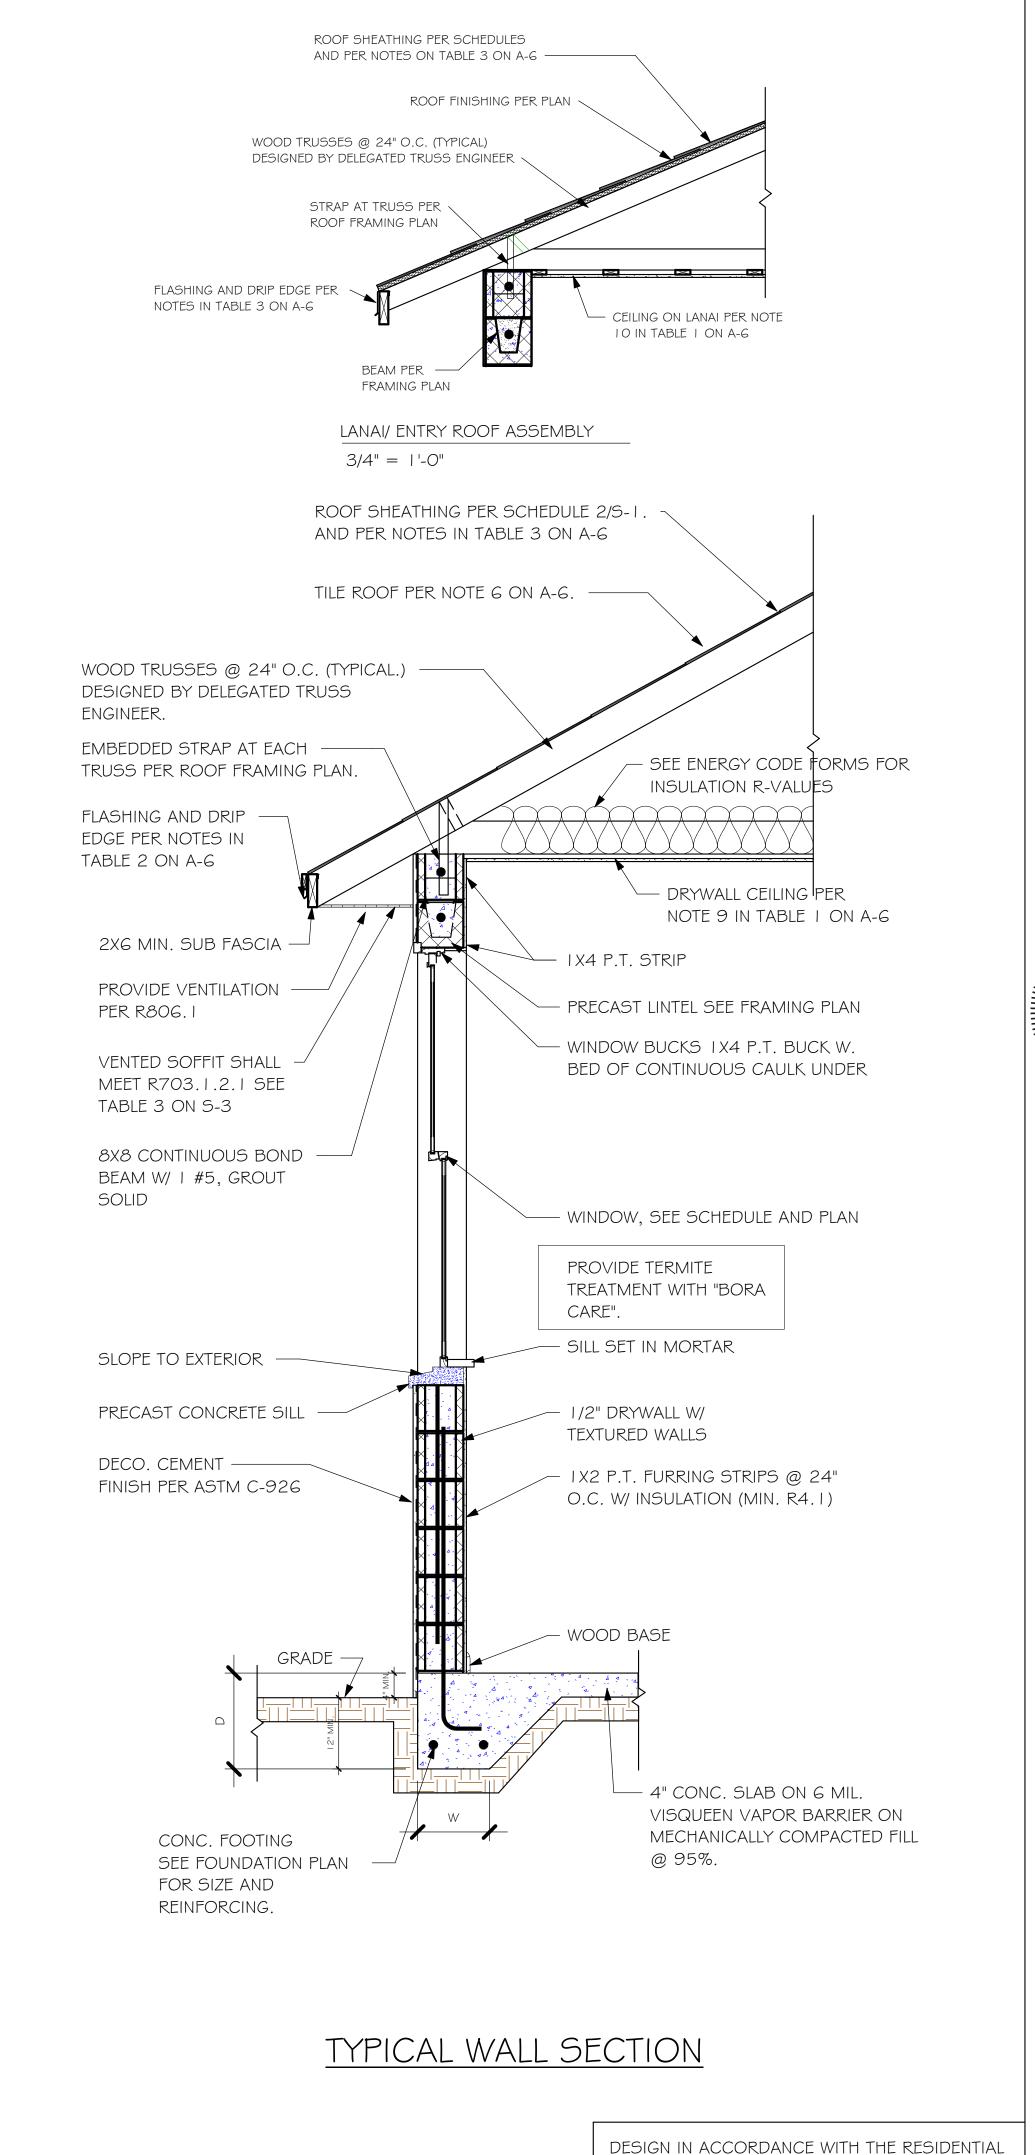

 $| = | \Box$ 

 $\omega$ 

DATE:

DRAWN BY:

CHECKED BY:

**REVISED:** 

FLORIDA BUILDING CODE 2017 - 6TH EDITION

07/13/20

JWC

SECTIONS

As indicated

A-6

7-618 1SION: LINDSF 4193 BLOON


DATE: 07/13/20 DRAWN BY: CHECKED BY:


JWC


As indicated

REVISED:


BANDING DETAILS SCALE:

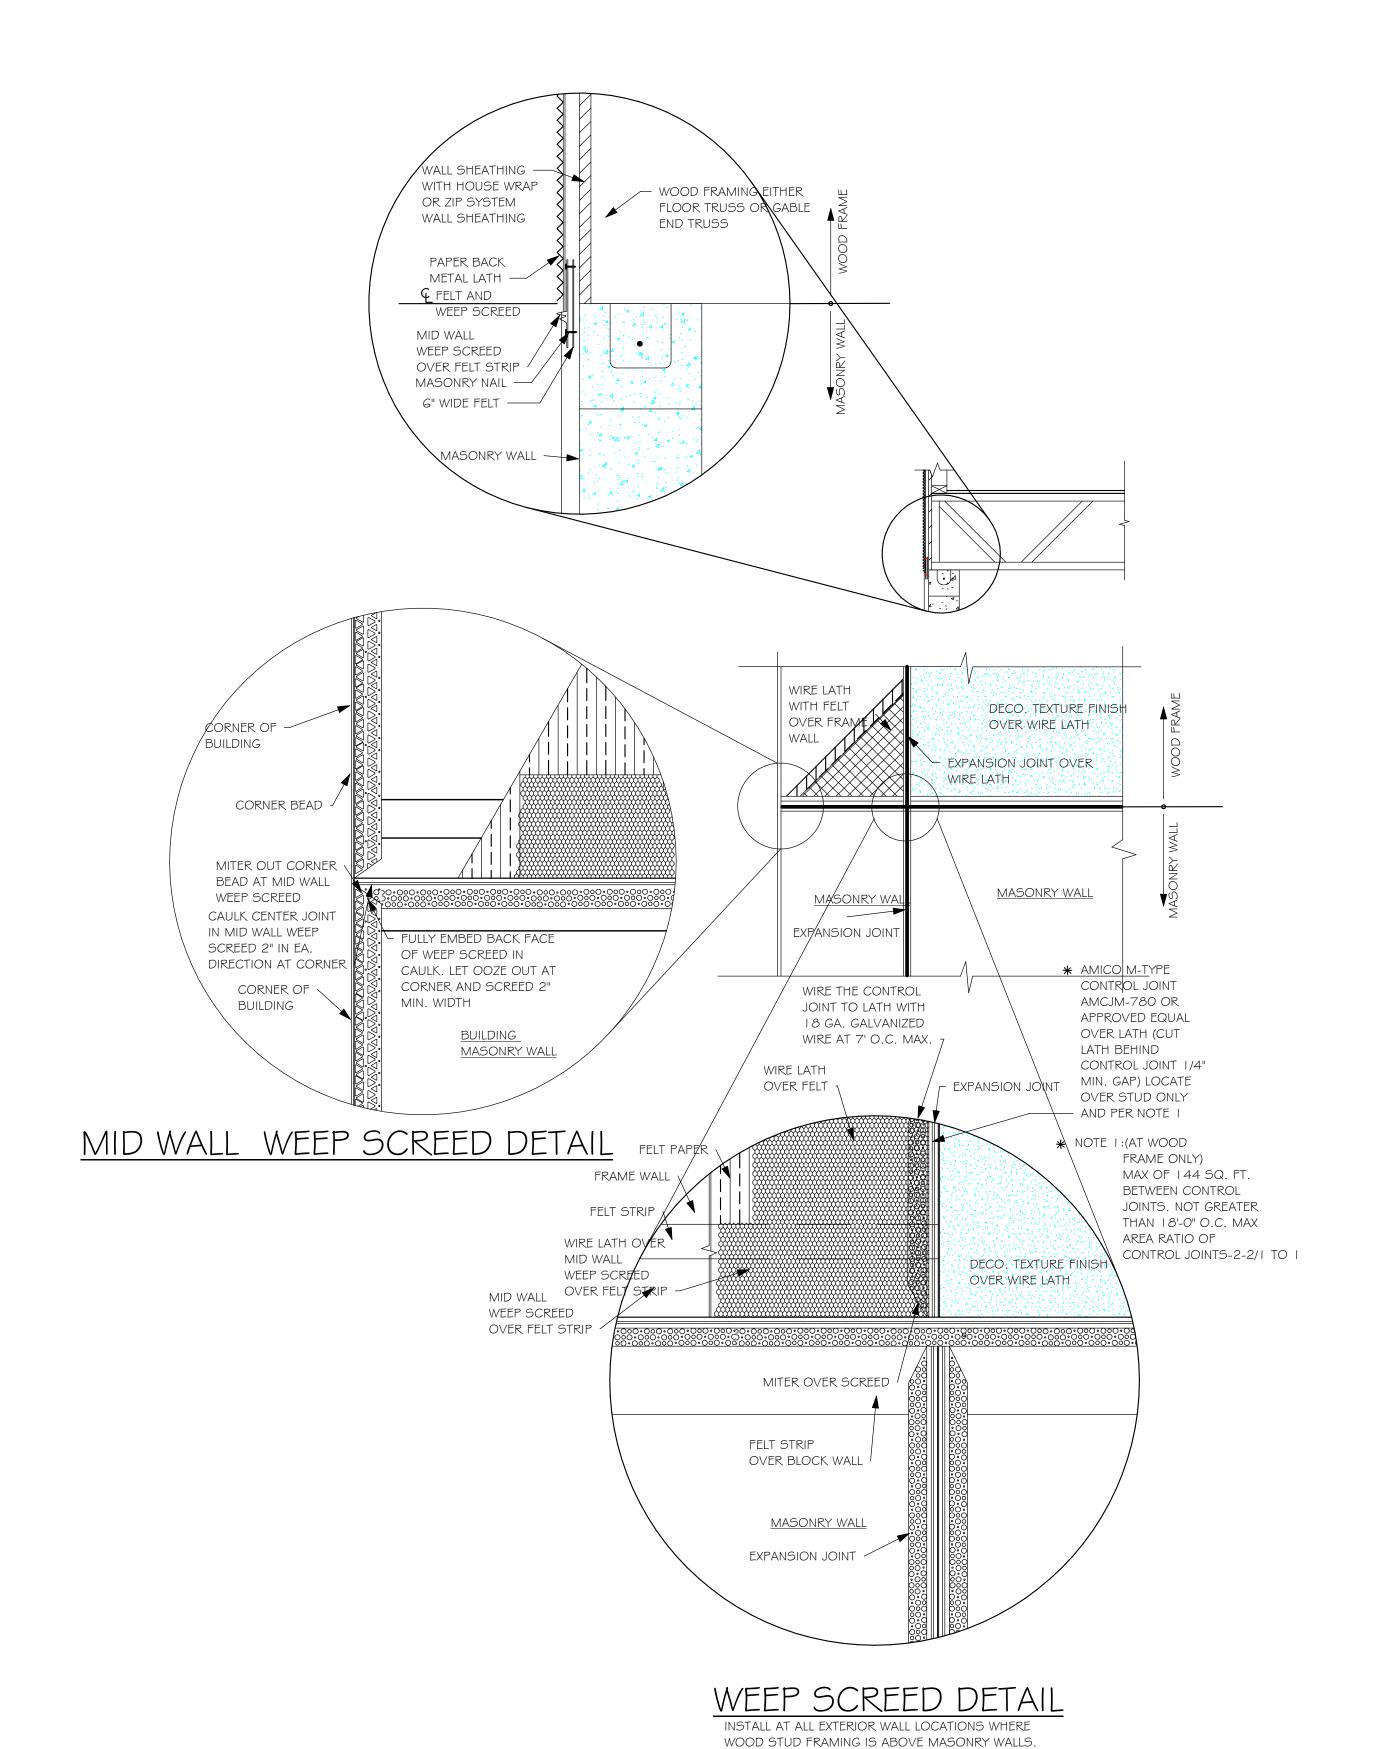

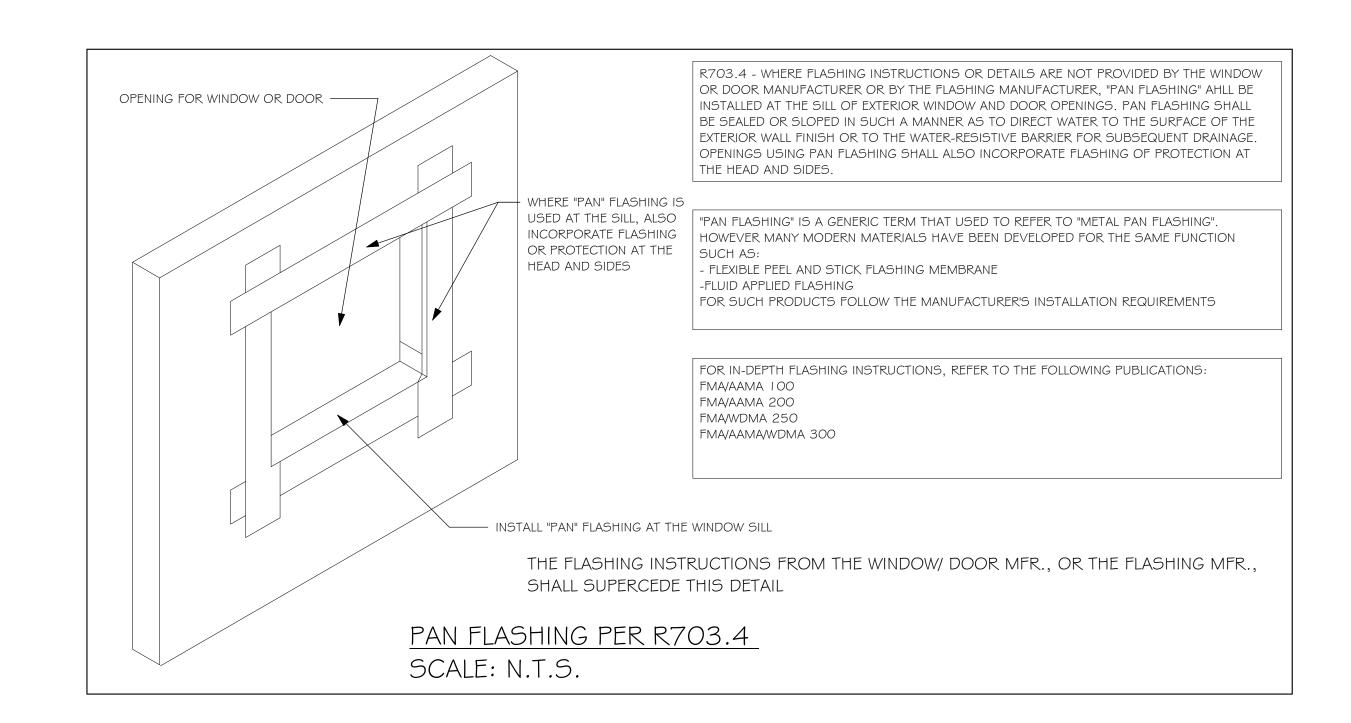


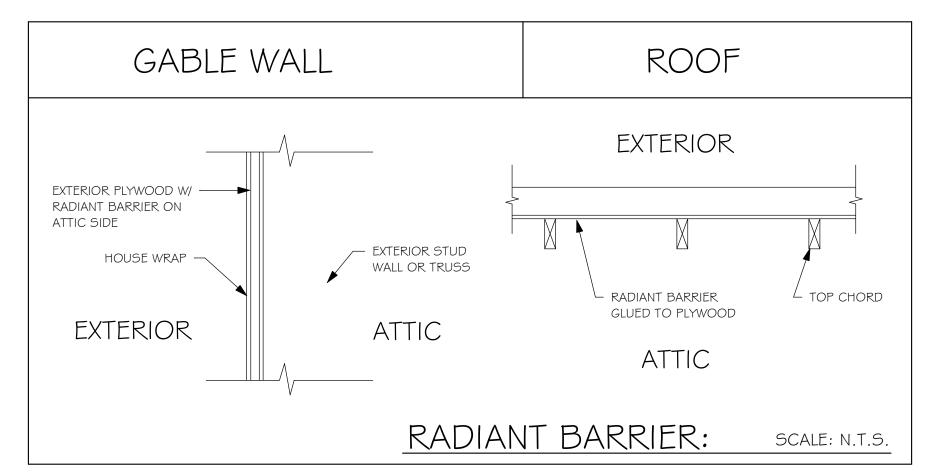

EXTERIOR WALLS ADJACENT TO ATTIC SPACE, INCLUDING KNEEWALLS AND GABLE END WALLS, MUST HAVE NOTE: RADIANT BARRIER AND HOUSE WRAP.

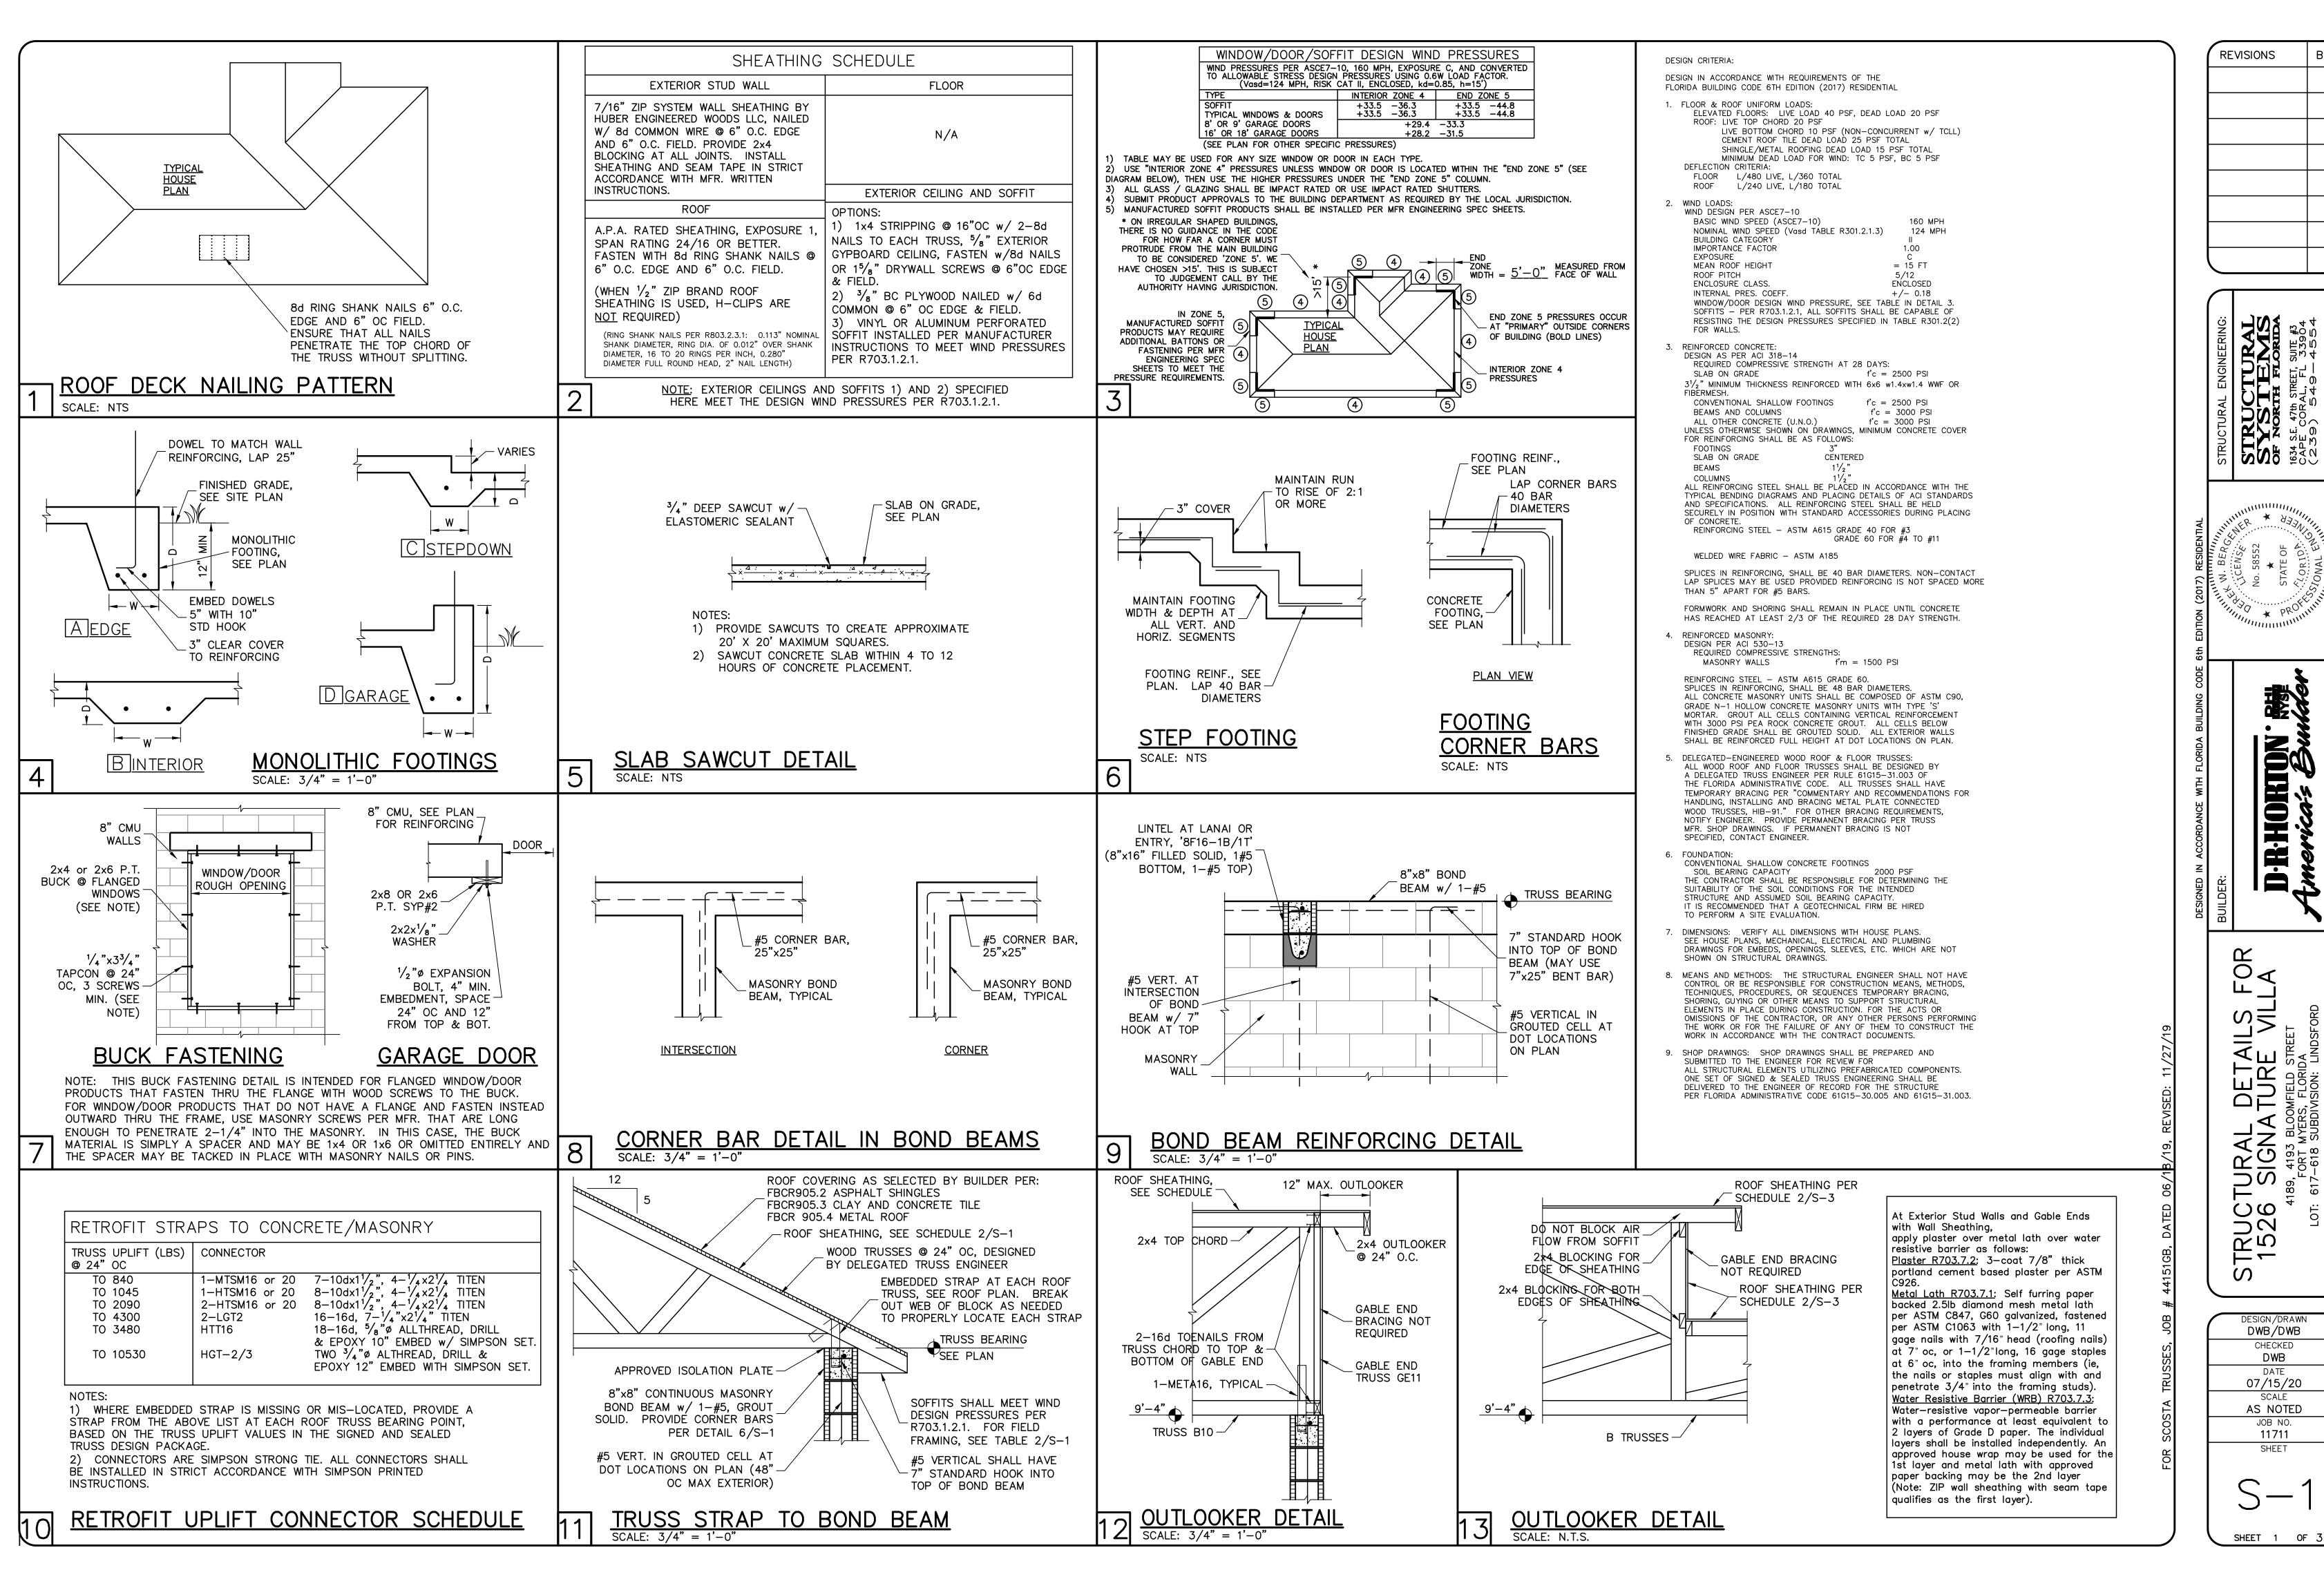

DESIGN/DRAWN DWB/DWB 07/15/20 AS NOTED

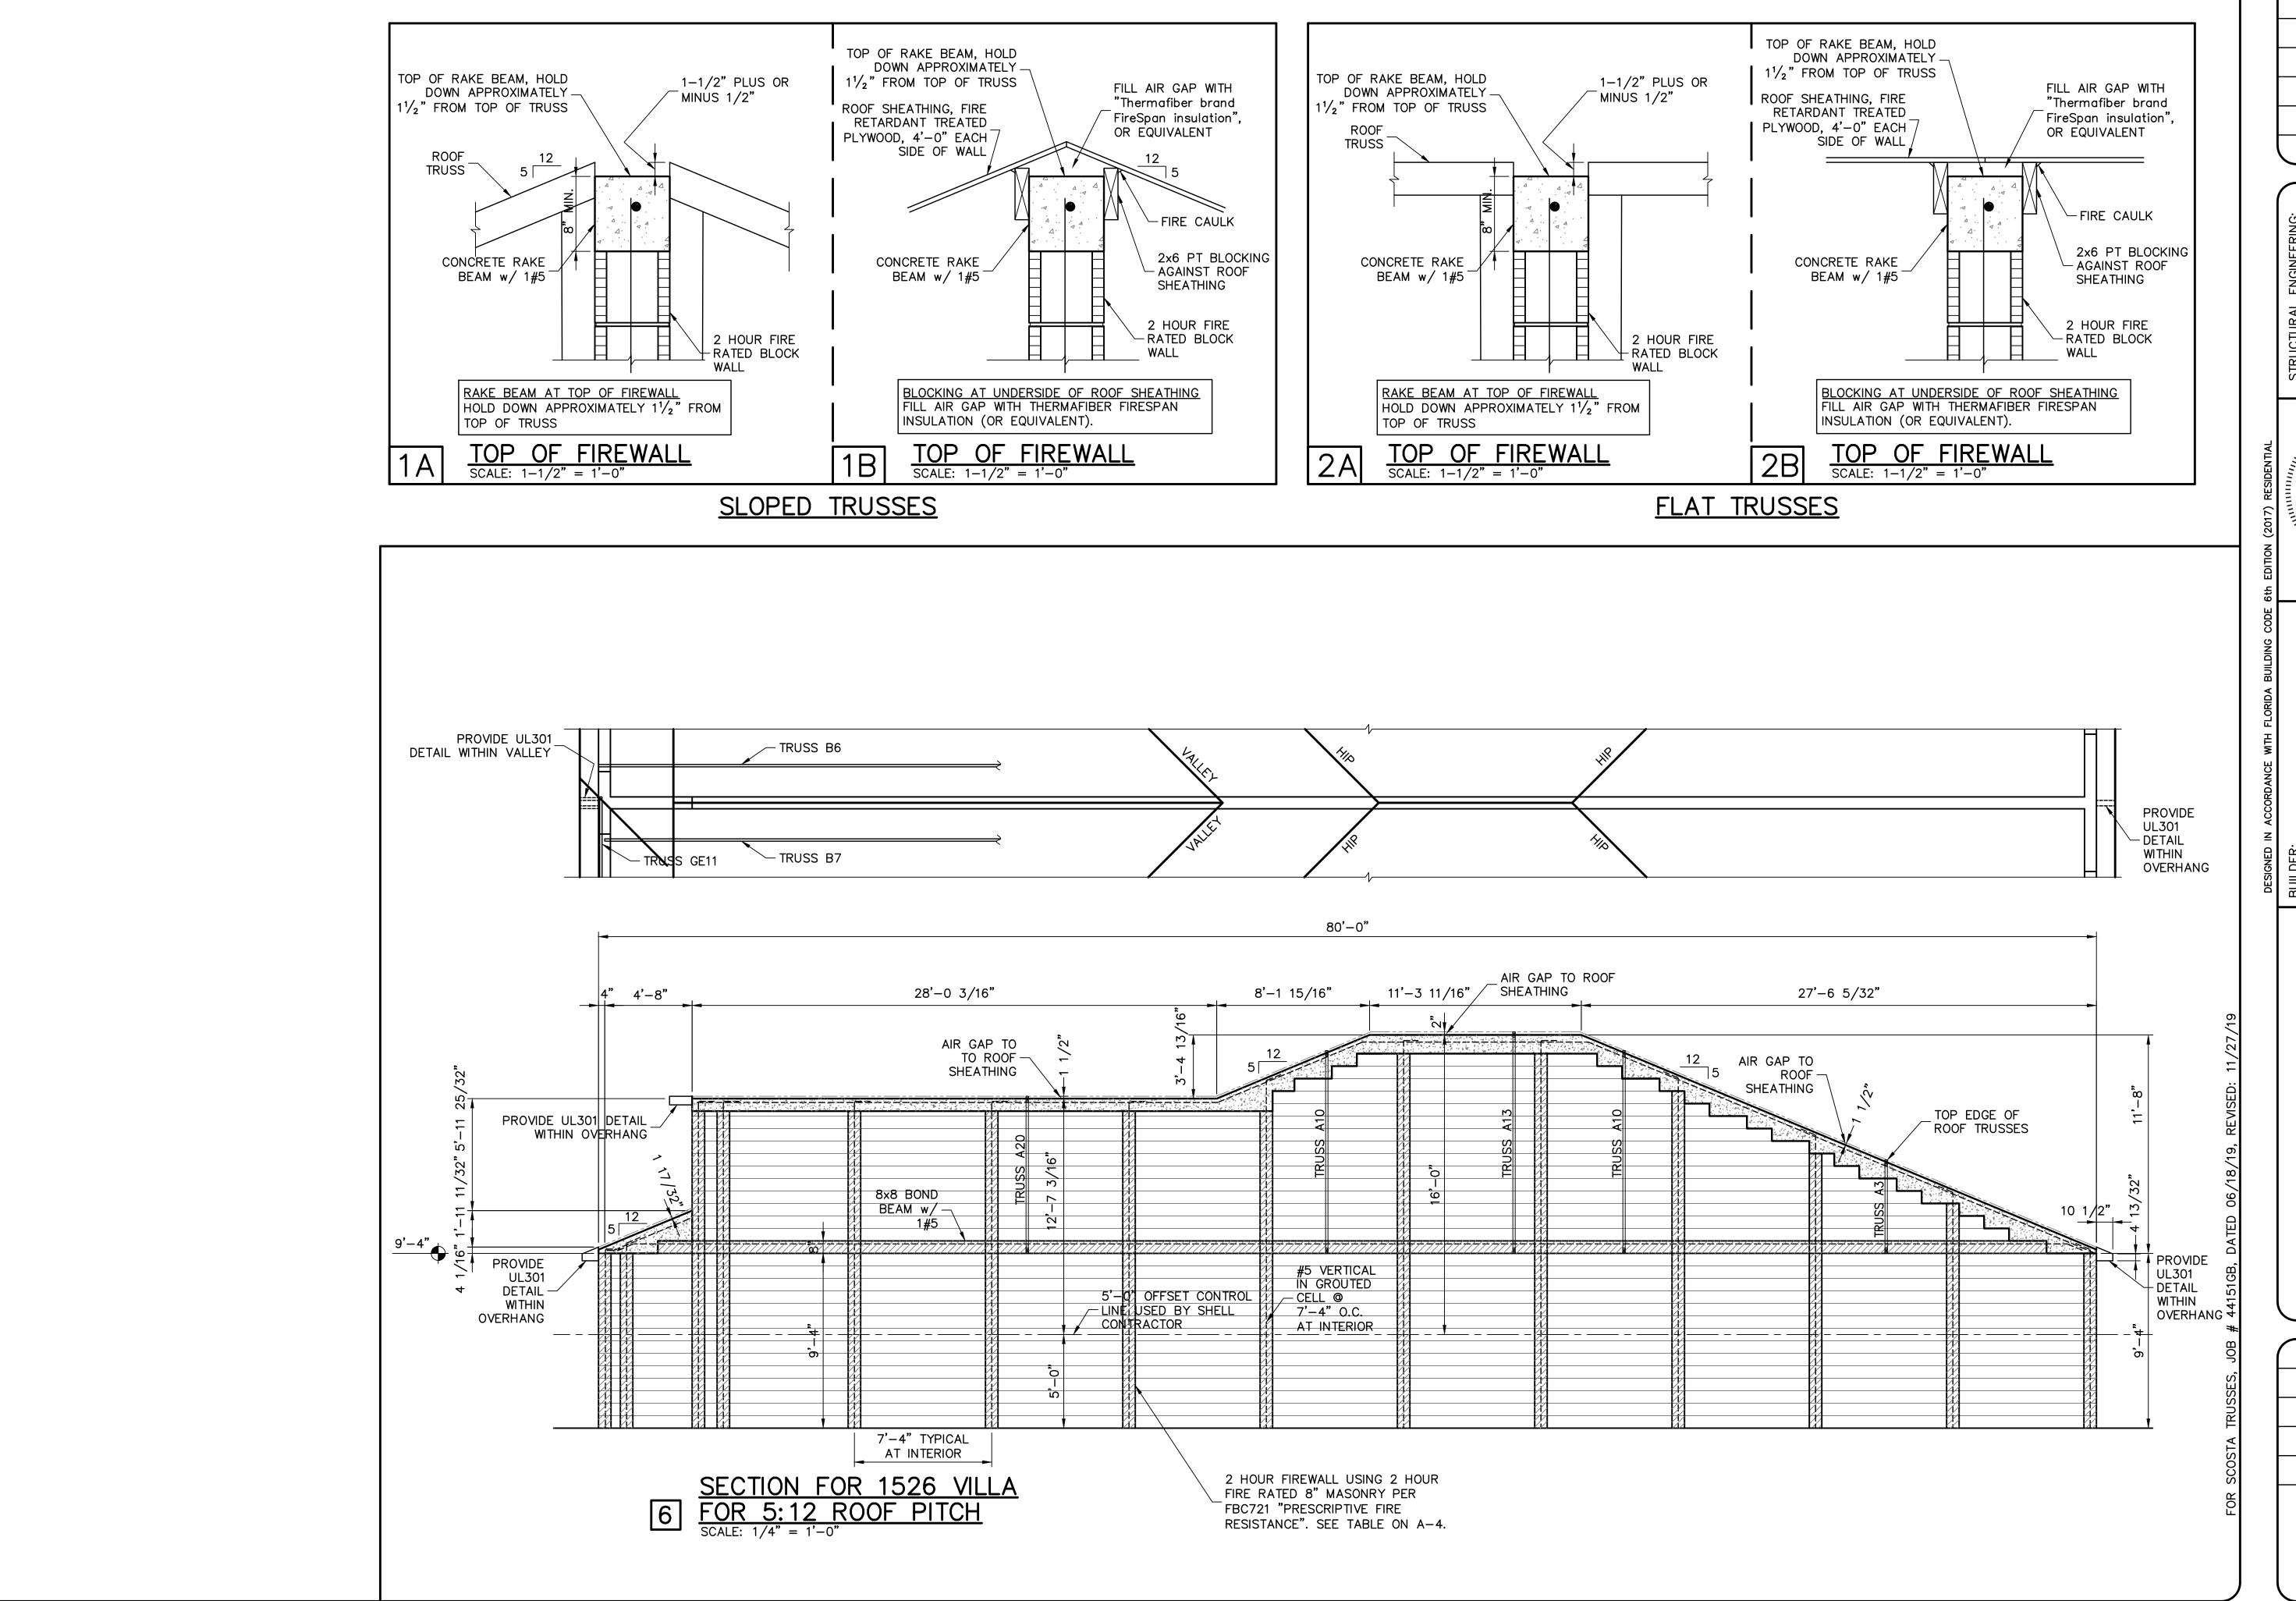


REVISIONS

IORION 12% Box D-R-H

FOR A CTURAL DETAILS
6 SIGNATURE VILL
4189, 4193 BLOOMFIELD STREET
FORT MYERS, FLORIDA
0T: 617-618 SUBDIVISION: LINDSFORD TRUC 1526

DWB/DWB CHECKED 07/15/20 SCALE AS NOTED JOB NO. 11711 SHEET

SHEET 2 OF 3

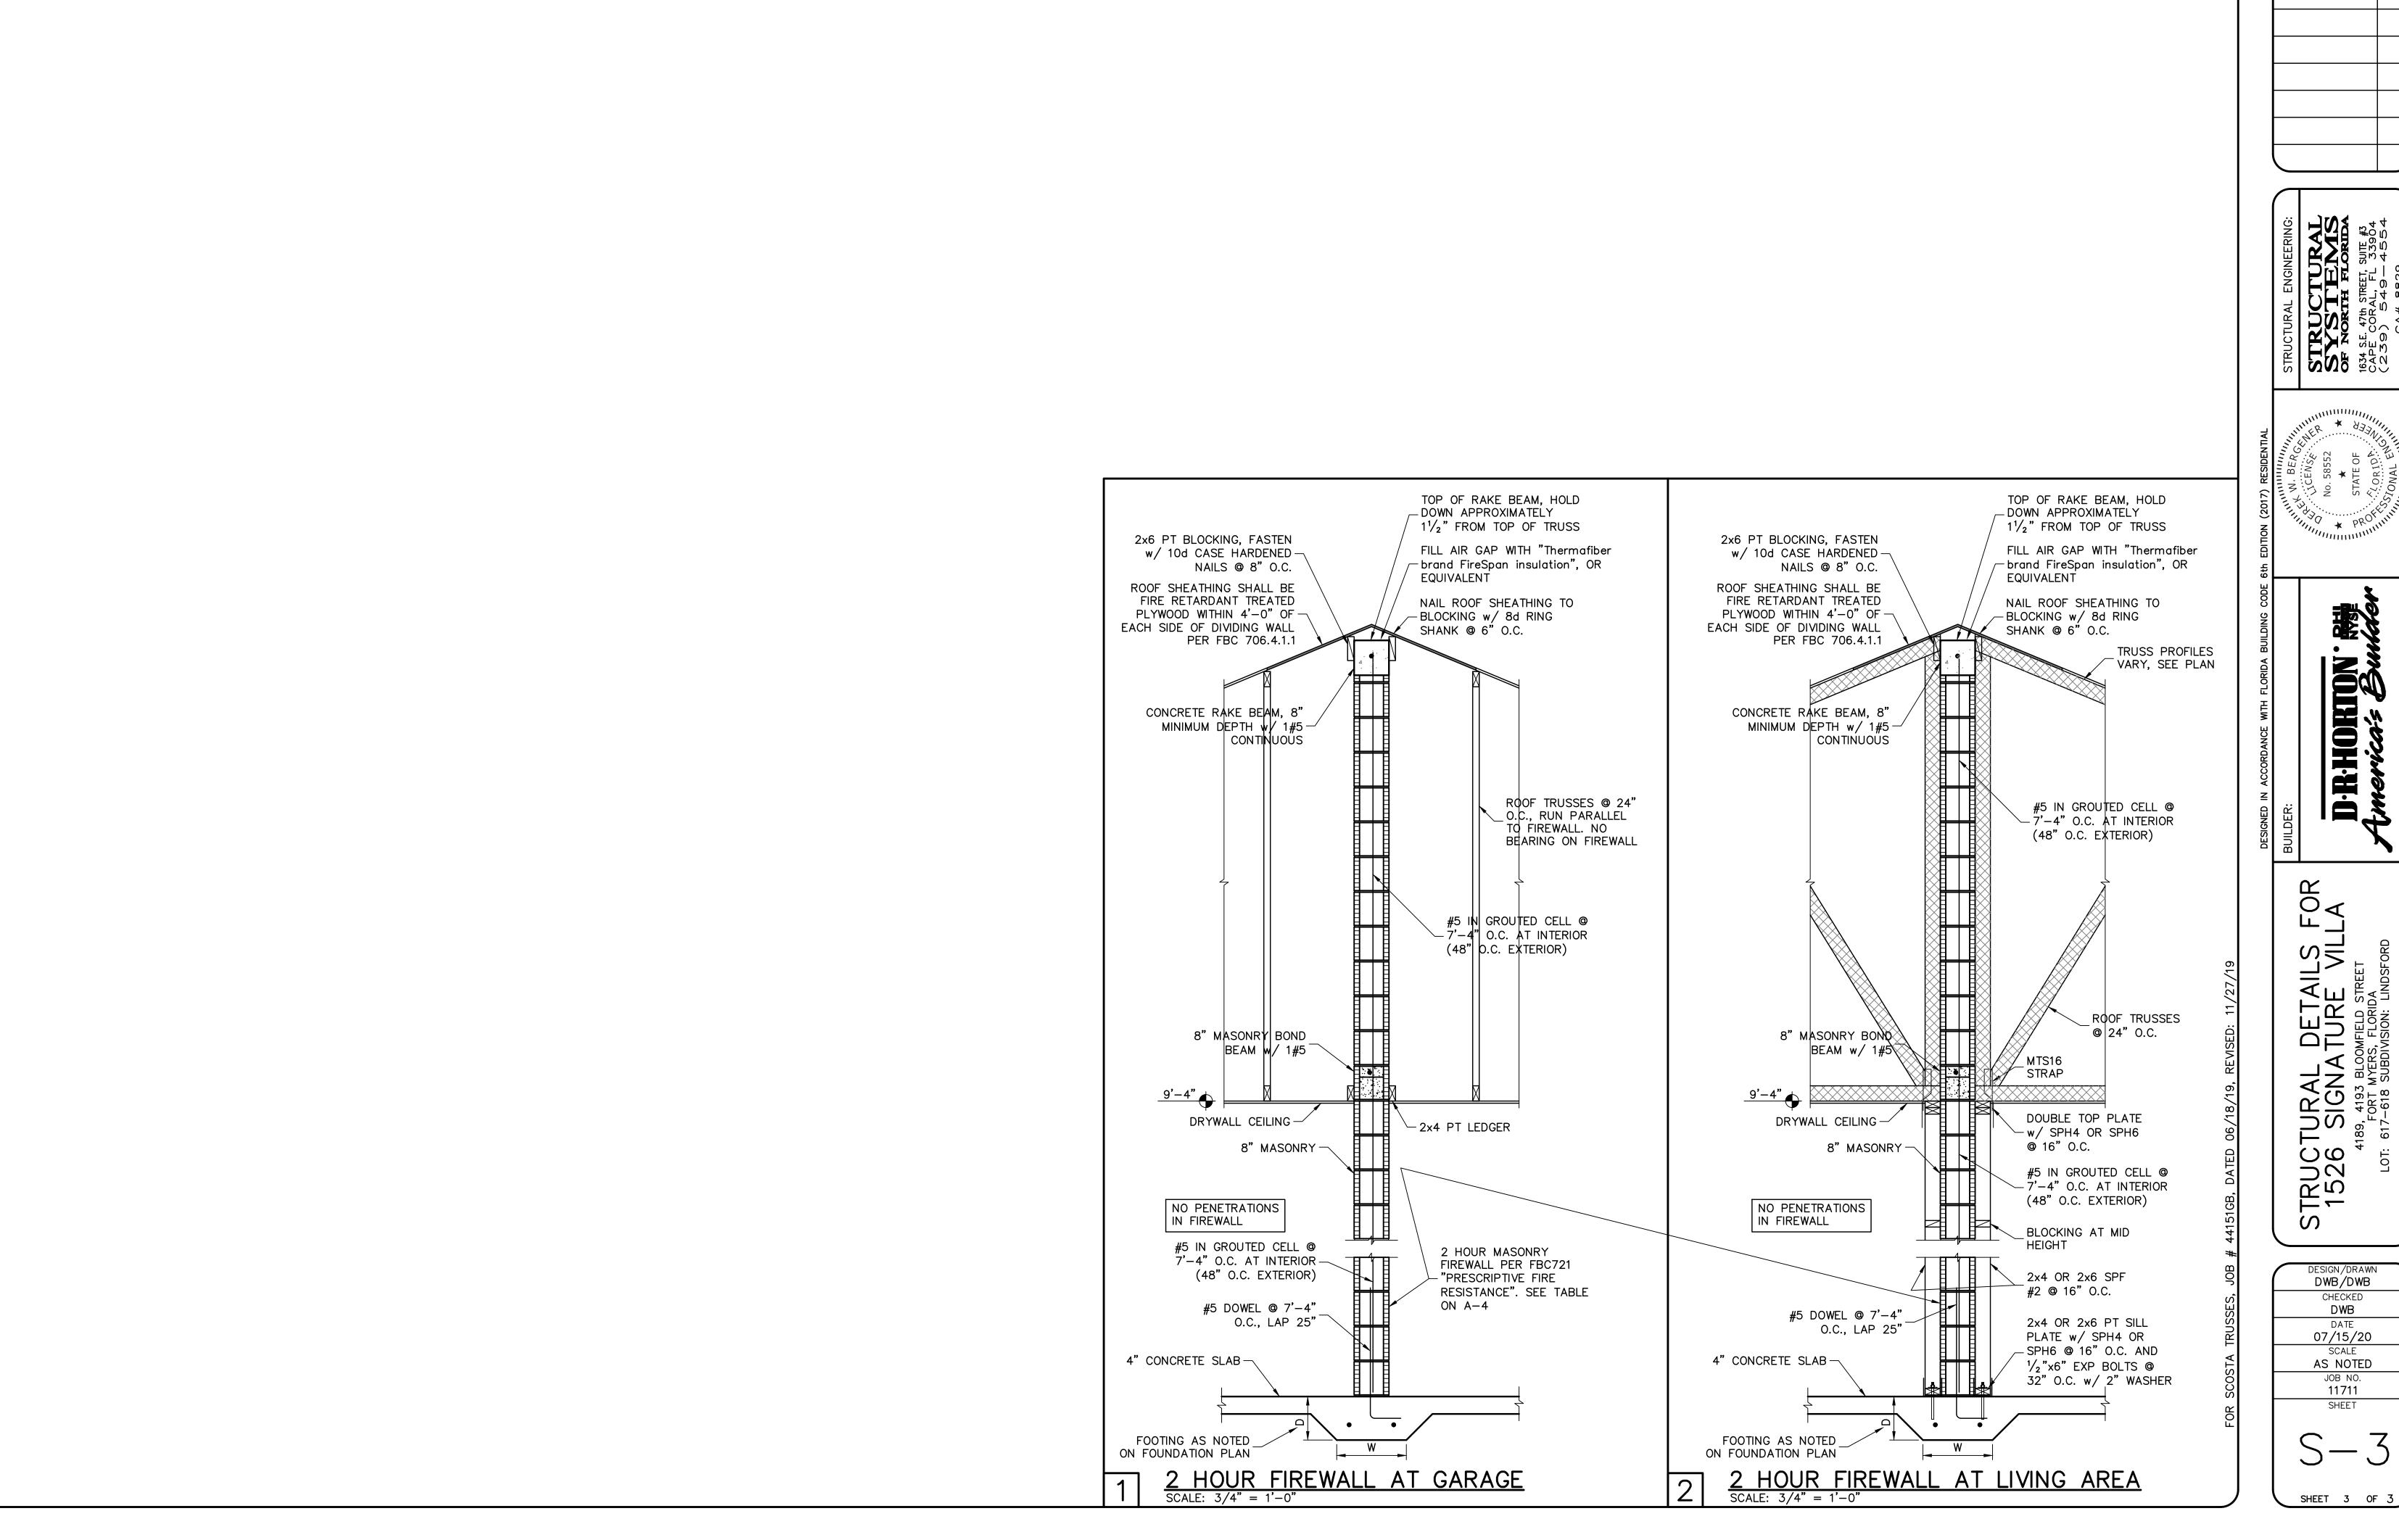

REVISIONS

D-R-H

FOR DETAILS
TURE VIL
OMFIELD STREET
IS, FLORIDA
DIVISION: LINDSFORD TURAL SIGNA 4189, 4193 BLOON FORT MYERS, 617-618 SUBDIV

DESIGN/DRAWN
DWB/DWB CHECKED DWB 07/15/20 SCALE AS NOTED JOB NO. 11711 SHEET