









03

04-05

Since its formation in 1997, Cromar Building Products has taken advantage of its independent ownership to respond to market demands and provide customers throughout the UK and Ireland with exceptional service and value. Our extensive range provides merchants with a one stop shop for all flat and pitched roofing products along with a full portfolio of building chemicals, timber treatments, adhesives, sealants, tanking membranes and DPCs.

Continuous investment in research and development enables us to extend the diverse portfolio of products manufactured at our North Yorkshire base. This culminated in a seven figure investment for the design and construction of one of the most modern roofing underlay manufacturing facilities in Europe. Consequently, our lead times have been consistently among the best in the industry.

> As a supplier to roofing, builders' and agricultural merchants throughout the UK and Ireland, Cromar is a member of NMBS so members have complete flexibility to buy from us without restriction. Our Associate Membership of the NFRC also illustrates our commitment to improving quality standards in the roofing industry.

> At a time of continuing mergers, acquisitions and consequent reduction in supplier choice, we take pride in the fact that Cromar's independence gives us the flexibility to respond quickly to new and changing customer needs. This is why we not only supply one of the largest ranges in the industry but one which can be guaranteed to be at the forefront of new developments.

2







4

What's New

Underlays

Breathable and Non Breathable

Vent 3 Pro | Vent 3 | Vent 3 Classic | Vent 3 Light | Protect 1F

Roof Accessories 06-07 Roof ventilation, Ridge Kits and Dry Verge

Liquid Membranes Elastomeric Coatings and Roof Tile Renovation RubberCoat | Elasta-thane | Cromapol | Renocoat

Bitumen Coatings 11 Waterproofing, Roof Maintenance and Reflective Paints

12-13 **GRP Roofing**

Advanced Glassfibre Roofing System PRO GRP with 25 year guarantee

14 Felts Traditional | Torch-on | Oxidised Bitumen | 5U

Lead Replacements 15 Lead Free Plus | Mageflex | Cromaflex | Flashband

Construction Chemicals 16-17 Liquid Admixtures | Surface Treatments Bonding Agents | Paving Compound | Mortar Tones

18 Sealants Adhesives | Fillers | Foams The Business MS polymer | Lead Seal

19 **Timber Treatments** Solvent & Water Based Solutions

Ancillary Products 19 Flooring | Damp proofing | White Spirit

What's New

CromaFlex



Polyurethane

Page 09

waterproof coating



Cromaflex Premium lead replacement Page 15



GRP Glassfibre Roofing kit





Dry Verge Universal dry verge system

compound Page 17

email: sales@cromar.uk.com

For more information, sales and technical support please contact us on:

Vent3®Pro

Heavy weight

Page 04

breather membrane

Tel: 01977 663 133 Fax: 01977 662 186

Or visit our website for up to date product information,

datasheets, and downloads

www.cromar.uk.com

Social media:



www.facebook.com/cromarbuildingproducts

Follow us on:





CROMAR BUILDING PRODUCTS LTD. UNITS 3,4,5 NORTHSIDE INDUSTRIAL ESTATE, WHITLEY BRIDGE, DN14 0GH



Roofing Underlays The Vent3® Range of Breathable Underlays





HEAVYWEIGHT BREATHER HEAVYWEIGHT PERFORMANCE

VENT3® PRO is a **165gsm** heavyweight breathable roof underlay for cold and warm roof applications which gives major benefits over traditional roof underlays.





On 1 January 2011 NHBC Standards Section 7.2 was revised requiring cold pitched roofs on NHBC warranty houses to have ridge or high level ventilation equivalent to a continuous opening of 5mm when vapour permeable underlays are used.

To comply with this requirement the combined use of Cromar Vent3 vapour permeable roof underlays and Cromar Universal Ridge will reduce the risk of harmful roof space condensation in cold pitched roofs. It is important to highlight that this additional ventilation is only required when seeking the NHBC warranty for houses with a cold roof construction.

We have the solution





Use any of our Vent 3 Range of vapour permeable roof underlays in conjuction with our ventilated ridge kit.



Vent3® Pro

A heavyweight performance breathable roof underlay for cold and warm roof application requires no ventilation.



- BBA certifiedCold & Warm roof application
- 3 layer spun-bonded membrane
- Clean and easy to use
 Heavyweight performance
 Flexibility
 Excellent tensile strength
 Green Surface prohibits glare

- No gusting wind noise
 UV stable for up to 3 months
 Excellent nail tear resistance
 Weight 165 gsm

Roll sizes available: 50m x 1m | 50m x 1.5m

Vent3®

A high performance breathable roof underlay for cold and warm roof application requires no ventilation.



- BBA certified
 Cold & Warm roof application
 3 layer spun-bonded membrane
- Clean and easy to useExcellent tensile strength

- No gusting wind noiseUV stable for up to 3 months
- Excellent nail tear resistance
- Weight 135 gsm

Roll sizes available: 25m x 1m | 50m x 1m 50m x 1.5m

Vent3[®] Classic

A lightweight breathable roof underlay for cold and warm roof applications which give major benefits over traditional roof underlays.



- BBA certified
 Cold & warm roof application
 alayer spun-bonded membrane
- Clean & easy to use

- Lightweight & flexible
 Excellent tensile strength
 Light grey surface prohibits glare
 UV stable for up to 3 months
 Requires no ventilation
 Weight 115 gsm

Roll sizes available: 25m x 1m | 50m x 1m 50m x 1.5m



An economy breathable roof underlay for cold and warm roof applications which give major benefits over traditional roof underlays.



- 3 layer spun-bonded membrane
- Clean & easy to use

Roll sizes available: 25m x 1m | 50m x 1m 50m x 1.5m







Non-Breathable Underlay



Is a non breathable roof underslating which gives major benefits over plastic and traditional 1F bitumen based underslating felt.

Roll sizes available: 15m x 1m | 45m x 1m | 30m x 1.5m






See page 07

Roof accessories

Roof ventilation, Ridge Kits and Dry Verge

Ventilated Tile Range

Will fit most major manufacturer's tiles. Inline or cowl. The low line 10k ventilation area is virtually flat with the sheet, whilst the 10k and 20k cowl in terracotta, slate grev, red and brown as standard.



Tile Vent - Flat

Suitable for

- · Russell Galloway, Grampian, Lotian, Moray
- Marley Modern
- Sandtoft Plain
- · Redland Stonewold



Tile Vent - Double Pantile

Suitable for:

- · Sandtoft Double Pantile
- · Redland Double Pantile, Grovebury
- Russell Penine
- Marley Mendip



Tile Vent - Profile

Suitable for:

- Redland Brown
- · Russell Cheviot
- Marley Ludlow
- Sandtoft Lindum

Tile Vent - Double Roman

Suitable for:

- Marley Double Roman
- · Sandtoft Double Roman
- Redland 50 Double Roman
- · Russell Double Roman



Universal Tile Ventilators

Designed to be unobtrusive and for use with the majority of manufacturers profiles and colours. Available as 10k or 20k Cowl and new Solar tiles. Moulded in 'HIPS' with UV stable paint to suit most colours.



Designed to be both unobtrusive and practical. Available as low Line or Raised Cowl in Riven or Pinseal finishes in all standard slate sizes. The low line 10k ventilation area is virtually flat with the sheet, whilst the 10k and 20k cowl type have patented 'anti-splash sleeve' devices and fly screen protection.



Plain Tile Ventilators

Injection moulded offering precision and strength. Designed to suit all plain clay tiles and can be fitted without cutting the tiling battens. Suitable for pitches of 30° and above





Pipe Adapters Square to round



112mm

3-in-1 Ventilated Eaves Protector

The fast and easy way to ventilate and protect at the eaves, consisting of a1000mm over fascia vent with intergrated underlay support tray and eaves comb filler.



Bird Comb Filler

A physical barrier that prevents birds, bats and insects entering the roof

void between the felt and tiles and causing nesting and infestation problems.

Available in size: 1000mm

Over Fascia Vent


Available in 2 ventilation capacities. Allows an air stream in to the roof void between the felt and fascia board

Available in sizes: 1000 x 10mm 1000 x 25mm



Underlay Support Trays

A support tray to ensure any underlay is not carried into the gutter, and prevents water ponding behind the fascia. Therefore reducing long term maintenance to the eaves of a building.



Size available: 1.5M X 300mm

5U Eaves Protector Strip

A support strip to ensure any underlay is not carried into the gutter, and prevents water ponding behind the fascia. Therefore reducing long term maintenance to the eaves of a building.

Size available: 16m X 333mm



Continuous Rafter Tray

Allows a constant flow of air between the loft space and outside meaning built-up moisture can escape

Available in sizes: 6000 x 300mm 6000 x 400mm 6000 x 600mm 6000 x 800mm



Disc soffit Vent

Easy to install circular vent provides eves ventilation through the soffit for new build or re-roofing.

Colours: White | Black | Brown | Tan





Universal Dry Verge System



- Fast fitting time
- Easy installation
- Compatible with most roof tiles
- Maintenance free
- 10 Year UV protection
- Attractive and functional appearance
- No need to cut or move tiles*
- Can be fitted in all weather
- Secure fixing offering better resistance to wind uplift

Available in left and right handed long and short sections.

Available colours:





Long leg version

Standard version

Angled ridge cap

Half round ridge cap

www.cromar.uk.com www.cromar.uk.com

Coating Liquid RUBBER ROOF COATING

FLEXIBLE HEAVY DUTY LIQUID RUBBER WATERPROOF COATING

RubberCoat is a brush / roll-on high performance coating that can be applied over many surfaces including concrete, masonry, wood, brick, metal foam & more...









Forms a durable, seamless, waterproof membrane.

Use Indoor/Outdoor. Suitable for applications to steel & waterproof including bathrooms, basements, roofs, rain gutters, skylights, pipes, balconies & decks, planter boxes, shower pan liners, ponds & more!

- EASY TO APPLY BRUSH, ROLLER & SQUEEGEE
- FLEXIBLE SEAMLESS TECHNOLOGY
- EXCELLENT UV, ADHESION & CHEMICAL RESISTANCE
- PROTECTS & BONDS TO VIRTUALLY ANY SURFACE
- EXCELLENT FREEZE / THAW RESISTANCE
- RESISTS CRACKING, CHIPPING, PEELING, IMPACT & ABRASION

Sizes Available 3.78ltr | 18.9ltr

Rubbercoat + Universal Primer = An ideal EPDM patch repair system

CROMAR @

FLEXIBLE HEAVY DUTY

WATERPROOFING COATING

WIER-BASED ENVIRONMENTALLY SAFE ZERO VOCT








VATER-BASED ENVIRONMENTALLY SA

ZERO VOC

RubberCoat UNIVERSAL PRIMER



- EASY TO APPLY BRUSH, ROLLER OR SPRAY
- FLEXIBLE SEAMLESS TECHNOLOGY
- RESISTS CRACKING, CHIPPING, PEELING, IMPACT & ABRASION
- EXCELLENT FREEZE/THAW RESISTANCE

GENERAL APPLICATIONS

RubberCoat Universal Primer bonds to EPDM, TPO, PVC, concrete, metal, wood, shingle, brick, masonry, foam and more.

RubberCoat Universal Primer is recommended for use as a primer for RubberCoat Waterproof Sealant.

Ideal as an EPDM patch repair primer when used in conjuction with Rubbercoat waterproof coating

Sizes Available 946ml

ELASTA-THAN E

POLYURETHANE WATERPROOF COATING

Product Description

Elasta-thane is a premium, liquid applied, highly permanent elastic, cold applied and cold curing, one component polyurethane used for long lasting waterproofing. The Elasta-thane is based on a pure elastomeric hydrophobic polyurethane resins, which result in excellent mechanical, chemical, thermal, UV and natural element resistance properties.

Naterproofing protection of

- Bitumer
- Edom
- Pvc membranes
- Acrylic coatings
- Green roofs
- Balconies, Terraces and Verandas
- Wet areas (under tiles) in bathrooms and kitchens
- Pedestrian and vehicular traffic decks
- Concrete constructions like bridge decks, carparks etc..

Elasta-thane Advantages

- Simple application
- Totally seamless
- Resistant to water and frost
- Resistant to water and frost
- Provides water vapour permeability so the surface can breathe
- Excellent thermal resistance
- Excellent weather and UV resistance
- Solar reflective
- Maintains its mechanical properties from -40°c to +90°c
- Excellent adhesion to almost any type of surface
- Resistant to detergents, oils, seawater and domestic chemicals.

Size available **25kg**

Colour available
Grey





Product Description

Elasta-thane rapid cure catalyst is an accelerating additive for use with Elasta-thane polyurethane waterproof coating.

Size: 750gm per 25kg or Elasta-thane



Cromapol One Coat Instant Waterproofing

Cromapol will waterproof instantly, even while wet, and will not wash off while curing. It is ideal for use in damp conditions. Will withstand ponding and covers in only one coat*





White

1kg | 2.5kg | 5kg | 20kg | 310ml tube



Cromapol Clear

The Benefits are Clear A clear fibre free acrylic roof coating designed for use predominantly on roof lights and to provide a clear weather proof protection to

Available in 5kg and 20kg



Cromapol 1kg **Emergency Roof** Repair



Grey Black

CROMAR

CROMAPOL ADVANTAGES

temperature | Economical

WATERPROOF PROTECTION OF:

Grey Black White

Great adhesion | Application in damp weather | Instant protection

No wash off | Excellent solar reflectivity | Reinforced membrane

Application in one coat | Seamless | Fully flexible | Unaffected by

Flat and pitched roofs | Corrugated asbestos | Roof lights | Flashing Roofing felts | Gutters | Slate | Asphalt | Lead | Glasshouses | Metal |

> **Cromapol Tube Emergency Roof**

Reinforcement Scrim

For use when extra

- reinforcement is required Cracks in corrugated
- asbestos and gutters

 Splits in felt and asphali

*Check data sheet for full application qui

Bitumen Products Waterproofing, Roof Maintenance and Reflective Paints

Bitumen Roof Waterproofing Compounds continue to represent exceptional value for flat roof weatherproofing and emergency repairs. Our range covers every application including Cromaprufe which is a liquid damp proof membrane.



A general purpose paint for waterproofing and weather protecting steelwork and concrete.

1.0 | 2.5 | 5.0 | 25.0



Bright aluminium, raditional, solar reflective coating suitable for application to bituminous roofing substrates.

Premium grade also available Sizes 1.0 | 2.5 | 5.0 |



Cold applied bituminous adhesive for bonding successive layers of roofing felt.

1.0 | 2.5 | 5.0 | 25.0



Filled bituminous solution for overall waterproofing of roofs. Can be applied to dry surfaces all year round

Sizes: 2.5 | 5.0 | 25.0



Rubberised bitumen emulsion. General nurnose product used on walls and floors to prevent vater ingress and dampness from the ground Can also be used on roofs and as wood block loor adhesive.

2.5 | 5.0 | 25.0



Heavy body bituminous mastic for sealing cracks and spills in roofing substrates and gutters.

Sizes: 1.0 | 2.5 | 5.0 |



Bituminous emulsion containing fillers which provides all over waterproofing of roofs leaving a smooth finish.

Size: 5 | 25.0



Low viscosity bituminous primer for use on porous surfaces before remedial roof treatment, including pour and roll and torch-on felt applications. Quick drying version also available

1.0 | 2.5 | 5.0 | 25.0



Cold applied bituminous adhesive for bonding chippings to flat or low pitched roofs.

Sizes: 5.0 | 25.0

RENOGOAT

A water based roof tile renovation paint is a quality acrylic coating to give a long lasting protective & decorative finish on slate and concrete roof tiles. RENOCOAT is suitable for use on all exterior roofs and has excellent adhesion properties on porous surfaces

Sizes: 5.0 | 20.0







Solvent based reflective coating for use on bituminous surfaces. Can be used on roofs that are subject to standing rain water.

> Colours Grey | White

> > Sizes: 5.0 | 20.0



www.cromar.uk.com

PROGRP

ADVANCED GLASSFIBRE ROOFING SYSTEM

No Joints No Seams No Leaks

Benefits of a GRP System

- COLD APPLIED
- no heat required • EASY TO FORM
- around complex situations
- VERY DURABLE resists heavy foot traffic
- NON-SLIP WALKWAYS can be incorporated
- CLASS LEADING ROOFING SOLUTION that far exceeds traditional methods
- VIRTUALLY MAINTENANCE FREE for very long periods of time
- IMPACT RESISTANT due to its ultra hard finish
- FIRE RETARDANT
- HIGHLY ECONOMICAL SOLUTION

What is PRO GRP?

GRP stands for Glass Reinforced Polyester. GRP is also known as Glass-Fibre. This system is cold applied on site, giving it a seamless and flexible weatherproof finish that resists water, heat and frost. The resulting surface gives a strong architectural finish that looks very impressive. If maintained properly it will last as long as the building stands.

We have developed this technology further to produce the perfect all weather protection for any flat roof. PRO GRP can be applied in small domestic situations right through to large industrial environments.



Available in 3m lengths



RESISTANT



PROOF





RESISTANT





Available in 10kg and 20kg containers





10kg / 20kg



Available in 10kg / 20kg

Available in 5ltr / 25ltr

PROGRP ACETONE

> Available in 310ml

Trim Adhesive Available in 310ml



Wall Fillet

Available in 3m lengths

Firrings added to aid run off

PROGRE

Raised Edge Trim Available in 3m lengths

Large Fascia Trim Fascia / Drip Trim Available in 3m lengths

Also available Glass Fibre Roofing Kit Covers approx. 13m²





Glass Fibre Matting

Available in rolls of 6.75kg / 16.5kg / 33kg

12



A170 A200 B230 A250

C100

INT195

Glass Fibre Finishing Tissue

Simulated Lead Internal & External Angle Wall Fillet

Available in

1ltr / 5ltr

Application Rollers








F300 300mm x 20m



C3 Internal & External fillet corner



C5 Large roof ridge closure C6 Small roof ridge closure

www.cromar.uk.com

www.cromar.uk.com

Roofing Felts

Torch-on and Oxidised Bitumen

A comprehensive range of SBS, APP and traditional roofing felts. Our products cover all specification options, whether the need is for high performance, torch-on or traditional pour and roll felts.




CROMATORCH TORCH-ON ROOFING FELT IDROPOL APP -5°c Cold bend flexibility Pallet Qty U/lay 2kg 16m x 1m Cap Sheet Sand 4kg 08m x 1m 30 Cap Sheet Green 4.5kg 30 08m x 1m

CROMATORCH TORCH-ON ROOFING FELT Arcoflex SBS -15°c Cold bend flexibility			
Type/Finish	Pallet Qty	Weight	Roll Length
U/lay Sand 2kg	30	32kg	16m x 1m
U/lay Glossy Finish 2kg	30	32kg	16m x 1m
Perforated U/lay 800gsm	30	24kg	30m x 1m
Cap Sheet Sand 4kg	30	32kg	08m x 1m
Cap Sheet Grey/Green 4.5kg	25	36kg	08m x 1m
Cap Sheet Black/Charcoal 4.5kg	25	36kg	08m x 1m
Cap Sheet Brown 4.5kg	25	36kg	08m x 1m

















10m x 1m

20m x 1m

20m x 1m

10m x 1m

Traditional Felts

GLASS BASE / OXIDISED BITUMEN
3B Bonding Felt Sand

3H Venting base Layer

34	TIDIL DAGED / CAIDIGED DITOMEN						
9	Type Shedfelt	Finish Sand	Pallet Qty 80	Weight 0.7kg	Roll Length 05m x 1m		
	Shedfelt	Sand	48	14kg	10m x 1m		
8	Bonding Felt-Standard	Sand	42	18kg	10m x 1m		
	Bonding Felt-Standard	Sand	25	36kg	20m x 1m		
3	Shedfelt	Green	63	10kg	05m x 1m		
	Shedfelt	Green	36	20kg	10m x 1m		
	Shedfelt	Green	20	40kg	20m x 1m		
	Mineral Felt	Green	25	38kg	10m x 1m		
	1F Underslating Felt	Sand	36	22.5kg	15m x 1m		

HIGH PERFORMANCE FELTS POLYESTER BASE / OXIDISED

10 YEAR GUARANTEED MINIMUM LIFE EXPECTANCY

High Performance U/lay 125 Sand

High Performance U/lay 180 Sand

High Performance Cap 180 Green

High Performance Cap 250 Green

High Performance Sand 350 Sand

High Performance Cap 350 Green



23kg Slabs x 50 to a pallet

95/25 Oxidised Bitumen

Lead replacement products

Flashing and patination oil

ing suitable for use as an alternative to traditional lead in both flat and pitched roof applications.


Typical Installation


- Abutments Chimneys Dormers Saddles
- Soakers Stepped Valleys Windows/Rooflights

Mage Flex

BBA certified aluminium flashing

- BBA Certified (Mage Flex) Versatile Waterproof
- Durable Malleable Lightweight Easily Cut
- Easily Repaired No health and safety issues
- No re-sale value Alternative to traditional lead

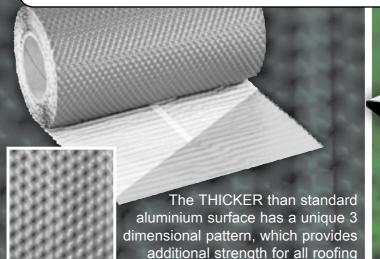



Product Data			
Roll width/mm	150	300	450
Roll weight/kilos	1.5	3	4.5
Roll length/metres	5	5	5
Rolls/box	1	1	1
Rolls/pallet	144	72	48



for use as an alternative to

pitched roof applications.

traditional lead in both flat and

Product Data			
Roll width/mm	140	320	450
Roll length/metres	5	5	5
Rolls/box	4	4	4
Rolls/nallet	160	160	64

CromaFlex Premium lead replacement

CromaFlex is a lead substitute manufactured with a base of EPDM and aluminum expanded metal. Here the exceptionall flexible and malleable properties of the metal with the excelle UV and ozone resistance of EPDM combine to provide a tota unique product.

- Appearance of lead
- · Lighter than lead & Easier to use
- · No scrap value No risk of theft
- 50% quicker to install than lead
- · Self adhesive Butyl strip for ease of application





Self adhesive bitumen coated, heavy duty lead look finish for trade use.



Sizes available

50mm x 10m in boxes of 6 75mm x 10m in boxes of 4 100mm x 10m in boxes of 3 150mm x 10m in boxes of 2 225mm x 10m in boxes of 2 300mm x 10m in boxes of 1 450mm x 10m in boxes of 1 600mm x 10m in boxes of 1



Patination Oil

Specially developed to reduce unsightly staining and provides a pleasing apperance to newly applied lead sheet and flashings

Sizes available: 1 Litre

www.cromar.uk.com

Building Chemical

Admixtures, Surface Treatment and Bonding Agents

An ideal variety of products for interior and exterior applications. This includes mortar tones in both liquid and powder form, to provide permanent colour to all types of mortar, renders and concrete. Alongside traditional mortar admixes, for ease of use and convenience.



CROMAR®

Easy to use wood glue that bonds to form a permanent and inseparable ioint. Conforms to the requirements of the European Standard D3/3 and D3/4 Not suitable continuous water submersion

for joints subject to

500ml | 1.0 | 2.5 |

A styrene butadiene

bonding compound

synthetic rubber

properties. To be

used externally

shrinking in repair

and screeding mixes.

with excellent

waterproofing

this reduces

cracking and

1.0 | 2.5 | 5.0 | 25.0



CROMAR®

grade Multi-use admixture and adhesive used as a bonding agent, sealer and admixture for concrete mortars and plasters, for use internally.

A contractor

0.5 | 1.0 | 2.5 | 5.0

and prevent

reinfestation by

Sizes: 2.5 | 5.0 | 25.0

admixture.

wood rotting fungi



Multi-use admixture and adhesive to BS5270 used as a bonding agent, sealer and admixture for concrete mortars and plasters, for use internally.

0.5 | 1.0 | 2.5 | 5.0 25.0



emulsion which penetrates dusty, chalky and badly weather surfaces. Suitable for interior and exterior use.

2.5 | 5.0 | 25.0



Triple action Waterproofs. plasticises and retards to assist

0.5 | 1.0 | 2.5 | 5.0

workability reduce

water penetration

areas to be covered

in one application.

and allow larger



1.0 | 2.5 | 5.0 | 25.0

To treat and

moss.

remove active

mildew, fungi and





CROMAR® BLOCK & PAVING SEN

A water based sealer for block paving and porous masonry. This reduces staining, loss of jointing sand and enhances appearance.

1.0 | 2.5 | 5.0 |



Formulated to provide a permanent colour to all types of mortars. rendering, concrete and pointing.

Brown | Black | Red 1.0 | 2.5 |



Formulated to provide a permanent types of mortars. rendering, concrete and pointing.

Colours: Brown | Black | Red |



To BS 4887, liquid admixture used in bricklaying and plastering mortars to aid workability.



Designed to improve resistance and the ingress of water in renders. mortars and concrete.

1.0 | 2.5 | 5.0 |



and plasticiser for use in structural and non-structural concrete

1.0 | 2.5 | 5.0 |





Stay Putt Paving Compound



CROMAR®

STAY PUTT

WIDE JOINT COMPOUND

FOR FLAG PAVING

Colours: Buff | Grey

15kg

Joint Sizes Narrow | Wide

- Easy to apply as kiln dried jointed sand But with added benefits
- Not vacum packed so there's No Waste
- Ready to use Just Sweep, Wet & Go
- Non staining
- Tough & long lasting Superior adhesion
- · Inhibits moss, weeds, alge growth And removal by insects
- · Water permeable Allows water to escape

www.cromar.uk.com www.cromar.uk.com

Sealants

Adhesives, Fillers and Foams



Universal A competitively priced, high modulus silicone for use in all building applications. Contains fungicide

> White | Clear Brown | Black

A flexible water

based filler and

after 1-2 hours

sealant that is easily

applied, dries quickly

and can be overpainted

For sealing and filling

gaps and cracks where

movement can occur.

such as those between

plasterwork, window

frames, door frames,

High performance

solvent based gap

Illing adhesive.

skirting boards and

architrives.

White



A low modulus neutral curing silicone that conforms to S5889 (A), for sealing of construction and dilation joints and perimeter pointing around all types of frames.







A low modulus silicone specifically designed for use when sealing lead.

Grey

SERL



erformance, butyl ubber waterproof sealant, specifically developed for repairing leaking gutters, downpipes and flashing. Also suitable for bedding roofing sheets and felts.

Black

vear life





Business

The Business MS POLYMER

White | Clear | Black

An all round durable, flexible adhesive and

sealant based on MS Polymer technology.

Has excellent adhesion to non-porus surfaces

and is paintable with most paints. this product

is odourless, neutral and free from isocvanates.

and architrives. White | Brown



An extremely

flexible low

modulus acetoxy

(LMA) silicone

sealant with

excellent

weathering

properties

Conforms to

adhesion and

For sealing and

filling gaps and

cracks where

movement can







A high modulus acetoxy curing silicone containing anti-fungal compounds to prevent mould growth in areas subject to high humidity levels conforms to BS5889 (B). White | Clear



BS 5889A. White | Clear



An easy to use. Polyurethane pased Expanding Foam for general Construction and Home improvement applications.

750ml

www.cromar.uk.com





Must only be used

with a gun grade

applicator of NBS

system dispensing

Timber Treatments

Solvent and water based solutions for wood



Colours available DARK BROWN LIGHT BROWN RED CEDAR GREEN RICH MAHOGANY CLEAR

Solvent based decorative wood treatment ideal for use on fences and sheds.

1 litre, 2.5 litre, 5 litre, 25 Litre



Universal Wood Worm and Dry Rot Killer

Solvent based wood treatment combined with a woodworm killer, a clear solution, can be used internally, ideally suited for treating timber prior to decorating.





Petroleum based timber treatment and stain for all wooden fences and sheds. Also available in black

4 litre, 20 litre, 200 litre



5 litre, 25 litre

and plants.

Colours available: **DARK BROWN** LIGHT BROWN RED CEDAR **GREEN**





Protects timber from water damage. For Decking and External Timbers. Allows wood to breathe and weather naturally over time.

5 litre, 25 litre

Latex Liquid For use with Self Levelling Flooring Compound to give a highly flexible

and durable application.



White Spirits

cleaning brushes after use. Complies with BS 245. Sizes:

2litre | 5litre

Sundry Products

CROMAR® SELF-LEVEL

Self Levelling Floor Compound

Portland cement based self smoothing underlayment designed for use as a levelling compound. To be used in conjunction with Cromar Latex Liquid

20kg



5 Litre | 25 Litre

Used for paint thinning and

Cromar DPC's and DPM's can be used for traditional housing grade damp-proofing through to high performance tanking applications - with three British Board of Agreement Certificates in support of our products


BBA BRITISH BOARD OF AGREMENT

Cromaseal 100

Damp Proof Membrane

BBA BOARD OF

Pitch Polymer DPC | Polythene DPC (20m Roll) (30m Rolls)







FOAM APPLICATION GUN Contractors (Metal)





MPANDING FOAM







CROMAR BUILDING PRODUCTS LTD. UNITS 3,4,5 NORTHSIDE INDUSTRIAL ESTATE, WHITLEY BRIDGE, DN14 0GH



Tel: 01977 663 133 Fax: 01977 662 186

web: www.cromar.uk.com
Email: sales@cromar.uk.com