
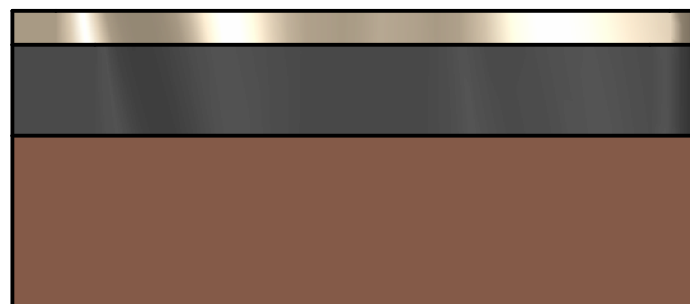
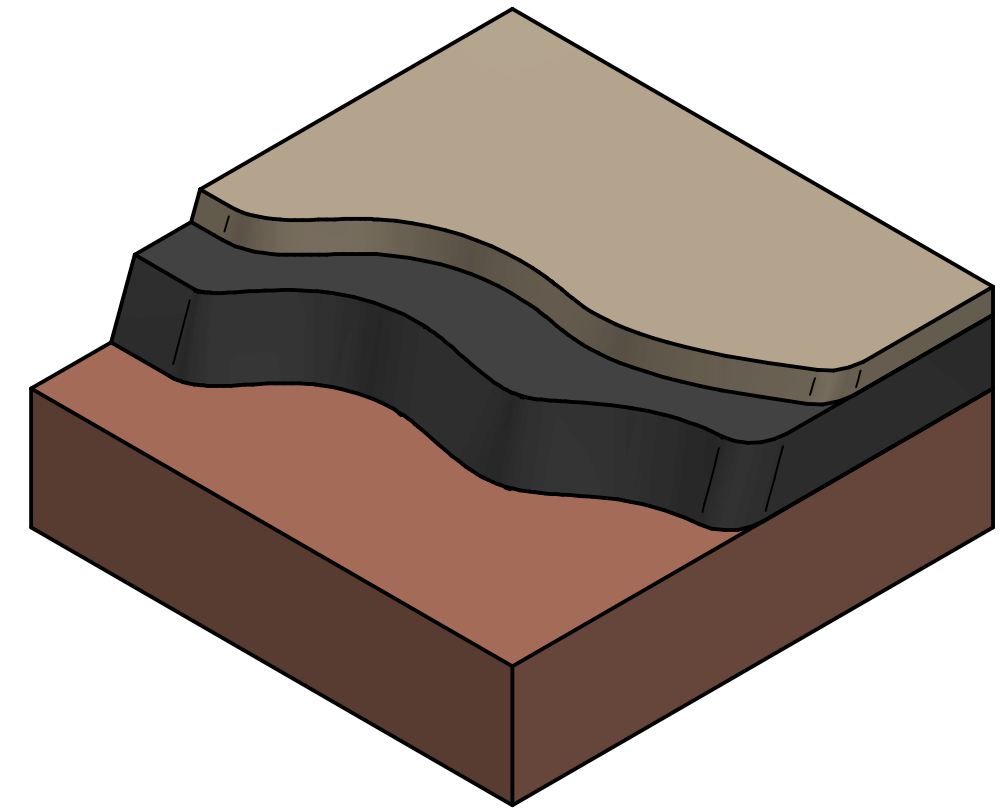


The information below does not constitute an architectural specification and so, is provided in good faith. We advise contacting a suitably qualified architect to verify specification for a particular project prior to commencing. Clients wishing to build or extend driveway, parking bay or pedestrian path using asphalt or concrete can use the information provided as a guide only.

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED

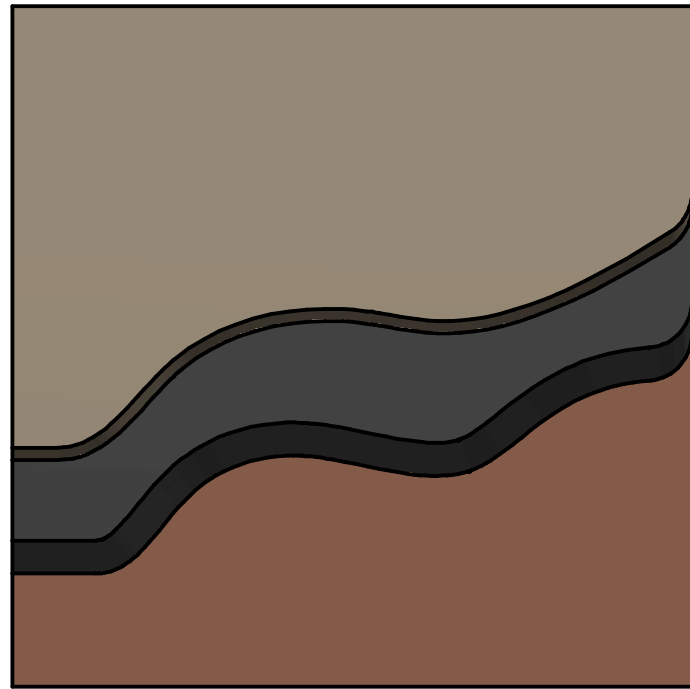


15-18mm Resin Bound Gravel

40mm of Well compacted AC14 Binder Course Asphalt. Minimum Fall 1.5%

50-100mm Compacted Type 1 Minimum Fall 1.5%

**AquaPave**<sup>®</sup>  
WaterPermeable Paving

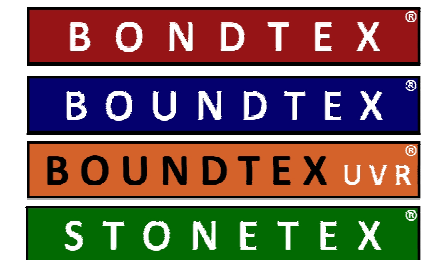

	NAME	DATE	<b>RBSG Materials</b> Unit 2, Brook House, Larkfield Trading Estate, New Hythe Lane, Larkfield, Kent ME20 6SW Tel: +44 (0)11 732 845007 Internet: www.resinbondedsurfaces.co.uk E-mail: mail@resinbondedsurfaces.co.uk	
DRAWN	Adrian White	20/12/2014	TITLE: <b>BoundTex Installation Guide Pedestrian Path (Permeable)</b>	
CHECKED			SIZE: A3	DWG NO: <b>RBS-120427-DFT-001</b>
ENG APPR			SCALE:	WEIGHT:
MGR APPR			REV: <b>A</b>	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGLES ±X.X° 2 PL ±X.XX 3 PL ±X.XXX			FILENAME: Boundtex_Pedestrian_Path.dft SHEET 1 OF 1	