

Valvola di ritegno a palla filettata

Ball check ends screwed valve

Clapet anti-retour à boule filetée

Válvula de retención de bola atornillada




DESCRIPTION

- 1.Silent closing , no water hammer
- 2.Full bore flow , large flow, small resistance
- 3.Loss of water head is 50% lower
Than swing check valves
- 4.Installation:horizontal or vertical
- 5.Working Temperature:-10°C~+80°C
- 6.Medium : Water , Sewage Heavy Thick and
Viscous Liquid

MATERIALS LIST

NO.	Part	Material
1	Body	GG25/GGG40
2	Ball	Metal+Rubber NBR/EPDM
3	Cover	GG25/GGG40
4	Bolt	SS
5	Nut	SS
6	O-Ring	NBR/EPDM
7	O-Ring	NBR/EPDM

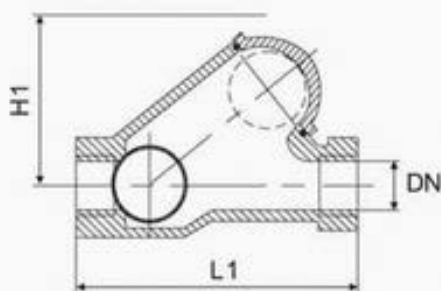

DIMENSION(SCREWED END)

SIZE	1"	1-11/4"	1-1/2"	2"	2-1/2"	3"
L1(mm)	125	132	145	174	200	243
H1(mm)	75	75	85	116	116	160