




Introduction

Catering to a range of modern and classic design schemes, the Stoneworks® paving collection will give your outdoor area the individual touch it's been waiting for. Designed to suit a range of applications around the home including walkways, patios, courtyards and pool surrounds.

Stoneworks® pavers come in a carefully selected number of colour palettes and textures, offer flexible installation options, require little maintenance and most are thick enough to be laid directly on crushed rock and sand. This saves you time and reduces costs making your dream outdoor design a reality.

PEDESTRIAN POOL STEPS


Dimensions



Colours


also available



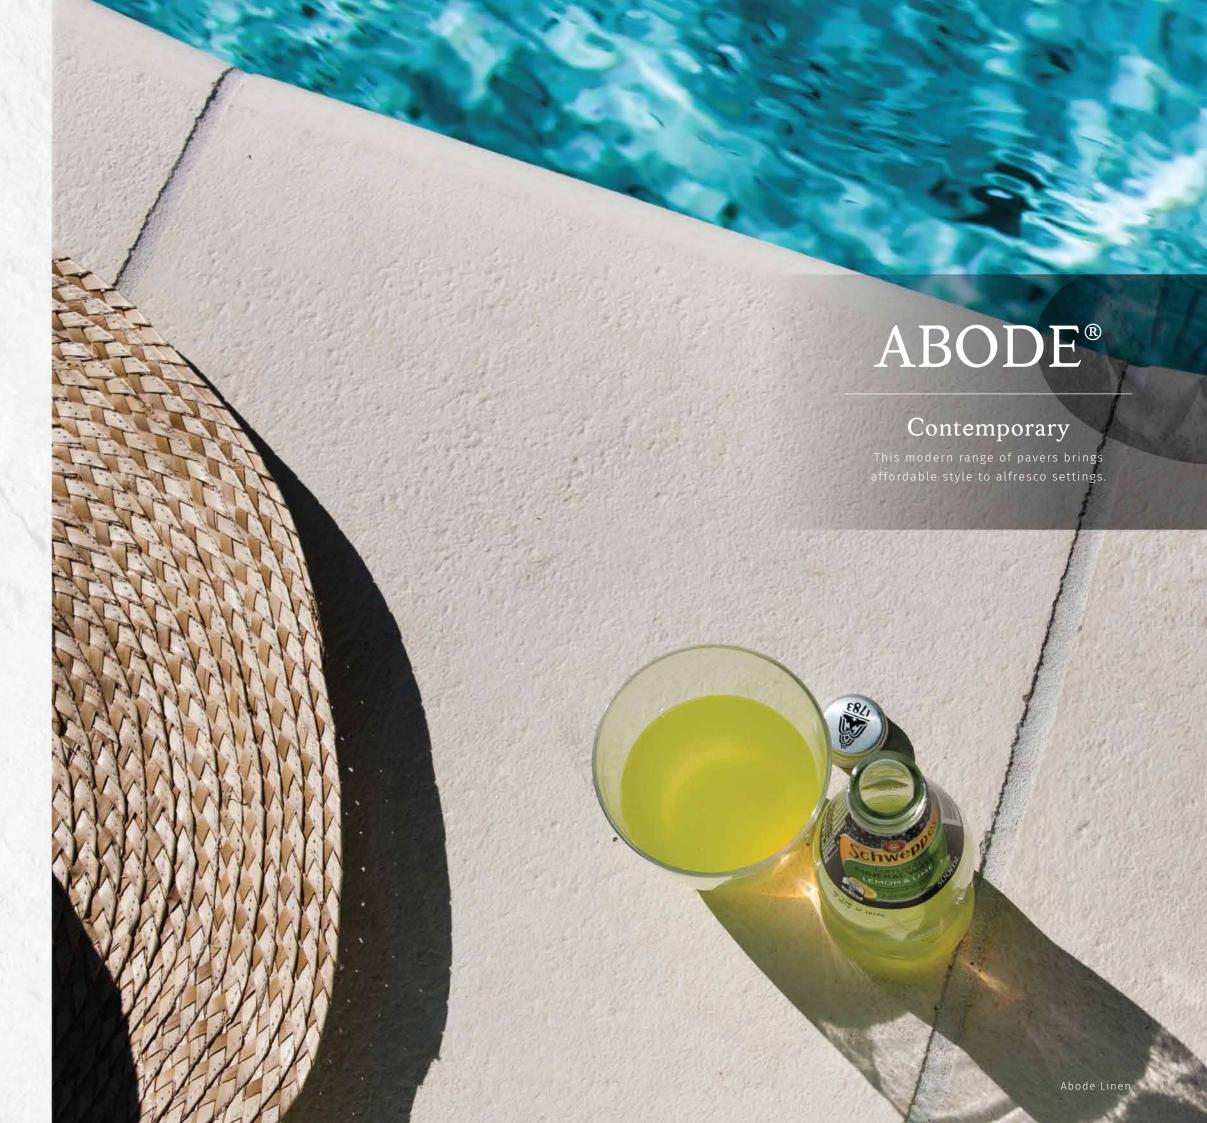




Dimensions



Made to order










Dimensions

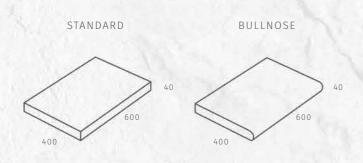


Made to order



VANILLA



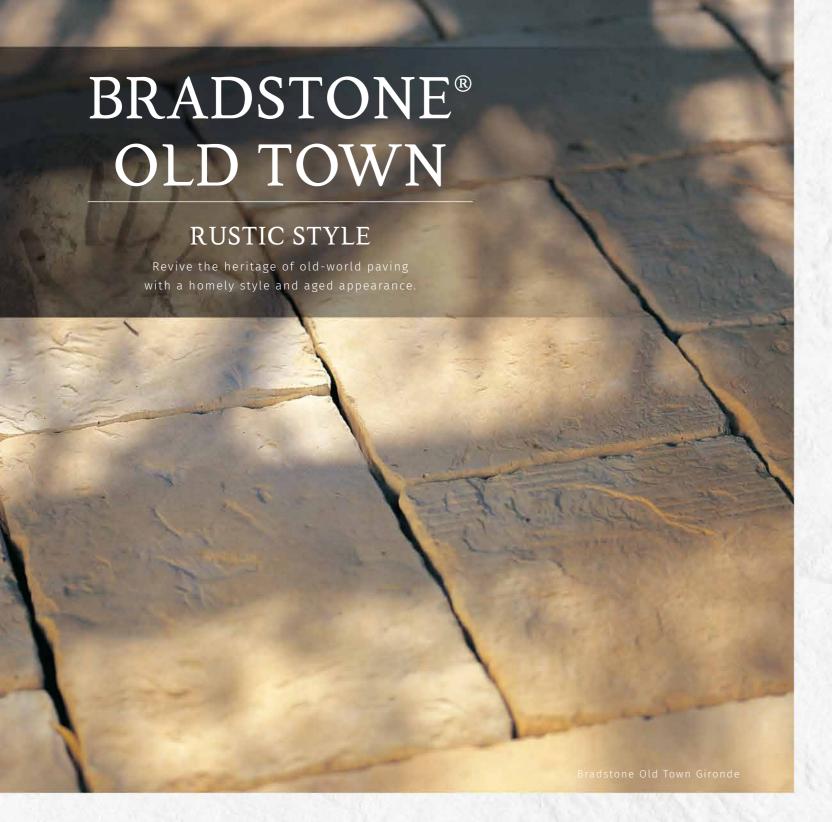

PEDESTRIAN

POOL

STEPS







Colours







GIRONDE


GREY GREEN

Dimensions


MEDIUM








BULLNOSE





COBBLES


BRADSTONE® OLD TOWN **RANDOM PATTERNS**

Bradstone® Old Town random pattern is comprised of three sizes:

- · 300 x 300 x 40mm
- · 450 x 300 x 40mm
- · 600 x 300 x 40mm


Sold in economical pre-blended 6m² or 12m² packs or separately.





1 standard unit

 $2m^2 = 5$ of each size




450 x 300 x 40mm

600 x 300 x 40mm



Dimensions










Dimensions









Dimensions









Prevention Is Better Than Cure

- · Leave pavers wrapped and as dry as possible until just before laying. After wrap is removed, ensure paver surfaces are evenly exposed to the air, do not leave them 'star-stacked' around the site for long periods before laying as the concrete hydration process may cause exposed corners to visibly lighten in comparison to covered sections.
- Sweep regularly with a stiff-bristled broom to keep pavers free of debris.
- · For maximum protection we suggest pavers are sealed after installation with a penetrating sealer (please check with a reputable sealing company for advice).
- · Re-seal pavers as required taking special care in heavy wear areas and salt-water locations.
- During construction cover the paved areas to protect against damage.
- · Protect your pavers against possible staining from mortar, oxides, cement and rust.
- The use of acid and chemically-based cleaning agents can be hazardous if used incorrectly so always consult a professional.
- · In all cases attempt to clean a stain before it hardens or dries up.

For our complete installation & maintenance guide visit www.stoneworkspavers.com.au/howto


ABOUT GEO-FIX®

Geo-Fix® is an air-cured joint filler for pavers and retaining walls. This ready-to-use jointing material is suitable for applying a permanent, rigid joint over 5mm wide and a minimum 25mm deep on all types of paving including concrete, natural stone, slate, clay and granite.

Geo-Fix® means no more trowelling, hiring a compactor, wasting water and hours of cleaning to complete the task. Simply scatter, sweep and leave.

For our complete Geo-Fix® guide visit www.stoneworkspavers.com.au/geo-fix



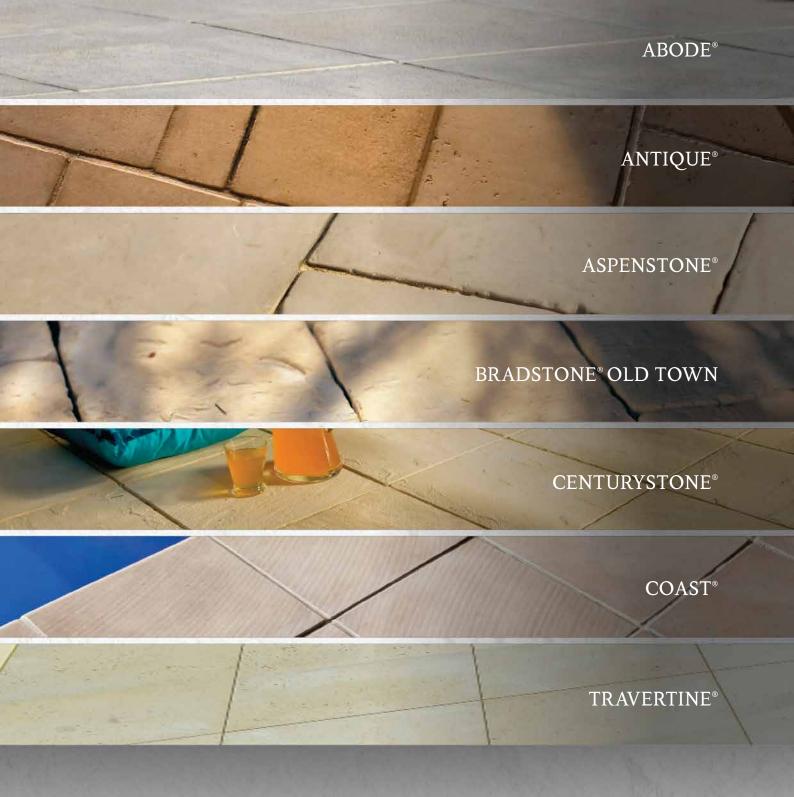

STONEW®RKS®

HAND-MADE STONE

To locate your nearest Stoneworks® distributor or to learn more about our products contact National Masonry:

Brisbane (07) 3271 9292 | Gold Coast (07) 5552 3300 Newcastle (02) 4088 1888 | Mackay (07) 4955 1155 | Melbourne (03) 9361 6400

or visit our website at www.stoneworkspavers.com.au

Colour variations occur from batch to batch. Images shown are indicative only and should not be used for final selection. Products ordered should be chosen from actual samples current at the time of order. Samples, brochures and displays should be viewed as a guide only. Customers should ensure all delivered products are acceptable, and any concerns about products are made prior to laying. All prices are subject to availability and can be withdrawn or varied without notice. © Copyright National Masonry Pty Ltd – all rights reserved 2013-2019. Bradstone® is a registered trademarks of Bradstone® International, used under licence by National Masonry®. Geo-Fix is a registered trademark of Cairn Holdings (UK) Limited, used under licence by National Masonry®. Abode, Antique, Aspenstone, Centurystone, Coast, Travertine, the National Masonry® logo, www.nationalmasonry.com.au and www.stoneworkspavers. com.au are trademarks or registered trademarks of National Masonry®. If these and other National Masonry Pty Ltd trade marked terms are marked on their first occurrence in this information with a trade mark symbol (® or TM), these symbols indicate Australian registered or common law trade marks owned by National Masonry® Pty Ltd at the time this information was published. Such trade marks may also be registered or common law trade marks on their countries. Other product, company or service names may be trade marks or service marks of others. National Masonry Pty Ltd ABN 94 155 064 136. Correct as at 1/8/2019.