


HOOK & LUG MOUNTED HOISTS WITH PUSH AND HAND-GEARED TROLLEYS

One and Two Speed Hoists



Lug Mounted

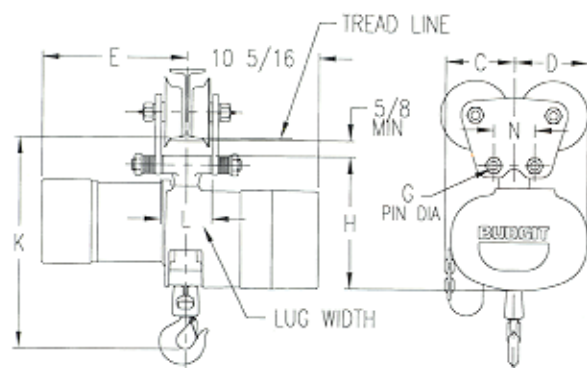


CATALOG NUMBERS, SPECIFICATIONS & DIMENSIONS *(Push and hand-geared trolleys)*

Capacity (tons)	Lift Speed (fpm)	Motor H.P.	Electric Current Phase	Parts of Chain	Hoist Catalog Number	Net Wt. (lbs)	Dimensions			
							A (in)	B (in)	C (in)	D (in)
1/4	16	1/4*	Single	1	BEH2516	79	15 3/4	11 1/16	5 1/8	6 5/16
	32	1/2	Three		BEH2532	82				
	64	1	Single		BEH2564	78				
1/2	16	1/2	Three	1	BEH5016	82	15 3/4	11 1/16	5 1/8	6 5/16
	32	1	Single		BEH5032	83				
	64	1	Three							
1	8	1/2	Single	1	BEH0108	90	16 9/16	11 1/16	5 1/8	6 5/16
	16	1	Three		BEH0116	91				
	32	2 1/2	Single		BEH0132	96				
2	4	1/2	Three	2	BEH0204	115	22 1/4	12 13/16	6 7/16	4 7/8
	8	1	Single		BEH0208	116				
	16	2 1/2	Three		BEH0216	117				
3	5	1	Single	3	BEH0305	156	24	14 3/8	7 3/4	7 3/8
	10	2 1/2	Three		BEH0310	166				
			Single							

* Two speed hoist has a 1/2 H.P. motor

One and Two Speed Hoists

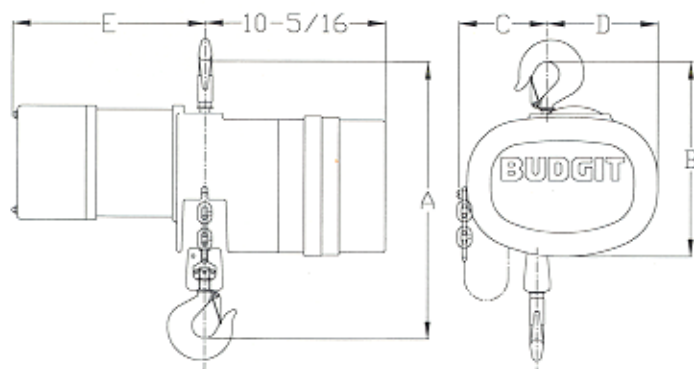

Hook Mounted



CATALOG NUMBERS, SPECIFICATIONS & DIMENSIONS *(Push and hand-gear-ed trolleys)*

E		G Pin Diameter (in)	H (in)	J Max. (in)	K (in)	L (in)	M (std. flange width) (in)	N (in)
One Speed (in)	Two Speed (in)							
10 ⁷ / ₈	—	5/8	9 ¹⁵ / ₁₆	3 ⁵ / ₈	15 ³ / ₈	3 ⁵ / ₈	—	3 ¹ / ₈
11	—							
11 ³ / ₈	—							
11	11 ¹ / ₂							
11	—							
11	12 ¹ / ₁₆	5/8	9 ¹⁵ / ₁₆	3 ⁵ / ₈	15 ³ / ₈	3 ⁵ / ₈	—	3 ¹ / ₈
11 ³ / ₈	—							
11	11 ¹ / ₂							
12 ¹ / ₈	—							
11 ¹ / ₂	12 ¹ / ₁₆							
11 ³ / ₈	—	5/8	9 ¹⁵ / ₁₆	3 ⁵ / ₈	16 ⁵ / ₁₆	3 ⁵ / ₈	9 ³ / ₄	3 ¹ / ₈
11	11 ¹ / ₂							
12 ¹ / ₈	—							
11 ¹ / ₂	12 ¹ / ₁₆							
—	—							
12	14	1	10 ¹¹ / ₁₆	4 ³ / ₈	20 ¹ / ₁₆	4 ³ / ₈	10 ¹ / ₄	5
11 ³ / ₈	—							
11	—							
12 ¹ / ₈	—							
11 ¹ / ₂	12 ¹ / ₁₆							
—	—	1 ¹ / ₄	12 ⁷ / ₈	6	24 ¹ / ₂	6	18 ³ / ₈	6
12	14							
12 ¹ / ₈	—							
11 ¹ / ₂	12 ¹ / ₁₆							
—	—							
12	14							