




PE & PVC Pulling Eyes

Condex PE & PVC Pulling Eyes provide optimum gripping power and a watertight design. The watertight pulling eyes feature a multiple o-ring configuration, an extremely rigid center rod to prevent bending and a steel tapered lead cone with the same OD as the conduit. These design features protect the outer leading edge of the conduit and form a watertight seal. Condex PE & PVC Pulling Eyes also feature split gripping segments with aggressive gripping threads coupled with a steel expander plug that better grips the full range of conduit I.D.s.

Installation of the PE & PVC Pulling Eyes simply requires the leading eye to be tightened. The pulling eyes come standard with attachment eyes at both ends for connecting rope or steel lines. Pull-out strengths generally exceed the tensile capacity of the conduit.

See Ordering Information pages 74 & 75.

NOTE: PE & PVC Pulling Eyes come with a 90 day limited warranty.

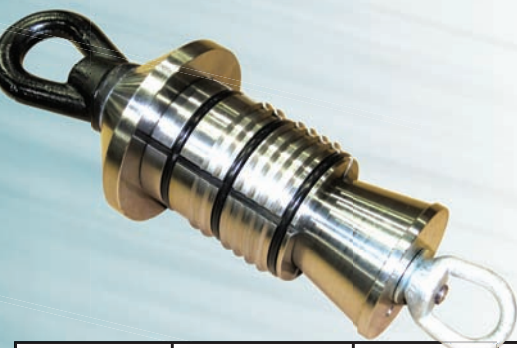

PE & PVC Pulling Eyes Non-Sleeved Part Numbers

Part No.	Size in (mm)	Length in (mm)	Conduit ID in (mm)		Lead Cone OD in (mm)	Duct Type	Nom. Duct ID in (mm)
			Min.	Max.			
*08220020	2 [51]	8.18 [206]	1.88 [48]	2.15 [55]	2.83 [60]	2.0 SDR 11.0	1.92 [49]
						2.0 SCH 80	1.94 [49]
						2.0 SDR 13.5	2.00 [51]
						2.0 SDR 15.5	2.05 [52]
						2.0 SCH 40	2.07 [53]
*08220030	3 [76]	11.89 [302]	2.69 [68]	3.13 [79]	3.50 [89]	2.0 SDR 17.0	2.08 [53]
						3.0 SDR 11.0	2.83 [72]
						3.0 SCH 80	2.90 [74]
						3.0 SDR 13.5	2.95 [75]
						3.0 SDR 15.5	3.02 [77]
*08220611	4 [101]	14.11 [358]	3.50 [89]	4.20 [106]	4.81 [122]	3.0 SDR 17.0	3.06 [78]
						3.0 SCH 40	3.07 [78]
						4.0 SDR 7.0	4.026
						4.0 SDR 9.0	4.026
						4.0 SDR 11.5	4.026
*08220050	5 [127]	18.45 [469]	4.25 [108]	5.06 [129]	5.56 [141]	4.0 SDR 15.0	4.026
						5.0 SDR 11.0	4.49 [114]
						5.0 SDR 13.5	4.69 [119]
						5.0 SDR 15.5	4.80 [122]
						5.0 SDR 80	4.81 [122]
*08220060	6 [152]	19.6 [498]	5.06 [129]	6 [152]	6.63 [168]	5.0 SDR 17.0	4.87 [124]
						5.0 SDR 21.0	5.00 [127]
						5.0 SCH 40	5.05 [128]
						6.0 SDR 11.0	5.35 [136]
						6.0 SDR 13.5	5.58 [142]
*08220060	6 [152]	19.6 [498]	5.06 [129]	6 [152]	6.63 [168]	6.0 SDR 15.5	5.72 [145]
						6.0 SCH 80	5.76 [146]
						6.0 SDR 17.0	5.80 [147]
*08220060	6 [152]	19.6 [498]	5.06 [129]	6 [152]	6.63 [168]	6.0 SDR 21.0	5.96 [151]

*Non-sleeved

PE & PVC Pulling Eyes, O-Rings & O-Rings in Sleeve Part Numbers

Part No.	Size in (mm)	Length in (mm)	Conduit I.D. in (mm)		Lead Cone O.D. in (mm)	Duct Type	Nom. Duct I.D. in (mm)
			Min.	Max.			
08220612	1.00 (25)	6.23 (158)	1.00 (25)	1.25 (32)	1.415 (36)	1.00 SDR 11.0	1.075 (27)
						1.00 SDR 13.5	1.121 (28)
08220600	1.25 (32)	6.23 (158)	1.25 (32)	1.50 (38)	1.76 (48)	1.25 SDR 11.0	1.33 (34)
						1.25 Sch 40	1.38 (35)
						1.25 SDR 13.5	1.39 (35)
						1.25 SDR 15.5	1.43 (36)
						1.25 SDR 17.0	1.44 (37)
08220601	1.50 (38)	6.23 (158)	1.50 (38)	1.75 (44)	2.01 (51)	1.25 SDR 21.0	1.50 (38)
						1.5 SDR 11.0	1.53 (39)
						1.5 SDR 13.5	1.60 (41)
						1.5 Sch 40	1.61 (41)
						1.5 SDR 15.5	1.63 (41)
08220602	2 (51)	8.18 (208)	1.88 (48)	2.15 (55)	2.45 (62)	1.5 SDR 17.0	1.66 (42)
						1.5 SDR 21.0	1.72 (44)
						2.0 SDR 11.0	1.92 (49)
						2.0 SDR 13.5	2.00 (51)
						2.0 SDR 15.5	2.05 (52)
08220609	2.5 (64)	8.80 (224)	2.31 (59)	2.56 (65)	3.01 (76)	2.0 Sch 40	2.07 (53)
						2.0 SDR 17.0	2.08 (53)
						2.0 SDR 21.0	2.15 (55)
						2.5 SDR 11.0	2.32 (59)
						2.5 SDR 13.5	2.42 (61)
08220603	3 (76)	11.89 (302)	2.69 (68)	3.13 (79)	4.63 (92)	2.5 Sch 40	2.47 (63)
						2.5 SDR 15.5	2.49 (63)
						2.5 SDR 17.0	2.51 (64)
						3.0 SDR 11.0	2.83 (72)
						3.0 SDR 13.5	2.95 (75)
08220604	4 (102)	14.11 (358)	3.50 (89)	4.06 (103)	4.63 (118)	3.0 SDR 15.5	3.02 (77)
						3.0 SDR 17.0	3.06 (78)
						3.0 Sch 40	3.07 (78)
						4.0 SDR 11.0	3.63 (92)
						4.0 SDR 13.5	3.79 (96)
08220605	5 (127)	18.45 (469)	4.25 (108)	5.06 (129)	5.63 (143)	4.0 Sch 80	3.83 (97)
						4.0 SDR 15.5	3.89 (99)
						4.0 SDR 17.0	3.94 (100)
						4.0 Sch 40	4.03 (102)
						4.0 SDR 21.0	4.05 (103)
08220606	6 (152)	19.60 (498)	5.06 (129)	6.00 (152)	6.76 (172)	5.0 SDR 11.0	4.49 (114)
						5.0 SDR 13.5	4.69 (119)
						5.0 SDR 15.5	4.80 (122)
						5.0 SDR 17.0	4.87 (124)
						5.0 SDR 21.0	5.00 (127)
08220608	8 (203)	21.53 (547)	6.63 (168)	7.69 (195)	8.84 (224)	5.0 Sch 40	5.05 (128)
						6.0 SDR 11.0	5.35 (136)
						6.0 SDR 13.5	5.58 (142)
						6.0 SDR 15.5	5.72 (145)
						6.0 SDR 17.0	5.80 (147)
						6.0 SDR 21.0	5.96 (151)
						8.0 SDR 11.0	6.96 (177)
						8.0 SDR 13.5	7.27 (185)
						8.0 SDR 15.5	7.45 (189)
						8.0 SDR 17.0	7.55 (192)

Eye Part Number	Expansion O-Ring Part No.	Qty Per Eye	O-Rings in Sleeve Part No.	Qty Per Eye
08220612	02288918	2	02288886	2
08220600	02269636	2	02288894	2
08220601	08010414	2	022888920	2
08220602	02269625	2	022888921	2
08220609	02269633	3	022888993	2
08220603	02269624	3	022888922	2
08220604	02269621	3	022888888	2
08220605	02269626	6	022888927	2
08220606	02269622	6	022888890	2
08220608	02269631	6	022888923	2
08220020	02269625	2	-	-
08220030	02269624	3	-	-
08220611	02269621	3	-	-
08220050	02269626	6	-	-
08220060	02269622	6	-	-

