

STANDARD FEATURES





- 2 Pump Hydraulic System
- Auxiliary Hydraulic Outlet
- AWD System
- Hard Wearing Durable Powder Coat Finish
- Hard Wearing Dingo Tyres
- DataDot Theft Prevention System
- Quick Hitch System
- Easy Soft Touch Operator Controls

SAFETY FEATURES

- Solid Operating Platform
- Machine Stability
- Safety Hydraulic Relief Valve
- Concealed and Protected Rupture Resistant Plastic Fuel Tank
- Low Engine Noise
- Balanced Lifting and Tie Down Points
- Engine Shut-Off Roll Over Protection (Mercury Switch) *optional feature

OPTIONAL FEATURES TO CUSTOMISE YOUR MACHINE

- Reverse Buzzer
- Rotating Beacon
- Traction Options for All Conditions including Narrow Wheels or Solid.

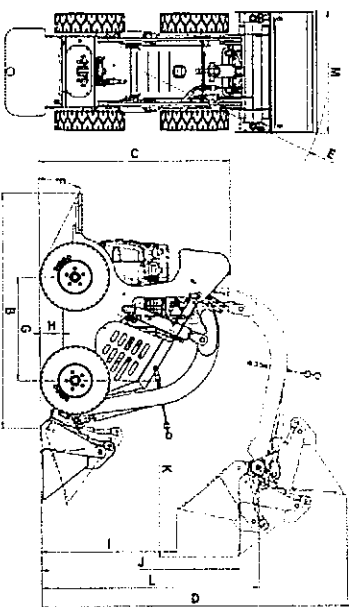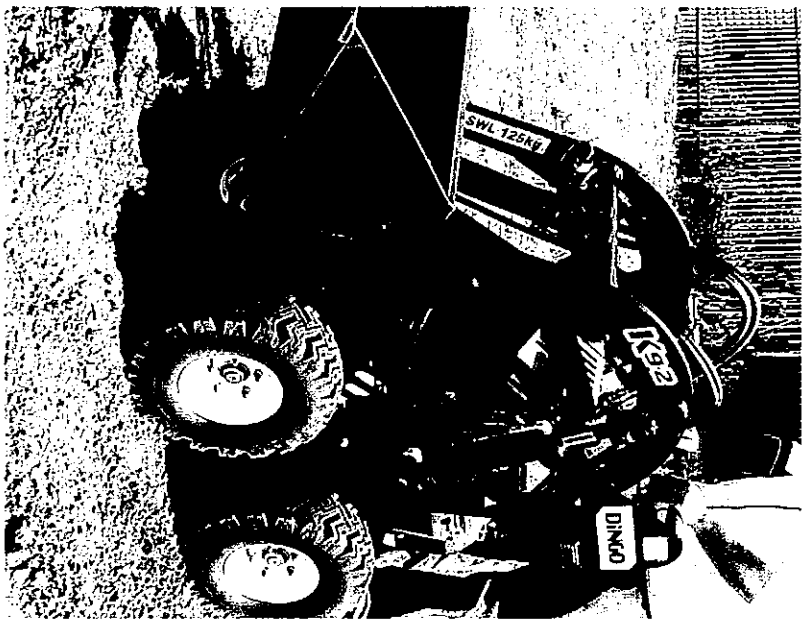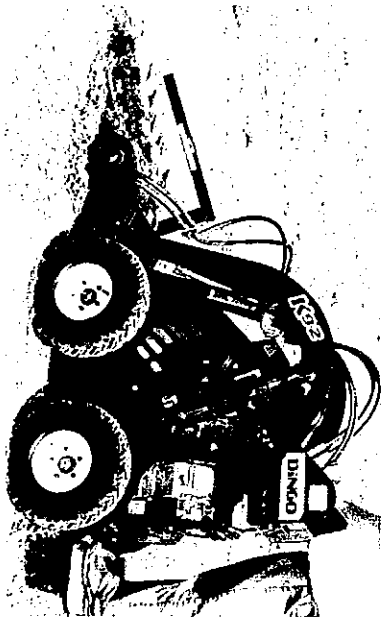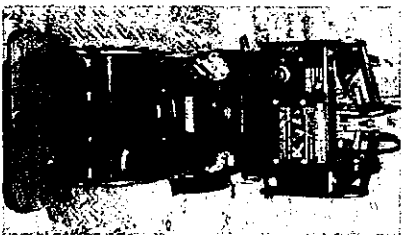

K9-2	
Engine	Vanguard Petrol
Make	16HP / 11.8kW
Power	
Performance	2 pumps
Hydraulic Pumps	8 & 1.5 cc
Pump Sizes	193 bar (2800psi)
Relief Pressure (Drivel)	206 bar (3000psi)
Relief Pressure (aux)	34 l/min
Hydraulic Pump Output	0-7.8 km/h
Travel Speed (with overdrive)	SWL: 125 kg
Rate Lift Capacity	MWL: 250 kg
	4 X 33cu in
Wheel Motors	1
Auxiliary Hydraulic Outlets	
Dimensions	
A. Overall Width	780mm
B. Overall Length	1400mm
C. Overall Height	1200mm
D. Maximum Operating Height with 4 in 1 Bucket	1920mm
E. Turning Radius with 4 in 1 Bucket	1150mm
F. Angle of Departure	27°
G. Wheel Base	450mm
H. Ground Clearance	150mm
I. Dump Height Std Bucket	800mm
J. Dump Height with 4 in 1 Bucket	1220mm
K. Reach Fully Raised 4 in 1 Bucket	880mm
L. Height to Hinge Pin	1350mm
M. Machine Width with 4 in 1 Bucket	780mm
Hydraulic Reservoir	34 l
Machine Mass	540kg (approx)
Warranty	
Engine Warranty	2 Years unlimited hours*
Product Warranty	2 Years / 1000hrs*

*Warranty conditions apply.